

# LEGIBILITY NOTICE

A major purpose of the Technical Information Center is to provide the broadest dissemination possible of information contained in DOE's Research and Development Reports to business, industry, the academic community, and federal, state and local governments.

Although a small portion of this report is not reproducible, it is being made available to expedite the availability of information on the research discussed herein.

Los Alamos National Laboratory is operated by the University of California for the United States Department of Energy under contract W-7405-ENG-36

LA-UR-83-1812

LA-UR-83-1812

TITLE: A HIGH-Q FERRITE-TUNED CAVITY

AUTHOR(S): Roger D. Carlini, Henry A. Thiessen, James M. Potter  
and Lawrence M. Earley

NOTICE  
PORTIONS OF THIS REPORT ARE ILLEGIBLE.  
It has been reproduced from the best  
available copy to permit the broadest  
possible availability.

SUBMITTED TO: Presented at 1983 Particle Accelerator Conference  
Santa Fe, New Mexico, March 21-23, 1983

#### DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.



By acceptance of this article, the publisher recognizes that the U.S. Government retains a nonexclusive, royalty-free license to publish or reproduce the published form of this contribution, or to allow others to do so, for U.S. Government purposes.

The Los Alamos National Laboratory requests that the publisher identify this article as work performed under the auspices of the U.S. Department of Energy

MASTER

LOS ALAMOS

Los Alamos National Laboratory  
Los Alamos, New Mexico 87545

# A HIGH-Q FERRITE-TUNED CAVITY

by

Lawrence M. Earley, Sandia National Laboratories  
Albuquerque, New Mexico, 87185  
Henry A. Thieszen, Roger Carlini, and James Potter  
Los Alamos National Laboratory, Los Alamos, New Mexico 87545\*

## Summary

Rapid cycling proton synchrotrons, such as the proposed LAMPF II accelerator, require approximately 10 MV per turn rf with 17% tuning range near 50 MHz. The traditional approach to ferrite-tuned cavities uses a ferrite which is longitudinally biased (rf magnetic field parallel to bias field). This method leads to unacceptably high losses in the ferrite. At Los Alamos, we are developing a cavity with transverse bias (rf magnetic field perpendicular to the bias field) that makes use of the tensor permeability of the ferrite. Initial tests of a small (10-cm-diam) quarter-wave singly re-entrant cavity tuned by several different ferrites indicate that the losses in the ferrite can be made negligible compared with the losses due to the surface resistivity of the copper cavity.

## Introduction

The use of ferrites in cavity tuning is not a new idea. As early as 1956, several people<sup>1,2,3</sup> had successful experimental results and had developed a theoretical understanding of ferrites in rf fields. These early experiments used ferrites with a bias magnetic field applied perpendicular to the rf magnetic field in their cavities. They also tried placing the bias direction along other possible axes of their cavities. All these experiments were carried out at X-band (approx. 10 GHz). In all the cases of applied magnetic field perpendicular to the rf magnetic fields, the applied bias was less than the needed bias to cause the gyro-magnetic resonance. These experimenters were hampered by the poorer quality of the materials they used.

Accelerator cavities have been tuned with ferrites in many laboratories. Some examples are the CERN PS, the Brookhaven AGS, and the rings at Fermilab. In all these facilities, ferrite tuning is achieved by having the applied bias magnetic field parallel to the rf magnetic fields in the cavities. The variation in cavity frequency is achieved by varying the  $\mu$  of the ferrite by moving along the hysteresis loop of the ferrite.

The many disadvantages of ferrite tuning include: low cavity Q, heating problems in the ferrite, and high maintenance. All of these problems are caused by the high loss most ferrites exhibit in rf cavities. A low loss ferrite-tuned cavity was built for the Los Alamos Proton Storage Ring<sup>4</sup> using a newer ferrite material. The applied bias magnetic field is perpendicular to the rf magnetic fields and the cavity is operated in the region above the gyro-magnetic resonance. Selecting the right ferrite can lead to the condition of a high-Q resonant cavity that can be tuned in frequency over a large range with no appreciable losses in the ferrite.

\*Work performed under auspices of US Department of Energy

## A. Perpendicular Bias Magnetic Field Theory

Perpendicular bias is used in ferrite devices today for a variety of microwave uses. These devices include isolators, circulators, phase shifters, attenuators, and filters. These devices have their properties derived from the gyro-magnetic resonance phenomena.

If we have the condition of a magnetic dipole in a ferrite subjected to a dc magnetic field  $H_0$  and next apply a second magnetic field  $h$ , which is both an rf field and perpendicular to the dc field, the rotating vector  $(H_0 + h)$  describes a cone. The magnetic moment  $M$  moves with a precessional motion around the cone. The condition of gyro-magnetic resonance occurs when the rf frequency is synchronized with the precession. The resonance condition occurs at

$$H_0 = f/2.8$$

where  $H_0$  is the dc magnetic field in oersteds and  $f$  is the rf frequency in MHz.

One must remember that under these conditions, the representation of the permeability of the ferrite is a tensor quantity. The permeability tensor was derived by Polder and given by

$$\bar{\mu} = \mu_0 \begin{bmatrix} \mu_x - jk & 0 & 0 \\ jk & \mu_y & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

where the dc magnetic field is applied in the  $z$ -direction and the material is saturated in the  $z$ -direction. The permeability of the ferrite has both a dispersive and a dissipative component and can be written as

$$\mu = \mu' - j\mu''$$

Figure 1 shows a plot of permeability versus applied dc magnetic field. The plot of  $\mu''$  is the dissipative component and the greatest loss occurs at an applied field  $H_{KES}$  which is the condition for gyro-magnetic resonance. The plot of  $\mu_x$  is the effective  $\mu$  for the dispersive part of the permeability  $\mu'$ . The value of  $\mu_x$  is varied depending on the relation between the direction of wave propagation in a cavity and the dc magnetic field. The cavity frequency is tuned in the optimum way by varying the dc bias from  $H_2$  to  $H_1$  thus varying the  $\mu_x$  from  $\mu_2$  to  $\mu_1$ . In the region above resonance, the value of  $\mu_x$  is

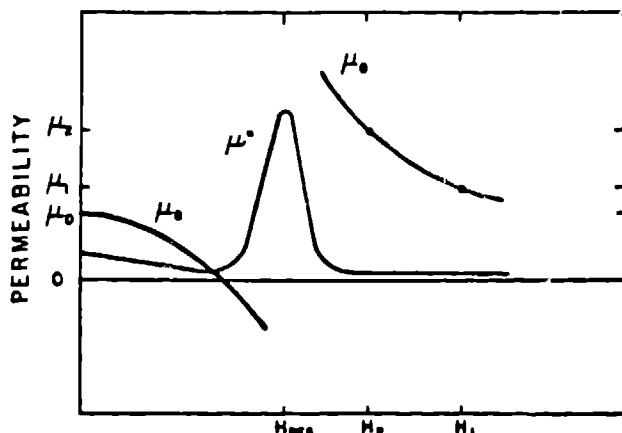


Fig. 1. Plot of permeability versus applied dc magnetic field.

lowest. In selecting ferrite, care should be taken to choose a material that has the lowest  $\mu''$  above resonance. Materials with low values (1.5-2.5 oersteds) of  $\Delta H_k$  (spin-wave line width) should be chosen. Thus, a large variation in  $\mu_e$  can be reached under a very low loss condition.

#### B. Prototype Ferrite-Tuned Cavity

##### Experimental Results

A prototype cavity was built near the suggested frequency of 40-50 MHz for the proposed LAMFF II synchrotron. The prototype cavity is shown in Fig. 2. It is a quarter-wave coaxial cavity with ferrite loading on the low-voltage end. The solenoid provides an axial dc magnetic field, while the rf magnetic fields of the cavity are in the  $\theta$ -direction. The cavity had a resonant frequency of 54 MHz and a  $Q_0$  of 2600 with no ferrite loading. The solenoid was capable of providing dc magnetic fields up to 3500 Gauss. Table I shows some of the ferrites that were tested in the prototype cavity. These three ferrites have low values of spin-wave line width.

Experiments were performed with approximately 3.5% ferrite loading by volume. The solenoid had a region of uniform field large enough to handle a ferrite volume of 3.5%. Figure 3 shows the results for all three ferrites with frequency being plotted versus dc magnetic field. Figure 4 shows the same materials plotted now with loaded-cavity  $Q$  versus frequency. The plots show that a 6% tuning range over a region where the ferrite-loaded cavity  $Q$  is the same

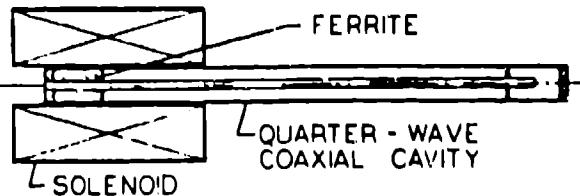


Fig. 2. Drawing of early prototype cavity.

TABLE I

FERRITE	MANUFACTURER	MATERIAL COMPOSITION	SATURATION MAGNETIZATION
TT1-105	TRANS-TECH	MAGNESIUM FERRITE	1750 G
TT2-111	TRANS-TECH	NICKEL FERRITE	5000 G
CVG-1850	AMPEX	CALCIUM VANADIUM GARNET	1850 G

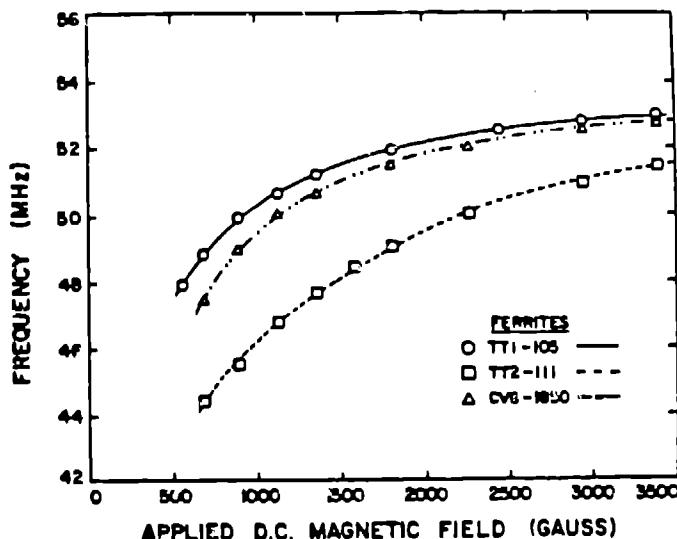


Fig. 3. Results for three ferrites with frequency plotted versus dc magnetic field.

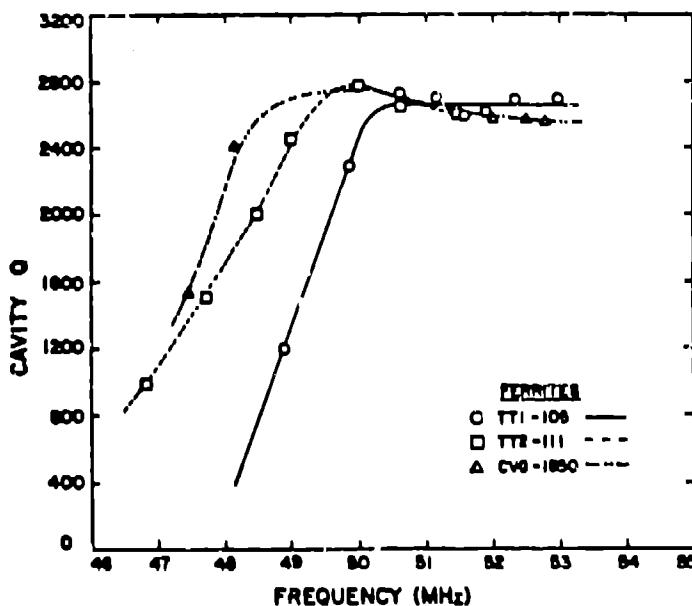


Fig. 4. Results for three ferrites plotted as "Q" versus frequency.

TABLE II. SPECIFICATIONS FOR FULL-POWER PROTOTYPE CAVITY SHOWN IN FIG. 5.

Cavity length = 350.000 cm	Cavity diameter = 100.000 cm
Gap = 10.000 cm	
Frequency	= 55.986 MHz
Normalization Factor (EO=1 MV/M)	A Scale = 45790.8
Stored Energy	= 62.9165 joules
Power dissipation	= 1034969.38 watts
T, TP, TPP, S, SP, SPP = 0.979	0.007
Q = 21384	0.001 0.186 0.029 0.000
Product $Z^*T^{**2}$	Shunt Impedance = 1.69 MOHM/M
Magnetic field on outer wall	ZTT = 1.62 MOHM/M
Maximum electric field on boundary	= 12154.0 amp/M
	= 48.528 MV/M

as the unloaded-Q of cavity. Thus, a region of operation can be found where the ferrite losses are negligible in comparison to the losses in the cavity walls. All results are at low power levels.

C. Design of a Full-Power Prototype Ferrite-Tuned Cavity

A full-power prototype ferrite-tuned cavity is being designed using SUPERFISH. Some preliminary design parameters are shown in Table II. The cavity is shown in Fig. 5.

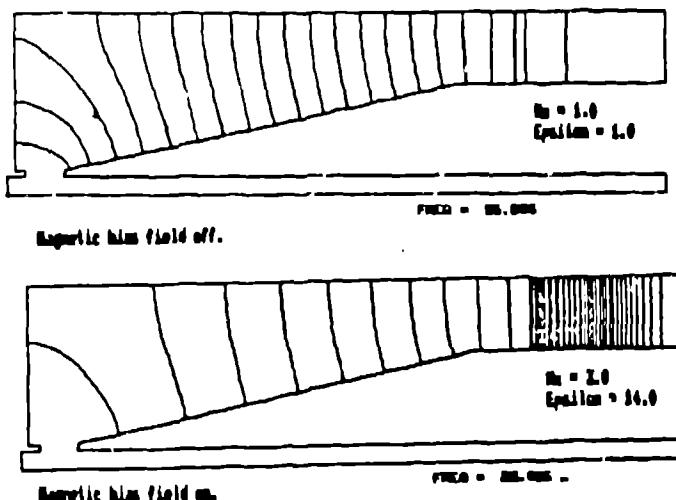


Fig. 5. SUPERFISH design for a full-power prototype.

D. Conclusion

Results for the first ferrite-tuned cavity using transverse bias are very promising. A high Q has been achieved over a large tuning range for several different ferrites. In order to achieve the 17% tuning range needed for LAMPF II, a 10% ferrite volume will be needed. It is reasonable to expect that this tuning range can be reached in the high-Q region. Early SUPERFISH designs show a full-power prototype can be designed with the needed parameters for the LAMPF II system.

REFERENCES

1. G. R. Jones, J. C. Cacheris, and C. A. Morrison, "Magnetic Tuning of Resonant Cavities and Wide-band Frequency Modulation of Klystrons," Proc. IRE, Vol. 44, pp. 1431-1438; October 1956.
2. C. E. Fay, "Ferrite-Tuned Resonant Cavities," Proc. IRE, Vol. 44, pp. 1446-1449; October 1956.
3. C. E. Nelson, "Ferrite-Tunable Microwave Cavities and the Introduction of a New Reflectionless, Tunable Microwave Filter," Proc. IRE, Vol. 44, pp. 1449-1455; October 1956.
4. L. M. Earley, G. P. Lawrence, J. M. Potter and F. J. Humphry, "A Resonantly Coupled, Ferrite-Tuned Buncher-Cavity System for the Los Alamos Proton Storage Ring," 1982 IEEE MTT-S International Microwave Symposium, pp. 246-248, June 1982.
5. L. Thourel, "The Use of Ferrites at Microwave Frequencies," Pergamon Press, Macmillan Co., New York, 1964.
6. B. Lax and K. Button, "Microwave Ferrites and Ferrimagnetics," McGraw Hill, 1962.