

LA-UR- 03-3066

Approved for public release;  
distribution is unlimited.

C.  
113

*C.*

*113*

Title:

FABRICATION OF THE MEBT CHOPPER SYSTEM FOR  
THE SPALLATION NEUTRON SOURCE

Author(s):

R. Hardekopf, S. Kurennoy, J. Power, R. Roybal, D. Schrage,  
Los Alamos National Laboratory, Los Alamos, NM 87545  
R. Sherwood, S. Collins, Directed Energy, Inc., Ft. Collins,  
CO

Submitted to:

Particle Accelerator Conference  
May 12-16, 2003  
Portland, Oregon



Los Alamos National Laboratory, an affirmative action/equal opportunity employer, is operated by the University of California for the U.S. Department of Energy under contract W-7405-ENG-36. By acceptance of this article, the publisher recognizes that the U.S. Government retains a nonexclusive, royalty-free license to publish or reproduce the published form of this contribution, or to allow others to do so, for U.S. Government purposes. Los Alamos National Laboratory requests that the publisher identify this article as work performed under the auspices of the U.S. Department of Energy. Los Alamos National Laboratory strongly supports academic freedom and a researcher's right to publish; as an institution, however, the Laboratory does not endorse the viewpoint of a publication or guarantee its technical correctness.



# FABRICATION OF THE MEBT CHOPPER SYSTEM FOR THE SPALLATION NEUTRON SOURCE \*

R. Hardekopf<sup>†</sup>, S. Kurennoy, J. Power, R. Roybal, D. Schrage,  
Los Alamos National Laboratory, Los Alamos, NM 87545  
R Sherwood, S. Collins,  
Directed Energy, Inc., Ft. Collins, CO 80526

## Abstract

Los Alamos completed design, fabrication, procurement, and initial testing (without beam) of the SNS medium-energy beam-transport (MEBT) chopper, including the meander-line traveling-wave structure and the electrical-pulser system. This report reviews the design parameters and discusses the fabrication process for the chopper structures, including measurements of the impedance and rise time. (The MEBT vacuum system and chopper-target beam stop were developed at and reported by LBNL.) We discuss the specifications for the pulse generator and its fabrication and testing at Directed Energy, Inc. of Boulder, CO. Experimental tests of the chopper system are currently being performed at the SNS site at ORNL and will be reported separately.

## 1 INTRODUCTION

The SNS linac will accelerate an intense, 1 to 2 mA (average)  $H^-$  beam to 1 GeV for injection into an accumulator ring for bunch compression. Beam chopping is required to provide a gap in the beam, which is maintained during the accumulation process and allows extraction from the ring with minimal losses. A beam chopper in the low-energy beam transport (LEBT) between the ion source and the RFQ pre-chops the beam, and a fast traveling-wave chopper in the medium-energy beam transport (MEBT) provides the final clean up of the chopping gap. The physics design of the MEBT chopper meander-line deflecting structure has been described previously [1,2]. It is a folded, notched stripline that matches the electric wave velocity along the beam axis to the beam particle velocity, thus providing a rise and fall time determined mainly by the speed of the electric pulse.

Table 1. MEBT Chopper Specifications

Parameter	Value	Comments
Beam energy	2.5 MeV	$\beta=0.073$
Length	0.35 m	
Gap	1.8 cm	Adjustable
Pulser voltage	$\pm 2350$ V	Max. $\pm 2500$ V
Deflection angle	18 mrad	
Chopping period	841 ns	
Duty factor	35 %	65 % beam on
Rise / fall time	10 ns	2-98 %

\* Work supported by the Office of Basic Energy Science, Office of Science of the US Dept. of Energy, and by Oak Ridge National Lab.

<sup>†</sup>hardekopf@lanl.gov

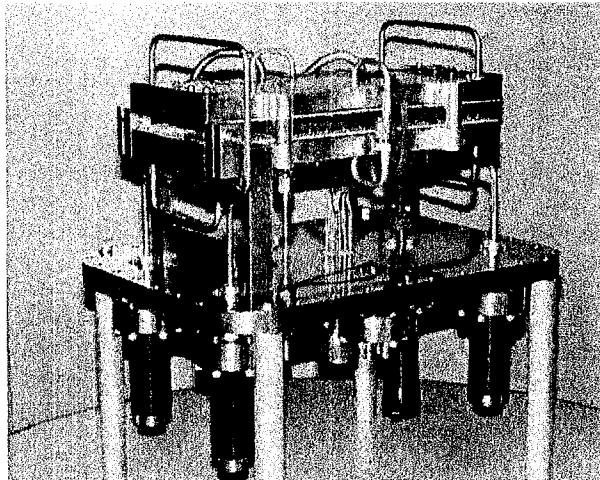


Figure 1. One of two completed MEBT-chopper structure assemblies. The unit is upside down from the normal mounting position on the beamline.

The MEBT chopper is suspended from the lid of a vacuum box located just downstream of the RFQ [3]. There is space in the MEBT for an identical structure called the "antichopper" located downstream of the chopper beam stop. If required, the antichopper could restore partially deflected beam on the leading and trailing edges of the pulse to the MEBT axis prior to entering the DTL. Beam simulations of the chopper systems were reported at a previous conference [4].

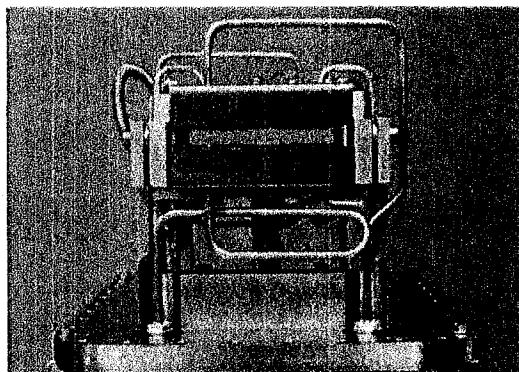


Figure 2. End view of the chopper structure

## 2 DEFLECTING STRUCTURE

The meander line required a material with high electrical conductivity on a substrate with a low dielectric constant. We chose a composite material commonly used in the manufacture of printed circuit boards, Rogers Corp. RT6002, which is 0.100-inch thick with a .020-inch thick copper back plate. The profile of the meander strip-line was drawn in AutoCAD and translated to a machine that made a mask of the notched meander pattern. The vendor for the etched circuit boards was Multi-Plate Circuits, Inc. Although not extremely difficult, the entire process was tedious and time consuming. The first step was to fabricate sample pieces that could be used to measure critical dimensions. We determined that an "etch factor" was needed in the artwork to achieve our final specifications. The next step was to etch the raw material to the desired thickness. Then a photo-image resist was applied to the boards, and they were run through a developer. About 350 microns of tin/lead was applied to the boards, and they were then run through an ammonia etcher. The boards were measured on an optical comparator after each pass until desired dimensions were achieved. Finally, the tin/lead was stripped, the boards were run through a dryer, and then routed to the final dimensions (See Figure 3).

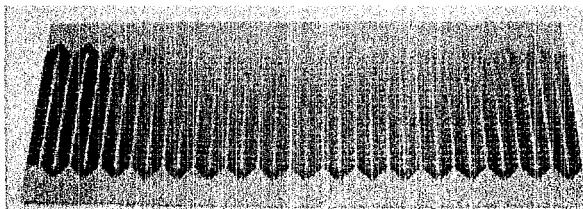


Figure 3. Etched circuit board prior to machining

After the machining of the substrate was complete, it was impossible to maintain the flatness tolerance on the copper surface because of the removal of the dielectric material on the underside of the substrate. A solution to this problem was to epoxy the substrate to the base plate. Eccobond 45 Catalyst 15 epoxy was used for this process. Several tests to determine the bonding strength of the epoxy were conducted prior to actually epoxying the assembly together. A thin layer of epoxy (.003"-.004") mixed with a "rigid" mix ratio yielded the best results. It was also determined that a "weighted" cure time of 48 hours with 100 lbs./sq. in. would be necessary. To ensure uniform weight distribution over the entire length of structure, a precision fixture was placed over the epoxied assembly. Approximately 2000 lbs. of weight was then placed over the entire assembly and the epoxy was allowed to cure for over two days. As part of the manufacturing process we performed in-process testing to assure that the glue joint had been properly made. Glue-joint specimens were fabricated simultaneously with the gluing of the meander line to the ground plane using the same procedure (epoxy from the same mixed batch, thickness of epoxy applied, joint loading, and cure time).

The test measures whether the glue joint has achieved strength greater than that of the meander-line substrate material. The full strength of the epoxy is specified as 2.5X the ultimate strength of the substrate material. So, the strength test determines whether the glue joint would fail in the epoxy or in the meander-line assemblies.

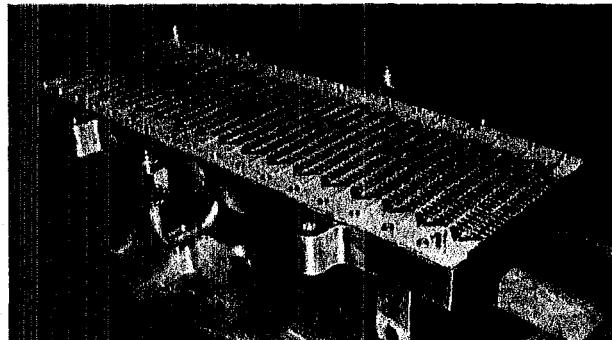


Figure 4: Finished circuit board glued to ground plane

### 2.3 Structure Electrical Tests

Following fabrication, the structures were tested to ensure proper 50-ohm impedance and to check the physical risetime parameters.

John – need better description here –

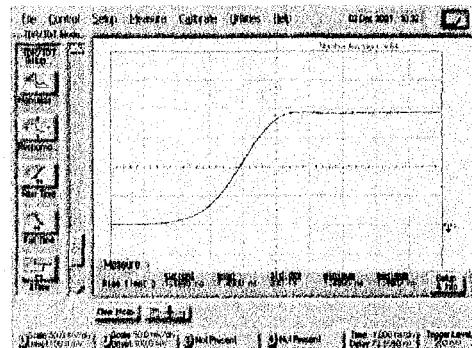


Figure 5. The risetime of a typical complete assembly is 1.5 ns including all of the interconnections and vacuum feedthrough connectors. Actual data are in green. A 2-ns risetime filter is applied in red. The structure risetime is substantially faster than that of the pulsers, which are about 10 ns. The delay through the structures varies from 22.07 to 22.24 ns including the 7-16 DIN to N to SMA adaptors required for the measurement.

## 3 DEFLECTING PULSER

The deflecting pulser was designed and built by Directed Energy, Inc. (DEI) to specifications provided by Los Alamos. The specification for two pulsers to drive the top and bottom meander lines is  $\pm 2500$  V with 10-ns (2

to 98%) risetime. Development of the FETs to achieve the voltage and risetime was done by DEI under a separate R&D contract.

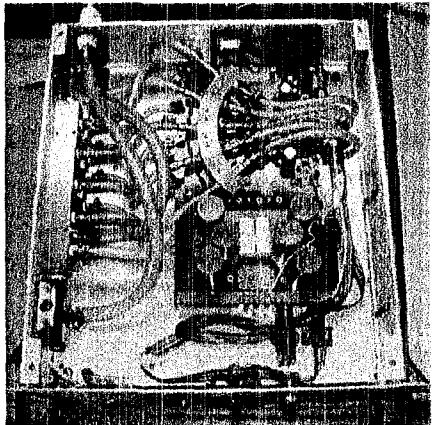


Figure 6. Chassis layout of the DEI positive polarity pulser.

The PVX-3125 pulse generator is a half-bridge (totem pole) design, providing fast rise and fall times. It uses DEI's patented power MOSFET transistors as the main switching devices operated in a series configuration scaled to handle the voltage and current requirements of this pulse generator.

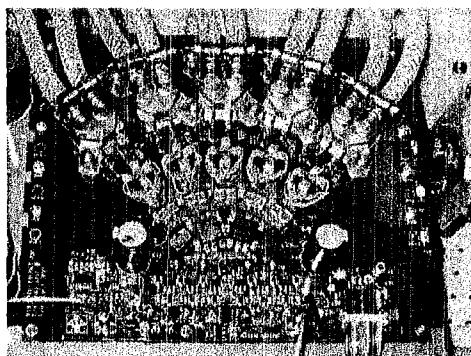


Figure 7 One-half of the MEBT chopper pulser output switch assembly

The amplitude of the external DC power supply controls the output voltage. The efficiency of the pulse generator is about 90%; therefore a DC power supply setting of 3.3 kV will yield an output voltage of about 3 kV. Two versions are available, a positive pulser and a negative pulser. A TTL input gate controls the output pulse width and frequency. When the input gate is high, the output pulse is active. When the gate is low, the output is connected to ground. Thus the high-voltage output pulse replicates the input TTL gate width and frequency. Pulse width and frequency are limited to preset limits. The maximum pulse width is 100 to 905 nanoseconds and the maximum frequency to 1.05 MHz.

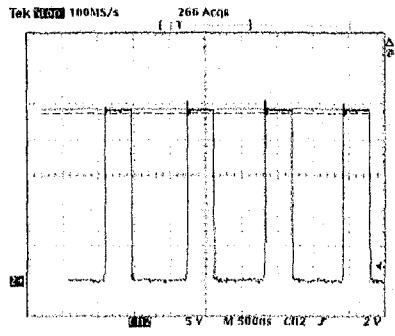


Figure 8. String of four pulses (out of ~1000 during a 1-ms SNS macropulse, repeated at 60 Hz.

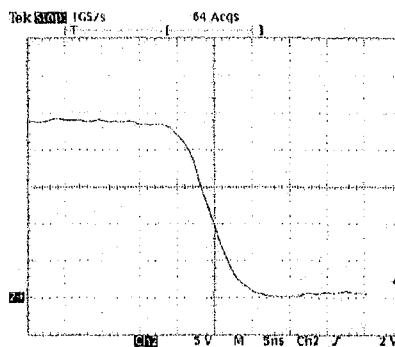


Figure 9. Expansion of trailing edge of typical output pulse showing fall-time of about 8 ns at 2350 volts

This pulse generator features a high-speed overcurrent protection circuit. If a peak over-current condition is detected, the output pulse is truncated within 100ns of detection of the condition, and the output is tied to ground. This circuit protects the pulse generator, load and cabling from potential damage due to an arc or short in the cable or load. It should be noted that maintaining fast rise and fall times is inconsistent with protection from arcs or open circuits on the output. Although the PVX-3125 has over-current protection circuitry, it is not possible to protect the pulse generator from all possible load conditions.

#### 4 ACKNOWLEDGEMENTS

The authors acknowledge the close collaboration with LBNL personnel who designed and built the SNS Front-End system. In particular, they designed and fabricated the MEBT, the chopper vacuum enclosure, and the "chopper stopper" beam aperture, all vital parts of the overall chopping system.

#### 5 REFERENCES

- [1] S. Kurennoy and J. Power "Meander-Line Current Structure Development for SNS Fast Chopper," Proc. of the XX Intl. Linac Conference, 2000, Monterey, CA.
- [2] S. Kurennoy et al., "Progress with SNS Fast Beam Chopper," Proc. of the 2001 PAC, Chicago, IL.

- [3] D. Oshatz et al., "Mechanical Design of the SNS MEBT," Proc. of the 2001 PAC, Chicago, IL.
- [4] S Nath et al., "Beam Behavior Through the SNS Chopper System," Proc. of the XXI Intl. Linac Conference, 2002, Korea.