

Nanoarray Device for Detection of Gas Phase I₂





Kyle Klavetter, Carlos Perez, Jonathan
Coleman, W. Graham Yelton, Mike Siegal (PI)




Technology Summary



- Electrochemical sensor to monitor low concentrations of I_2 gas
 - Sensing of I_2 by means of hydrolyzing I_2 to ionically detectable species

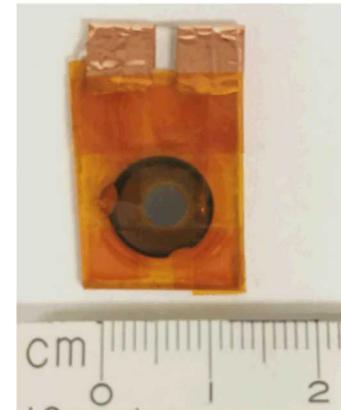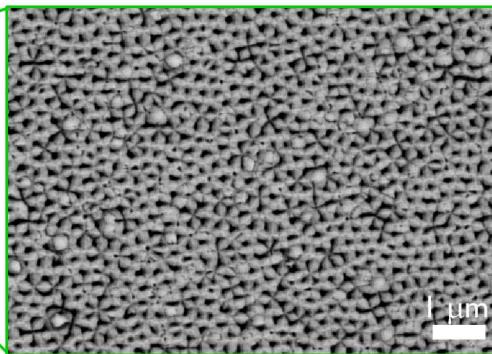

- I_2 health hazards
 - OSHA 0.1 ppm limit¹
 - ^{131}I is radioactive²
- Trace I_2 detection can indicate hazardous or illicit activity
 - Meth lab activity³

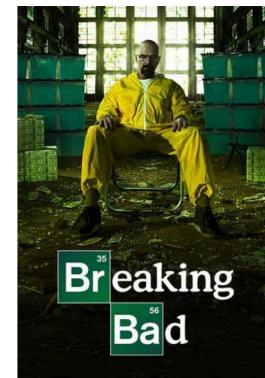

¹CDC Chem. Safety Card, "Iodine"

²Sava et al, JACS, 133, 12398 (2011)

³CA Dept. Justice, "Iodine: Inhalation Hazards, Detection and Protection"

Survey of existing technology

- Existing technology isn't sufficient to the task

Ion chromatography



creative-proteomics.com/

(OSHA protocol): 0.4 ppb
/ lab-based analysis¹

Photoionization detectors



raeco.com

1 ppb / negligible
selectivity²

Electrochemical sensors



gas-sensing.com

>10 ppb / battery-powered (6 hr
use), not selective vs Cl₂, warm-
up period needed and ~\$2K ea³

- Desired properties for our I₂ sensor
 - fieldable
 - low-power/long-life
 - real-time or near real-time detection
 - ppb level detection
 - selective relative to Cl₂

¹OSHA, "Iodine in Workplace Atmospheres"


²CA Dept. Justice, "Iodine: Inhalation Hazards, Detection and Protection"

³<http://www.gas-sensing.com/c-16-gas-detector.html>

Key attributes of our I₂ sensor



- Nanoporous platform is critical
- Why nanoporous? To retain liquid electrolyte in low relative humidity environments!

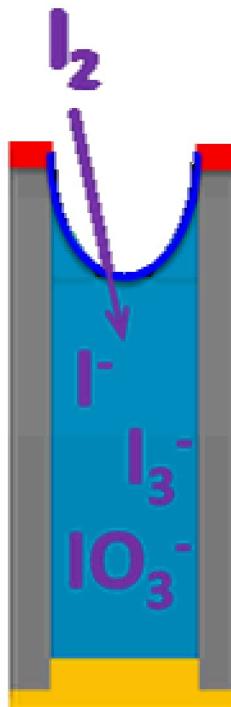


Cartoon representation
of single nanopore

Key attributes of our I₂ sensor





- Nanoporous platform is critical
 - Why nanoporous? To retain liquid electrolyte in low relative humidity environments!
- Properties of selected nanoporous platform
 - Aluminum oxide (anodized aluminum)
 - COTS (commercial off-the-shelf), from InRedox
 - PVD (physical vapor deposition) coated surfaces are the electrodes

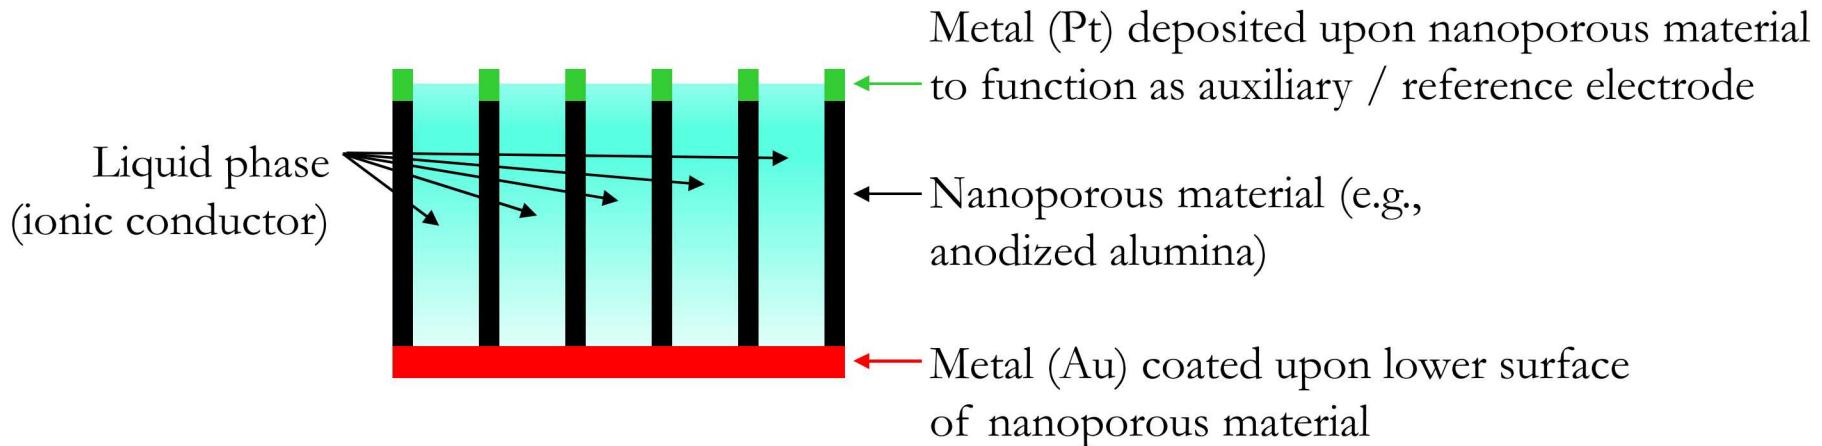

Key attributes of our I₂ sensor




- Nanoporous platform is critical
 - Why nanoporous? To retain liquid electrolyte in low relative humidity environments!
- Properties of selected nanoporous platform
 - Aluminum oxide (anodized aluminum)
 - COTS (commercial off-the-shelf), from InRedox
 - PVD (physical vapor deposition) coated surfaces are the electrodes

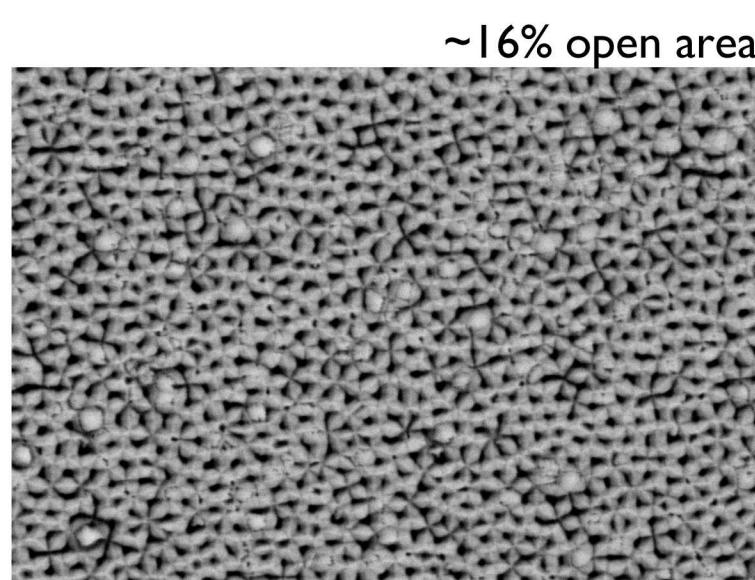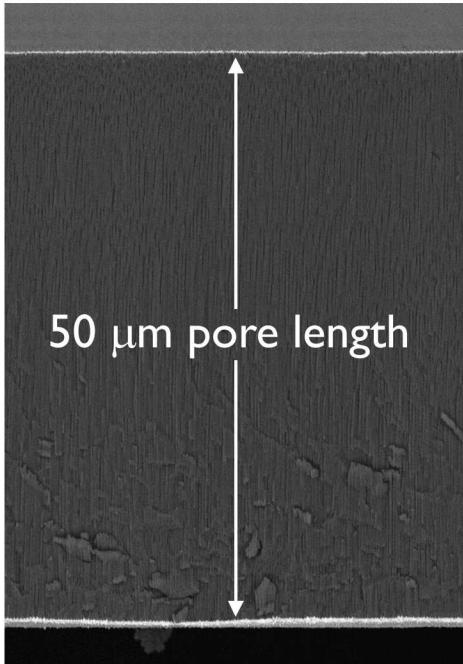

9 | Key attributes of our I₂ sensor




- Nanoporous platform is critical
 - Why nanoporous? To retain liquid electrolyte in low relative humidity environments!
- Properties of selected nanoporous platform
 - Aluminum oxide (anodized aluminum)
 - COTS (commercial off-the-shelf), from InRedox
 - PVD (physical vapor deposition) coated surfaces are the electrodes

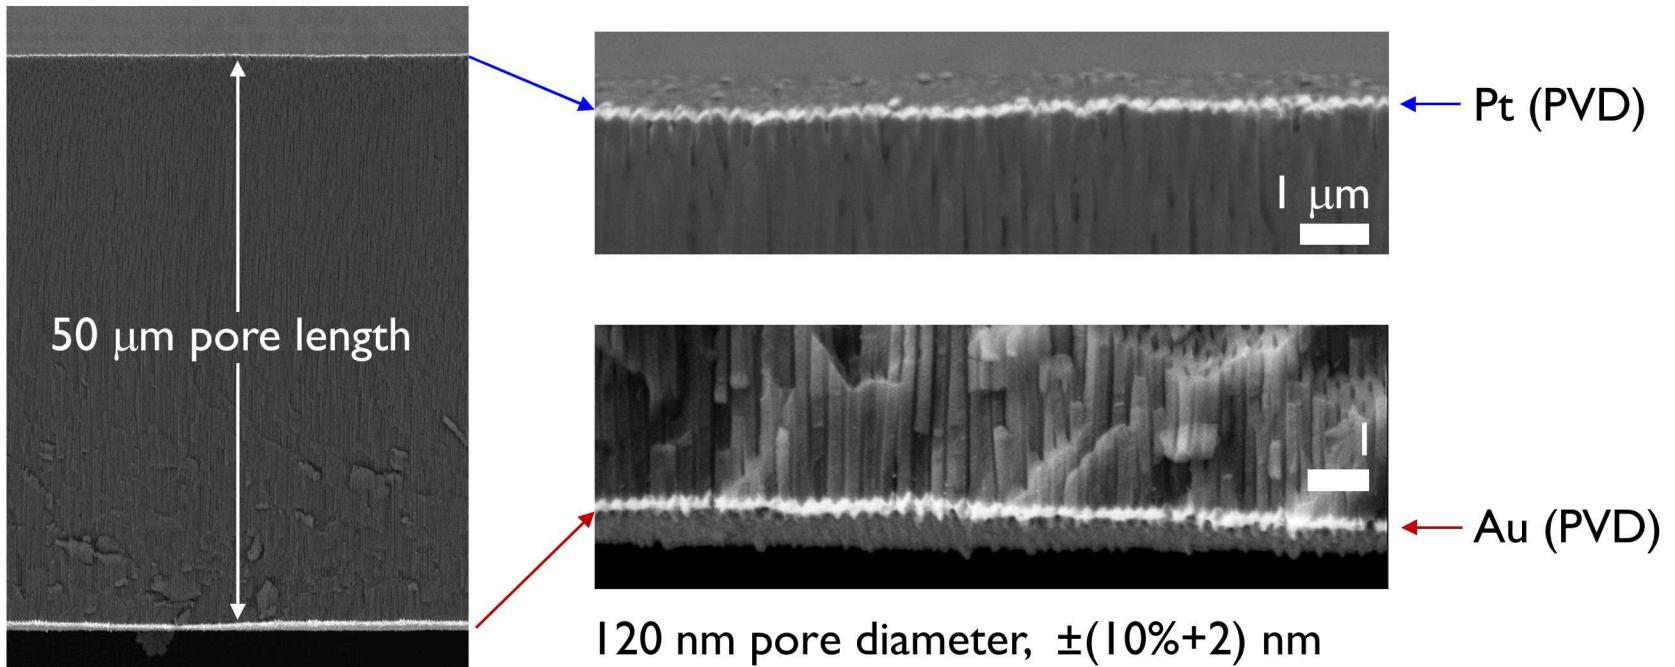


Method for accumulating anionic species of iodine in the sensor nanopores

- The I_2 vapor equilibrates with the aqueous phase in the nanopores of the sensor (Henry's Law)

Critical to maintain pH so that calibration curve is applicable!

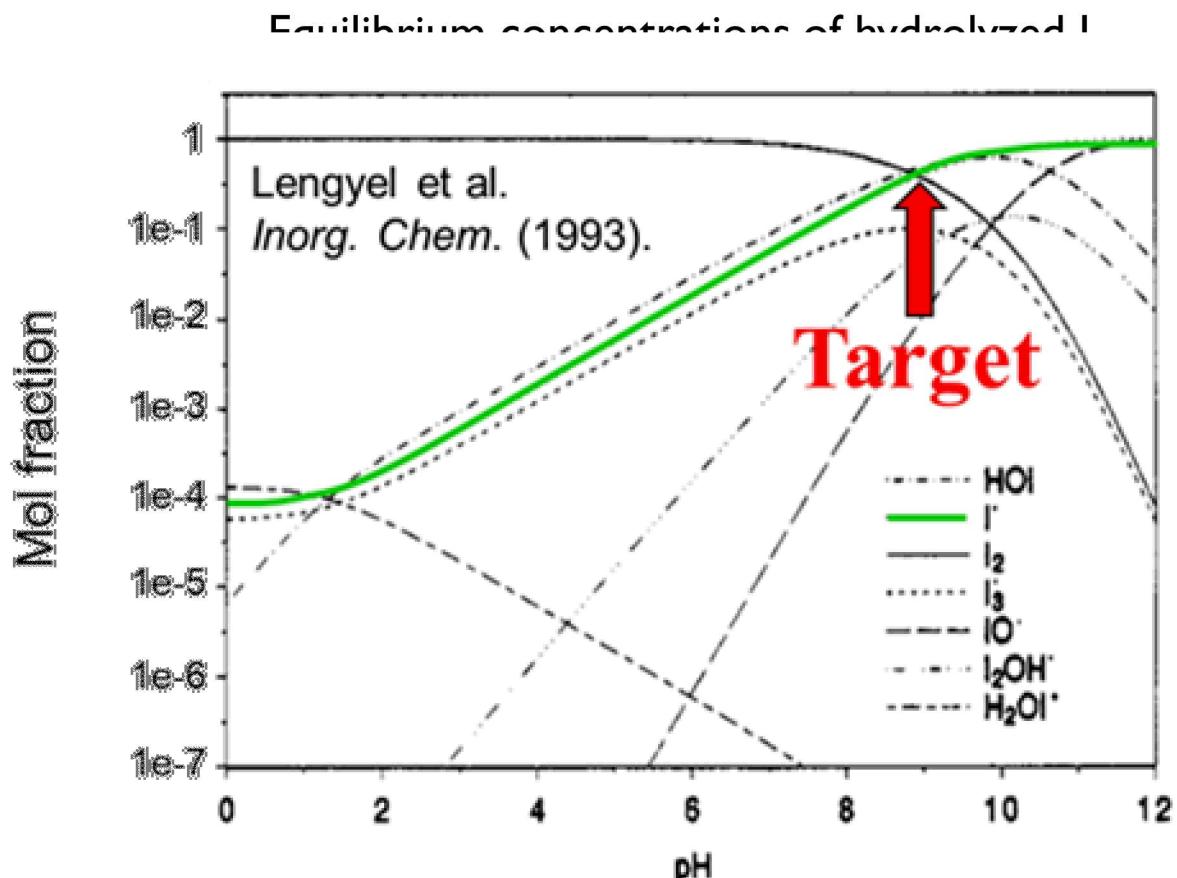

pH 9 buffer accumulates hydrolyzed I_2

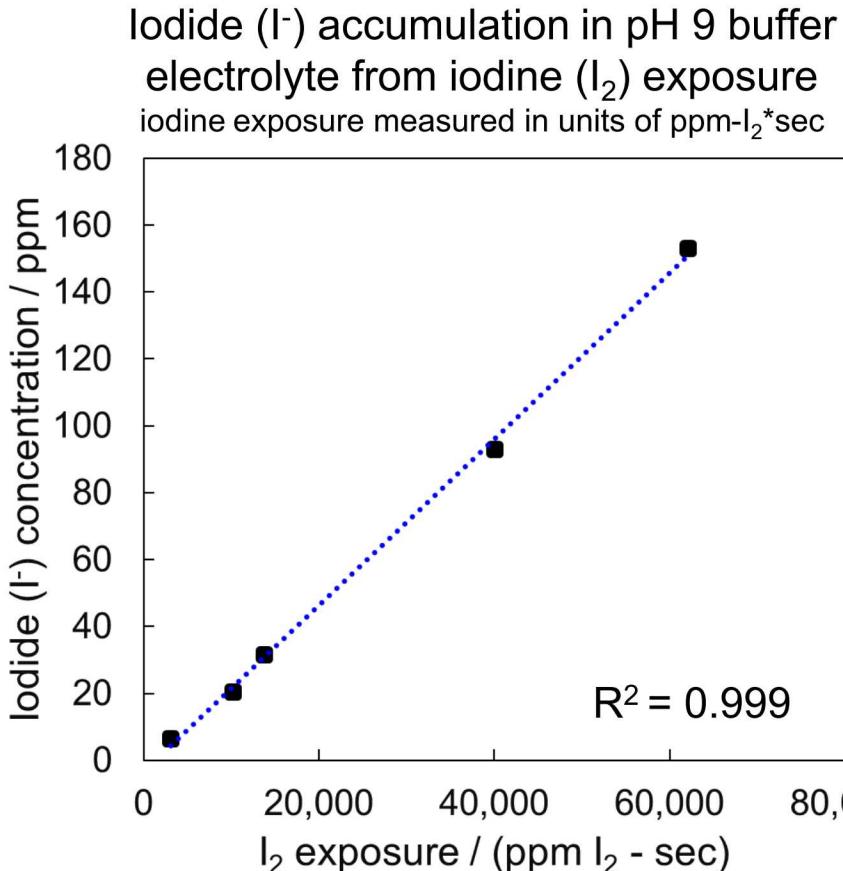


- Linear relationship between iodine (I_2 , gas) exposure and iodide (I^- , aqueous) accumulation up to limit of > 400 ppm I^- (*data point not shown*)
- Thermodynamic limit for iodide accumulation is a function of electrolyte
- Iodide measured by ion selective electrode
- $I_{2(g)}$ measured by commercial sensor

Key point: Ambient iodide can be concentrated in the sensor electrolyte to higher than 400 ppm

Mechanism for I_2 detection


Detection via measured current from the electrochemical oxidation of anionic species of iodine:

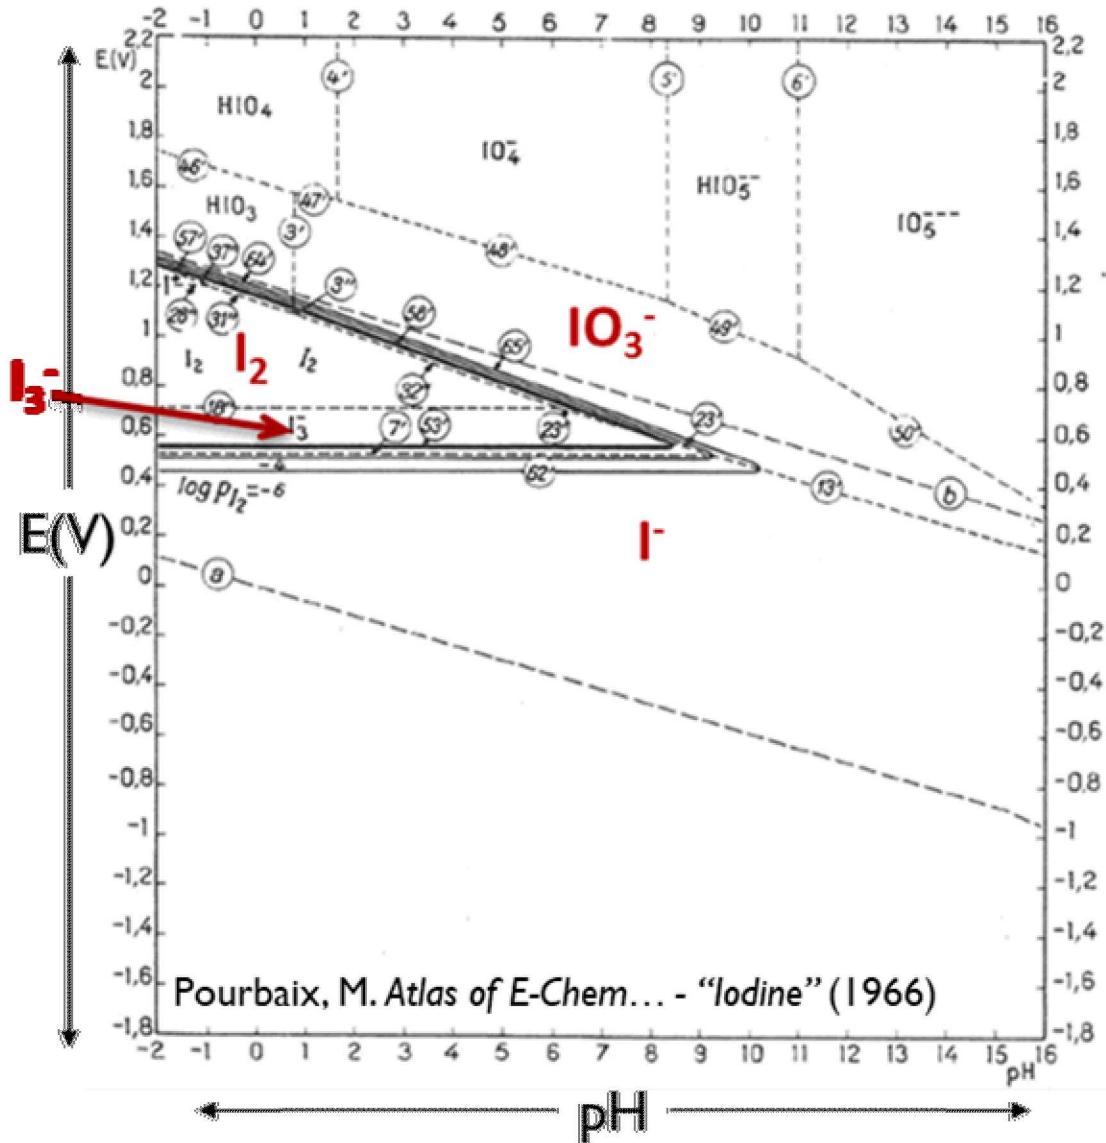


Sensor limit of detection of I⁻

- Electrochemical detection of I⁻ ion in beaker experiment
- Sensor immersed in solutions of MilliQ water (18.2 M^Ωcm) + 40 mM pH 9 buffer
- with or without I⁻ (from 99.995% purity KI salt)

Sensor response vs I⁻ concentration

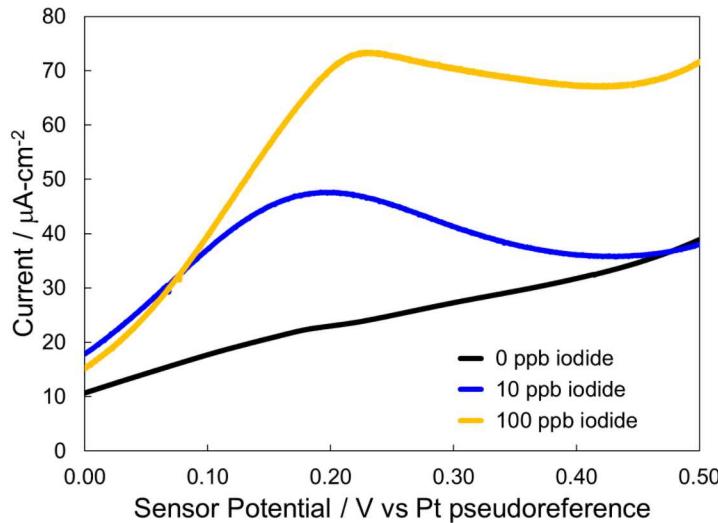

Reproducibility of sensor response


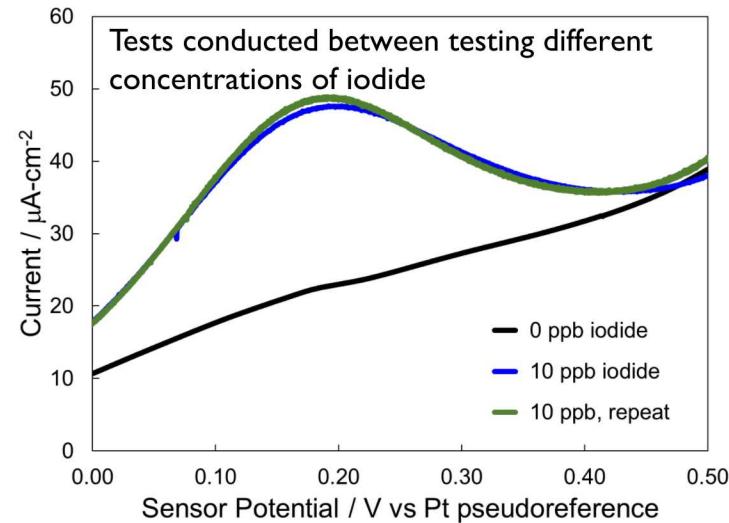


Key result: LOD << 10 ppb
 Cyclic voltammetry at 20 mV/s


Sensor detection of I₂ gas in 89% RH

- Pre-wet sensor with pH 9 buffer solution
- Establish baseline reading with no I₂ in N₂/H₂O gas flow
- Introduce 20 ppb I₂ flow
- Run CV sequence (3x cycles) over time

Sensor detection of I_2 gas in 89% RH

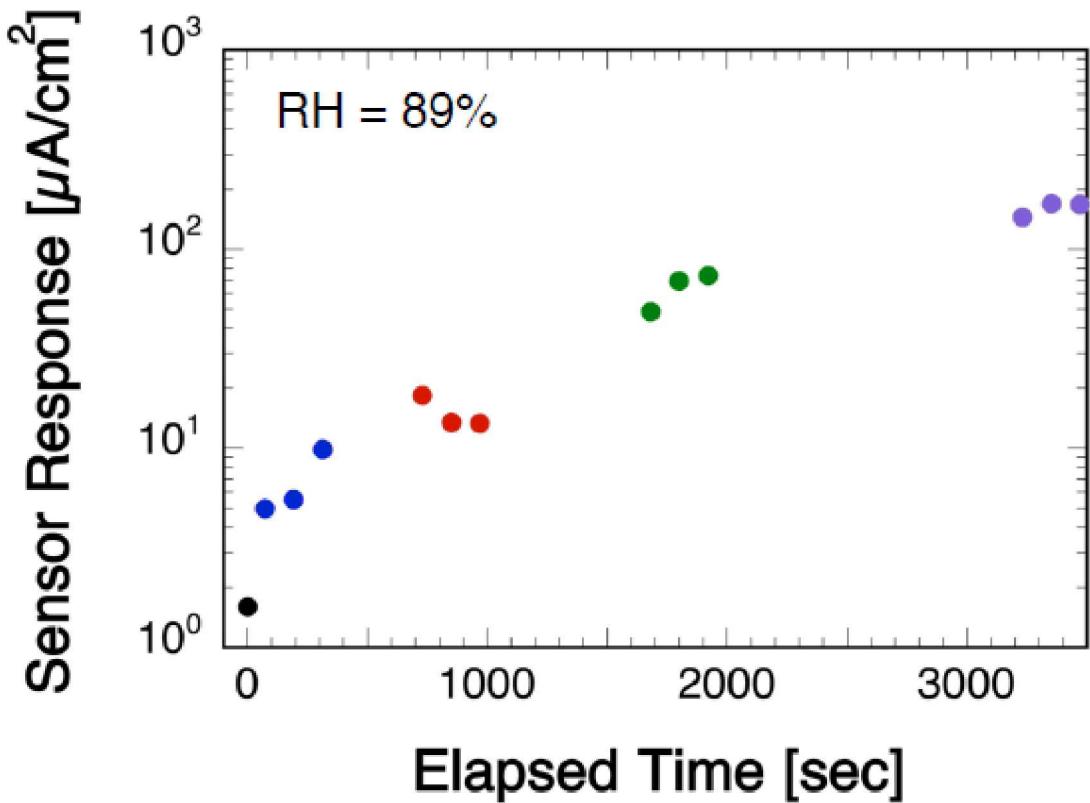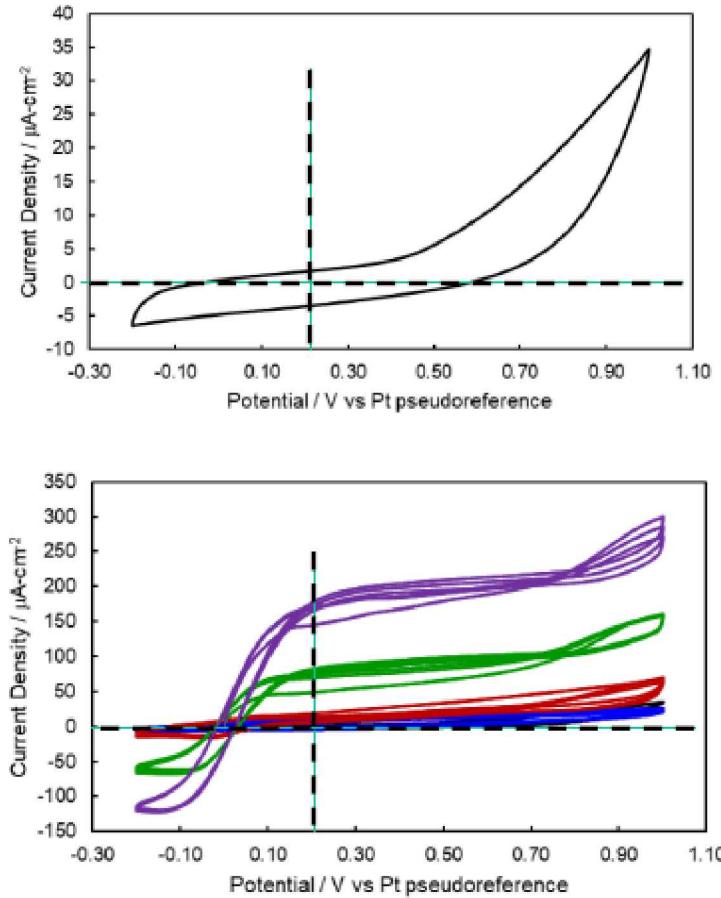

Sensor detection of I_2 gas at variable RH

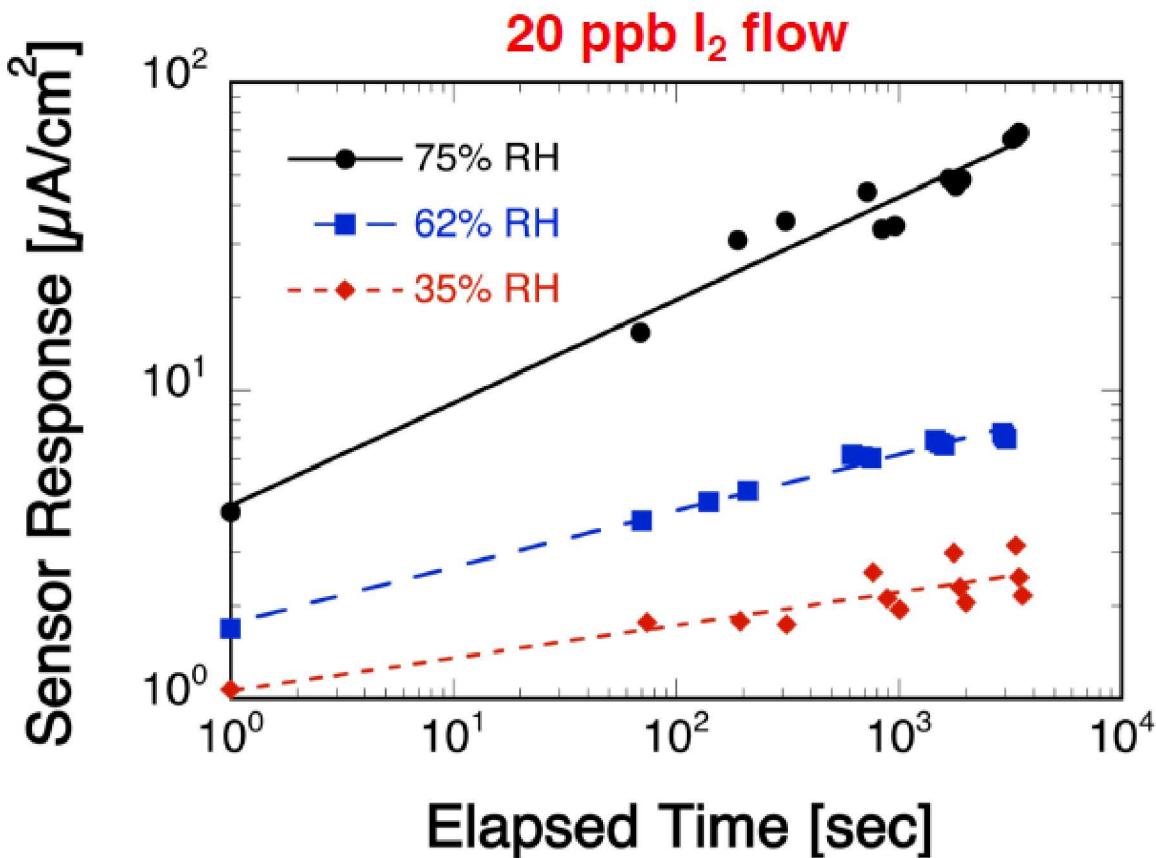

- Sensor response decreases with decreasing RH
- Sensor response increases with pre-concentration time
- Viable response at RH = 35% for 20 ppb I_2 (gas concentration)

Future work


- Demonstrate selectivity of I^- detection over Cl^- for concentration ranges of interest
 - Cl^- will result from hydrolyzed $Cl_{2(g)}$
- Detect I_2 with chronoamperometric signal
 - Measured current at fixed voltage
 - Advantage: faster sampling & minimize analyte consumed
- Enable sensor to operate at lower RH by adjusting geometry of sensor pores



Thank you for your attention



Electrochemical cleaning of sensor

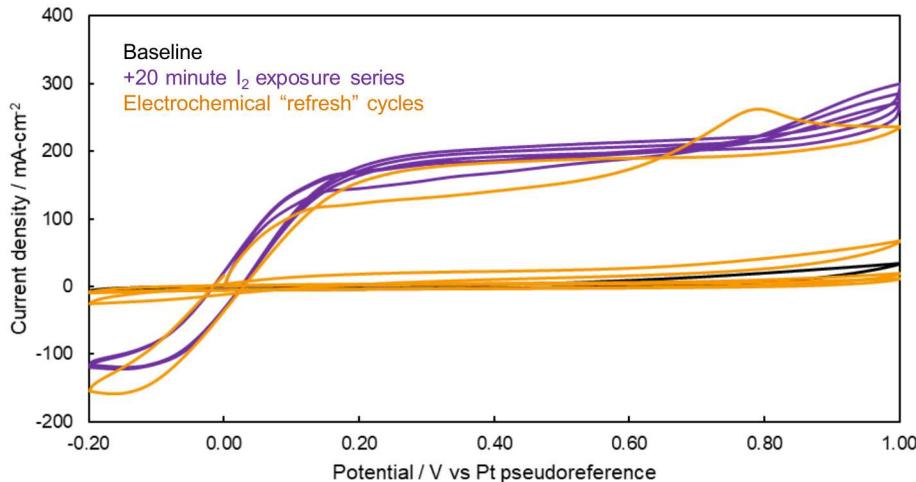

- Electrochemical “refresh” cycles 1, 10, 50 and 100 of 100 cycle CV sequence shown at left in orange
- Purple data shows the sensor when reading after the longest period it was exposed in the I_2 flow chamber
- Black data shows the initial baseline (no I_2)

