

NONINTRUSIVE MANUFACTURED SOLUTIONS FOR NON-DECOMPOSING ABLATION IN TWO DIMENSIONS

Brian A. Freno

Brian R. Carnes

Victor E. Brunini

Neil R. Matula

Sandia National Laboratories

ASME Verification, Validation, and Uncertainty Quantification Symposium
May 25–26, 2022

Outline

- Introduction
- Governing Equations
- Manufactured Solutions
- Heat Equation Solution
- Boundary Condition Reconciliation
- Numerical Examples
- Summary

Outline

- Introduction
 - Ablation
 - Verification and Validation
 - Code Verification
 - Nonintrusive Manufactured Solutions
- Governing Equations
- Manufactured Solutions
- Heat Equation Solution
- Boundary Condition Reconciliation
- Numerical Examples
- Summary

Ablation

Ablative processes are important in many scientific and engineering problems

- Glacial erosion, fire protection, medical procedures, and industrial manufacturing processes
- Ablative materials used as sacrificial heat shields for weapons, rockets, and hypersonic reentry vehicles
 - Accurate prediction of mass and energy loss necessary to minimize weight and cost of heat shield
 - Changes in outer mold line from surface erosion important in hypersonic flight
- Establishing credibility in ablative models is essential

Verification and Validation

Credibility of computational physics codes requires verification and validation

- **Validation** assesses how well models represent physical phenomena
 - Computational results are compared with experimental results
 - Assess suitability of models, model error, and bounds of validity
- **Verification** assesses accuracy of numerical solutions against expectations
 - *Solution verification* estimates numerical error for particular solution
 - *Code verification* verifies correctness of numerical-method implementation

Code Verification

Code verification is focus of this work

- Governing equations are numerically discretized
 - Discretization error is introduced in solution
- Seek to verify discretization error decreases with refinement of discretization
 - Should decrease at an expected rate
- Use manufactured and/or exact solutions to compute error

Code Verification

Code verification demonstrated in many computational physics disciplines

- Fluid dynamics
- Multiphase flows
- Solid mechanics
- Electrodynamics
- Heat transfer
- Fluid-structure interaction
- Radiation hydrodynamics
- Electromagnetism

Existing ablation code verification has used simple exact solutions

We present an approach for developing nonintrusive manufactured solutions

- Manufactured solutions more thoroughly test code capabilities
- Approach does not require code modification
- Instead of introducing a source term, we manufacture ablation parameters

Nonintrusive Manufactured Solutions

- Optionally transform governing equations
- Derive solutions that satisfy nonablating boundary conditions
- Manufacture parameters to satisfy ablating boundary condition

Outline

- Introduction
- Governing Equations
 - Heat Conduction
 - Ablation and Boundary Conditions
- Manufactured Solutions
- Heat Equation Solution
- Boundary Condition Reconciliation
- Numerical Examples
- Summary

Heat Conduction

For a solid, the energy equation due to heat conduction is

$$\frac{\partial}{\partial t}(\rho e) + \nabla \cdot \mathbf{q} = 0$$

Internal energy e and heat flux \mathbf{q} are modeled by

$$e = e_0 + \int_{T_0}^T c_p(\hat{T}) d\hat{T}, \quad \mathbf{q} = -k(T) \nabla T$$

The heat equation is

$$\rho c_p(T) \frac{\partial T}{\partial t} - \nabla \cdot (k(T) \nabla T) = 0$$

ρ is constant density

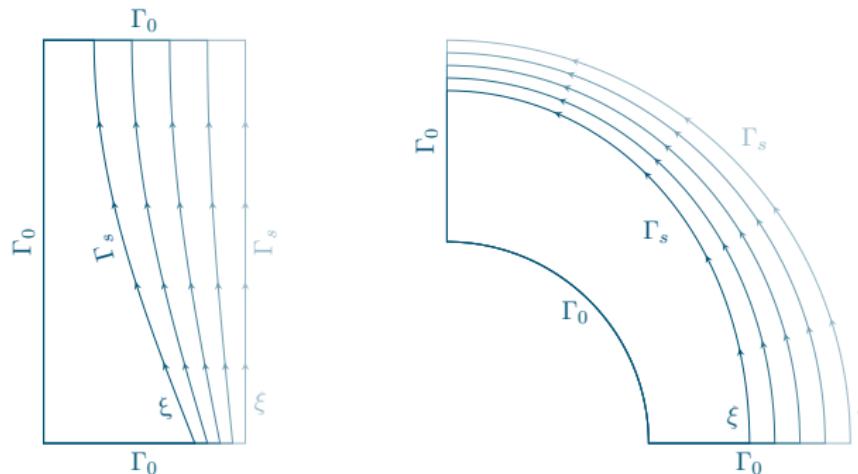
$c_p(T)$ is specific heat capacity

$k(T)$ is thermal conductivity of isotropic material

Ablating Surface Parameterization

Time-dependent material domain is $\Omega(t)$ with boundary $\Gamma = \Gamma_s \cup \Gamma_0$

- Γ_s is ablating surface: $\Gamma_s = \{(x, y) : x = x_s, y = y_s\}$
 - arbitrarily parameterized by $\mathbf{x}_s(\xi, t) = (x_s(\xi, t), y_s(\xi, t))$
 - $\xi \in [0, 1]$ increases in counterclockwise direction
- Γ_0 is non-ablating surface



Recession Definition

Along Γ_s , material recedes by $s(\xi, t)$ in direction opposite to outer normal

Recession rate defined by

$$\dot{s}(\xi, t) = -\frac{\partial \mathbf{x}_s}{\partial t}(\xi, t) \cdot \mathbf{n}_s(\xi, t),$$

where the outer unit normal vector is defined by

$$\mathbf{n}_s(\xi, t) = \frac{1}{\sqrt{(\partial x_s / \partial \xi)^2 + (\partial y_s / \partial \xi)^2}} \frac{\partial}{\partial \xi} \begin{Bmatrix} y_s \\ -x_s \end{Bmatrix}$$

Recession Rate and Heat Flux Modeling

Recession rate modeled by $\dot{s}(\xi, t) = \frac{B'(T_s, p_e) C_e}{\rho}$

Heat flux along ablating surface $q_s = \mathbf{q}_s \cdot \mathbf{n}_s$ modeled by

$$q_s = \underbrace{C_e [h_w(T_s, p_e) - h_r]}_{\text{convective heat flux}} + \underbrace{\rho \dot{s} [h_w(T_s, p_e) - h_s(T_s)]}_{\text{energy loss from ablation}} + \underbrace{\epsilon \sigma (T_s^4 - T_r^4)}_{\text{radiative flux}}$$

$T_s(\xi, t) = T(\mathbf{x}_s(\xi, t), t)$ is temperature along ablating surface

$p_e(\xi, t)$ is pressure at outer edge of boundary layer

$B'(T_s, p_e)$ is nondimensionalized char ablation rate

$C_e(\xi, t)$ is heat transfer coefficient ($\rho_e u_e C_h$)

$h_w(T_s, p_e)$ is wall enthalpy

$h_r(\xi, t)$ is recovery enthalpy

$h_s(\xi, t)$ is solid enthalpy, computed from $h_s(T_s) = h_0 + \int_{T_0}^{T_s} c_p(\hat{T}) d\hat{T}$

ϵ is emissivity

σ is Stefan–Boltzmann constant

$T_r = 300$ K is radiation reference temperature

Outline

- Introduction
- Governing Equations
- Manufactured Solutions
 - Discretization Error
 - Solutions
 - Manufactured Solutions from Manufactured Parameters
- Heat Equation Solution
- Boundary Condition Reconciliation
- Numerical Examples
- Summary

Discretization Error

A governing system of equations can be written generally as

$$\mathbf{r}(\mathbf{u}; \boldsymbol{\mu}) = \mathbf{0}$$

\mathbf{r} represents equations, $\mathbf{u}(\mathbf{x}, t)$ is state vector, and $\boldsymbol{\mu}$ is parameter vector

Discretize in time and space to get

$$\mathbf{r}_h(\mathbf{u}_h; \boldsymbol{\mu}) = \mathbf{0}$$

\mathbf{r}_h is residual of discretized equations and \mathbf{u}_h is solution to discretized equations

Discretization error is $\mathbf{e}_u = \mathbf{u}_h - \mathbf{u}$, and its norm $\|\mathbf{e}_u\| \approx Ch^p$

C is function of solution derivatives

h is measure of discretization size

p is order of accuracy

Convergence studies of $\|\mathbf{e}_u\|$ to measure p

Solutions

e_u can only be measured if \mathbf{u} is known

Exact solutions

- Negligible implementation effort: $\mathbf{r}(\mathbf{u}_{\text{Exact}}; \boldsymbol{\mu}) = \mathbf{0}$
- Limited cases, span small subset of application space

Manufactured solutions from forcing vector

- Do not satisfy original equations: $\mathbf{r}(\mathbf{u}_{\text{MS}}; \boldsymbol{\mu}) \neq \mathbf{0}$
- Require source term: $\mathbf{r}_h(\mathbf{u}_h; \boldsymbol{\mu}) = \mathbf{r}(\mathbf{u}_{\text{MS}}; \boldsymbol{\mu})$
- Manufactured to exercise features of interest

Manufactured solutions from manufactured parameters

- Favorable properties similar to traditional manufactured solutions
- Negligible implementation effort: $\mathbf{r}(\mathbf{u}; \boldsymbol{\mu}_{\text{MP}}) = \mathbf{0}$

Manufactured Solutions from Manufactured Parameters

- Manufactured parameters do not require code modification
- Compute \mathbf{u} from solutions to governing equations
- For unsatisfied boundary conditions, manufacture underlying parameters

Outline

- Introduction
- Governing Equations
- Manufactured Solutions
- Heat Equation Solution
 - Time Dependency
 - Cartesian Coordinates
 - Polar Coordinates
- Boundary Condition Reconciliation
- Numerical Examples
- Summary

Heat Equation Solution

For $k(T) = \bar{k}f(T)$ and $c_p(T) = \bar{c}_p f(T)$, heat equation is

$$\frac{\partial \theta}{\partial t} - \bar{\alpha} \Delta \theta = 0,$$

where $\theta = \int_T f(T')dT' + C_k = F(T)$ (Kirchhoff transformation)

Disregard time dependency of domain and assume we can separate variables:

$$\theta(\mathbf{x}, t) = \sum_{i=0}^{\infty} \sum_{j=0}^{\infty} \hat{\theta}_{i,j}(t) \varphi_{i,j}(\mathbf{x})$$

$\varphi_{i,j}(\mathbf{x})$ is orthogonal basis

i and j are indices associated with the basis of different spatial coordinates

Time Dependency

Inserting solution expression into equation yields

$$\frac{1}{\bar{\alpha}} \frac{\hat{\theta}'_{i,j}(t)}{\hat{\theta}_{i,j}(t)} = \frac{\Delta \varphi_{i,j}(\mathbf{x})}{\varphi_{i,j}(\mathbf{x})} = -\lambda_{i,j}$$

For the time dependency,

$$\hat{\theta}_{i,j}(t) = \hat{\theta}_{i,j_0} e^{-\bar{\alpha} \lambda_{i,j} t}$$

Interested in $\lambda_{i,j} < 0$

- Focusing on ablative processes and interested in verifying time integrator
- Interested in cases where temperature increases with time

Cartesian Coordinates

Separate x and y dependencies:

$$\varphi_{i,j}(\mathbf{x}) = u_i(x)v_j(y)$$

From $v'_j(0) = v'_j(H) = 0$,

$$v_j(y) = \cos(j\pi y/H)$$

From $u'(0) = 0$,

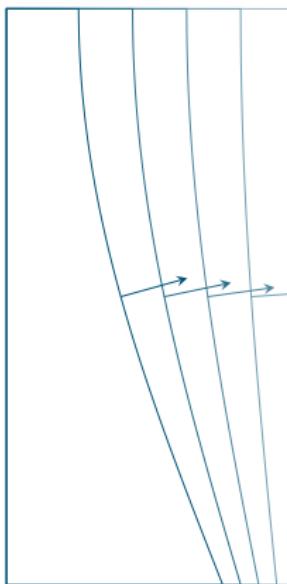
$$u_i(x) = \begin{cases} \cosh(|\mu_i|x) & \text{for } \mu_i^2 < 0 \\ \cos(\mu_i x) & \text{for } \mu_i^2 \geq 0 \end{cases}$$

μ_i depends on BC at $x = x_s$, and

$$\lambda_{i,j} = \mu_i^2 + \nu_j^2,$$

where $\nu_j = j\pi/H$

$$\frac{\partial T}{\partial y}(x, H, t) = 0$$



$$\frac{\partial T}{\partial x}(0, y, t) = 0$$

$$\frac{\partial T}{\partial y}(x, 0, t) = 0$$

$$-k(T_s) \frac{\partial T}{\partial n}(\mathbf{x}_s, t) = q_s$$

Polar Coordinates

Partially separate r and ϕ dependencies:

$$\varphi_{i,j}(\mathbf{x}) = u_{i,j}(r)v_j(\phi)$$

From $v'_j(0) = v'_j(\bar{\phi}) = 0$,

$$v_j(\phi) = \cos(j\pi\phi/\bar{\phi})$$

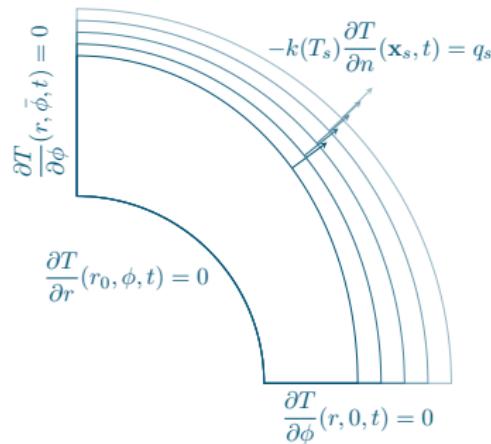
From $u'(r_0) = 0$ and letting $r' = \sqrt{|\lambda_{i,j}|}r$,

$$u_{i,j}(r) = \begin{cases} K_{i,j}I_{\nu_j}(r') + I_{i,j}K_{\nu_j}(r') & \text{for } \lambda_{i,j} < 0 \\ Y_{i,j}J_{\nu_j}(r') + J_{i,j}Y_{\nu_j}(r') & \text{for } \lambda_{i,j} > 0 \\ \cosh(\nu_j \ln(r/r_0)) & \text{for } \lambda_{i,j} = 0 \end{cases}$$

$\lambda_{i,j}$ depends on boundary condition at $r = r_s$, and $\nu_j = j\pi/\bar{\phi}$

I_α and K_α are modified Bessel functions of 1st and 2nd kind J_α and Y_α are Bessel functions of 1st and 2nd kind

$$\begin{aligned} K_{i,j} &= K_{\nu_j-1}(r'_0) + K_{\nu_j+1}(r'_0) \\ I_{i,j} &= I_{\nu_j-1}(r'_0) + I_{\nu_j+1}(r'_0) \end{aligned}$$



Outline

- Introduction
- Governing Equations
- Manufactured Solutions
- Heat Equation Solution
- Boundary Condition Reconciliation
 - Overview
 - Manufacture Temperature and Ablating Surface
 - Manufacture Parameters
- Numerical Examples
- Summary

Overview

- Solutions disregard boundary condition on ablating surface
- Manufacture underlying functions of ablating boundary condition
- Can manufacture arbitrary solutions without adding source term
- Much freedom, provided functions are sufficiently smooth
- Desirable properties take precedence over being physically realizable
 - Sufficient number of finite nontrivial derivatives
 - Elementary function composition

Manufacture Temperature and Ablating Surface

Manufacture $T(\mathbf{x}, t)$, which requires manufacturing

- Material properties: $k(T) = \bar{k}f(T)$, $c_p(T) = \bar{c}_p f(T)$ ρ , and ϵ
 - \bar{k} , \bar{c}_p , $\rho \rightarrow \bar{\alpha}$
 - $f(T)$ relates $\theta(\mathbf{x}, t)$ and $T(\mathbf{x}, t)$
 - Manufacture $f(T)$ to easily compute integral $F(T)$ and its inverse $F^{-1}(\theta)$
- Transformed temperature: $\theta(\mathbf{x}, t)$
 - Truncate $\theta(\mathbf{x}, t) = \sum_{i=0}^{\infty} \sum_{j=0}^{\infty} \hat{\theta}_{i,j}(t) \varphi_{i,j}(\mathbf{x})$
 - Specify $\hat{\theta}_{i,j_0}$ in $\hat{\theta}_{i,j}(t)$
 - Specify μ_i in $u_i(x)$ and $\lambda_{i,j}$ (Cartesian) or $\lambda_{i,j}$ (polar)
- Compute temperature from $T(\mathbf{x}, t) = F^{-1}(\theta(\mathbf{x}, t))$

Manufacture $\mathbf{x}_s(\xi, t)$ to compute $\mathbf{n}_s(\xi, t)$ and $\dot{s}(\xi, t)$

Manufacture Parameters

Manufacture parameters to satisfy boundary condition on Γ_s :

$$-k(T_s) \frac{\partial T}{\partial n} = C_e [h_w(T_s, p_e) - h_r] + \rho \dot{s} [h_w(T_s, p_e) - h_s(T_s)] + \epsilon \sigma (T_s^4 - T_r^4)$$

and recession rate:

$$\dot{s}(\xi, t) = \frac{B'(T_s, p_e) C_e}{\rho}$$

Manufacture Parameters

Manufacture parameters to satisfy boundary condition on Γ_s :

$$-k(T_s) \frac{\partial T}{\partial n} = C_e [h_w(T_s, p_e) - h_r] + \rho \dot{s} [h_w(T_s, p_e) - h_s(T_s)] + \epsilon \sigma (T_s^4 - T_r^4)$$

and recession rate:

$$\dot{s}(\xi, t) = \frac{B'(T_s, p_e) C_e}{\rho}$$

- $\frac{\partial T}{\partial n}$, T_s , $k(T_s)$, ρ , ϵ , T_r , and $\dot{s}(\xi, t)$ already determined

Manufacture Parameters

Manufacture parameters to satisfy boundary condition on Γ_s :

$$-k(T_s) \frac{\partial T}{\partial n} = C_e [h_w(T_s, p_e) - h_r] + \rho \dot{s} [h_w(T_s, p_e) - h_s(T_s)] + \epsilon \sigma (T_s^4 - T_r^4)$$

and recession rate:

$$\dot{s}(\xi, t) = \frac{B'(T_s, p_e) C_e}{\rho}$$

- $\frac{\partial T}{\partial n}$, T_s , $k(T_s)$, ρ , ϵ , T_r , and $\dot{s}(\xi, t)$ already determined
- $h_s(T_s) = h_0 + \int_{T_0}^{T_s} c_p(\hat{T}) d\hat{T}$ computed from T_s and $c_p(T)$

Manufacture Parameters

Manufacture parameters to satisfy boundary condition on Γ_s :

$$-k(T_s) \frac{\partial T}{\partial n} = \mathbf{C}_e [h_w(T_s, p_e) - h_r] + \rho \dot{s} [h_w(T_s, p_e) - h_s(T_s)] + \epsilon \sigma (T_s^4 - T_r^4)$$

and recession rate:

$$\dot{s}(\xi, t) = \frac{B'(T_s, p_e) \mathbf{C}_e}{\rho}$$

- $\frac{\partial T}{\partial n}$, T_s , $k(T_s)$, ρ , ϵ , T_r , and $\dot{s}(\xi, t)$ already determined
- $h_s(T_s) = h_0 + \int_{T_0}^{T_s} c_p(\hat{T}) d\hat{T}$ computed from T_s and $c_p(T)$
- Manufacture $B'(T_s, p_e)$ and $p_e(\xi, t)$

Manufacture Parameters

Manufacture parameters to satisfy boundary condition on Γ_s :

$$-k(T_s) \frac{\partial T}{\partial n} = C_e [h_w(T_s, p_e) - h_r] + \rho \dot{s} [h_w(T_s, p_e) - h_s(T_s)] + \epsilon \sigma (T_s^4 - T_r^4)$$

and recession rate:

$$\dot{s}(\xi, t) = \frac{B'(T_s, p_e) C_e}{\rho}$$

- $\frac{\partial T}{\partial n}$, T_s , $k(T_s)$, ρ , ϵ , T_r , and $\dot{s}(\xi, t)$ already determined
- $h_s(T_s) = h_0 + \int_{T_0}^{T_s} c_p(\hat{T}) d\hat{T}$ computed from T_s and $c_p(T)$
- Manufacture $B'(T_s, p_e)$ and $p_e(\xi, t)$
- $C_e(\xi, t)$ computed from $\dot{s}(\xi, t)$, $B'(T_s, p_e)$, $p_e(\xi, t)$, and ρ

Manufacture Parameters

Manufacture parameters to satisfy boundary condition on Γ_s :

$$-k(T_s) \frac{\partial T}{\partial n} = C_e [h_w(T_s, p_e) - h_r] + \rho \dot{s} [h_w(T_s, p_e) - h_s(T_s)] + \epsilon \sigma (T_s^4 - T_r^4)$$

and recession rate:

$$\dot{s}(\xi, t) = \frac{B'(T_s, p_e) C_e}{\rho}$$

- $\frac{\partial T}{\partial n}$, T_s , $k(T_s)$, ρ , ϵ , T_r , and $\dot{s}(\xi, t)$ already determined
- $h_s(T_s) = h_0 + \int_{T_0}^{T_s} c_p(\hat{T}) d\hat{T}$ computed from T_s and $c_p(T)$
- Manufacture $B'(T_s, p_e)$ and $p_e(\xi, t)$
- $C_e(\xi, t)$ computed from $\dot{s}(\xi, t)$, $B'(T_s, p_e)$, $p_e(\xi, t)$, and ρ
- $h_w(T_s, p_e)$ and $h_r(\xi, t)$ need to be determined

Manufacture Parameters (continued)

Boundary condition and recession rate can be combined:

$$q_s = C_e (h_w(T_s, p_e) [1 + B'(T_s, p_e)] - h_r - B'(T_s, p_e)h_s(T_s)) + \epsilon\sigma(T_s^4 - T_r^4)$$

- Prevent BC instabilities due to perturbations (e.g., discretization errors)
- Impose $\frac{\partial q_s}{\partial T_s} \geq 0$ so perturbations do not grow
 - For radiative contribution, $\frac{\partial}{\partial T_s}(q_{s_{\text{rad.}}}) = 4\epsilon\sigma T_s^3 \geq 0$
 - For non-radiative contribution, set $\frac{\partial}{\partial T_s}(q_{s_{\text{non-rad.}}}) = 0$:

$$h_w(T_s, p_e) [1 + B'(T_s, p_e)] - B'(T_s, p_e)h_s(T_s) = g(p_e)$$

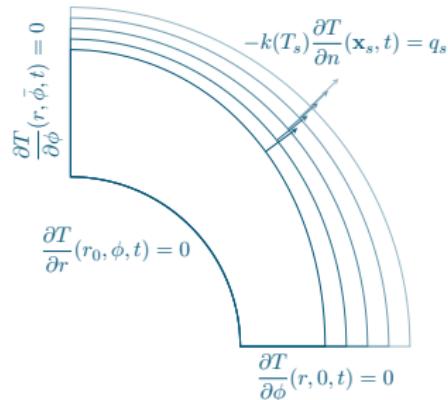
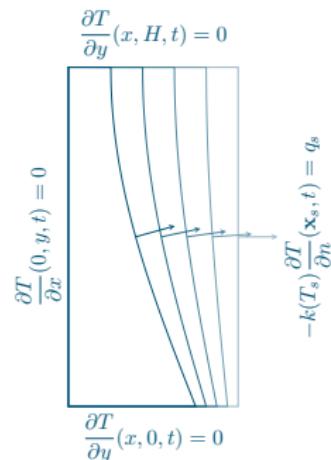
$$\rightarrow h_w(T_s, p_e) = \frac{B'(T_s, p_e)h_s(T_s) + g(p_e)}{1 + B'(T_s, p_e)}$$

- Set $g(p_e) = 0$
- $h_r(\xi, t)$ can be computed since other parameters are known

Outline

- Introduction
- Governing Equations
- Manufactured Solutions
- Heat Equation Solution
- Boundary Condition Reconciliation
- Numerical Examples
 - Overview
 - Cartesian Coordinates
 - Polar Coordinates
- Summary

Overview



- Demonstrate methodology on two problems: Cartesian and polar
- Spatial domain discretized with $\mathcal{O}(h^2)$ finite elements
- Backward Euler time integration is $\mathcal{O}(h)$
- Each discretization doubles elements in each dimension, quarters time step
- Piecewise linear interpolation of tabulated data is $\mathcal{O}(h^2)$ – halve spacing

Error Norms

Measure error in temperature using the norm

$$\varepsilon_T = \max_{t \in [0, \bar{t}]} \|T_h(\mathbf{x}, t) - T(\mathbf{x}, t)\|_2$$

- L^2 -norm of error computed over spatial domain
- Maximum of L^2 -norms over time

Measure error in ablating surface using the norm

$$\varepsilon_{\mathbf{x}_s} = \max_{t \in [0, \bar{t}]} \|\mathbf{x}_{s_h}(\xi, t) - \mathbf{x}_s(\xi, t)\|_2$$

- L^2 -norm of error computed over ablating surface

Mesh Deformation and Common Parameters

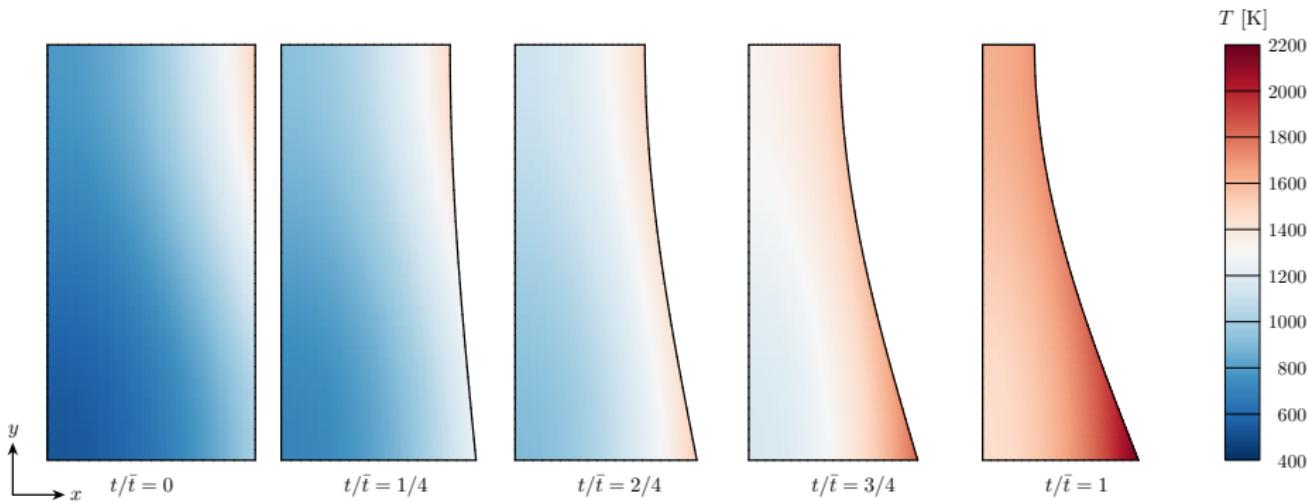
- Mesh deformation from Gent hyperelastic mesh stress model
- $\rho = 1000 \text{ kg/m}^3$, $\bar{k} = 0.7 \text{ W/m/K}$, $\bar{\alpha} = \{10^{-8}, 10^{-7}, 10^{-6}, 10^{-5}\} \text{ m}^2/\text{s} \rightarrow \bar{c}_p$
- With ($\epsilon = 0.9$) and without ($\epsilon = 0$) radiative flux
- Quartering ($\Delta t/4$) and halving ($\Delta t/2$) the time step
- Manufacture

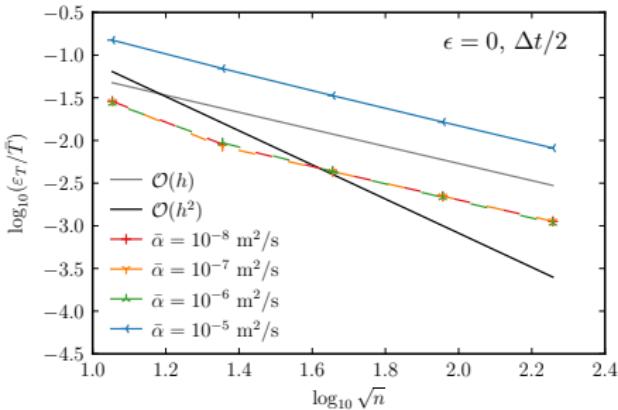
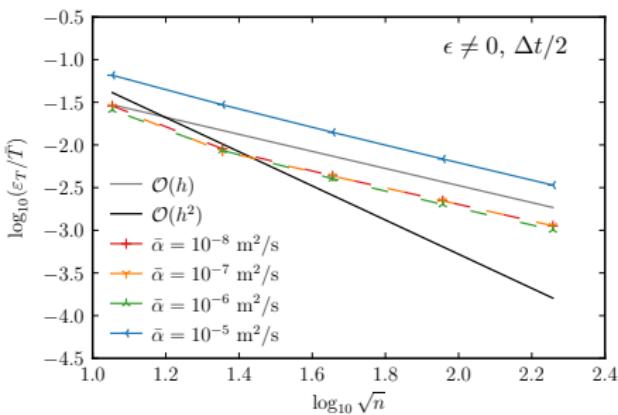
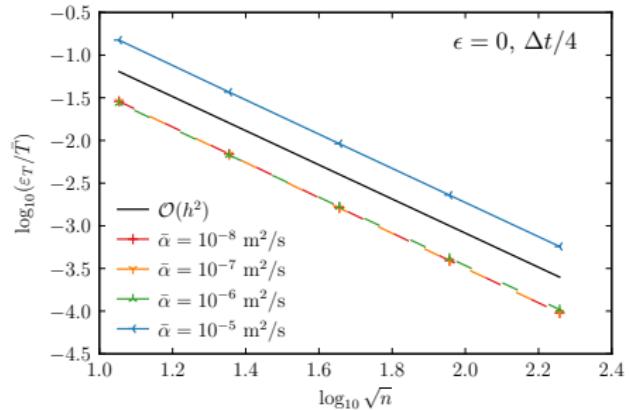
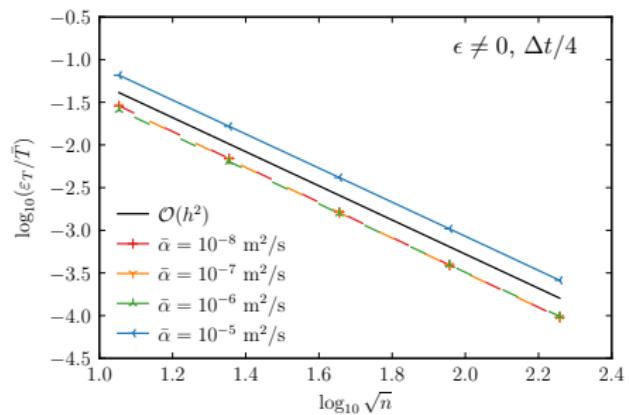
$$B'(T_s, p_e) = \exp \left(\frac{1}{1000} \frac{T_s}{\bar{T}} - \frac{1}{50} \frac{p_e}{\bar{p}} \right),$$

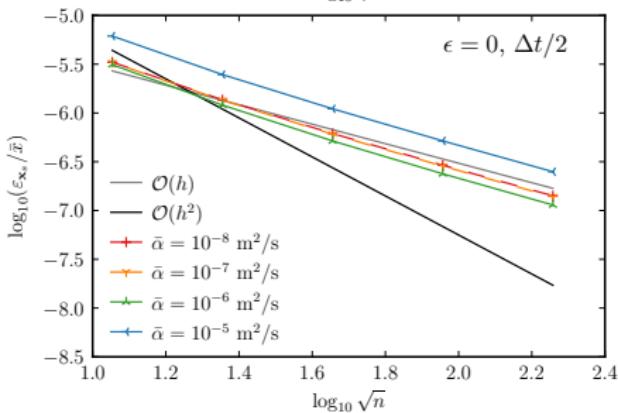
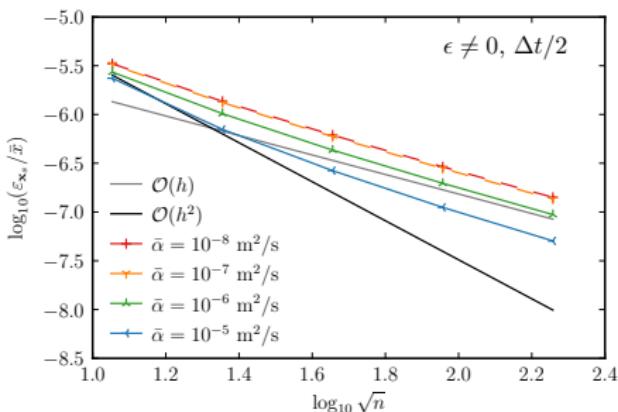
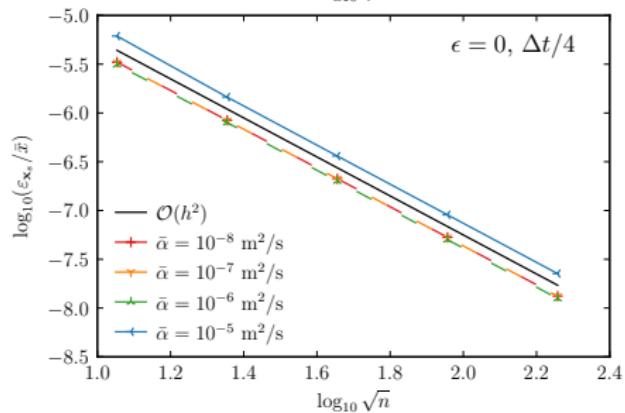
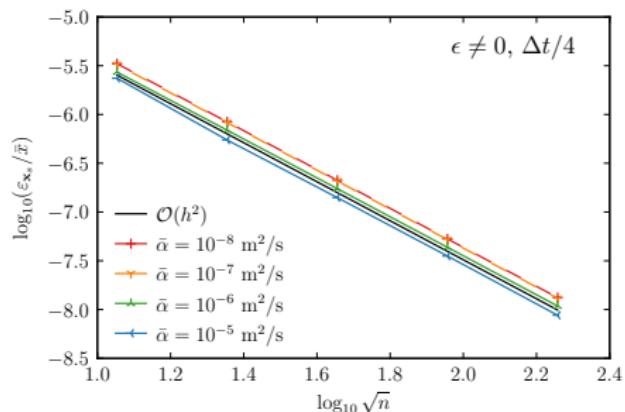
where $\bar{T} = 1 \text{ K}$, $p_e(t) = \bar{p}e^{5t/\bar{t}}/200$, $\bar{p} = 101,325 \text{ Pa}$, and $\bar{t} = 5 \text{ s}$

Cartesian Coordinates: Temperature and Recession

- Manufacture $f(T) = 4/3 \left(T/\bar{T}\right)^{1/3} \rightarrow T(\mathbf{x}, t) = F^{-1}(\theta) = \left(\bar{T}\theta(\mathbf{x}, t)^3\right)^{1/4}$
 - $\bar{T} = 3000$ K
- Truncate $\theta(\mathbf{x}, t) = \sum_{i=0}^{\infty} \sum_{j=0}^{\infty} \hat{\theta}_{i,j}(t) \varphi_{i,j}(\mathbf{x})$ to $\max i = 0$ and $\max j = 1$
 - $v_0(y) = 1$ and $v_1(y) = \cos(\pi y/H)$ permit y variation and $\theta(\mathbf{x}, t) > 0$
 - $u_0(x) = \cosh(3x/(2W))$ permits x variation and $\lambda_{i,j} < 0$
 - Set $\hat{\theta}_{0,0_0} = 400$ K and $\hat{\theta}_{0,1_0} = -100$ K
 - $\theta(\mathbf{x}, t) = 100e^{22,500\bar{\alpha}t} \left(4 - e^{-2500\pi^2\bar{\alpha}t} \cos(\pi y/H)\right) \cosh(3x/(2W))$ K
- Manufacture $\mathbf{x}_s(\xi, t) = \left\{W \left(1 - \frac{t}{\bar{t}} \frac{1+2\sin(\pi\xi/2)}{4}\right), H\xi\right\}$
 - Initial domain is rectangle $\mathbf{x}_s(\xi, 0) = \{W, \xi H\}$
 - ξ related to \mathbf{x}_s by $\xi = y_s/H$
 - Set $W = 1$ cm, $H = 2$ cm, and $\bar{t} = 5$ s

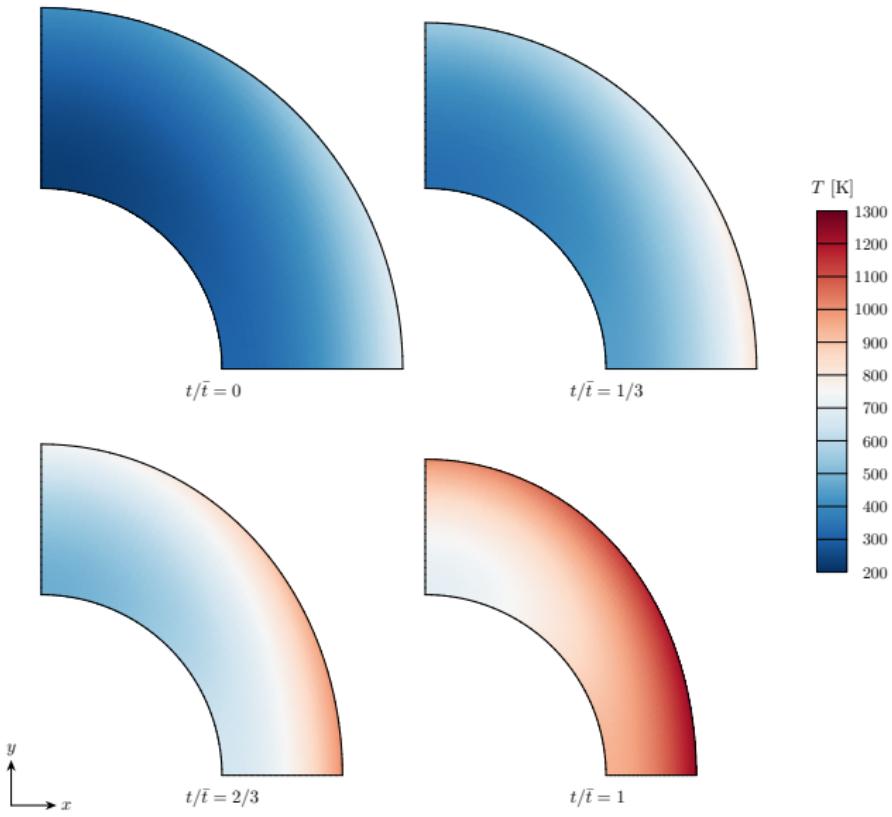
Cartesian Coordinates: Temperature and Recession ($\bar{a} = 10^{-5} \text{ m}^2/\text{s}$)

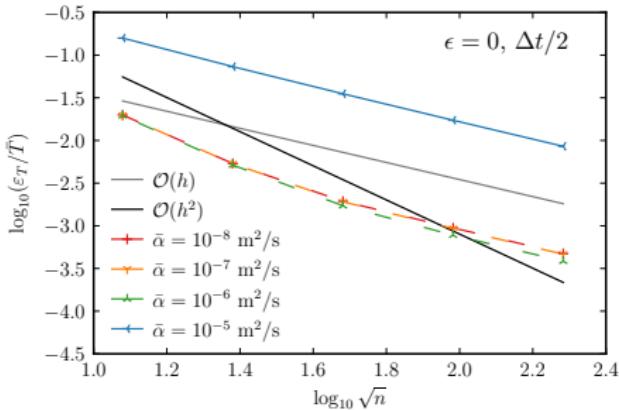
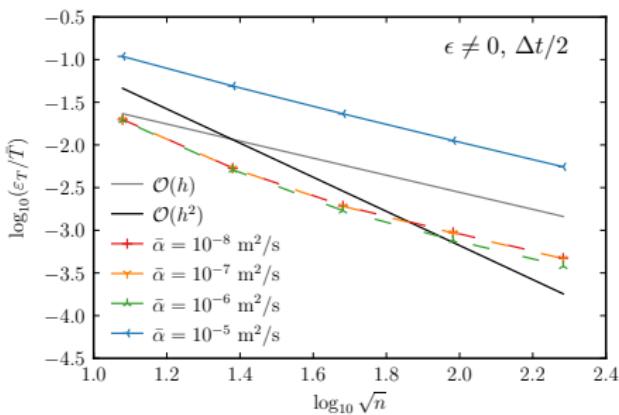
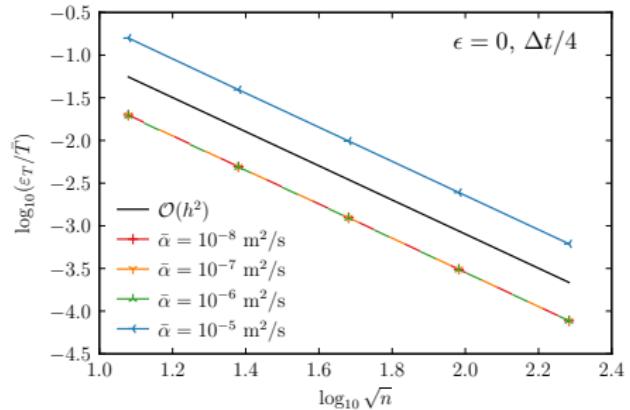
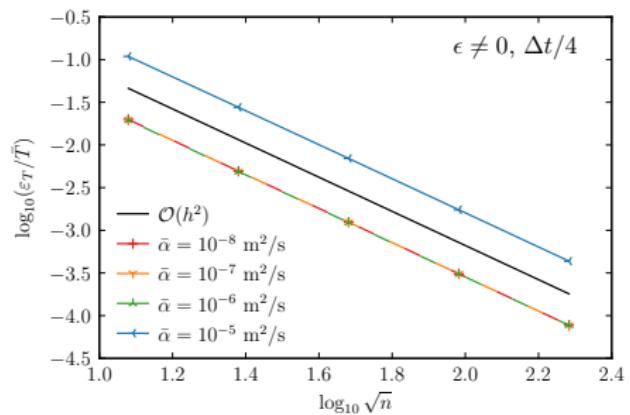
Cartesian Coordinates: Norm of the Error for T 

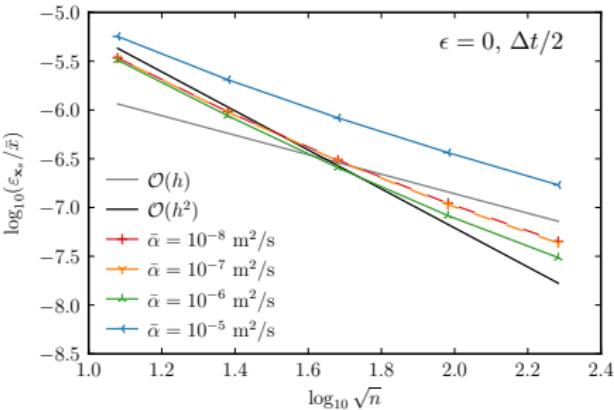
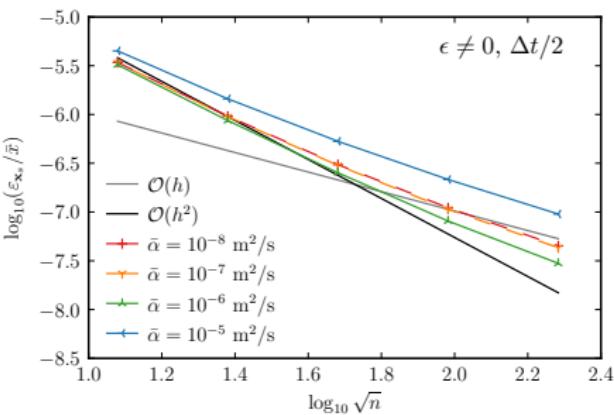
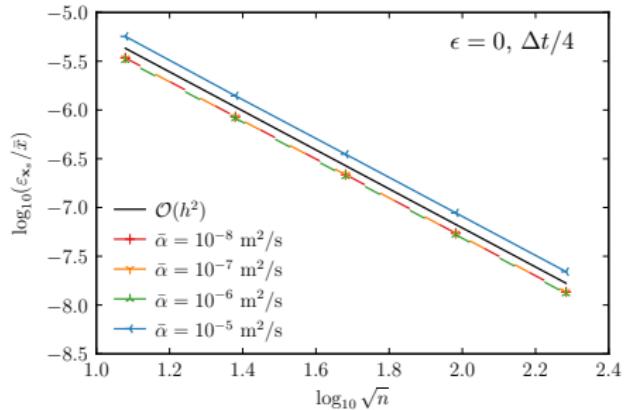
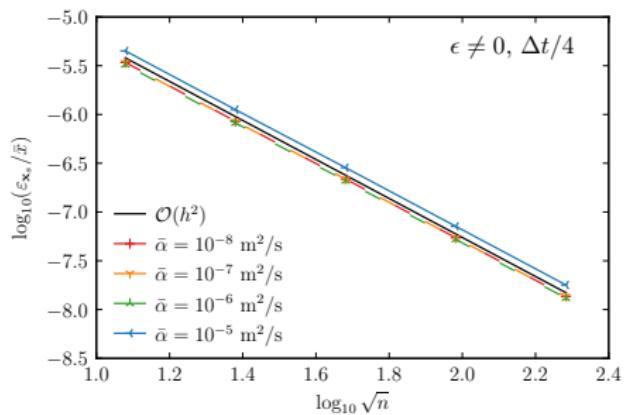
Cartesian Coordinates: Norm of the Error for \mathbf{x}_s 

Polar Coordinates: Temperature and Recession

- Manufacture $f(T) = 1 \rightarrow T(\mathbf{x}, t) = \theta(\mathbf{x}, t)$
- Truncate $\theta(\mathbf{x}, t) = \sum_{i=0}^{\infty} \sum_{j=0}^{\infty} \hat{\theta}_{i,j}(t) \varphi_{i,j}(\mathbf{x})$ to $\max i = 0$ and $\max j = 1$
 - $v_0(\phi) = 1$ and $v_1(\phi) = \cos(\pi\phi/\bar{\phi})$ permit ϕ variation and $\theta(\mathbf{x}, t) > 0$
 - Set $\lambda_{0,0} = \lambda_{0,1} = -22,500 \text{ m}^{-2}$ for $u_{0,0}(r)$ and $u_{0,1}(r)$
 - Set $\hat{\theta}_{0,0_0} = 200 \text{ K}$ and $\hat{\theta}_{0,1_0} = 300 \text{ K}$
- Manufacture $\mathbf{x}_s(\xi, t) = r_s(\xi, t) \{\cos \phi_s, \sin \phi_s\}$
 - $r_s(\xi, t) = r_1 - (r_1 - r_0) \frac{t}{\bar{t}} \frac{3 + \cos(\pi\xi)}{8}$
 - Initial domain is fractional annulus $\mathbf{x}_s(\xi, 0) = r_1 \{\cos \phi_s, \sin \phi_s\}$
 - ξ related to \mathbf{x}_s by $\xi = \phi_s/\bar{\phi}$
 - Set $r_0 = 1 \text{ cm}$, $r_1 = 2 \text{ cm}$, $\bar{\phi} = \pi/2$, and $\bar{t} = 5 \text{ s}$

Polar Coordinates: Temperature and Recession ($\bar{a} = 10^{-5}$ m²/s)

Polar Coordinates: Norm of the Error for T 

Polar Coordinates: Norm of the Error for \mathbf{x}_s 

Outline

- Introduction
- Governing Equations
- Manufactured Solutions
- Heat Equation Solution
- Boundary Condition Reconciliation
- Numerical Examples
- Summary
 - Code-Verification Techniques

Code-Verification Techniques

- Performed code verification for two-dimensional, non-decomposing ablation
- Derived solutions that did not require code modification
- Computed solutions to heat equations for different coordinate systems
- Manufactured boundary condition dependencies
- Demonstrated approach for two cases, which achieved expected accuracy

Additional Information

- B. Freno, B. Carnes, N. Matula
Nonintrusive manufactured solutions for ablation
Physics of Fluids (2021)
- B. Freno, B. Carnes, V. Brunini, N. Matula
Nonintrusive manufactured solutions for non-decomposing ablation in two dimensions
Journal of Computational Physics (2022) [arXiv:2110.13818](https://arxiv.org/abs/2110.13818)

Questions?

Sandia National Laboratories is a multimission laboratory managed and operated by National Technology & Engineering Solutions of Sandia, LLC, a wholly owned subsidiary of Honeywell International Inc., for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-NA0003525.

This presentation describes objective technical results and analysis. Any subjective views or opinions that might be expressed in the presentation do not necessarily represent the views of the U.S. Department of Energy or the United States Government.