

53
12/7/94 85 (2)

PREPARED FOR THE U.S. DEPARTMENT OF ENERGY,
UNDER CONTRACT DE-AC02-76-CHO-3073

PPPL-3018
UC-420,421,426

PPPL-3018

VERSATILE TV SYSTEM FOR PBX-M PLASMA CONTROL

BY

H.W. KUGEL, G. GETTELFINGER, J. SEMLER, ET AL.

NOVEMBER 1994


MASTER

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

js

PPPL

PRINCETON
PLASMA PHYSICS
LABORATORY

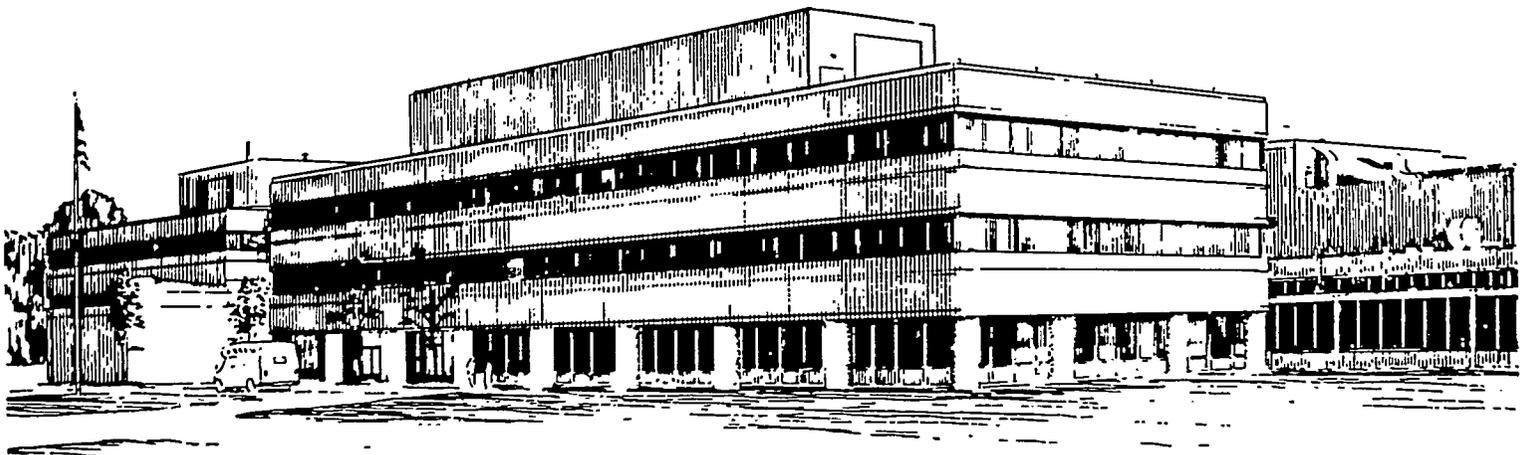

PRINCETON UNIVERSITY, PRINCETON, NEW JERSEY

NOTICE

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial produce, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

NOTICE

This report has been reproduced from the best available copy.
Available in paper copy and microfiche.

Number of pages in this report: 16

DOE and DOE contractors can obtain copies of this report from:

Office of Scientific and Technical Information
P.O. Box 62
Oak Ridge, TN 37831;
(615) 576-8401.

This report is publicly available from the:

National Technical Information Service
Department of Commerce
5285 Port Royal Road
Springfield, Virginia 22161
(703) 487-4650

DISCLAIMER

Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.

VERSATILE TV SYSTEM FOR PBX-M PLASMA CONTROL

H. W. Kugel, G. Gettelfinger, J. Semler, E. Thorsland, and J. Timberlake

Princeton Plasma Physics Laboratory
Princeton University, P. O. Box 451, Princeton, NJ 08543

Abstract

In advanced tokamak research involving complex magnetic geometries, midplane visible plasma TV images can indicate the need for tokamak control corrections not evident from other diagnostics. Suitable midplane viewports are often unavailable. The PBX-M plasma TV system uses four tangential midplane vacuum viewports. One tangential vacuum viewport is on a standard re-entrant midplane port flange. The other three vacuum viewports are tangentially-aligned along the inside vessel wall and connected to port flanges 40 cm from the midplane via 60 cm long re-entrant bellows. Fiber optic bundles transmit images from the re-entrant viewports through the off-midplane ports and out to TV cameras positioned beyond the TF coils. The VCR recorded images from each discharge were used to obtain information not available from other diagnostics.

I. INTRODUCTION

Midplane visible plasma TV systems have been used extensively for high temperature plasma control, diagnostic analysis, and device maintenance [1-3]. Increasingly, in advanced tokamak research involving complex magnetic geometries, midplane visible plasma TV systems have become a required diagnostic tool for operating high power, high- β , plasmas with auxiliary heating, profile control, and various RF antenna, limiter, and probe interactions with the edge plasma. Visible plasma TV images can indicate the need for control corrections not evident from other diagnostics. In addition, plasma TV systems can be used for vessel inspection during maintenance periods and for studying unforeseen edge plasma phenomena. These diverse uses require optical systems with adequate fields-of-view and a wide dynamic range. The TV viewport locations that provide the most useful fields-of-view are at tangential-viewing vacuum windows on the midplane. However, other hardware requiring midplane port access can impose significant constraints on the design of plasma TV systems. The use of off-axis ports usually places fewer constraints on toroidal location at the expense of more complex optical transport systems which must also accommodate the need for a wide dynamic range. At least one plasma view of high optical quality is desirable to provide the principal plasma shape and location information. Other plasma views, such as those used to monitor the plasma edge at the location of antennas and probes can be of lower optical quality and still provide the desired diagnostic information. In this paper, we describe the design and performance of the PBX-M plasma TV system which uses only one direct tangential-view midplane viewport and 3 off-midplane ports with simple fiber optic bundles to provide information for the operation of relatively complex diverted plasmas.

II. EXPERIMENTAL CONDITIONS

Recent PBX-M advanced tokamak, high- β , profile modification experiments for accessing the near second stability regime have been discussed previously [4]. The vessel internal hardware includes a passive plate stabilization system, internal coils, poloidal limiters, and internal buses and shields for passive plate biasing experiments. The experimental program requires the use of complex magnetic geometries and encounters a wide range of plasma shapes, conditions, heating and profile modification methods. PBX-M plasmas are started as low current

circular plasmas at the outboard major radius and are evolved to diverted, highly indented, high triangularity, high- β plasmas. The resulting plasma control requirements demand precise corrections in shape and position to optimize plasma conditions and minimize edge interactions with nearby passive plate structure, IBW antennas, and LHCD couplers. In this complex plasma environment, the resolution of the magnetic flux loop systems is not sufficient to allow for avoidance of deleterious edge plasma interactions without occasional operator assistance using visible edge plasma imaging systems. During PBX-M plasma operations, two or more, plasma TV views are video taped simultaneously using standard VCR's. Each recorded frame includes discharge number and lapsed-time into the discharge. The recorded plasma views are inspected by operators after each discharge to determine possible control corrections.

III. DESIGN AND PERFORMANCE

Fig. 1 gives a partial schematic plan view of PBX-M showing the locations of the 4 TV vacuum viewports and fields-of-view, 4 neutral beam injection (NBI) systems, 2 Ion Bernstein Wave (IBW) heating antennas, 2 Lower Hybrid Current Drive (LHCD) couplers, the UCLA Fast Probe, and a solid target boronization (STB) probe. The PBX-M visible plasma TV system uses one midplane viewport (TV-1) with a color TV, to obtain the primary information on plasma shape and position, and three off-midplane viewports (TV-2,-3,-4) using black and white TV's to monitor edge plasma interactions with the IBW Southwest antenna, the two LHCD couplers, and the solid target boronization probe. Fig. 2 (a) gives a partial schematic diagram showing a plan view of the re-entrant tangential viewport (TV-1) on a midplane perpendicular port and (b) an elevation view of re-entrant tangential viewports (TV-2,-3,-4) using off-midplane ports about 40 cm above or below the midplane. The main re-entrant vacuum interface is a high vacuum quality, 46 cm long by 3.8 cm I.D., stainless steel hose, consisting of a thin-walled bellows covered with flexible stainless steel braid. The hose has rotatable metal seal flanges at each end that couple to transition spool pieces. The window is BK7 glass to provide high thermal and shock resistance. The window of the re-entrant assembly can be placed at the outer vessel wall near midplane ports or in the usually ample space available opposite TF coils. A standard 50 mm TV lens is positioned behind the window and aimed and focused at objects about 3 m distant. The lens is coupled to a 1.2 m long, 8 mm x 10 mm bundle of 10 micron

fiber optics clad in a flexible stainless steel braid. The fiber optic transports the image to a standard CCD TV camera outside the TF coil region. This allows the camera to be easily accessed for maintenance and aperture adjustments to accommodate different experiments (*e.g.*, with optical filters) and for inspections using the vessel illumination sources. The outside face of the vessel flange was designed so that if an air leak should occur, a vacuum pump could be attached for evacuation and isolation without opening the vessel.

Figs 3 a, -b, -c, and -d show cross-section views of a 250 kA diverted, highly indented PBX-M plasma using camera system TV-1 positioned directly at a midplane, re-entrant tangential vacuum viewport. During the 1.3 MW NBI heated discharge, with solid target boronization in progress, the plasma transitioned to the H-mode from 456 ms to 568 ms. In Fig. 3a, at 68 ms, the ohmic plasma was initially circular and relatively outboard. At 201 ms (Fig. 3b), the plasma was becoming elongated, mildly indented, moved radially inward, and exhibited an intense plasma light at the inner midplane limiter. As the discharge progressed, the plasma elongation increased, the interaction at the midplane limiter decreased, and a separatrix became visible. At 503 ms (Fig. 3c), the plasma had transitioned into the H-mode and exhibited a sharply defined edge. At 602 ms (Fig. 3d), the plasma had transitioned out of the H-mode, the edge became more diffused, the plasma was moving radially outward, the interaction with the IBW East-antenna increased significantly, and the discharge disrupted at 680 ms. This visible record of the discharge sequence allowed the position, shape, and edge interactions to be monitored as the plasma proceeded from ohmic heated circular plasma to a diverted, highly indented, NBI heated plasma with an H-mode transition and asymmetric edge phenomena. This information allowed subsequent control corrections to optimize plasma performance.

LHCD has been applied to significantly modify PBX-M current density profiles in the presence of the closely-coupled passive plate stabilization system [4]. Fiber optic camera system TV-2 was used to monitor the LHCD couplers. Fig 4a shows the top and bottom LHCD couplers during normal operation. The brighter side of the coupler faced the incident ion direction (in Fig. 4, from the right). The upper outer passive plate structure is visible in the background. Fig. 4b shows the LHCD couplers during an arcing event such as occurs during high neutral density edge conditions and during high power reflection conditions. The visual record of the edge plasma interaction with the coupler aided in evaluating coupler design

performance and in positioning the plasma edge during LHCD profile modification experiments.

IBW has been applied to significantly modify PBX-M pressure profiles and provide localized bulk ion heating in the presence of the closely-coupled passive plate system [5]. The front face of the IBW Southwest antenna was clad with a developmental boron nitride shield to reduce heavy metal sputtering into the plasma. Fiber optic camera system TV-3 was used to monitor and record the performance of this design. Fig. 5a shows the IBW-Southwest antenna at 41 ms into a discharge when the plasma was positioned too outboard, and Fig. 5b shows the antenna at 108 ms into the discharge when the plasma had been moved radially inward. In Fig. 5, the ions were incident from the right. The upper and lower outer passive plate structure is visible in the background. The record of the antenna performance aided in evaluating the performance of the boron nitride shield during a wide range of edge plasma conditions and in positioning the plasma edge during IBW profile modification experiments.

Real-time boronization has been applied routinely to PBX-M using the plasma ablation of solid target probes [6]. During insertion of a probe into the edge plasma, its incandescence was viewed and recorded using fiber optic camera system TV-4. Fig. 6a shows a solid target boronization probe exhibiting undesirable spallation and Fig. 6b shows probe incandescence during a more ideal steady evaporation. The incandescence illuminates part of the outer vessel structure in the background. The record of the incandescence behavior helped the operators to achieve relatively steady evaporation rates and avoid the spallation that can occur when probes are inserted too deep. The visible light intensity emitted by a solid target boronization probe was detected by the same TV system and integrated using a fast photodetector to give a waveform exhibiting a rise time characteristic of an approximately constant incident power density and an exponential-like decay. The incandescence of the probe was observable for at least 4 sec after the start of the 1 sec discharge and was used to monitor the effectiveness of the applied heating.

The PBX-M plasma TV system can be expanded without perturbing existing midplane hardware by making use of available off-midplane ports and the ample space on the inner vessel wall opposite the TF coils. This system provides useful information on plasma performance and control corrections that are not evident from other diagnostics.

ACKNOWLEDGMENTS

We wish to acknowledge the helpful discussions and technical contributions of R. Bell, S. Bernabei, D. Krause, M. Okabayashi, M. Ono, and R. Palladino. This work was supported by US DOE Contract No. DE-AC02-76-CHO-3073.

REFERENCES

- [1] S. S. Medley *et al.*, Rev. Sci. Instrum. **56** (10), 1873 (1985).
- [2] S. J. Zweben and S. S. Medley, Phys. Fluids B **1** (10), 2058 (1989).
- [3] D. H. J. Gooddall and M. N. Price, J. Nucl. Mater. **196-198**, 1047 (1992).
- [4] S. Bernabei, *et al.*, Phys. Fluids, **B5**(7) 2562 (1993).
- [5] M. Ono, *et al.*, in the *Proc. of 10th Top. Conf. RF Power in Plasmas*, April 1-3, 1993, Boston.
- [6] H. W. Kugel, *et al.*, Fus.Technol., July, 1994.

FIGURE CAPTIONS

Fig. 1. Partial Schematic plan view of PBX-M showing TV viewports, fields-of-view, and edge hardware locations.

Fig. 2. Partial schematic showing (a) a plan view of re-entrant midplane viewport (TV-1) and (b) an elevation view of typical off-midplane re-entrant TV viewport (TV-2,-3,-4).

Fig. 3. Cross-section views using plasma camera system TV-1 at the re-entrant midplane tangential-viewport showing the evolution of a PBX-M plasma during solid target boronization from (a) 68 ms, initially ohmic heated circular outboard, (b) 201 ms, mildly indented and elongated, (c) 503 ms, NBI heated diverted highly indented and elongated, H-mode plasma, d) 602 ms, plasma had transitioned out of H-mode and moved outward toward IBW antenna.

Fig. 4. Fiber optic camera system TV-2 views showing (a) the top and bottom LHCD couplers during normal operation and (b) during an arcing event.

Fig. 5. Fiber optic camera system TV-3 showing (a) the boron nitride face of IBW Southwest antenna at 41 ms into a discharge when the plasma was positioned too outboard, and (b) at 108 ms into the discharge when the plasma was moved radially inward.

Fig. 6. Fiber optic camera system TV-4 showing (a) spallation of a solid target boronization probe, and (b) the same view under constant conditions.



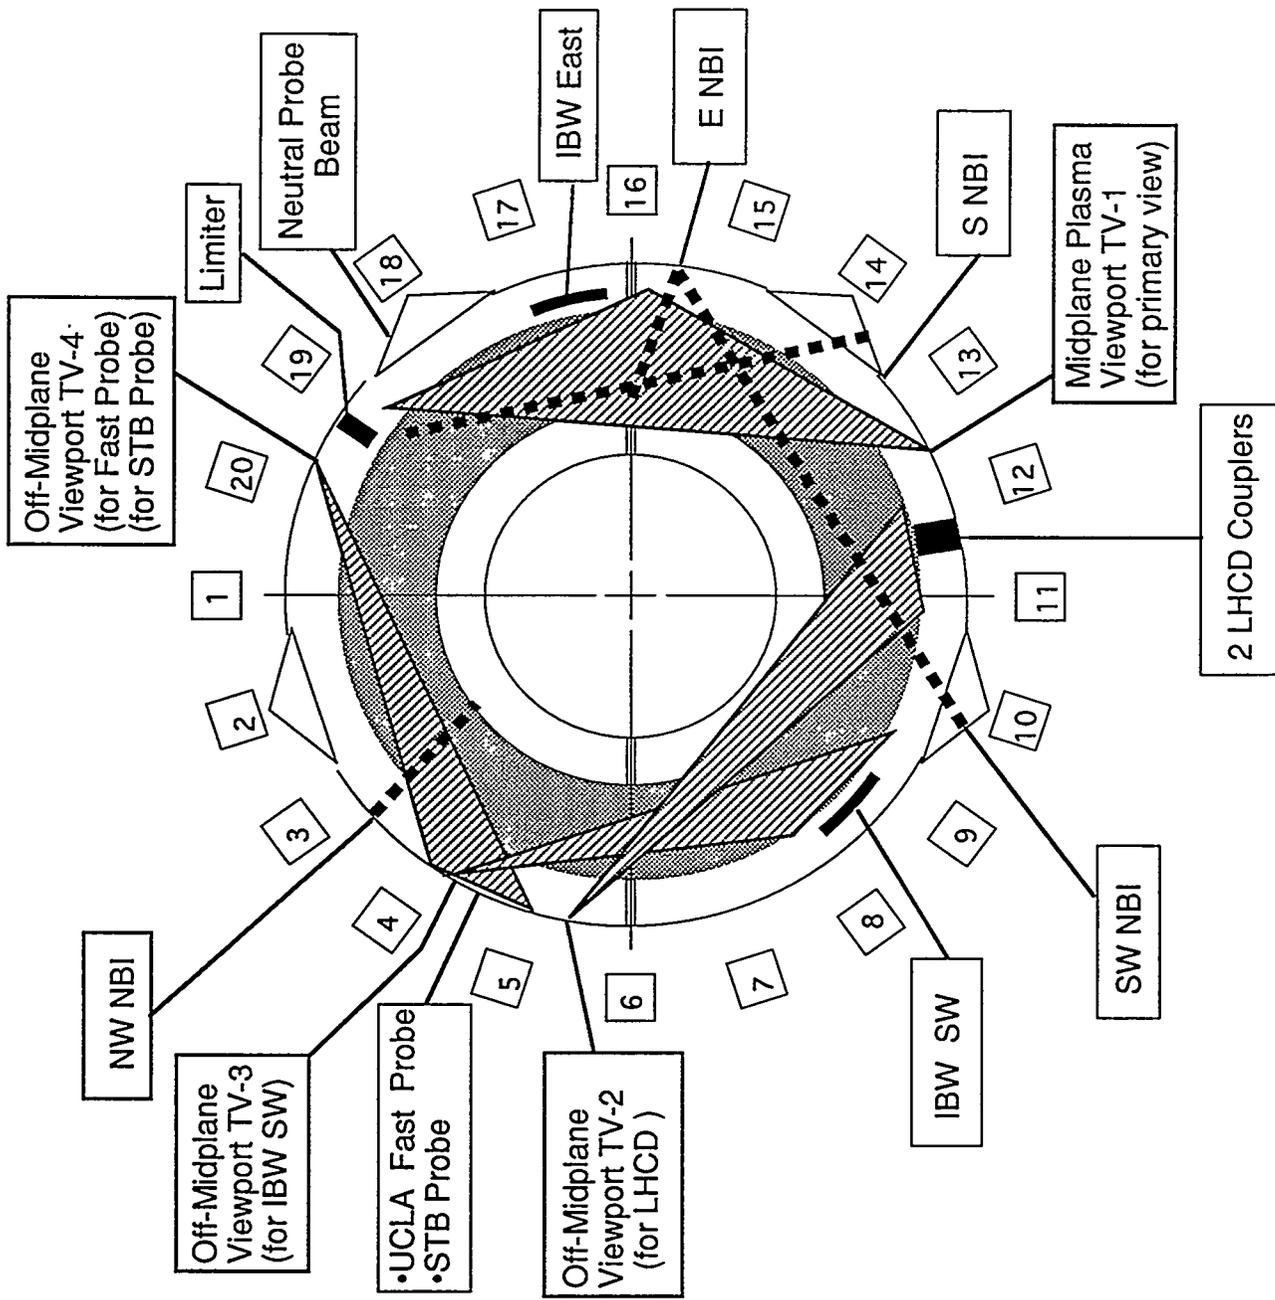


Fig. 1

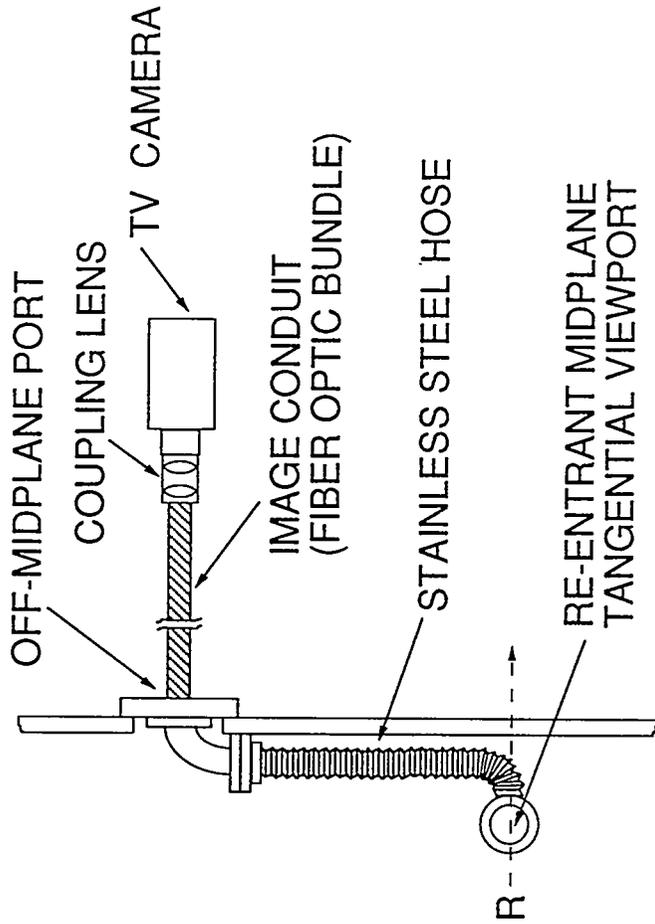

(B)

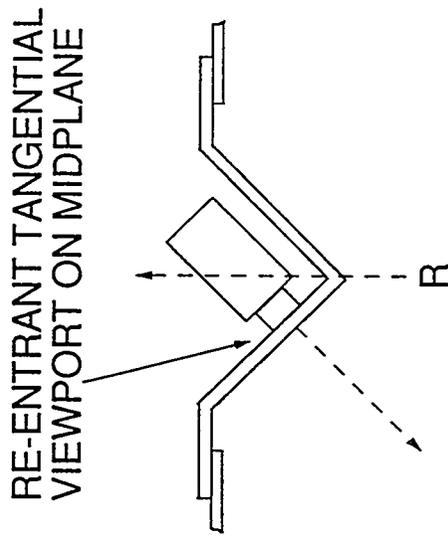

(A)

Fig. 2

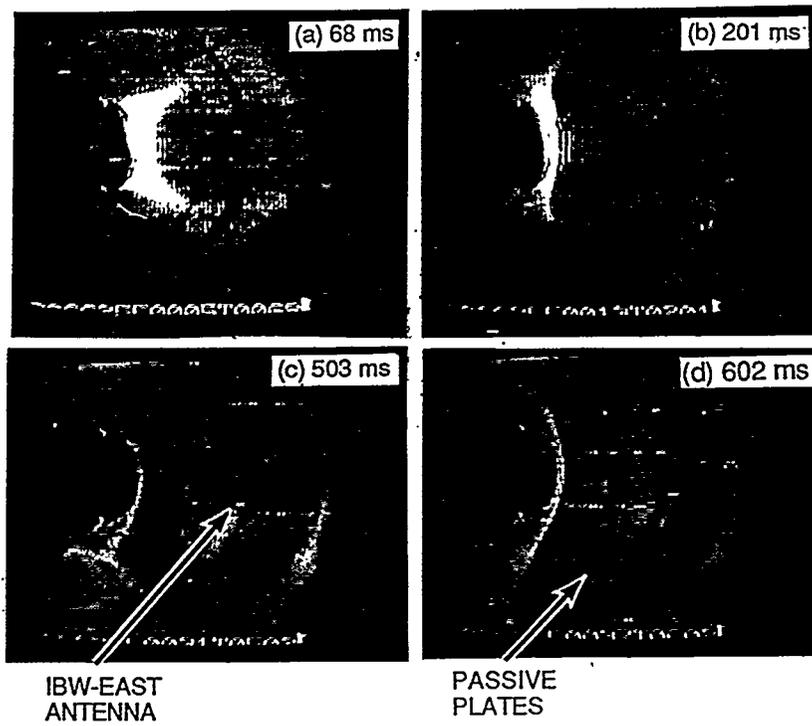


Fig. 3

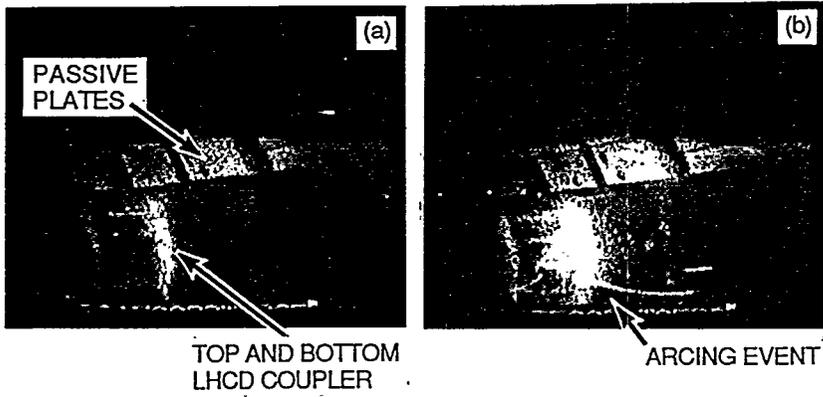


Fig. 4

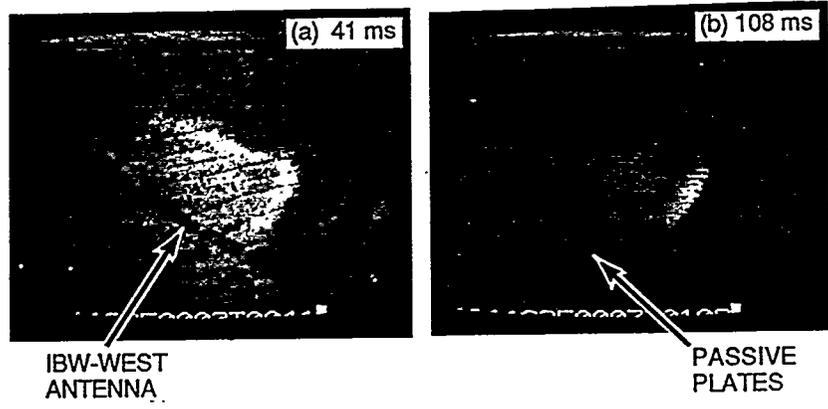


Fig. 5

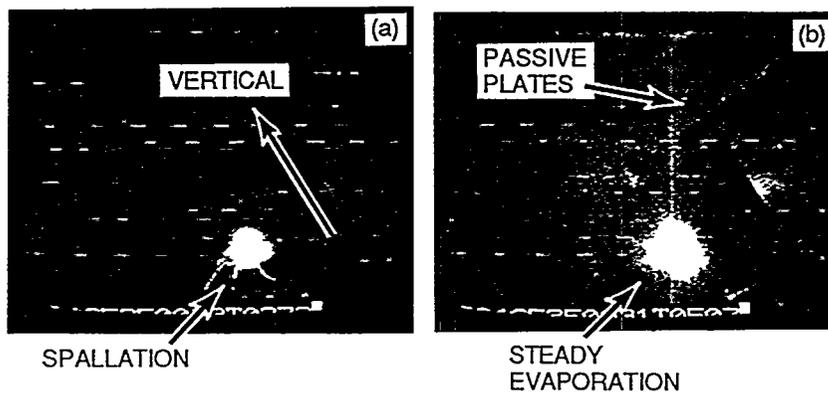


Fig. 6

EXTERNAL DISTRIBUTION IN ADDITION TO UC-420

Dr. F. Paoloni, Univ. of Wollongong, AUSTRALIA
 Prof. R.C. Cross, Univ. of Sydney, AUSTRALIA
 Plasma Research Lab., Australian Nat. Univ., AUSTRALIA
 Prof. I.R. Jones, Flinders Univ, AUSTRALIA
 Prof. F. Cap, Inst. for Theoretical Physics, AUSTRIA
 Prof. M. Heindler, Institut für Theoretische Physik, AUSTRIA
 Prof. M. Goossens, Astronomisch Instituut, BELGIUM
 Ecole Royale Militaire, Lab. de Phy. Plasmas, BELGIUM
 Commission-Europeen, DG. XII-Fusion Prog., BELGIUM
 Prof. R. Bouciqué, Rijksuniversiteit Gent, BELGIUM
 Dr. P.H. Sakanaka, Instituto Fisica, BRAZIL
 Prof. Dr. I.C. Nascimento, Instituto Fisica, Sao Paulo, BRAZIL
 Instituto Nacional De Pesquisas Espaciais-INPE, BRAZIL
 Documents Office, Atomic Energy of Canada Ltd., CANADA
 Ms. M. Morin, CCFM/Tokamak de Varennes, CANADA
 Dr. M.P. Bachynski, MPB Technologies, Inc., CANADA
 Dr. H.M. Skarsgard, Univ. of Saskatchewan, CANADA
 Prof. J. Teichmann, Univ. of Montreal, CANADA
 Prof. S.R. Sreenivasan, Univ. of Calgary, CANADA
 Prof. T.W. Johnston, INRS-Energie, CANADA
 Dr. R. Bolton, Centre canadien de fusion magnétique, CANADA
 Dr. C.R. James,, Univ. of Alberta, CANADA
 Dr. P. Lukác, Komenského Universzita, CZECHO-SLOVAKIA
 The Librarian, Culham Laboratory, ENGLAND
 Library, R61, Rutherford Appleton Laboratory, ENGLAND
 Mrs. S.A. Hutchinson, JET Library, ENGLAND
 Dr. S.C. Sharma, Univ. of South Pacific, FIJI ISLANDS
 P. Mähönen, Univ. of Helsinki, FINLAND
 Prof. M.N. Bussac, Ecole Polytechnique,, FRANCE
 C. Mouttet, Lab. de Physique des Milieux Ionisés, FRANCE
 J. Radet, CEN/CADARACHE - Bat 506, FRANCE
 Prof. E. Economou, Univ. of Crete, GREECE
 Ms. C. Rinni, Univ. of Ioannina, GREECE
 Preprint Library, Hungarian Academy of Sci., HUNGARY
 Dr. B. DasGupta, Saha Inst. of Nuclear Physics, INDIA
 Dr. P. Kaw, Inst. for Plasma Research, INDIA
 Dr. P. Rosenau, Israel Inst. of Technology, ISRAEL
 Librarian, International Center for Theo Physics, ITALY
 Miss C. De Palo, Associazione EURATOM-ENEA , ITALY
 Dr. G. Grosso, Istituto di Fisica del Plasma, ITALY
 Prof. G. Rostangni, Istituto Gas Ionizzati Del Cnr, ITALY
 Dr. H. Yamato, Toshiba Res & Devel Center, JAPAN
 Prof. I. Kawakami, Hiroshima Univ., JAPAN
 Prof. K. Nishikawa, Hiroshima Univ., JAPAN
 Librarian, Naka Fusion Research Establishment, JAERI, JAPAN
 Director, Japan Atomic Energy Research Inst., JAPAN
 Prof. S. Itoh, Kyushu Univ., JAPAN
 Research Info. Ctr., National Instit. for Fusion Science, JAPAN
 Prof. S. Tanaka, Kyoto Univ., JAPAN
 Library, Kyoto Univ., JAPAN
 Prof. N. Inoue, Univ. of Tokyo, JAPAN
 Secretary, Plasma Section, Electrotechnical Lab., JAPAN
 Dr. O. Mitarai, Kumamoto Inst. of Technology, JAPAN
 Dr. G.S. Lee, Korea Basic Sci. Ctr., KOREA
 J. Hyeon-Sook, Korea Atomic Energy Research Inst., KOREA
 D.I. Choi, The Korea Adv. Inst. of Sci. & Tech., KOREA
 Prof. B.S. Liley, Univ. of Waikato, NEW ZEALAND
 Inst of Physics, Chinese Acad Sci PEOPLE'S REP. OF CHINA
 Library, Inst. of Plasma Physics, PEOPLE'S REP. OF CHINA
 Tsinghua Univ. Library, PEOPLE'S REPUBLIC OF CHINA
 Z. Li, S.W. Inst Physics, PEOPLE'S REPUBLIC OF CHINA
 Prof. J.A.C. Cabral, Instituto Superior Tecnico, PORTUGAL
 Prof. M.A. Hellberg, Univ. of Natal, S. AFRICA
 Prof. D.E. Kim, Pohang Inst. of Sci. & Tech., SO. KOREA
 Prof. C.I.E.M.A.T, Fusion Division Library, SPAIN
 Dr. L. Stenflo, Univ. of UMEA, SWEDEN
 Library, Royal Inst. of Technology, SWEDEN
 Prof. H. Wilhelmson, Chalmers Univ. of Tech., SWEDEN
 Centre Phys. Des Plasmas, Ecole Polytech, SWITZERLAND
 Bibliotheek, Inst. Voor Plasma-Fysica, THE NETHERLANDS
 Asst. Prof. Dr. S. Cakir, Middle East Tech. Univ., TURKEY
 Dr. V.A. Glukhikh, Sci. Res. Inst. Electrophys. Apparatus, USSR
 Dr. D.D. Ryutov, Siberian Branch of Academy of Sci., USSR
 Dr. G.A. Eliseev, I.V. Kurchatov Inst., USSR
 Librarian, The Ukr.SSR Academy of Sciences, USSR
 Dr. L.M. Kovrizhnykh, Inst. of General Physics, USSR
 Kernforschungsanlage GmbH, Zentralbibliothek, W. GERMANY
 Bibliothek, Inst. Für Plasmaforschung, W. GERMANY
 Prof. K. Schindler, Ruhr-Universität Bochum, W. GERMANY
 Dr. F. Wagner, (ASDEX), Max-Planck-Institut, W. GERMANY
 Librarian, Max-Planck-Institut, W. GERMANY