LAWRENCE
LIVERMORE
NATIONAL
LABORATORY

LLNL-PROC-659253

Reservoir Pressure Management

T. M. Buscheck, Y. Sun, Y. Hao, W. Bourcier, F. J. Ryerson

August 26, 2014

2014 US # China Clean Energy Workshop
Taiyuan, China
September 15, 2014 through September 16, 2014

Disclaimer

2014 Clean Energy Workshop

Reservoir Pressure Management

Thomas A. Buscheck, Yunwei Sun, Yue Hao, William Bourcier

and F.J. Ryerson (presenter)

Lawrence Livermore National Laboratory, P.O. Box 808, L-223, Livermore, CA USA

ryerson1@llnl.gov ; buscheck1@llnl.gov

Clean Energy Workshop • August 2014 • Taiyuan, PRC

This work was sponsored by the US DOE National Energy Technology Laboratory and the US DOE Geothermal Technologies Program

LLNL-PRES-658052

This work was performed under the auspices of the U.S. Department of Energy by Lawrence Livermore National Laboratory under contract DE-AC52-07NA27344. Lawrence Livermore National Security, LLC

Benefit to the program

- Project benefits statement
  - This project provides an analysis of extraction of formation fluids as a method for increasing the storage capacity and reducing the risk of failure at carbon storage sites. Our results are aimed at enabling a cost-benefit analysis of fluid extraction at carbon sequestration sites and recommending methods for applying the technology.

- Program goals being addressed
  - Support industry's ability to predict CO_2 storage capacity in geologic formations to within ±30 percent.
  - Develop and validate technologies to ensure 99 percent storage permanence
  - ***Develop technologies to improve reservoir storage efficiency while ensuring containment effectiveness.***
  - *Develop Best Practice Manuals for monitoring, verification, accounting, and assessment; site screening, selection and initial characterization; public outreach; well management activities; and risk analysis and simulation*

Overview and Accomplishments

- We are investigating a range of pressure management approaches
  - *single-mode*, brine-extraction and CO_2-injection wells
  - *dual-mode*, brine extraction/CO_2-injection wells
- We continue to consider benefits/needs
  - suppressed CO_2 and brine leakage and migration
  - hydraulic isolation from neighboring subsurface activities
  - reduced pore-space competition and AOR
  - reduced risk of caprock fracturing and induced seismicity
- Past pressure management studies have emphasized
  - large well fields comprised of single-mode wells, including
    - ✓ brine-extraction wells
    - ✓ CO_2-injection wells
  - wide well spacing between extraction and injection wells, which assumes/requires homogeneous reservoirs with
    - ✓ good lateral hydraulic communication between wells
    - ✓ large compartment volumes

Overview (continued)

- We are now addressing the efficiency of brine management operations and strategies for a field demonstration
  - reduce well cost (dual-mode wells = fewer wells)
  - reduce brine extraction cost
    - ✓ brine production by artesian flow (reduce brine lifting cost)
    - ✓ pre-injection brine extraction (increases benefit/cost ratio)
  - utilizing dual-mode wells for
    - ✓ pilot studies
    - ✓ reservoir diagnostics
    - ✓ site screening
    - ✓ pressure-management planning

Concept is to extract and desalinate aquifer brines to create fresh water and space for CO_2 storage

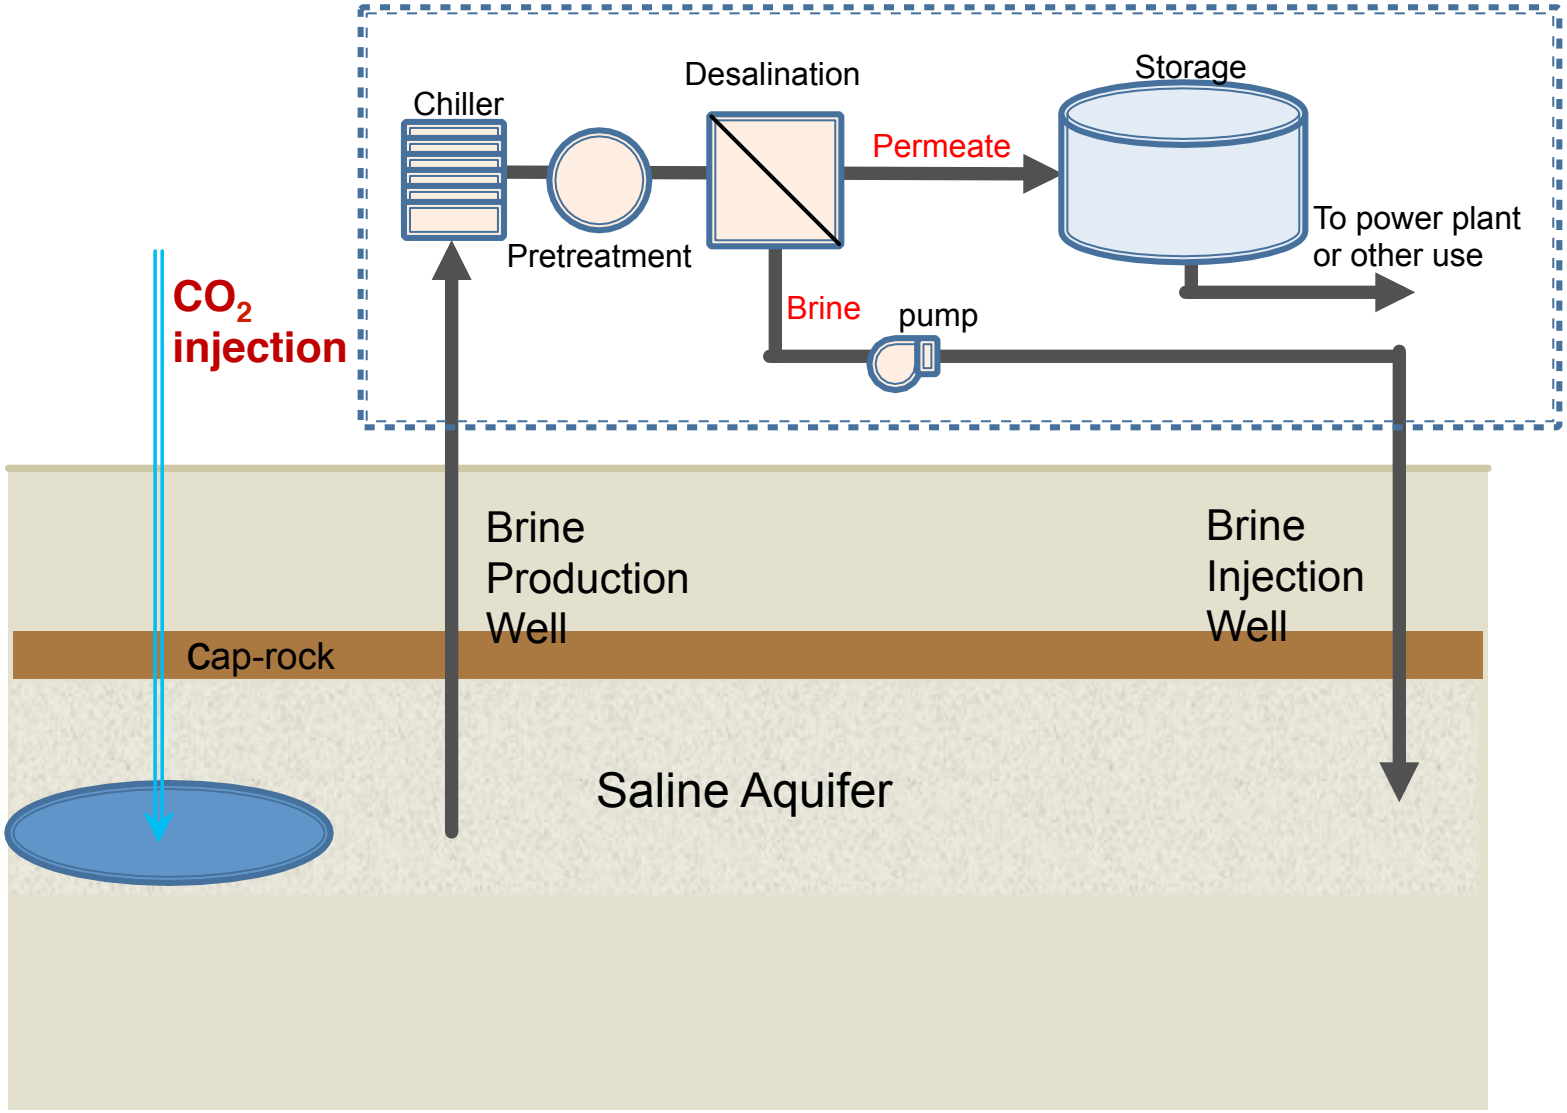

Past work has considered well fields with *single-mode* wells, including brine-extraction and CO_2-injection wells

- (a) Achieving early-time pressure relief may require close well spacing
- (b) Breakthrough of CO_2 at brine-extraction wells will limit how long they can provide pressure relief
- (c) Additional brine-extraction wells may need to be staged for ongoing pressure relief
- A monitoring well may be completed in the storage reservoir to assess plume migration
- A monitoring well may be completed in an overlying formation to assess caprock leakage

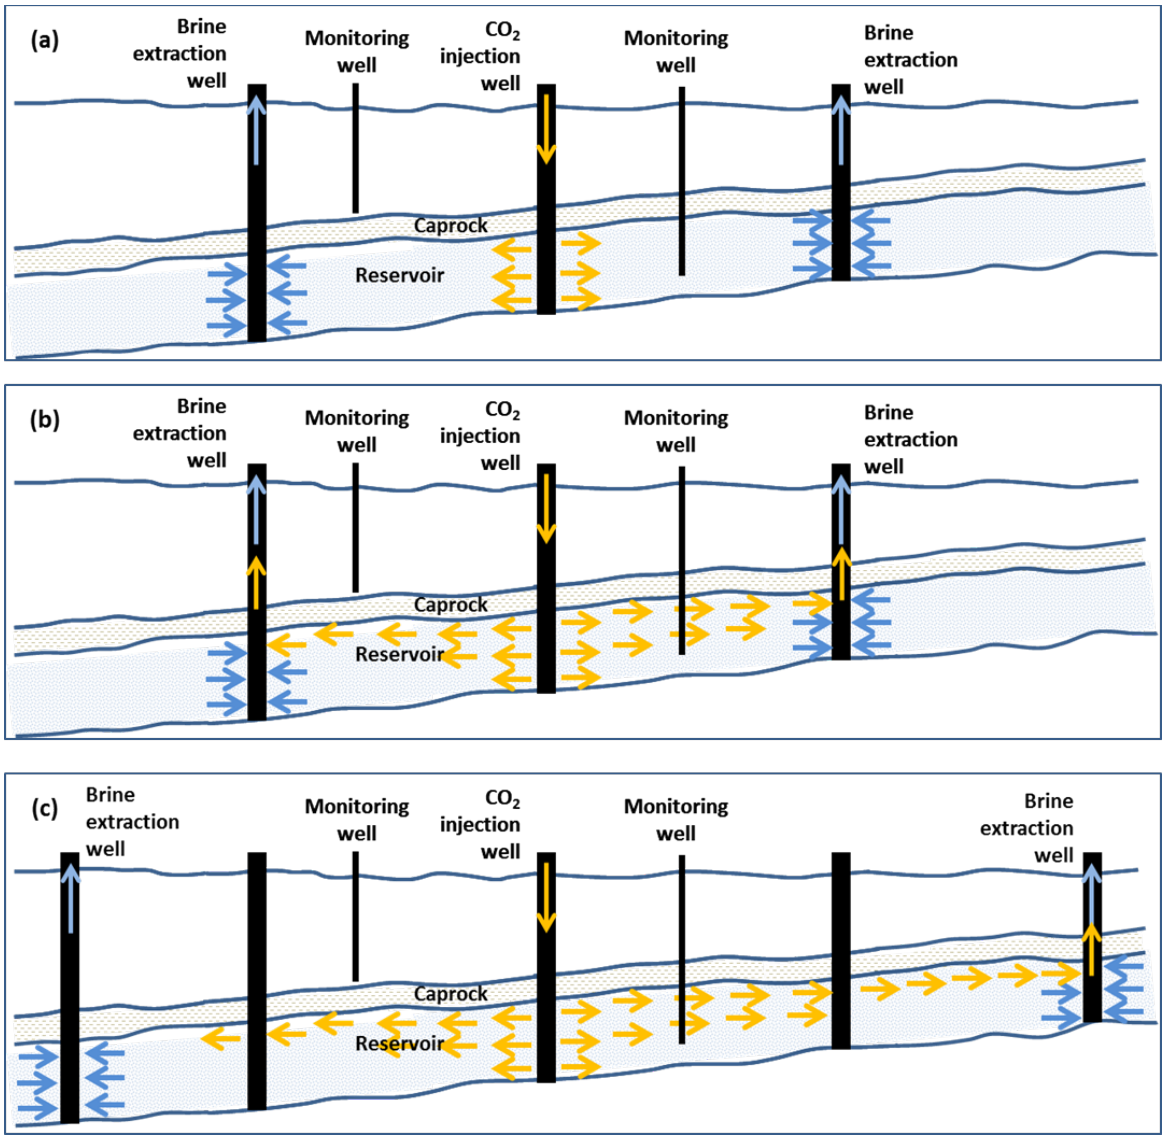

Dual-mode brine-extraction/CO_2-injection wells can reduce the total number of wells required for pressure management

- (a) Pre-injection brine extraction provides early-time pressure relief where it is most needed
- (a) Early-time pressure relief allows greater spacing between CO_2-injection and brine-extraction wells
- (b,c) Additional dual-mode wells may be staged as needed for ongoing pressure relief
  - preferably completed down-dip of the primary dual-mode well
- A monitoring well may be completed in an overlying formation to assess caprock leakage
- *The total number of wells is significantly reduced*

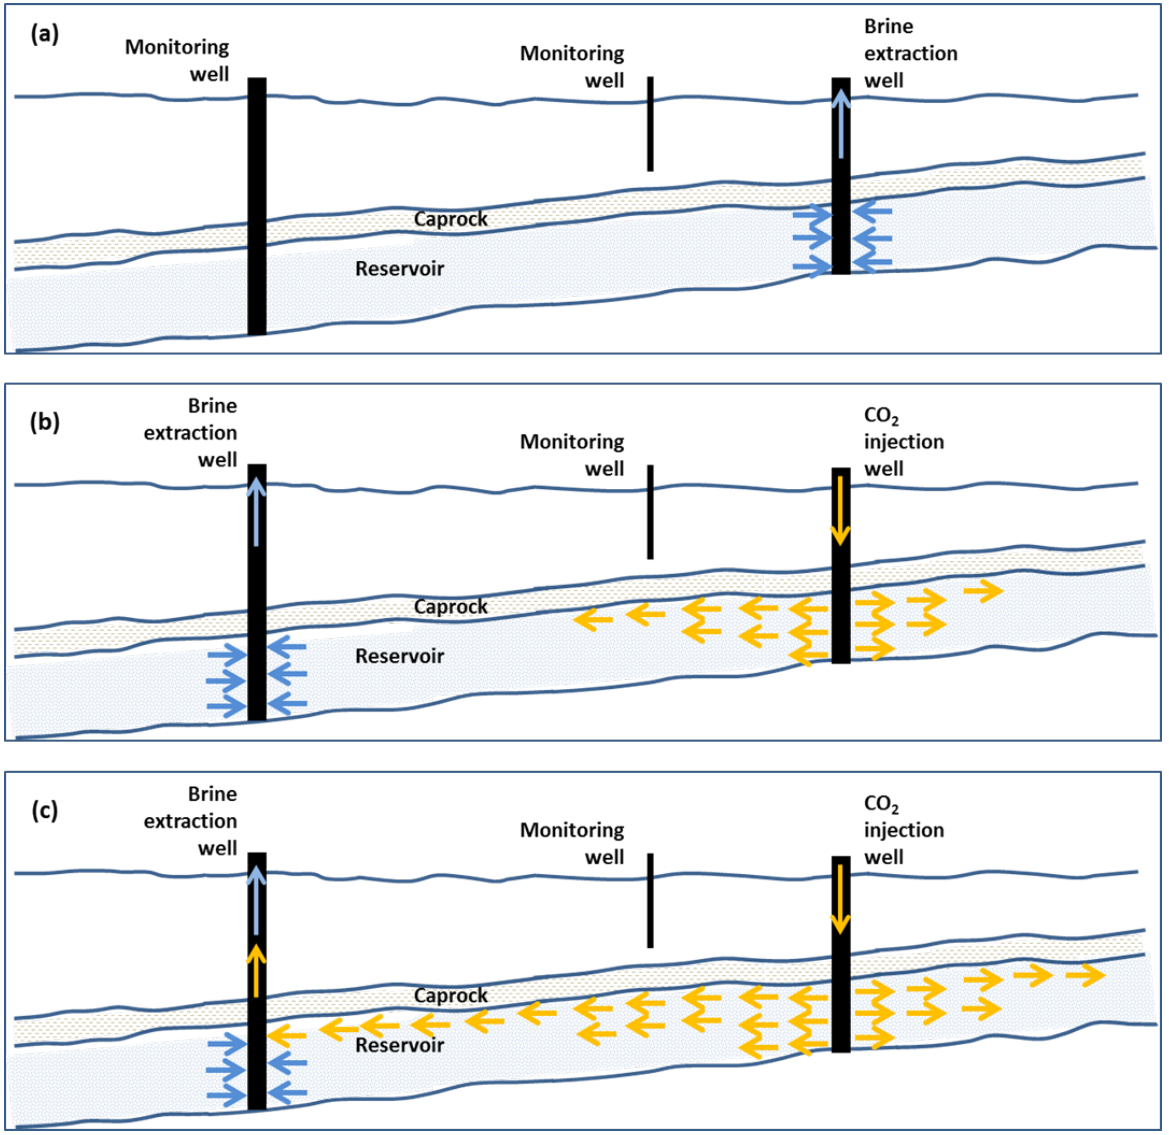

Time to reach a threshold overpressure ΔP can be significantly increased with pre-injection brine production

- Small reservoir compartments can result in rapid pressure buildup

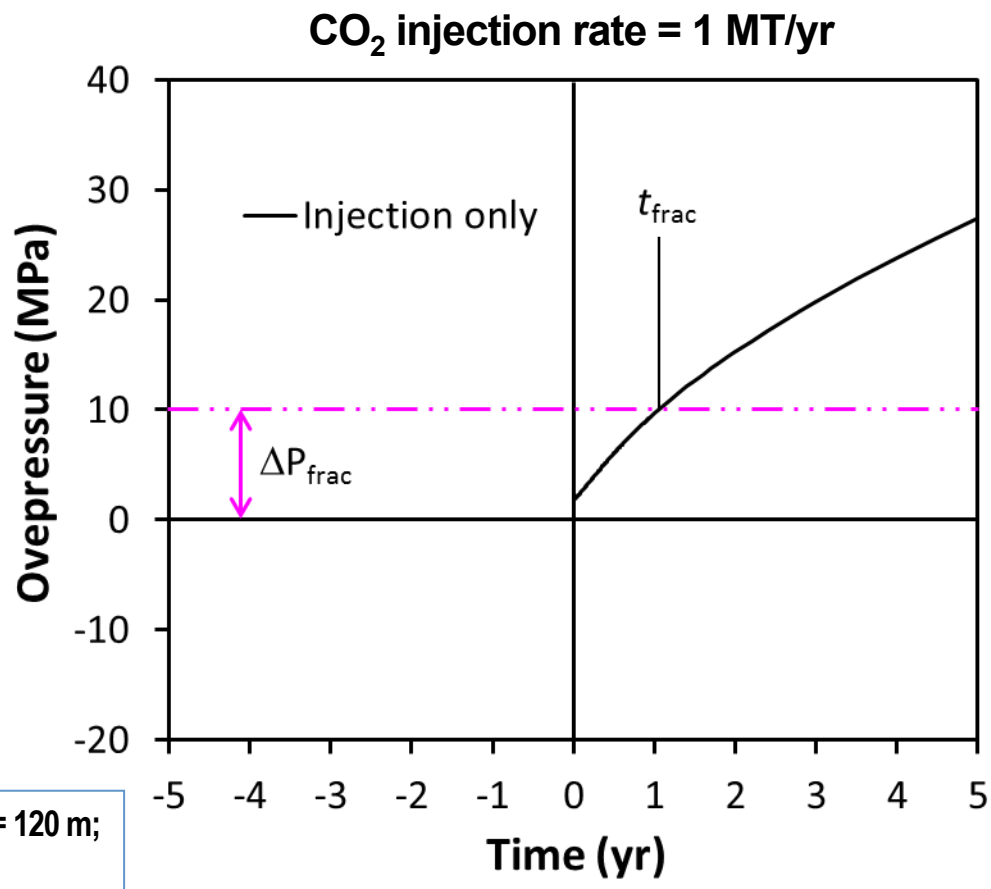

Notes: compartment area = 1.6 km^2; compartment thickness = 120 m; for brine extraction: 1x = 1 MT/yr and 2x = 2 MT/yr

Time to reach a threshold overpressure ΔP can be significantly increased with pre-injection brine production

- Small reservoir compartments can result in rapid pressure buildup
- Extract 1622 acre-ft (2 MT) of brine in 1 year

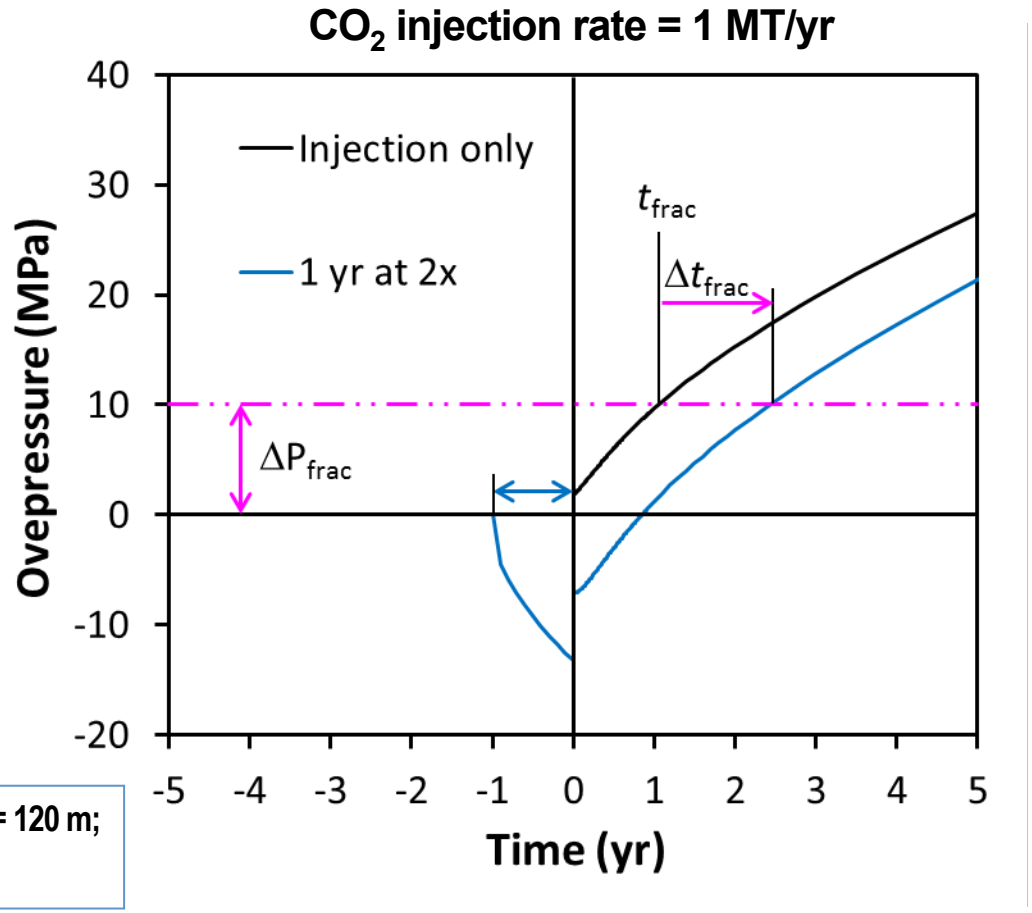

Notes: compartment area = 1.6 km^2; compartment thickness = 120 m; for brine extraction: 1x = 1 MT/yr and 2x = 2 MT/yr

Time to reach a threshold overpressure ΔP can be significantly increased with pre-injection brine production

- Small reservoir compartments can result in rapid pressure buildup
- Extract 1622 acre-ft (2 MT) of brine in 1 year
- Extract 1622 acre-ft (2 MT) of brine in 2 years
- Pressure drawdown is slightly less for the smaller brine extraction rate
- Time to reach threshold ΔP is similar for these two cases
- Pre-injection pressure response is diagnostic of pressure behavior during injection

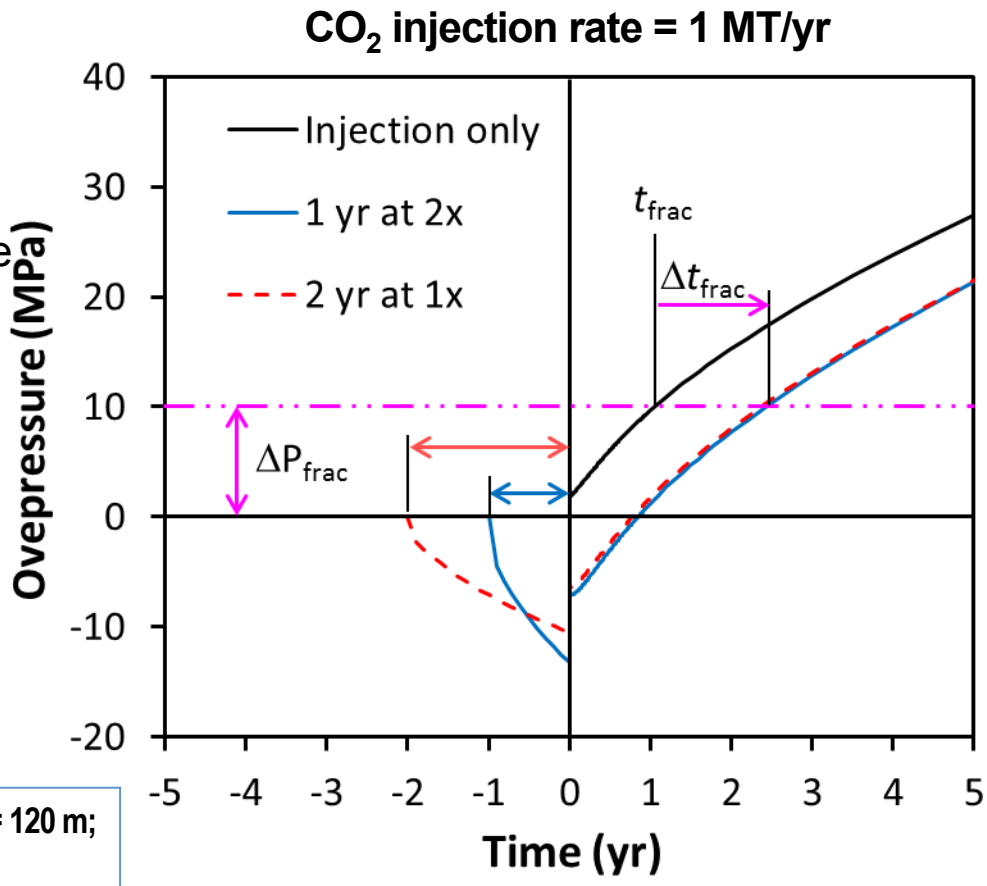

Notes: compartment area = 1.6 km^2; compartment thickness = 120 m; for brine extraction: 1x = 1 MT/yr and 2x = 2 MT/yr

Time to reach a threshold overpressure ΔP can be significantly increased with pre-injection brine production

- Small reservoir compartments can result in rapid pressure buildup
- Extract 3244 acre-ft (4 MT) of brine in 2 years

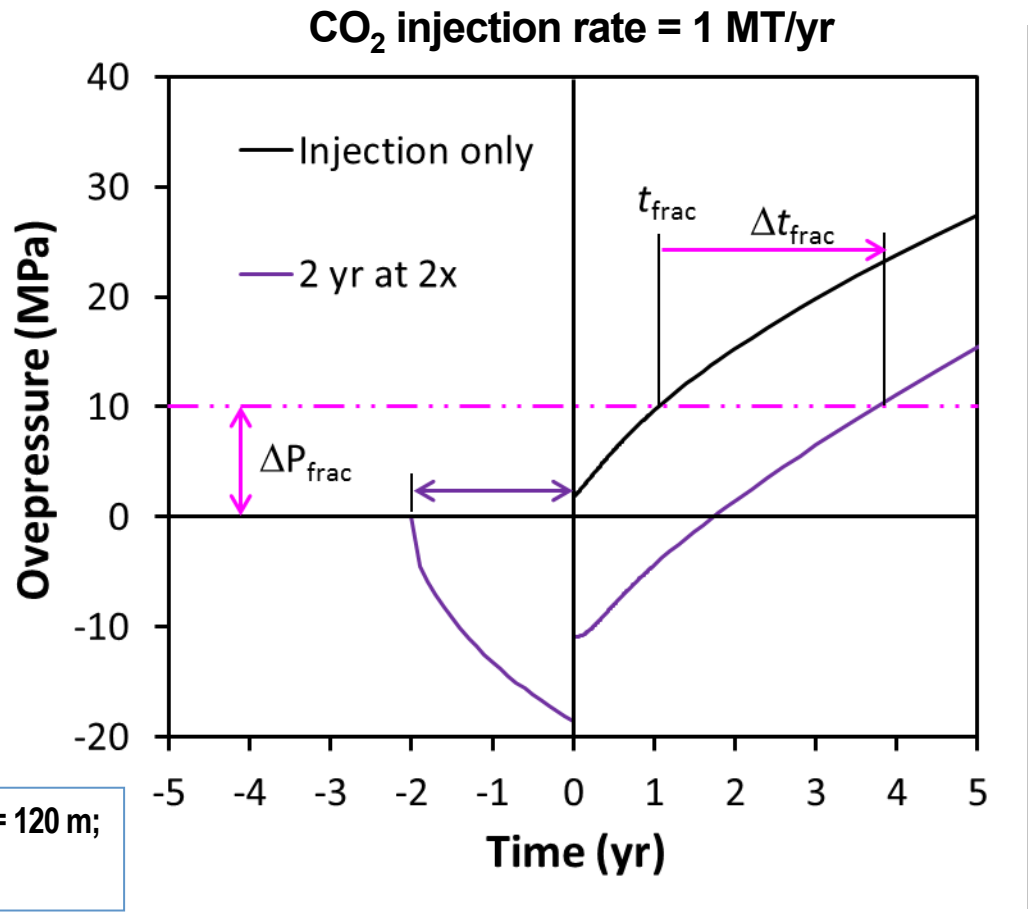

Notes: compartment area = 1.6 km^2; compartment thickness = 120 m; for brine extraction: 1x = 1 MT/yr and 2x = 2 MT/yr

Time to reach a threshold overpressure ΔP can be significantly increased with pre-injection brine production

- Small reservoir compartments can result in rapid pressure buildup
- Extract 3244 acre-ft of brine in 2 years
- Extract 3244 acre-ft of brine in 4 years
- Pressure drawdown is slightly less for the smaller brine extraction rate
- Time to reach threshold ΔP is similar for these two cases
- Pre-injection pressure response is diagnostic of pressure behavior during injection

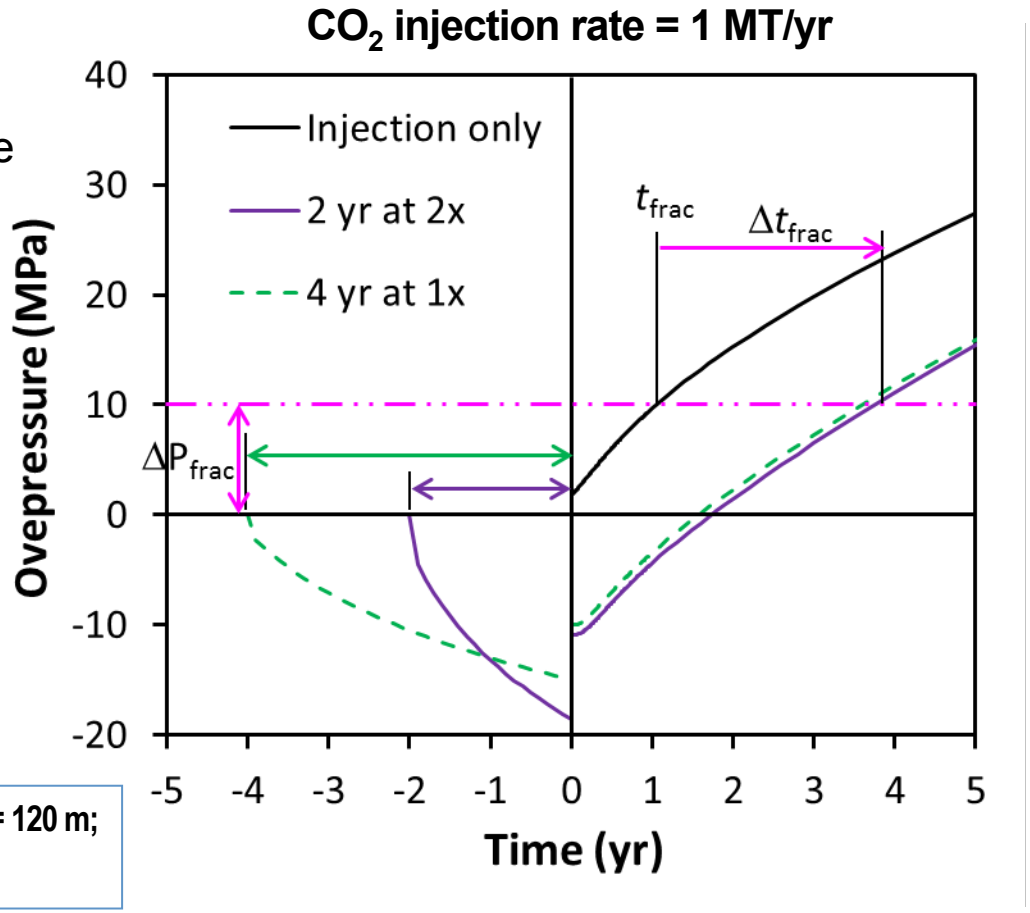

Notes: compartment area = 1.6 km²; compartment thickness = 120 m; for brine extraction: 1x = 1 MT/yr and 2x = 2 MT/yr

Time to attain an overpressure ΔP of 10 MPa increases with reservoir compartment area and thickness

- Initially, time to ΔP = 10 MPa increases linearly with compartment area and thickness, indicating that it is entire controlled by compressibility
- At later time, this dependence steepens as caprock leakage increasingly influences pressure relief

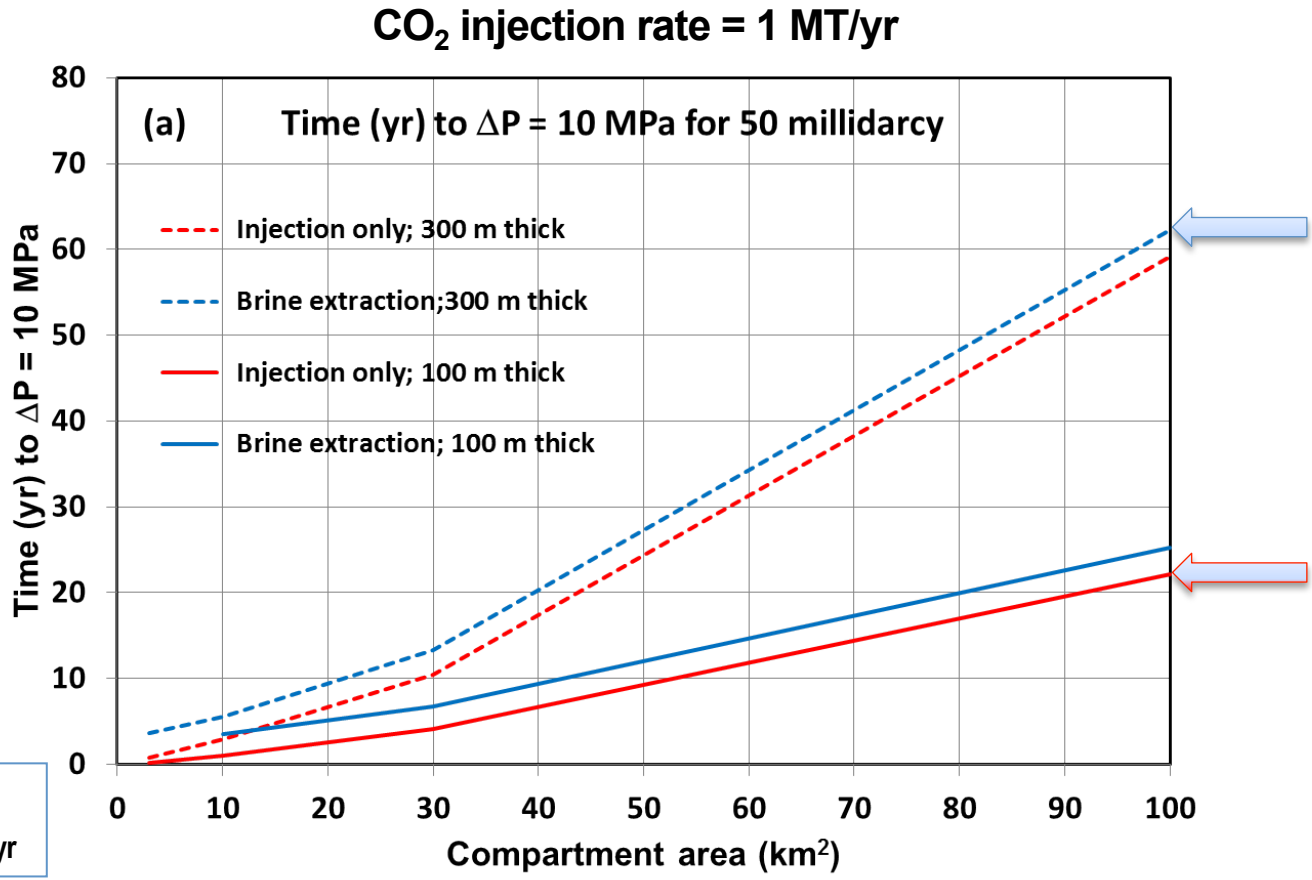

Note: brine extraction cases extract 1 MT/yr of brine for 4 yr

Time to attain an overpressure ΔP of 10 MPa increases with reservoir compartment area and thickness

- Time to ΔP = 10 MPa is weekly dependent on reservoir permeability

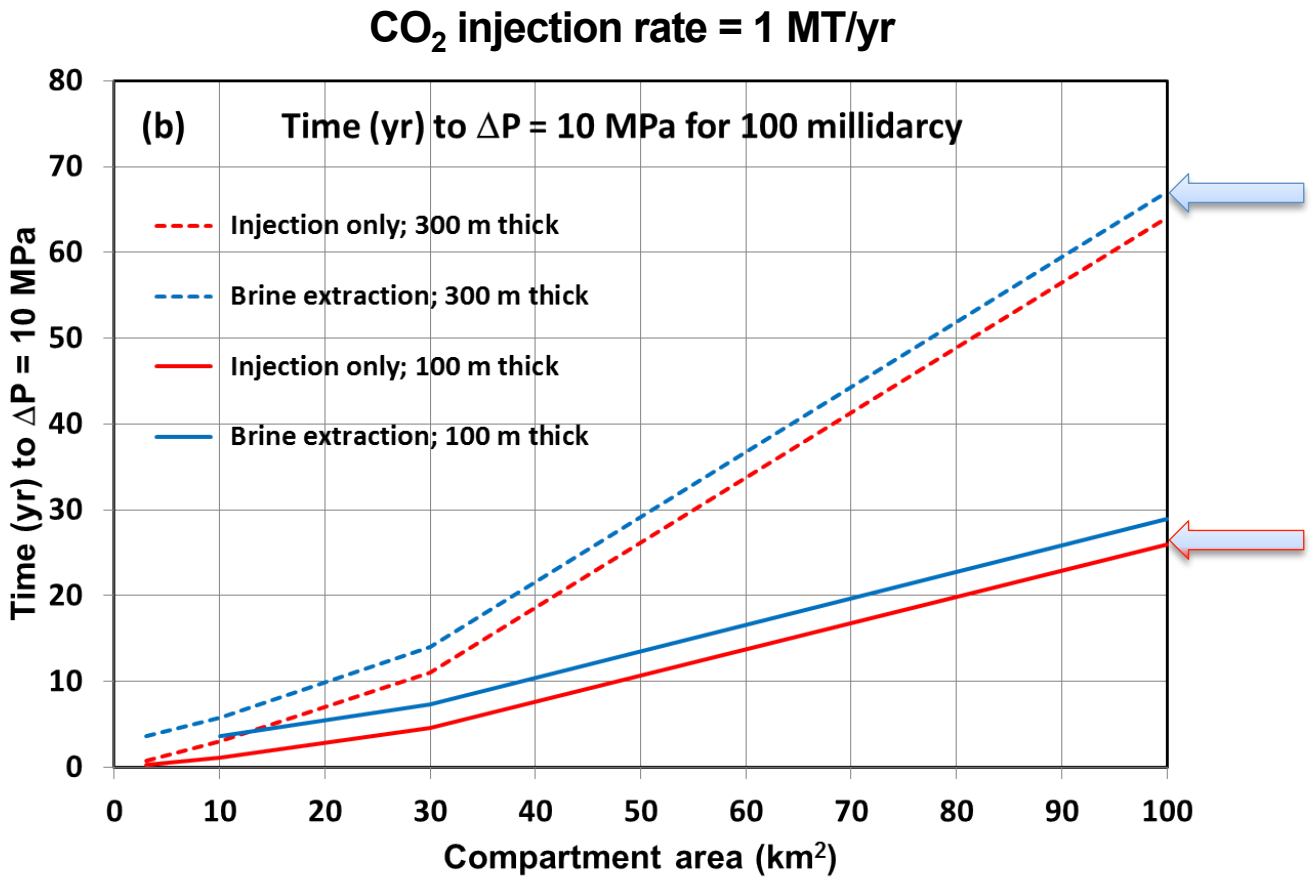

Time to attain an overpressure ΔP of 10 MPa increases with reservoir compartment area and thickness

- Thus, pressure buildup history depends primarily on reservoir compartment volume and leakage through the caprock and, possibly, sealing faults

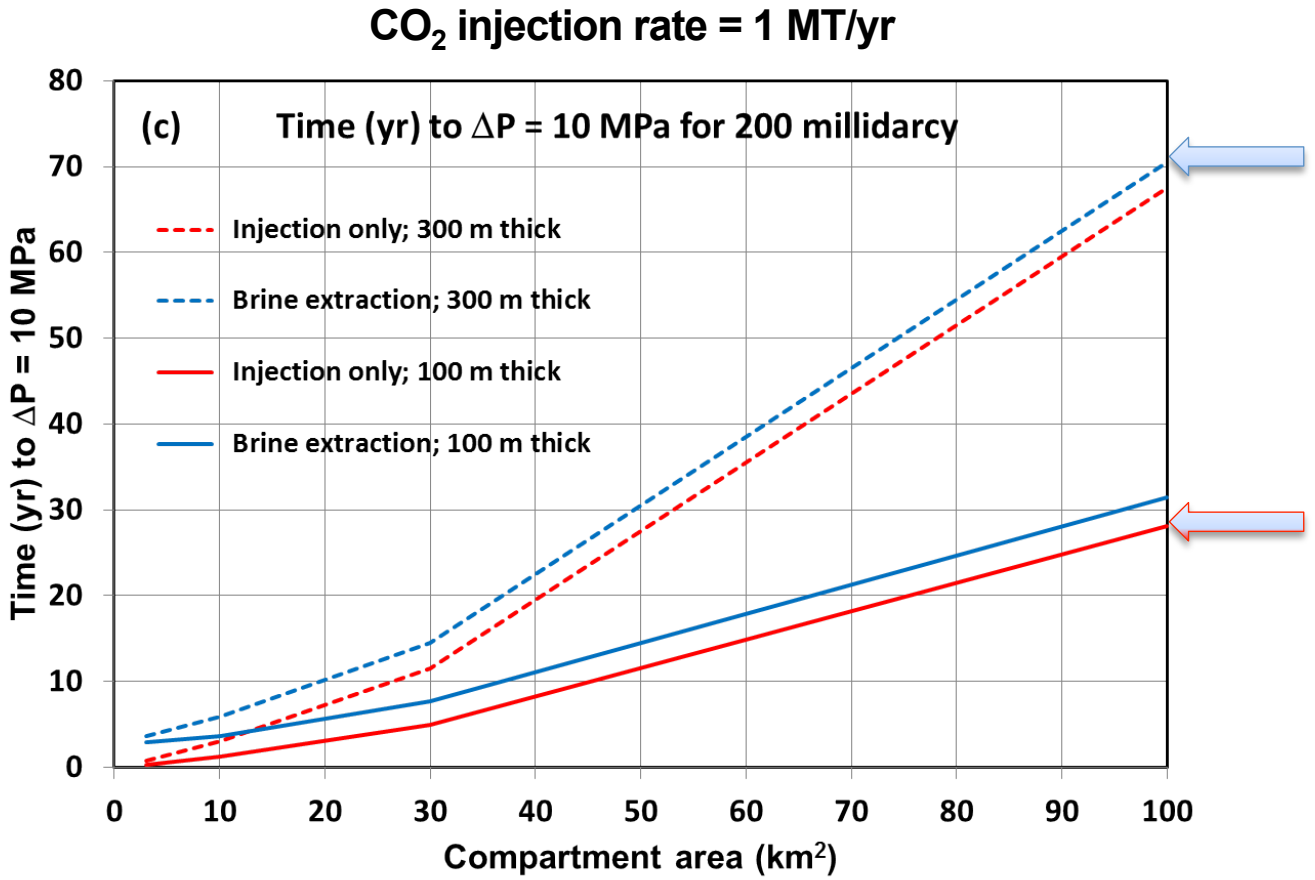

Underpressure caused by pre-injection extraction is the mirror image of overpressure driven by CO_2 injection

- Overpressure history for a single-mode CO_2-injection well is the mirror image of underpressure history for a corresponding dual-mode well
  - e.g., 10 MPa of underpressure from 4 yr of pre-injection brine extraction corresponds to 12 to13 MPa of overpressure at 3 yr for a single-mode CO_2-injection well and 4 MPa of overpressure for a dual-model well **(8 to 9 MPa of pressure relief)**
- For an initial reservoir pressure of 22 MPa and temperature of 100°C, CO_2 density is 70% that of brine density
- 4 years of 1X pre-injection brine extraction is equivalent to delaying CO_2 injection for 2.8 yr
- Early time pressure relief can be substantial
- Ongoing pressure relief can be achieved using additional dual-mode wells

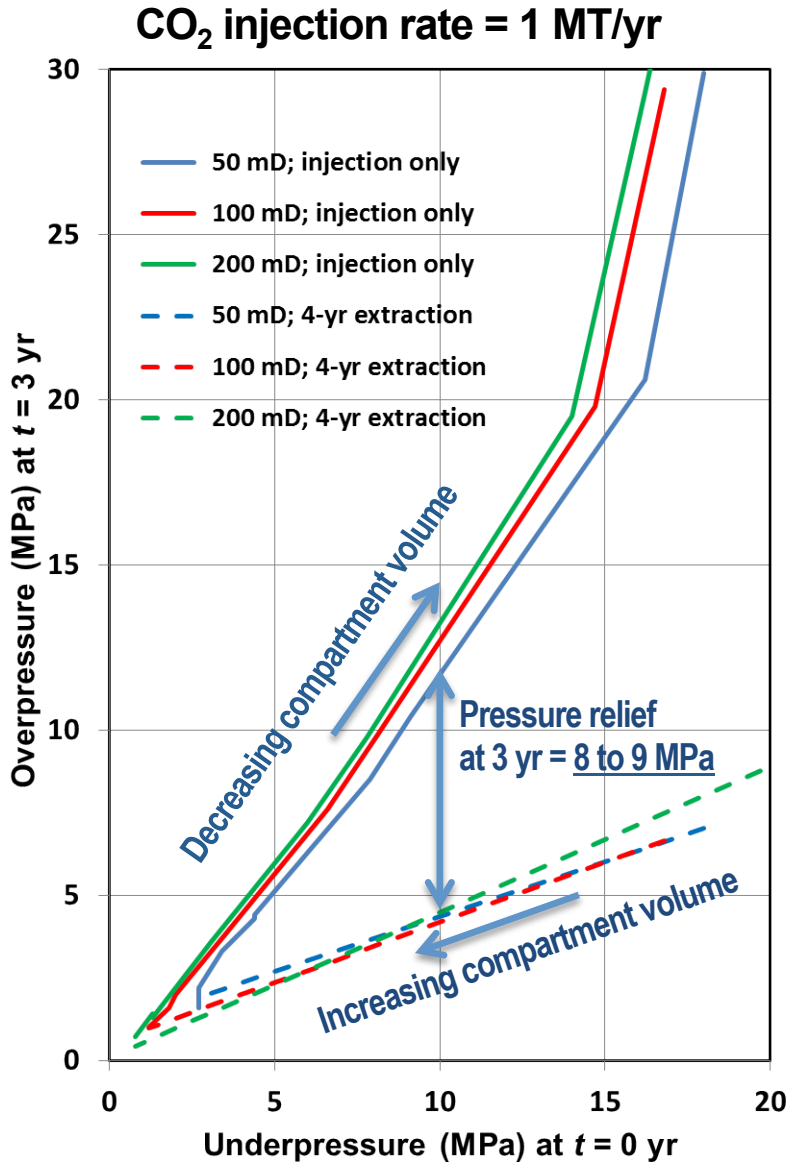

Note: brine extraction cases extract 1 MT/yr of brine for 4 yr

Staged treatment can extend the salinity range to cover most brines - but at additional expense

- Plot shows costs for surface treatment facilities
  - Does not include well-field costs
- Conversion to $/ton assumes vol/vol of CO_2 at density 0.75cm^3/g
- Single pass high pressure RO can desalinate brines up to about 8-10 wt%
- Multiple-pass NF-RO systems can extend this limit to ~20 wt % but at substantial additional cost
- Costs are significant but not large compared to overall CCS costs

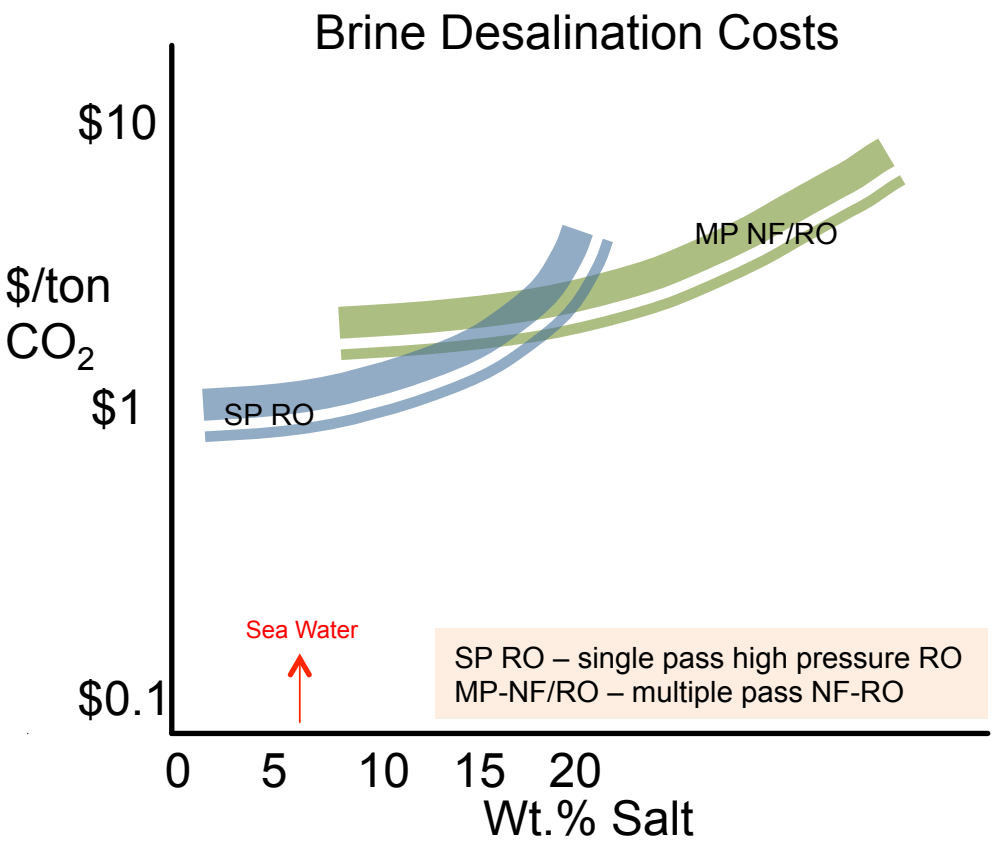

Summary and Conclusions

- Pressure management can be achieved using a small number of dual-mode brine-extraction/CO_2-injection wells, providing
  - pressure relief where it is needed most
  - reservoir diagnostics to help guide future well-field operations
  - an early source of brine for beneficial use
  - a cost-effective approach for a pilot-scale project
- A monitoring well in an overlying formation can provide
  - diagnostics about the contribution of caprock leakage to pressure relief
  - be used for assessment of the risk of caprock leakage
  - help guide future well-field operations
    - ✓ compartmentalized reservoirs
    - ✓ poor lateral hydraulic communication
  - diagnose reservoir characteristics prior to CO_2 injection
- Future work
  - consider a wide range of scenarios for leakage through the caprock and sealing faults
  - conduct site-specific analyses of well-field operations, using staged dual-mode wells