ARGONNE NATIONAL LABORATORY

TRANSPORTATION TECHNOLOGY R&D CENTER

Advanced Research in Diesel Fuel Sprays Using X-rays From The Advanced Photon Source

Christopher F. Powell

Argonne National Laboratory

DOE Program Manager:

Gurpreet Singh

ADVANCED PHOTON SOURCE

Project Motivation

- **Goal: Understand the mechanisms of spray atomization**
  - In-Nozzle effects - cavitation, nozzle structure
  - Aerodynamic effects - air entrainment, stripping, coalescence
  - Relative magnitudes unknown
  - Difficult to develop accurate spray models
- **Accurate modeling is important for emissions**
  - Engine testing is time-consuming, expensive
  - Modeling supplements real-world tests
- **Current spray models assume an initial fuel distribution**
  - Initial conditions uncertain
  - Little quantitative data exists in near-nozzle region
  - Visible light techniques limited by scattering
  - Lack of existing data, lack of reliable models
- **X-Ray technique**
  - Scattering is negligible
  - Quantitative measurement of fuel, even near the nozzle
  - Provide data necessary for accurate models
  - Unique diagnostic tool

Schematic of X-Ray Setup

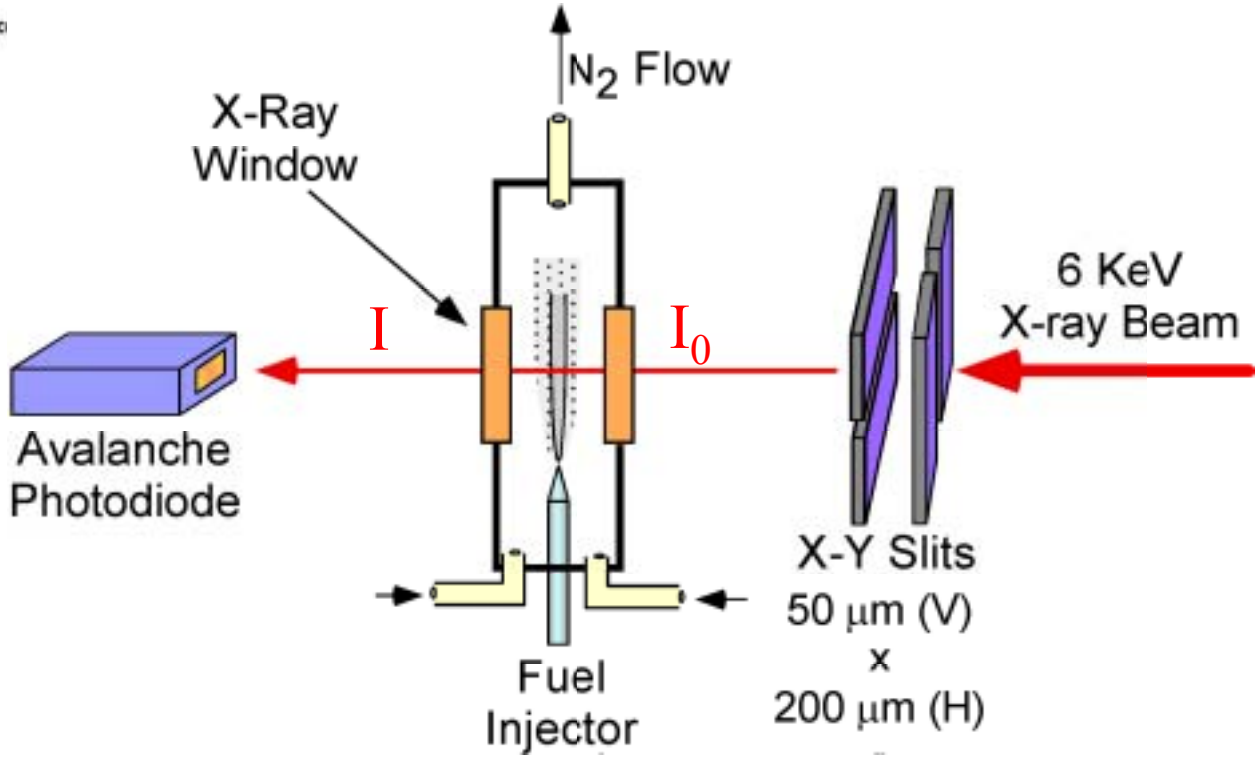

Direct relation between x-ray intensity and fuel mass

$$I/I_0 = \exp(-\mu_M M)$$

I_0	Incident x-ray intensity
I	Measured x-ray intensity
μ_M	Fuel absorption constant
M	Mass of fuel in x-ray beam

X-Ray Image Reconstruction

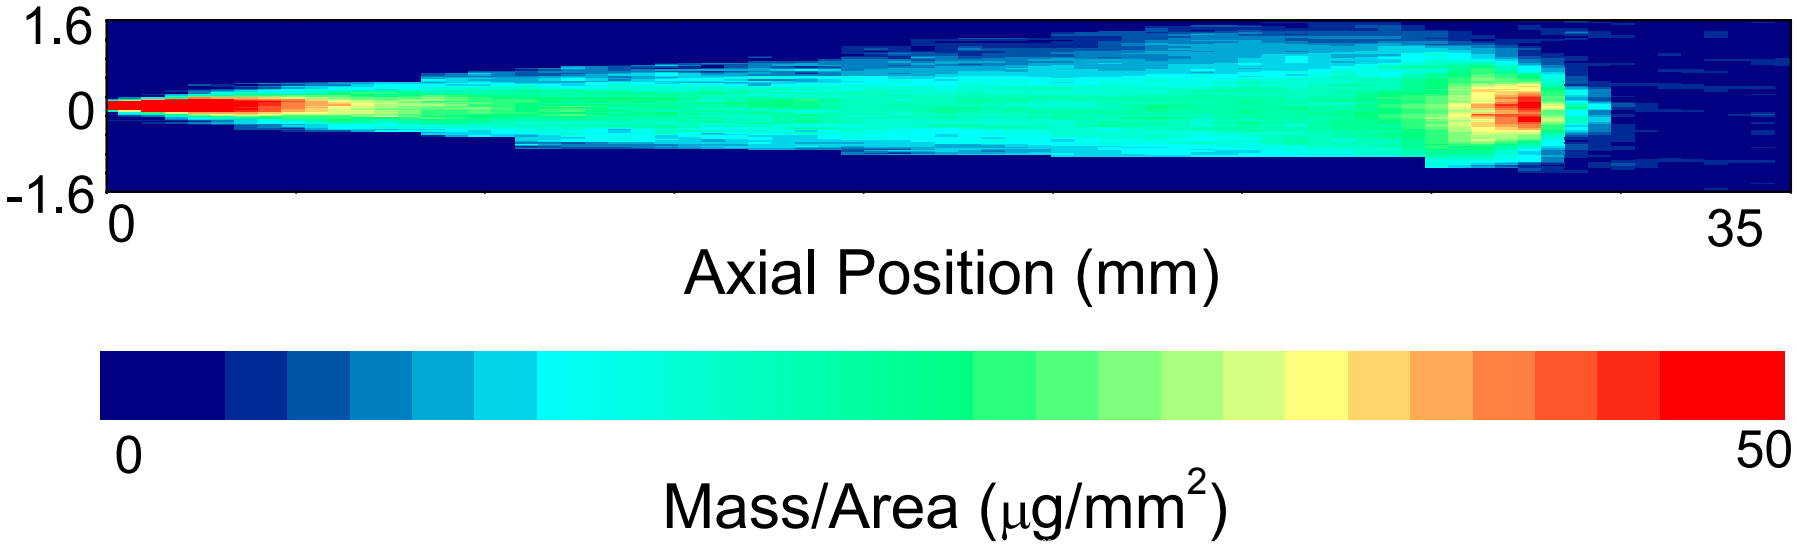

- Image is built from measurements at over 1500 different positions
- Image represents line-of-sight mass distribution

Injection Pressure = 500 bar
Ambient Pressure = 1 bar N_2
200 μs after SOI

Measurement Conditions

Common rail diesel, mini-sac nozzle, single hole

➢Orifice diameter	180 μm
➢Fuel pressure	500 bar
➢Pulse duration	400 μs
➢Spray chamber gas	N_2 @ 1-10 bar, 25 °C
➢Fuel Additive	Ce compound, 10%
➢Data Averaging	50-150 sprays

Sprays Under Different Ambient Pressures

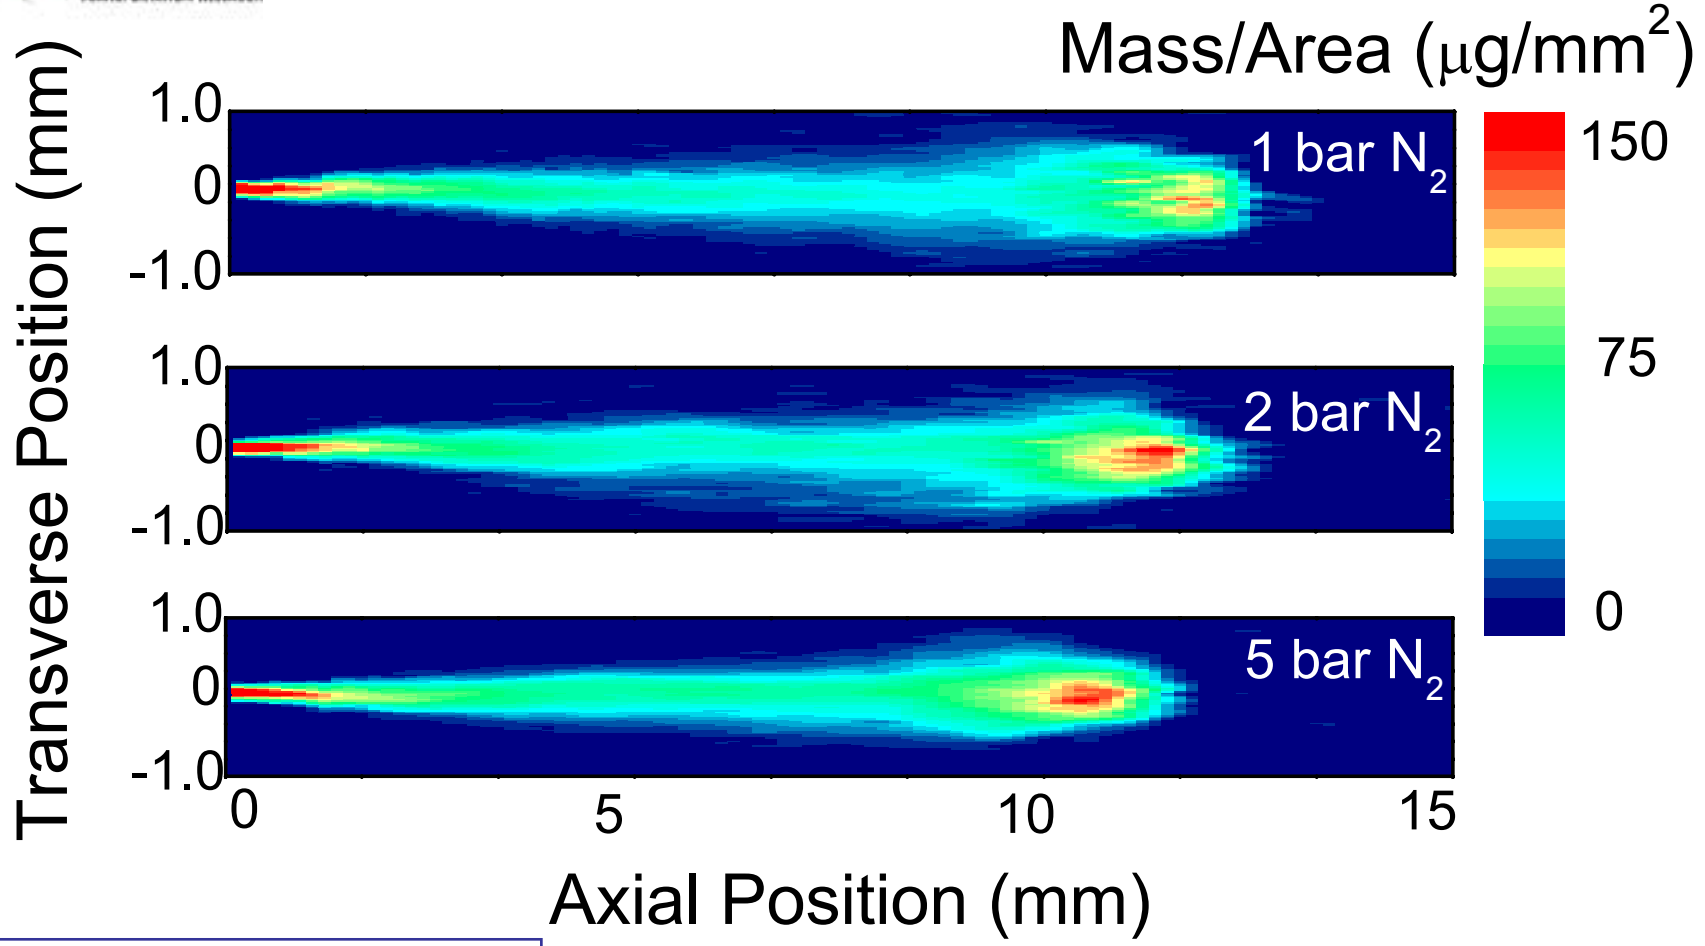

Injection Pressure = 500 bar
135 μs after SOI

Animation of X-Ray Measurements

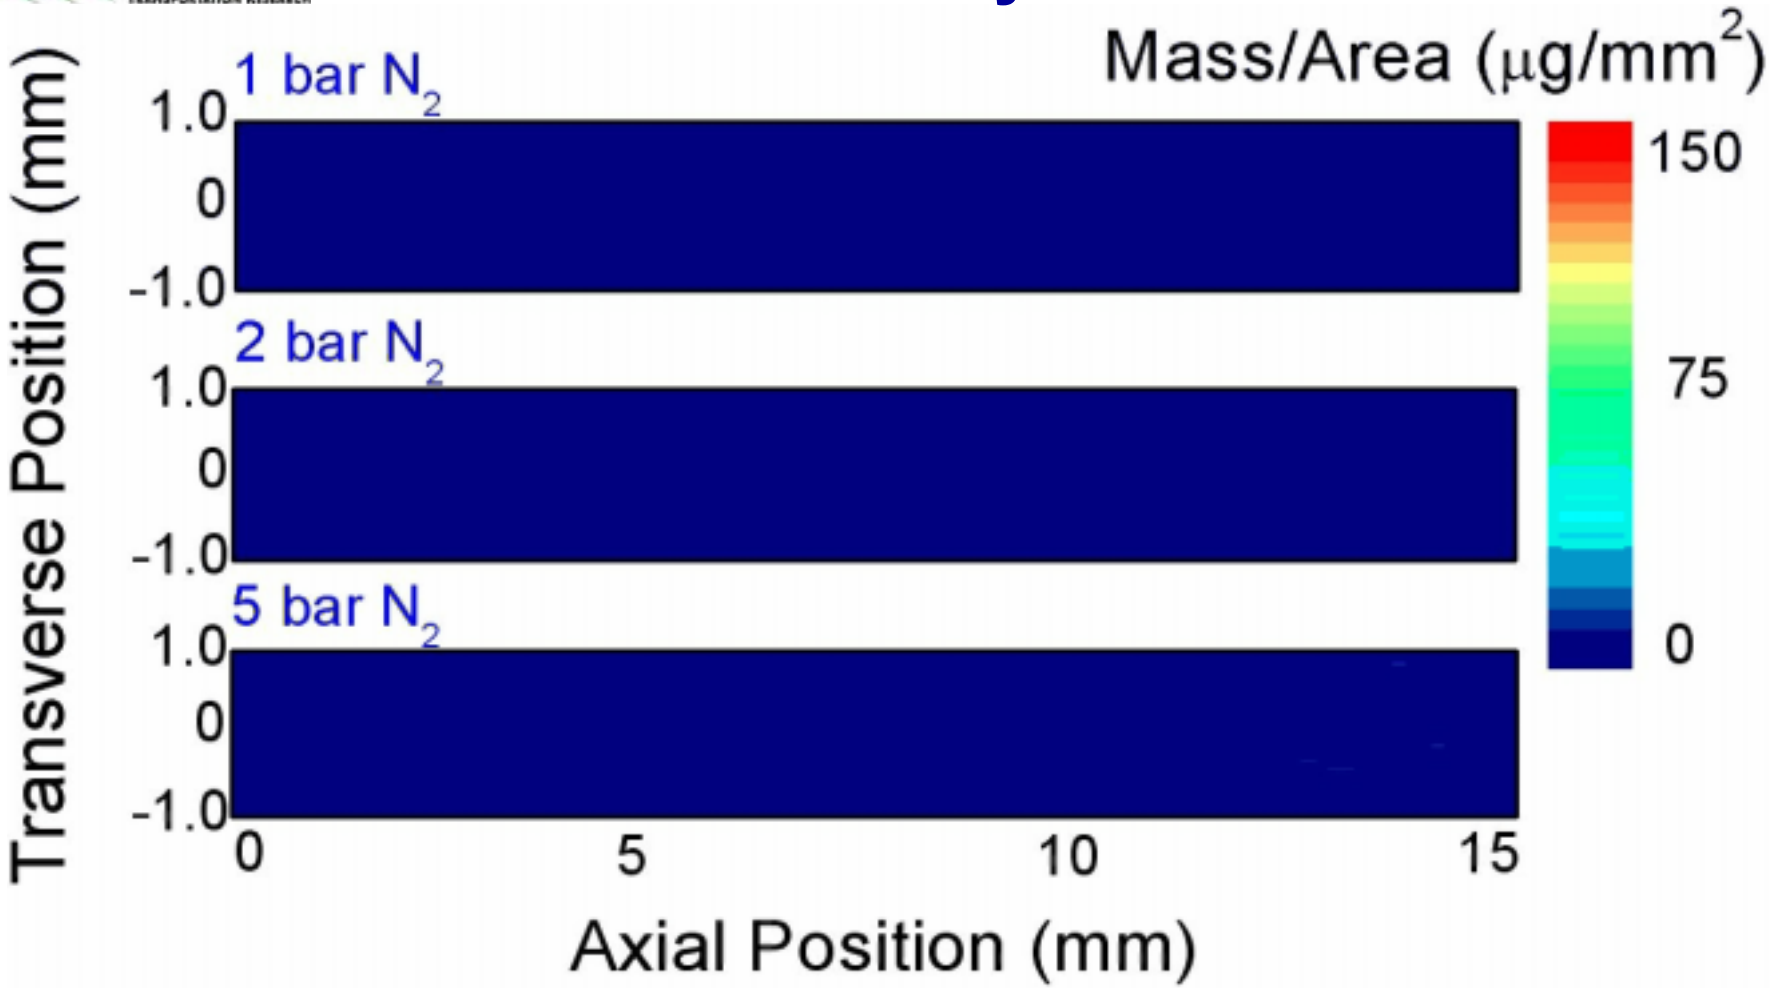

Injection Pressure = 500 bar

Near-Nozzle Mass Distributions

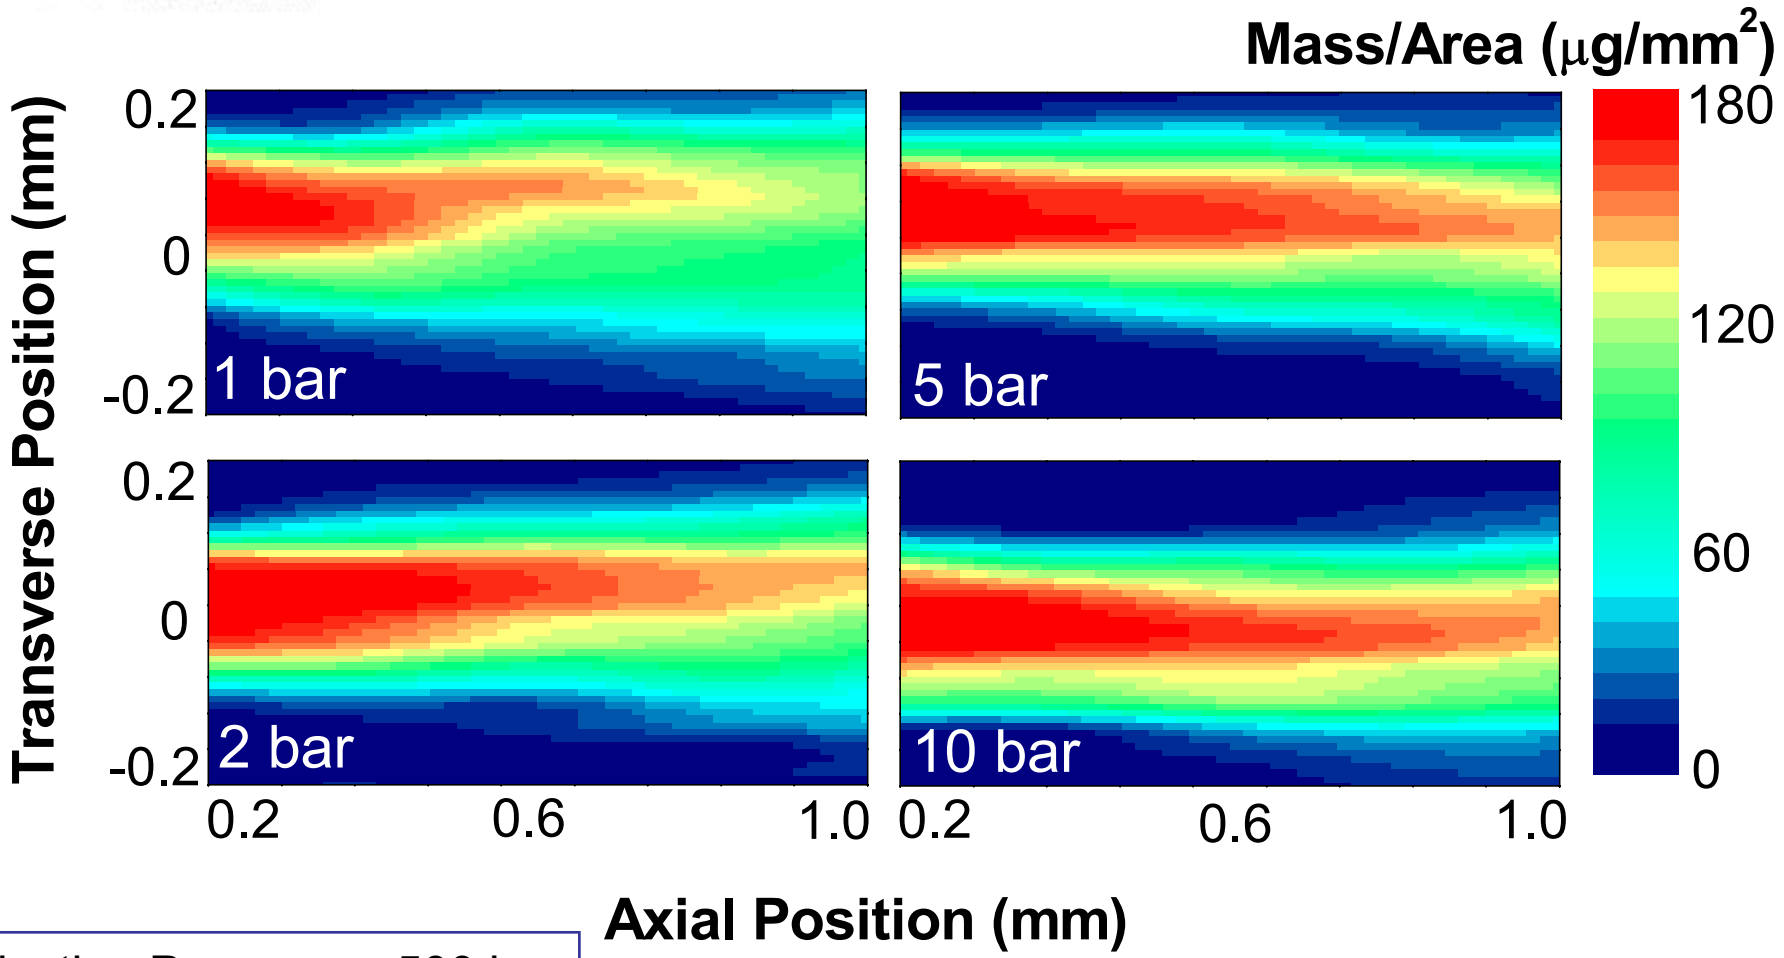

Injection Pressure = 500 bar
280 μs after SOI

Near-Nozzle Spray Structure

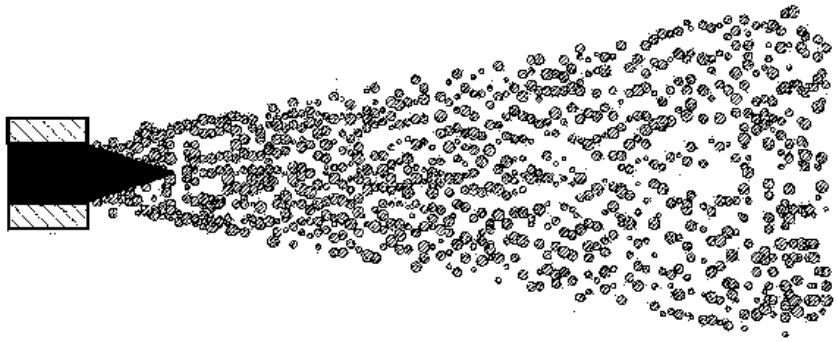

Smallwood and Gülder
Atomization and Sprays **10**, 2000.

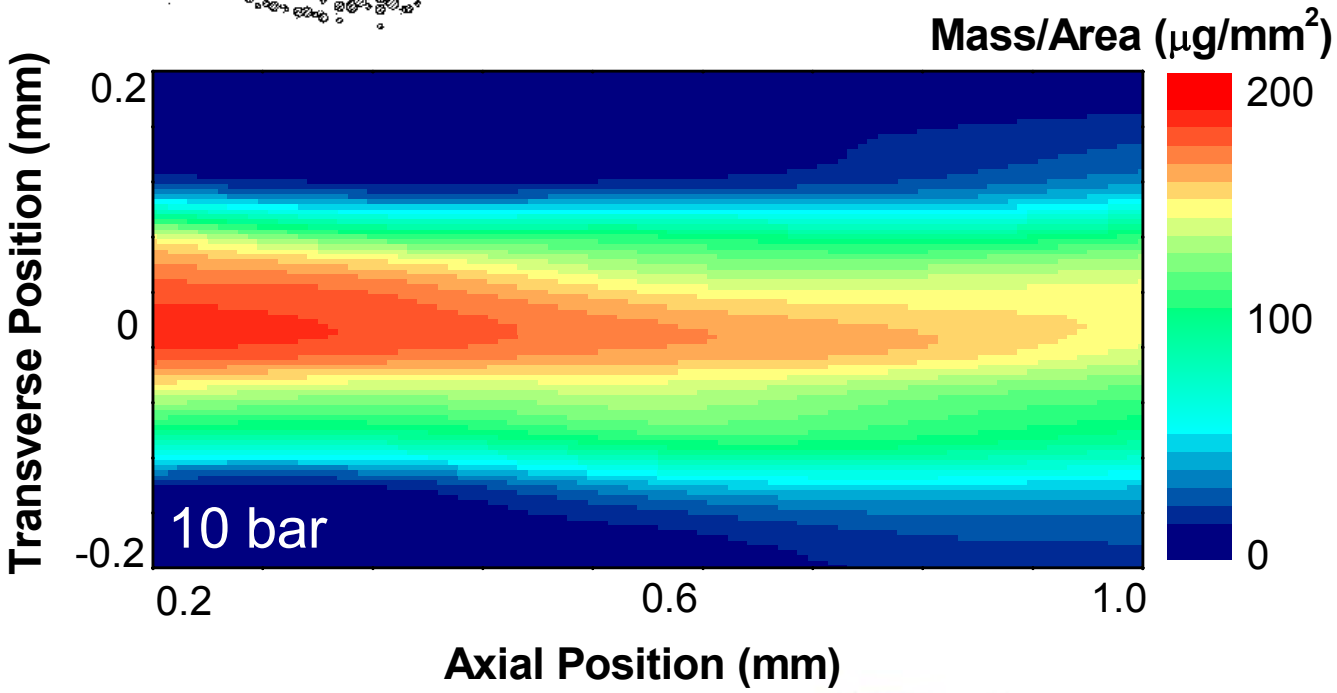

Future Work

- **Continue Analysis of Current Data**
  - Effects of ambient and injection pressure on atomization
- **Collaborations with modeling groups**
  - Develop new models of spray structure
- **Measurements at Higher Ambient Pressure**
  - Recent measurements at 10 bar.
  - Plans to measure up to 25 bar in 2004
- **Measurements at High Pressure, Temperature**
  - “Diesel-Like” conditions
  - Rapid Compression Machine for x-ray measurements

Acknowledgements

Argonne National Lab

Seong-Kyun Cheong
Jinyuan Liu
Suresh Narayanan
Jin Wang
Steve Ciatti
Yong Yue
Roy Cuenca
Deming Shu
Raj Sekar

Robert Bosch GmbH

Phillip Bohl
Johannes Schaller
Jochen Walther

Rhodia Rare Earths

Patrick Fournier-Bidoz

Department of Energy

Gurpreet Singh

This work is supported by the **U.S. Department of Energy** under contract W-31-109-Eng-38 and by the **Office of FreedomCAR and Vehicle Technologies**. Experiments were performed at the 1-BM beamline of the Advanced Photon Source, Argonne National Laboratory.

Challenges of X-Ray Measurements

- **Fuels inherently have low absorption**
  - Low energy (long wavelength) x-rays
  - Metal fuel additive
  - Average results from multiple sprays
- **Combustion engines operate at high pressure**
  - Pressurized gases attenuate x-rays
  - X-ray windows must support pressure without attenuation

X-ray transmission through 50 mm N_2 at 6 keV		
	1 bar	0.90
	2 bar	0.81
	5 bar	0.60
	10 bar	0.37

Near-Nozzle Mass Distributions

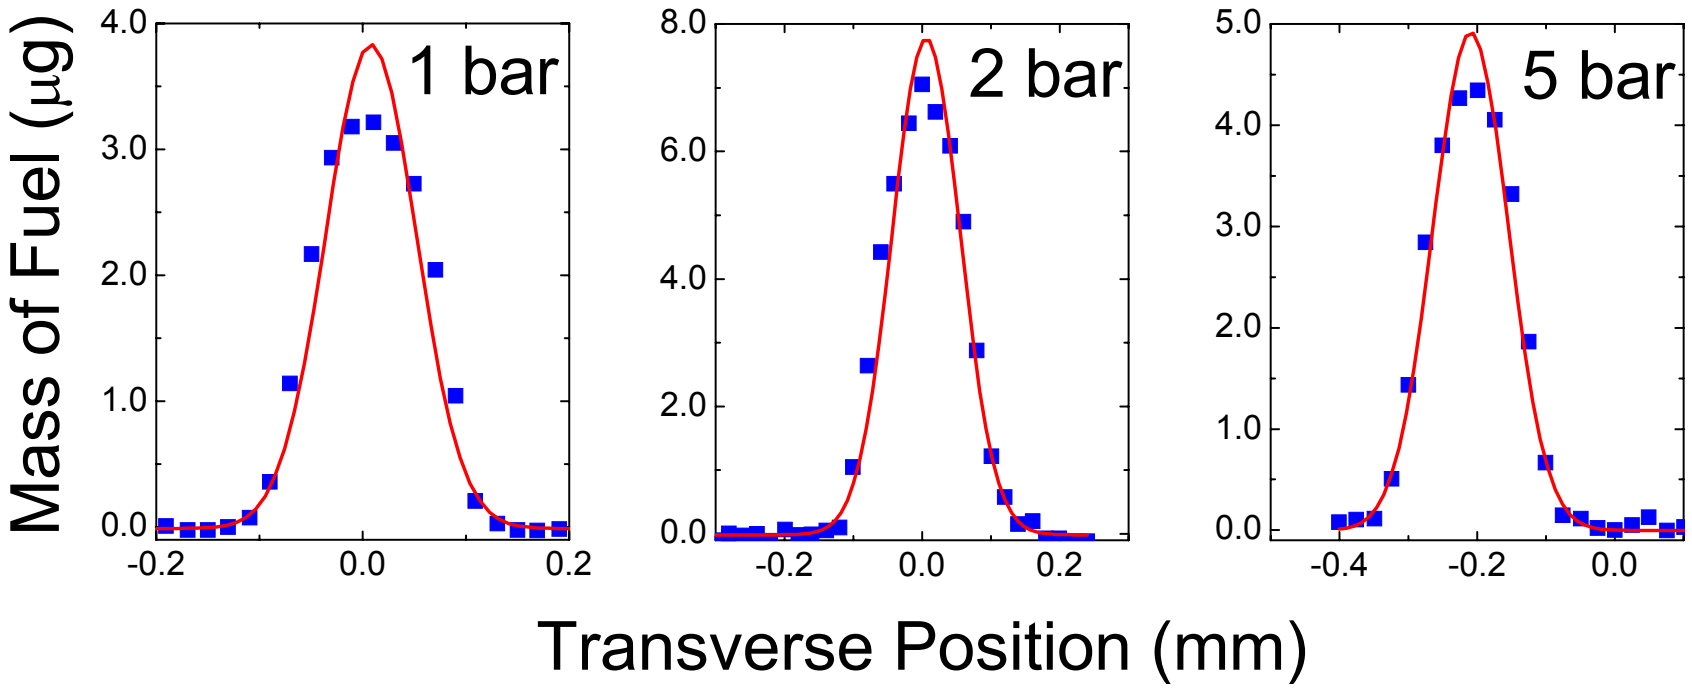

200 μm from nozzle
Injection Pressure = 500 bar
115 μs after SOI

Maximum Volume Fraction

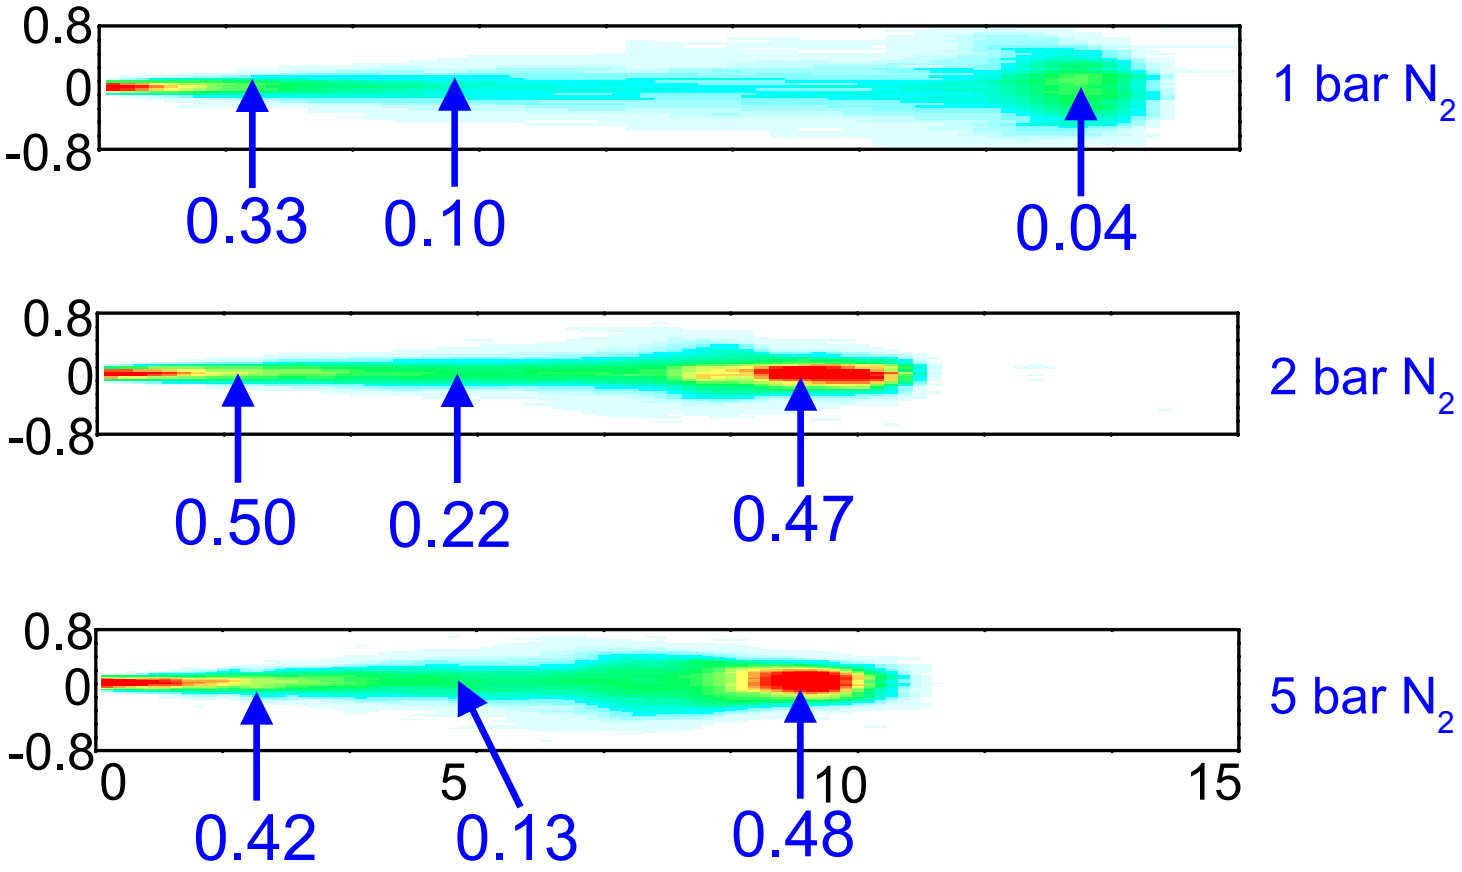

Injection Pressure = 500 bar
115 μs after SOI

Spray is Atomized 2 mm From Nozzle

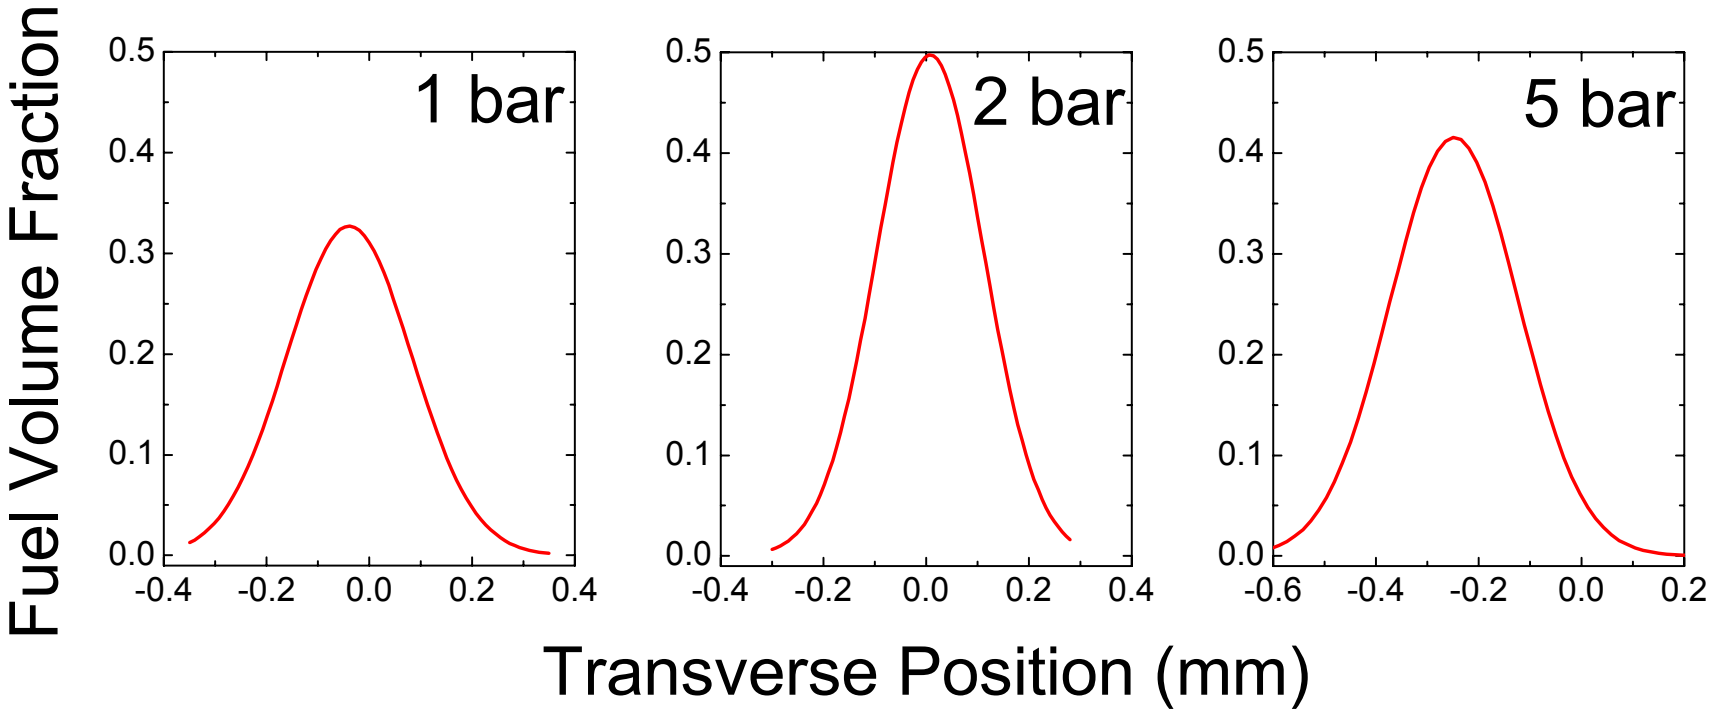

2 mm from nozzle
Injection Pressure = 500 bar
115 μs after SOI

Rapid Compression Machine for X-Ray Studies

- **Opposed Piston design to minimize vibration**
- **X-ray windows will be significant technical hurdle**
- **Operational in 2003**
- **X-ray Measurements in 2004**

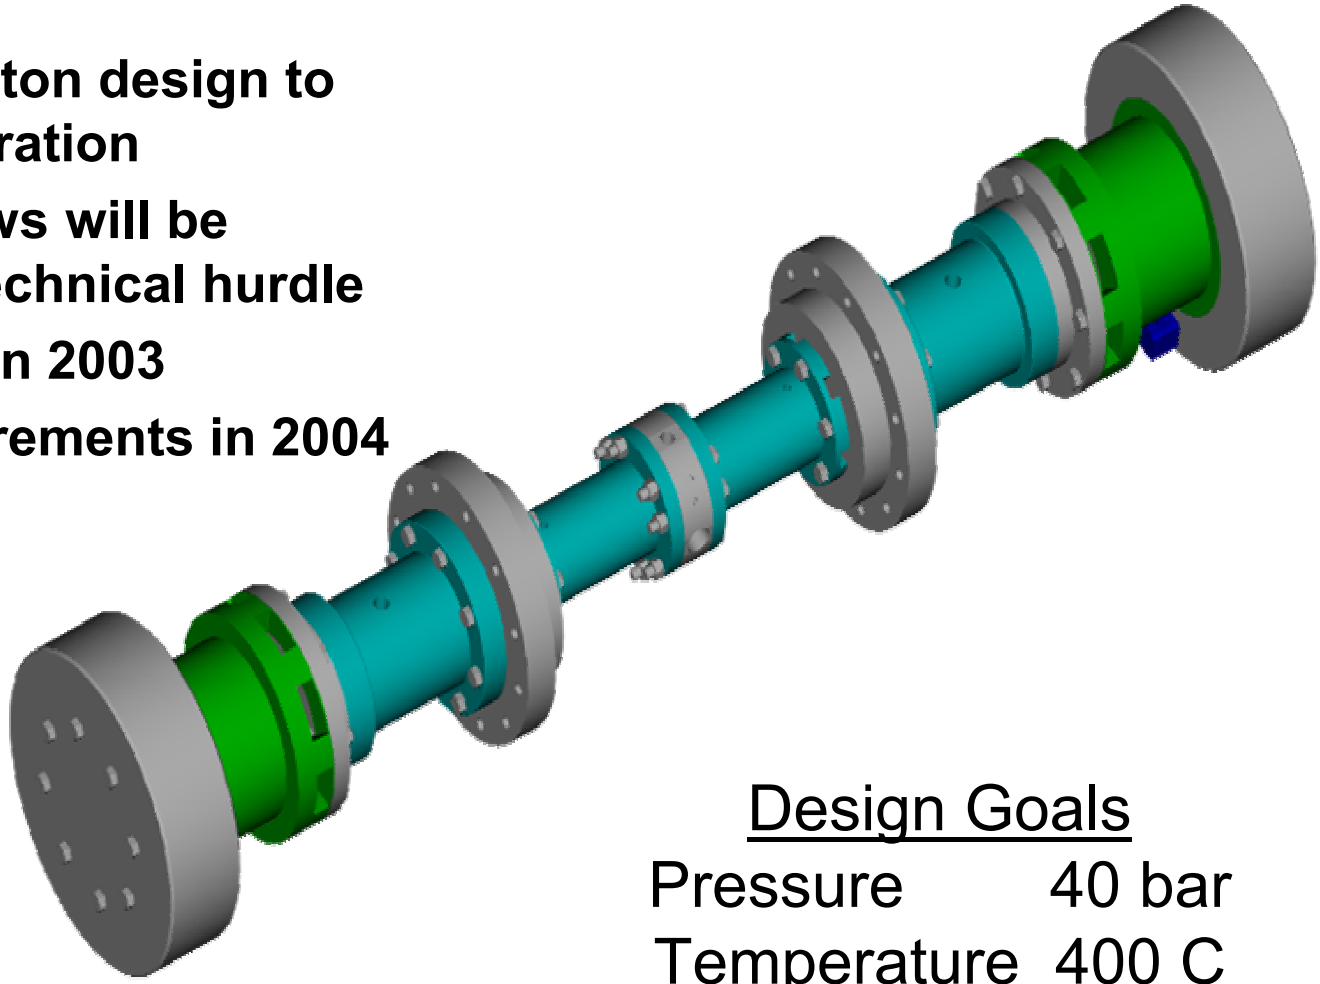

Design Goals

Pressure 40 bar

Temperature 400 C

Schematic of X-Ray Setup

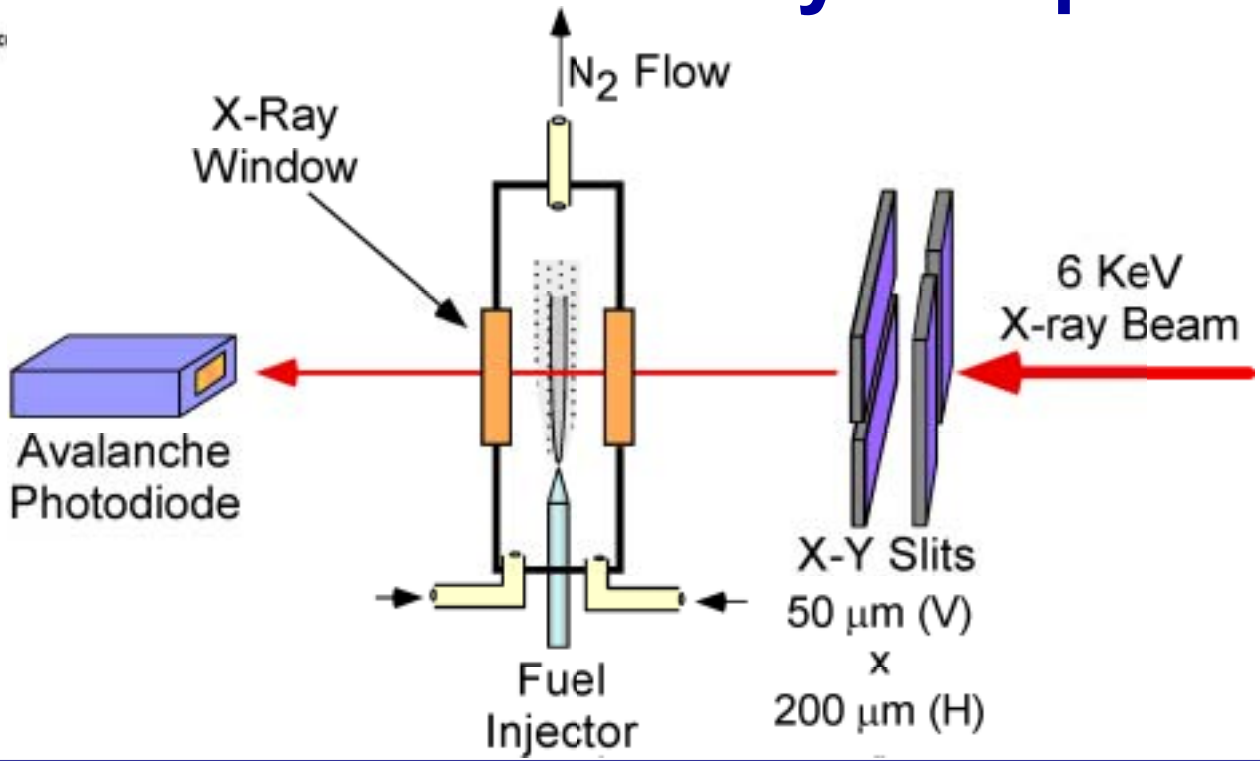

- **Injection chamber moves to probe different areas of spray**
  - Image is measured one pixel at a time
  - Each pixel obtained by averaging results from many sprays
  - Measure thousands of individual pixels
- **Fast detector, continuous measure of x-ray intensity**
  - Time-resolved measurement of fuel mass

Advantages of X-Rays

- **Techniques utilizing visible light are limited near nozzle**
  - ⇨ Scattering from droplets is likely
  - ⇨ Multiple scattering prevents quantitative analysis
- **X-rays have low scattering probability**
  - ⇨ Multiple scattering negligible
  - ⇨ Absorption is most likely interaction
- **Quantitative measurements**
  - ⇨ Direct measurement of the mass of fuel
  - ⇨ Intense beam, fast detector permit time-resolved measurement

Modeling the Cross Section of the Spray

2-D Mass Distribution ⟷ 1-D Mass Projection

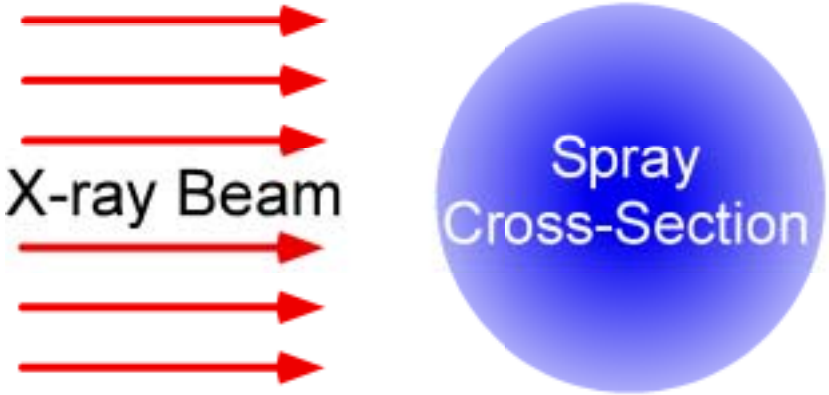

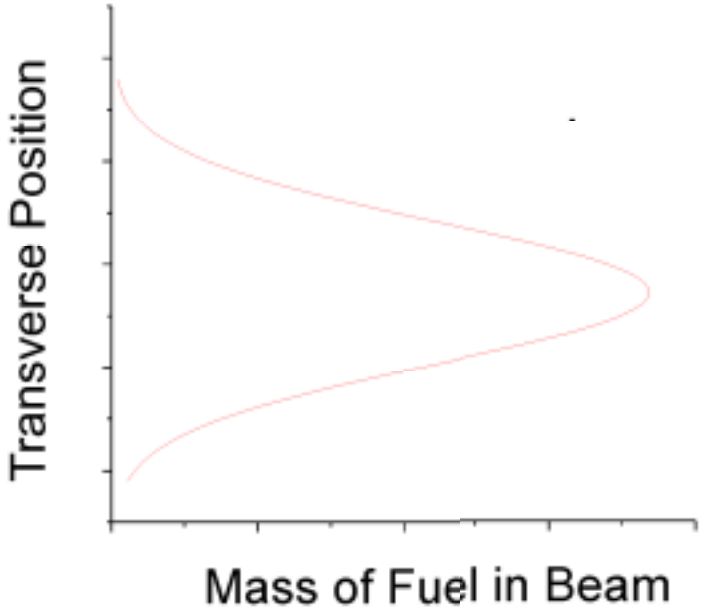

$$c(r,t) = \frac{M(r,t)}{A\sqrt{2\pi}a_t}$$

$$M(y,t) = M_0(t)\exp\left(-y^2/2a_t^2\right)$$

Volume Fraction = density / bulk fuel density

Comparison of Different Ambient Pressures

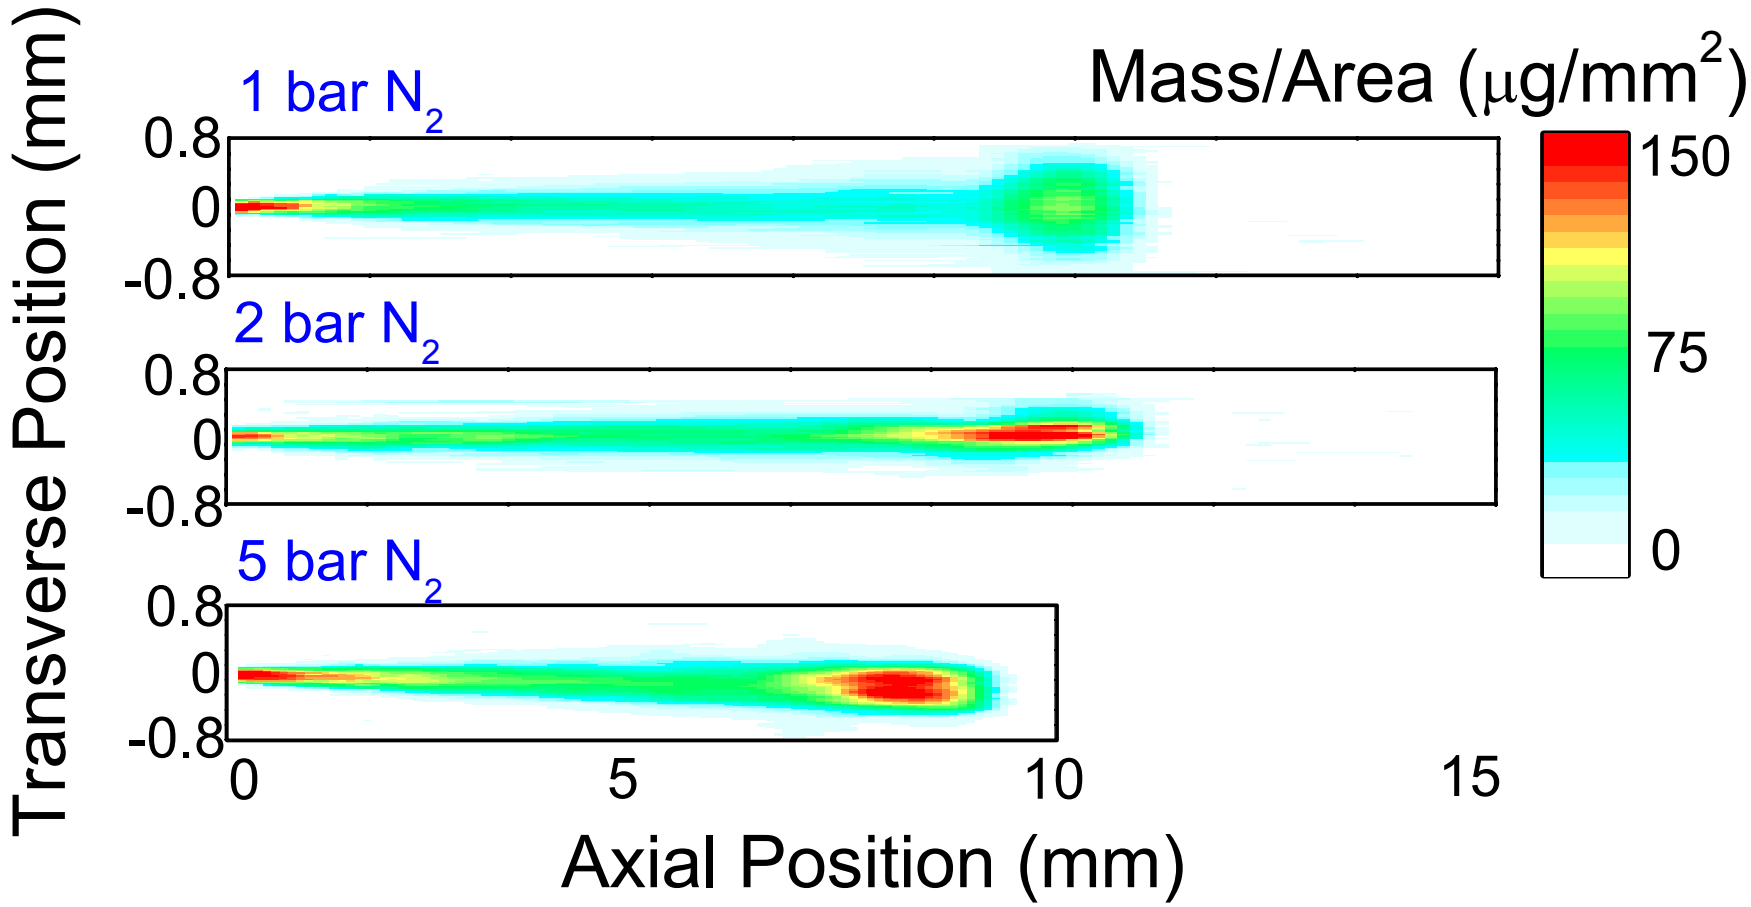

Injection Pressure = 1000 bar
45 μs after SOI