

S

ENGINEERING CHANGE NOTICE

Page 1 of 21. ECN **629195**Proj.
ECN

2. ECN Category (mark one) Supplemental <input type="checkbox"/> Direct Revision <input checked="" type="checkbox"/> Change ECN <input type="checkbox"/> Temporary <input type="checkbox"/> Standby <input type="checkbox"/> Supersedure <input type="checkbox"/> Cancel/Void <input type="checkbox"/>	3. Originator's Name, Organization, MSIN, and Telephone No. LA Domnoske-Rauch/DST Engineering/S5-13/376-9886		4. USQ Required? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	5. Date 5/15/2000
	6. Project Title/No./Work Order No. NA		7. Bldg./Sys./Fac. No. Double Shell Tanks	8. Approval Designator NA
	9. Document Numbers Changed by this ECN (includes sheet no. and rev.) HNF-3487 ⁴ Rev 1 ²⁷⁵⁻¹⁷⁻⁰⁰		10. Related ECN No(s). NA	11. Related PO No. NA
	12a. Modification Work <input type="checkbox"/> Yes (fill out Blk. 12b) <input checked="" type="checkbox"/> No (NA Blks. 12b, 12c, 12d)		12b. Work Package No. NA	12c. Modification Work Completed NA Design Authority/Cog. Engineer Signature & Date

13a. Description of Change
 Update of the Double Shell Tank Emergency Pumping Guide, HNF-3487 Revision 1, to reflect requested changes by the Washington Department of Ecology.


13b. Design Baseline Document? ☐ Yes ☒ No ²⁷⁵⁻¹⁷⁻⁰⁰

Also, typographical and editorial changes were made to improve readability.

14a. Justification (mark one) Criteria Change <input checked="" type="checkbox"/> Design Improvement <input type="checkbox"/> Environmental <input type="checkbox"/> Facility Deactivation <input type="checkbox"/> As-Found <input type="checkbox"/> Facilitate Const. <input type="checkbox"/> Const. Error/Omission <input type="checkbox"/> Design Error/Omission <input type="checkbox"/>	14b. Justification Details Update the document to reflect current criteria for DST emergency pumping and annulus emergency pumping. This change to the document will not change collective dose since it has no impact on radiological sources, contamination control, or shielding. Design verification preformed by informal review per HNF-IP-0842, Vol. IV, Sec. 4.24 USQ TF-98-1201 Rev. 1
--	---

15. Distribution (include name, MSIN, and no. of copies)
 LA Domnoske-Rauch S5-13
 DW Reberger S5-13
 DG Baide S5-05

RELEASE STAMP

DATE:		ID:
STA: <u>4</u>		<u>2</u>
MAY 17 2000		

ENGINEERING CHANGE NOTICE

Page 2 of 2

1. ECN (use no. from pg. 1)

629195

16. Design Verification Required

☐ Yes

☒ No

17. Cost Impact

ENGINEERING

Additional ☐ \$ NA

Savings ☐ \$ NA

CONSTRUCTION

Additional ☐ \$ NA

Savings ☐ \$ NA

18. Schedule Impact (days)

Improvement ☐ NA

Delay ☐ NA

19. Change Impact Review: Indicate the related documents (other than the engineering documents identified on Side 1) that will be affected by the change described in Block 13. Enter the affected document number in Block 20.

SDD/DD	<input type="checkbox"/>	Seismic/Stress Analysis	<input type="checkbox"/>	Tank Calibration Manual	<input type="checkbox"/>
Functional Design Criteria	<input type="checkbox"/>	Stress/Design Report	<input type="checkbox"/>	Health Physics Procedure	<input type="checkbox"/>
Operating Specification	<input type="checkbox"/>	Interface Control Drawing	<input type="checkbox"/>	Spares Multiple Unit Listing	<input type="checkbox"/>
Criticality Specification	<input type="checkbox"/>	Calibration Procedure	<input checked="" type="checkbox"/>	Test Procedures/Specification	<input type="checkbox"/>
Conceptual Design Report	<input checked="" type="checkbox"/>	Installation Procedure	<input type="checkbox"/>	Component Index	<input type="checkbox"/>
Equipment Spec.	<input type="checkbox"/>	Maintenance Procedure	<input type="checkbox"/>	ASME Coded Item	<input type="checkbox"/>
Const. Spec.	<input type="checkbox"/>	Engineering Procedure	<input type="checkbox"/>	Human Factor Consideration	<input type="checkbox"/>
Procurement Spec.	<input type="checkbox"/>	Operating Instruction	<input type="checkbox"/>	Computer Software	<input type="checkbox"/>
Vendor Information	<input checked="" type="checkbox"/>	Operating Procedure	<input type="checkbox"/>	Electric Circuit Schedule	<input type="checkbox"/>
OM Manual	<input type="checkbox"/>	Operational Safety Requirement	<input type="checkbox"/>	ICRS Procedure	<input checked="" type="checkbox"/>
FSAR/SAR	<input type="checkbox"/>	IEFD Drawing	<input type="checkbox"/>	Process Control Manual/Plan	<input type="checkbox"/>
Safety Equipment List	<input type="checkbox"/>	Cell Arrangement Drawing	<input type="checkbox"/>	Process Flow Chart	<input type="checkbox"/>
Radiation Work Permit	<input type="checkbox"/>	Essential Material Specification	<input type="checkbox"/>	Purchase Requisition	<input type="checkbox"/>
Environmental Impact Statement	<input type="checkbox"/>	Fac. Proc. Samp. Schedule	<input type="checkbox"/>	Tickler File	<input type="checkbox"/>
Environmental Report	<input checked="" type="checkbox"/>	Inspection Plan	<input checked="" type="checkbox"/>	none	<input checked="" type="checkbox"/>
Environmental Permit	<input type="checkbox"/>	Inventory Adjustment Request	<input type="checkbox"/>		<input type="checkbox"/>

20. Other Affected Documents: (NOTE: Documents listed below will not be revised by this ECN.) Signatures below indicate that the signing organization has been notified of other affected documents listed below.

Document Number/Revision

None

Document Number/Revision

NA

Document Number/Revision

NA

21. Approvals

Signature	Date	Signature	Date
Design Authority <i>[Signature]</i>	16 May 2000	Design Agent	
Cog. Eng. <i>[Signature]</i>	5/16/00	PE	
Cog. Mgr. <i>[Signature]</i>	5/16/00	QA	
QA		Safety	
Safety		Design	
Environ. <i>[Signature]</i>	5/16/00	Environ.	
Other <i>[Signature]</i>	5/16/00	Other	
	5/17/00		

DEPARTMENT OF ENERGY

Signature or a Control Number that tracks the Approval Signature

ADDITIONAL

DOUBLE-SHELL TANK EMERGENCY PUMPING GUIDE

LA Domnoske-Rauch

CH2MHill Hanford Group Inc.

Richland, WA 99352

U.S. Department of Energy Contract DE-AC06-96RL13200

EDT/ECN: 629195

UC: 2020

Org Code: 74120

Charge Code: 111273 EL10

B&R Code: EW3130010

Total Pages: 56


Key Words: Double Shell Tank, Annulus Emergency Pumping, Tank Farm
Emergency, Pumping, Guide, Secondary Containment, Annulus, Leak

Abstract: This document provides preplanning necessary to expeditiously remove any waste that may leak from the primary tank to the secondary tank for Hanford's 28 DSTs. The strategy is described, applicable emergency procedures are referenced, and transfer routes and pumping equipment for each tank are identified.

TRADEMARK DISCLAIMER. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors.

Printed in the United States of America. To obtain copies of this document, contact: Document Control Services, P.O. Box 950, Mailstop H6-08, Richland WA 99352, Phone (509) 372-2420; Fax (509) 376-4989.


Release Approval 5/17/00 Date

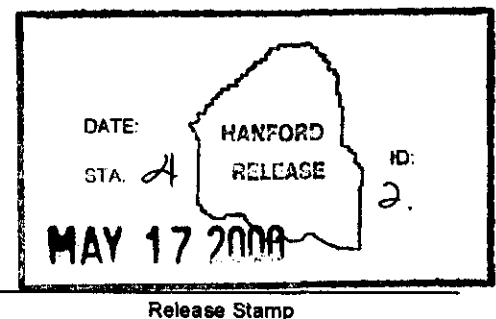

Approved For Public Release

[illegible]

DOUBLE-SHELL TANK EMERGENCY PUMPING GUIDE

Prepared for the United States Department of Energy

CH2MHill Hanford Group Inc.
P. O. Box 1500
Richland, Washington 99352

1. GENERAL INFORMATION	3
1.1. Purpose, Scope, and Background	3
1.2. Summary of Information Provided	3
1.3. Watch-List Tanks	4
2. EQUIPMENT DESCRIPTION	5
2.1. Primary Tank Configuration	6
2.2. Secondary Containment Configuration	6
2.3. Support Systems	7
3. PLAN OF ACTION.....	7
3.1. Regulatory Requirements Applicable to Leaking Double-Shell Tanks	7
3.2. General Strategy	8
3.3. Potential Leak Scenarios	9
3.3.1. Strategy for Emergency Pumping after a Minor Leak	10
3.3.2. Strategy for Emergency Pumping after a Moderate or Major Leak	11
3.4. Responsibilities	12
3.5. Major Activities	13
3.5.1. Pre-Emergency Pumping Planning Activities	13
3.5.2. Check Waste Characterization and Compatibility	13
3.4.3. Review/Prepare Safety Documentation	13
3.5.4. Ensure Equipment Readiness	13
3.6. Estimated Time To Start Pumping Tanks	14
4. REFERENCES.....	15

**APPENDIX A - PROPOSED EMERGENCY PUMPING TRANSFER ROUTES
From PRIMARY TANK To DESIGNATED AND ALTERNATE RECEIVER TANKS**

APPENDIX B - LIST OF IMPLEMENTING PROCEDURES AND RELEVANT DRAWINGS

**APPENDIX C - IDENTIFICATION AND LOCATION OF DST PUMPS AND JUMPERS
THAT WOULD BE USED FOR EMERGENCY PUMPING**

**APPENDIX D - VOLUME OF LIQUID IN ANNULUS OF DOUBLE-SHELL TANK AT VARIOUS
DEPTHS**

**APPENDIX E - PROPOSED ANNULUS EMERGENCY PUMPING TRANSFER ROUTES
To DESIGNATED AND ALTERNATE RECEIVER TANKS**

APPENDIX F - APPLICABLE ANNULUS EQUIPMENT

1. GENERAL INFORMATION

1.1 Purpose, Scope, and Background

The purpose of this plan is to provide as much preplanning as practical for pumping waste out of the annulus or secondary containment of Double-Shell Tanks (DST). If the primary tank leaks, waste would accumulate in the secondary tank. For the purposes of this report, the terms "secondary tank" and "annulus" are used interchangeably. The preplanning will expedite emergency pumping and provide the basis for demonstrating that the leaked waste will be "removed from the secondary containment system within 24 hours, or in as timely a manner as is possible" as required by the Washington Administrative Code.

There are 177 large underground waste storage tanks in the Hanford 200 East and 200 West Areas. There are 149 single-shell tanks (SSTs), and 28 DSTs. The scope of this plan includes all 28 of the Hanford DSTs in AN, AP, AW, AY, AZ and SY Tank Farms. The scope also includes the transfer lines, pump pits, valve pits, jumpers, transfer pumps, sump pumps, and procedures necessary to accomplish the emergency pumping.

An alternative study (ARES, 1999) was completed in March 1999 to identify a cost effective method of maintaining emergency annulus pumping equipment in a reliable condition. RPP's management has approved funds for Fiscal Year 2000 activities to refine and implement the study's recommendation.

1.2 Summary of Information Provided

This guide contains a general description of the DSTs and discussions of the requirements, strategy, transfer routes, procedures, and equipment that will be used to expeditiously respond to a leaking DST. References to statutory requirements are included. Information for each DST about the waste transfer routes, procedures, and equipment required for the transfers are contained or referenced in the appendices. These include:

Appendix A: PROPOSED TRANSFER ROUTES

Contains a tabulated summary description of the proposed transfer route for each DST. Routes are included for transferring the waste from the primary tank to the designated receiver tank and to an alternate receiver tank. Tank AP-108 is the designated receiver tank and AP-107 is the alternate receiver tank for emergency transfers from all DSTs except from the aging waste tanks AZ-101 and AZ-102. The designated and alternate receiver tanks for emergency transfers from AZ-101 and AZ-102 are AY-101 and AY-102 respectively. The receiver tank for both 101-SY and 103-SY is tank 108-AP or 107-AP via tank 102-SY.

Appendix B: IMPLEMENTING PROCEDURES AND RELAVANT INFORMATION

Contains a list of applicable transfer operating procedures and a list of Piping and Instrumentation Drawings (P&ID) for each DST farm.

Appendix C: INVENTORY AND STATUS OF REQUIRED EQUIPMENT

Contains a list of equipment that would be used to transfer waste out of a leaking DST.

Appendix D: VOLUME OF LIQUID IN ANNULUS OF DOUBLE-SHELL TANK

Contains a sketch of a cross-section of the bottom of a typical DST, a list of assumptions, and a table of the volume of liquid that would be present in the annulus at various depths.

Appendix E: ANNULUS PUMPING ROUTES

Contains a tabulated summary description of the proposed transfer route for each DST annulus. Routes are included for transferring the waste from the annulus to the designated receiver tank and to an alternate receiver tank. Tank AP-108 is the designated receiver tank, and AP-107 is the alternate receiver tank for emergency annulus transfers from all DSTs except from the aging waste tanks AZ-101 and AZ-102. The designated and alternate receiver tanks for emergency annulus transfers from AZ-101 and AZ-102 are AY-101 and AY-102 respectively. The receiver tank for both 101-SY and 103-SY is 108-AP or 107-AP via tank 102-SY.

Appendix F: APPLICABLE ANNULUS EQUIPMENT

Contains lists of applicable annulus equipment and storage locations. This equipment includes: 6 flex jumpers, components for 2 complete rigid jumpers, 4 submersible pumps, 2 reciprocating pumps, components for pump assemblies and a skid for air and electrical support equipment.

1.3 Watch-List Tanks

In response to Public Law 101-510, Section 3137, "Safety Measures for Waste Tanks at Hanford Nuclear Reservation," six DSTs are identified as hydrogen/flammable gas Watch-List tanks. The tanks are AN-103, AN-104, AN-105, AW-101, SY-101 and SY-103. These tanks are suspected to have a significant potential for hydrogen/flammable gas generation, entrapment and episodic release.

Operating Specifications Document (OSD) OSD-T-151-00030, "Operating Specifications for Watch-List Tanks" requires that written approval must be obtained from Nuclear Safety and from DOE prior to transferring waste out of these six tanks. The OSD also requires written approval by the Secretary of Energy prior to transfer of waste into these six tanks. Because the Watch-List safety issues are a subject of ongoing research, the

criteria for managing these tanks will continue to evolve. Therefore, a thorough evaluation of applicable requirements will need to be done at the time a leak is identified.

2. EQUIPMENT DESCRIPTION

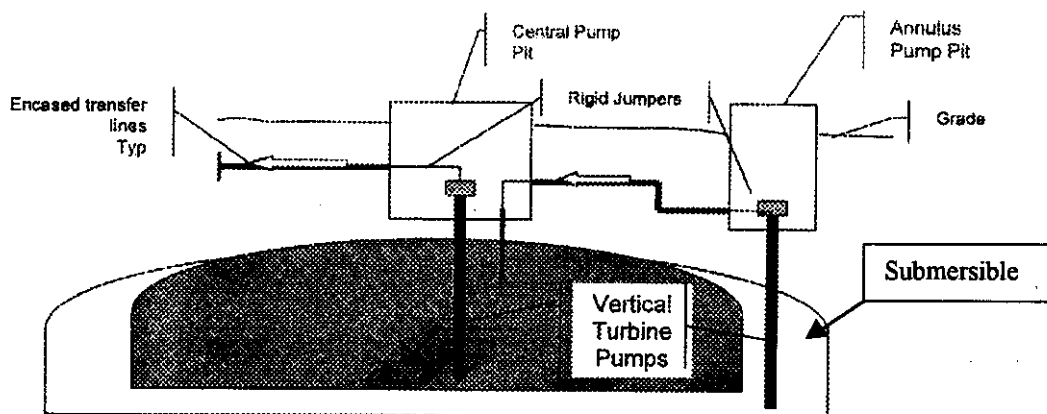


Figure 1 - Typical DST Configuration

All DSTs are similar in design and each has capacity of approximately 3.8 million liters, (L) (1 million gal). Slight differences in the tank and ancillary equipment, however, have occurred over the years from design improvements and because of the need to accommodate variations in waste composition. Twenty-eight DSTs are located in six farms, five farms in 200 East Area and one farm in 200 West Area. DSTs consist of a carbon steel primary tank and a carbon steel secondary tank encased by a protective reinforced concrete shell. The tanks contain a mixture of liquid, sludge and salt cake waste with both radioactive and chemically toxic hazardous constituents. Liquids exist as supernate (liquid above solids) and interstitial liquid (liquid filling the voids between solids) in the tanks. Sludge consists primarily of solids (hydrous metal oxides) precipitated by the neutralization of acid wastes. Salt cake, generally between the supernate and sludge, consists of the various salts formed by the evaporation of water from the waste. These waste types do not necessarily exist as distinct layers and may be intermingled to differing degrees. Some sludges and salt cakes contain interstitial liquid and are relatively soft; others may be drier and harder.

Each tank is equipped with riser pipes that penetrate the concrete dome and the top of the primary or secondary tank. The risers provide access to the primary tank and to the annulus space for waste transfer operations, equipment installation or use and monitoring. Most risers extend above grade. However, some risers are located under covered pits (e.g., Central Pump Pits and Annulus Pump Pits).

Pits provide access from the surface to process piping and tank risers and are the points where jumper (temporary piping systems), pumps, and other equipment are installed to establish waste transfer routes. A rigid jumper is a steel pipe that is fitted to specific wall nozzle configurations. The flexible jumpers are braided, stainless steel, flexible hose that permit connections to multiple wall nozzles.

There are three types of pumps used at RPP to transfer waste into and out of DSTs. These types are (1) jet pumps in combination with centrifugal pumps, with nominal capacities of 0.05 to 4.0 gpm, (2) submersible pumps, with nominal capacities of 10 to 30 gpm and (3) transfer pumps, with nominal capacities of 100 to 250 gpm.

The components of a jet pump system located within a pump pit are a centrifugal pump, flexible or rigid jumpers, a flush line, and a flow totalizer. The centrifugal pump supplies motive fluid to the submerged jet pump system. Jet pumps are used to move liquid at very low rates.

A submersible pump can be used to raise large volumes of supernatant. The pump motor is below the pump intake and is submersed in the liquid being pumped.

Transfer pumps are typically installed in a pump pit, with the motor located in the pit and the intake located in the tank waste. Transfer pumps are normally deep-well, vertical turbine pumps, where the pump intake is a rigid pipe that extends to a fixed depth in the tank waste. Some transfer pumps have a floating intake, which is a flexible jumper connected to rigid pipe that does not extend into the waste.

2.1 Primary Tank Configuration

All DSTs have a Central Pump Pit, which is approximately centered over the primary tank. The primary function of the pit is to provide confinement for a possible spray leak during waste transfers and to provide radiation shielding during waste transfers. The Central Pump Pits provide for access to the tank for supernatant filling or removal, slurry distribution, and mixing. Supernatant filling is accomplished through piping or jumpers connected to the riser. For supernatant removal, Central Pump Pits are designed to hold a deep-well turbine pump and piping or jumpers. Central Pump Pits for receiver tanks that store slurry are equipped with slurry distributors. The jumpers installed in the Central Pump Pit are either rigid or flexible jumpers. Transfer pumps are normally used to remove large volumes of supernatant. Jet pumps would be used to remove interstitial liquid because the liquid drains out of the sludge interstices too slowly to employ the transfer pumps. Before a jet pump system can be used to pump interstitial liquid, a stainless steel, salt screen must be installed in the waste to prevent solids from plugging the jet intakes.

2.2 Secondary Containment Configuration

The annulus pump pit is located directly above the annulus and is connected to the annulus by a riser. The pit and riser provide access for pumping out any liquids that may accumulate in the annulus. There is just one annulus pump per tank farm that is interchangeable between the tanks within that farm, except for AW Farm. As of January 1999, there is an annulus pump installed in tanks AN-107, AP-103, AY-101, AZ-101 and SY-103. These pumps were all original equipment and were subjected to an extensive 8-hr run-in test in the shop prior to installation. The tests included checking bearing temperature, flow rates, pressure and vibration. The annulus pump designated for AW

farm, pump #111-P10, is in the pump laydown area north of Building 2101M in the 200 East Area.

In the Annulus Pump Pit a rigid or flex jumper assembly connects the annulus pump outlet to a 51-mm (2-in.) waste transfer line enclosed in a 102-mm (4-in.) encasement. The encasement drains to the Annulus Pump Pit. The waste transfer line terminates at the Central Pump Pit of the tank. The two AY and AZ tanks, have an additional route back to the primary tank via a waste transfer route from the Annulus Pump Pit to a riser, which connects directly to the primary tank.

2.3 Support Systems

Virtually all of the equipment and support systems that would be used for emergency pumping of DSTs are existing and are in nominal serviceable condition. There may be occasions where it would be necessary or practical to use a Jet Pump to remove waste or drainable liquid from the annulus of a leaking DST. In that case, equipment dedicated for emergency pumping of Single-Shell Tanks (SST) would be employed. That equipment consists of a jet pump, jumper, pumping and instrumentation control skid, flammable gas monitor, and over-ground piping. The RPP Stabilization Program stages and stores this emergency pumping equipment for SSTs in HO-64-05192. See RPP-SD-WM-AP-005, "Single-Shell Tank Leak Emergency Pumping Guide" for details.

Submersible pumps and other emergency equipment for use in annulus pumping will be stored in HO-64-07008, which is an enclosed portable trailer. Flex jumpers to be used will be stored in the 2101-M Warehouse. This equipment will be maintained per procedure 5-MISC-331, "Servicing and Testing of Annulus Emergency Pumping Equipment".

Procedure, ATP-001-001, "Acceptance Test Procedure Test Pump for Annulus Emergency Pumping", will be used to test the pump performance prior to acceptance.

3. PLAN OF ACTION

3.1 Regulatory Requirements Applicable to Leaking Double-Shell Tanks

40CFR, Part 265.193 (c) (4) Containment and detection of releases

"...sloped or otherwise designed or operated to drain and remove liquids resulting from leaks, spills or precipitation. Spilled or leaked waste and accumulated precipitation must be removed from the secondary containment system within 24 hours, or in as timely a manner as is possible to prevent harm to human health or the environment, if removal of the released waste or accumulated precipitation cannot be accomplished within 24 hours."

WAC 173-303-640 (4) (iv) Tank Systems

"...sloped or otherwise designed or operated to drain and remove liquids resulting from leaks, spills, or precipitation. Spilled or leaked waste and accumulated precipitation must be removed from the secondary containment system within twenty-four hours, or in as timely a manner as is possible to prevent harm to

human health and the environment, if the owner or operator can demonstrate to the department that removal of the released waste or accumulated precipitation cannot be accomplished within twenty-four hours."

3.2. General Strategy

The general strategy for emergency pumping a leaking DST is based on several assumptions. The more significant assumptions are:

- Tank AP-108 is the designated receiver tank for all DST emergency pumping, except the AZ aging waste tanks. The designated receiver tank for aging waste will be AY-101.
- Tank AP-108 is the primary receiver, but in the event it is not available, Tank AP-107 will be the alternate. These are staging tanks for the 242-A Evaporator and one or both should be near empty at any time. Waste compatibility will not be an issue that causes a delay in the pumping.
- Tank AP-107 will be the alternate receiver tank in the event that AP-108 is not available or suitable for receiving an emergency transfer. Tank AY-102 will be the alternate receiver tank for aging waste from AZ farm.
- To the maximum extent possible, existing double-contained, underground transfer lines will be used.
- Existing transfer pumps in the DST central pump pits will be used to pump waste out of the primary tank.
- Existing annulus pumps in the DST farm may be used to pump waste out of the annulus to a designated or alternate receiving tank.
- The saltwell jet pump and emergency SST skid may be used to remove waste from the primary tank and annulus.
- Leaks from SY-101 and SY-103 could be pumped to SY-102.
- About eight inches of liquid would need to accumulate in the bottom of the annulus before the existing annulus pump would automatically prime upon starting. Six inches would be needed for the submersible pumps.
- Each DST annulus has a probe installed that is set to alarm if liquid is detected within the annulus.
- Each DST annulus has at least one probe installed that could be used to monitor liquid level in the annulus.
- A pumping strategy plans to use submersible pumps in all locations.

3.3 Potential Leak Scenarios

The best strategy for emergency pumping of a specific DST to "prevent harm to human health and the environment" will depend upon the rate or size of leak from the primary tank and upon whether the tank is a Watch-List Tank. For purposes of this plan, leak scenarios are divided into three classes based upon the rate of the leak. The Minor Leak is treated separately because pumpable quantities of waste are likely to be slow to accumulate. Moderate and Major Leaks are treated together because the emergency response to them would be the same in either case.

The existing deep-well vertical turbine annulus pump intakes are nominally two and one half inches above the bottom of the secondary tank. The vendor recommends that the intake needs to be submerged about four to six inches before the pump can be primed. Assuming that eight inches of waste need to accumulate prior to starting the annulus pump, a "pumpable quantity" of waste in the annulus is approximately 11,360 liters (3,000 gallons). See Appendix D for calculations of annulus volume. Assuming that a vortex two inches deep forms at the pump intake, the annulus pump would quit or begin entraining air at the intake when the waste level is approximately four inches. Assuming there is no absorption of waste in the insulating concrete, about 5,300 liters (1,400 gallons) of residual waste will remain in the annulus. Methods to remove the residual waste include: some number of flush/dilution pump cycles; removing the capacity turbine pump and installing a low capacity jet pump, submersible pump, or positive displacement pump designed for pumping down to fractions of an inch; and evaporating any moisture from the unpumpable residue with the HEPA filtered annulus ventilation system.

An improved strategy is being pursued to install a submersible pump 2.5 inches above the bottom of the secondary tank. This will allow for pumping of the waste to within approximately 6 inches of the bottom of the tank. An air pump will also be installed to within 2.5 inches of the bottom of the secondary tank and would be capable of pumping to within approximately 3 inches of the bottom of the tank. Assuming there is no absorption of waste in the insulating concrete, about 3,900 liters (1,030 gallons) of residual waste will remain in the annulus. Repeated water flushing could be used as a method to remove the residual waste. Any moisture from the unpumpable residue would be evaporated by the HEPA filtered annulus ventilation system.

3.3.1 Strategy for Emergency Pumping after a Minor Leak

Scenario: Primary steel tank corrosion causes small breach. Waste dribbles into annulus and the annulus Continuous Air Monitor (CAM) alarms. Leak rate is so slow that dried waste will form on side of tank. Liquid accumulates in the bottom of the annulus very slowly over a period of weeks or months, if at all. See Figure 1 for schematic depiction of minor leak.

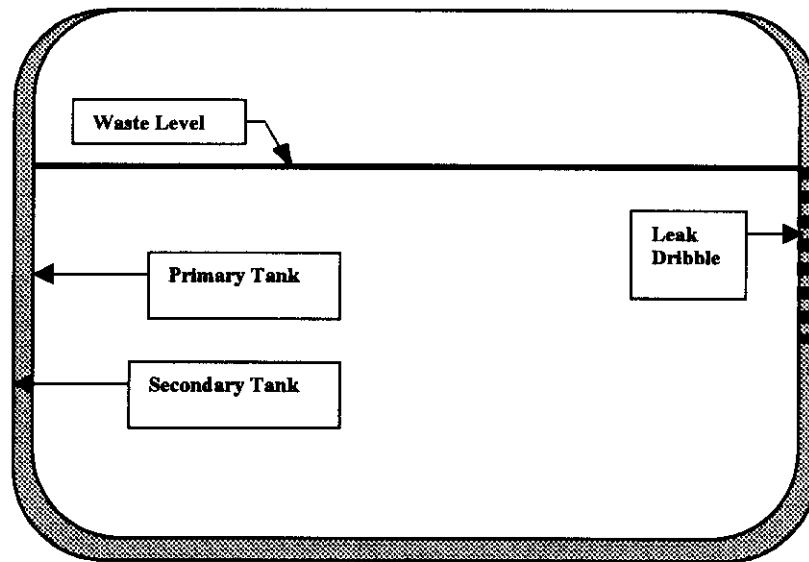


Figure 1. Schematic Diagram of Minor Leak

OBJECTIVE: Pump waste out of annulus within 24 hours or as timely as possible.

STRATEGY: Begin pumping primary tank contents via existing underground supernatant transfer pipelines with the existing transfer pump already installed in the central pump pit. In parallel, install and prepare an annulus pump, if one is not already installed. Visually inspect annulus using a remote video camera mounted on a hand-held wand or using a remote video camera mounted on a robot similar to ones used for tank integrity assessments to determine location of leak. Continue pumping the primary tank until the waste level is sufficiently below the leak path. When and if pumpable quantities of liquid accumulate in the annulus, the annulus will then be pumped through the annulus pump pit, via the submersible or reciprocating pump, to the designated or alternate receiving tank.

BENEFITS OF STRATEGY: For minor leaks this strategy minimizes the amount of waste that will be leaked to the annulus by using transfer pumps and pipelines already installed and serviceable to lower the waste level in the primary tank. If pumpable quantities accumulate in the annulus, they will be removed as expeditiously as possible.

Once the primary tank waste level has been lowered below the leak path and any pumpable quantities of waste in the annulus are removed the emergency nature of the

transfers can be downgraded and a permanent resolution determined. Removing as much of the waste as possible in a non-emergency mode is more likely to prevent harm to human health or the environment than pumping all of the tank's contents in an emergency mode.

3.3.2 Strategy for Emergency Pumping after a Moderate or Major Leak

Scenario: A moderate or major leak occurs in the primary steel tank somewhere below the waste level. The waste levels in the primary tank and secondary tank equilibrate within hours or days. See Figure 2 for schematic depiction of a moderate to major leak.

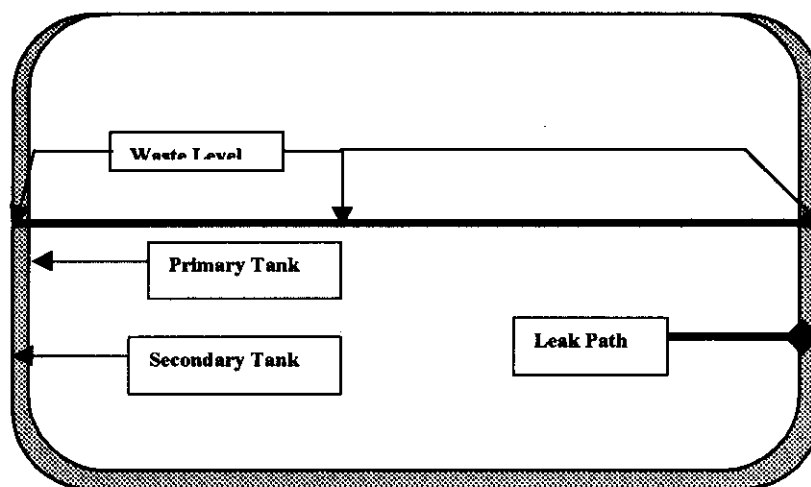


Figure 2. Schematic Diagram of Major Leak in Double-Shell Tank

OBJECTIVE: Pump waste out of annulus within 24 hours or as timely as possible.

STRATEGY: Begin pumping primary tank via existing underground supernatant transfer pipelines with the transfer pump installed in the leaking tank's central pump pit. Monitor levels and material balances in primary tank to determine elevation of leak path on the sidewall or bottom of primary tank. In parallel with pumping of primary tank, install and prepare annulus pump. Monitoring and controlling the waste level in the annulus with respect to the waste level in the primary tank is important to prevent buoyant forces from floating the primary tank.

Once the primary tank waste level has been lowered below the leak path, begin pumping waste from the annulus via existing underground transfer lines from the annulus pump pit to the central pump pit. From the central pump pit, the route would be jumpered to the same route used for transferring waste from the primary tank to the designated or alternate receiver tank.

For leaking DSTs that do not have an installed primary transfer pump, an annulus pump would be installed. The annulus pump would be used to pump waste from the annulus to the central pump pit. The route would be jumpered through the central pump pit to the

same route used for transferring waste from the primary tank to the designated receiver tank.

BENEFITS TO STRATEGY: Most DSTs have primary transfer pumps installed. This strategy uses transfer pumps and pipelines already installed and serviceable so that pumping could be initiated more quickly. The leak will be stabilized faster and the portion of the annulus above the leak path will be pumped faster by using the higher capacity primary tank transfer pump than by using the annulus pump.

The waste in the annulus would be pumped to the designated or alternate receiver tank via the established transfer route as necessary. This approach avoids having to modify the transfer procedure or having to set up and arrange additional equipment and jumpers. Once the location of the leak is determined and the annulus is pumped, the emergency nature of the transfer could be downgraded. The waste remaining in the non-leaking portion of the tank could be left in the tank or pumped to some other tank, depending upon the best solution under the circumstances. Removing as much of the waste as possible in a non-emergency mode is more likely to prevent harm to human health or the environment, than pumping all of the tanks contents in an emergency mode.

If the leak path is near the bottom of the tank, then this approach will result in removing waste from the annulus in the most timely manner because the highest capacity pump and transfer routes are employed.

Because the primary tank pumping and annulus pumping use a common route to the designated receiver tank, an alternate strategy could also be considered. This alternate strategy would be to initiate pumping of the primary tank to the designated receiver and then pump the annulus back into the leaking tank. This strategy would allow both primary tank and annulus transfers simultaneously through separate routes.

3.4 Responsibilities

The responsibilities for various actions and activities associated with emergency pumping are detailed in the specific emergency pumping procedures. See Appendix B. Because a leaking tank may constitute both a safety issue and an environmental issue, the emergency response must be planned in cooperation with the Richland Office of the ORP (RL), the Washington State Department of Ecology and the Washington State Department of Health.

3.5 Major Activities

3.5.1 Pre-Emergency Pumping Planning Activities

- Hold a kick-off meeting to bring together all required participants to assign responsibilities and action items necessary to initiate pumping.
- Walk-down facility to identify needed repairs or scheduled maintenance that may need to be accelerated.

- Review applicable operating and emergency transfer procedures and validate for specific conditions or circumstances if necessary.
- Other activities as defined by the Time Deployment Study for Annulus Pumping

3.5.2 Check Waste Characterization and Compatibility

Before waste is transferred, compatibility tests or assessments are performed on the waste in both the supply and receiver tanks to ensure that undesirable chemical reactions do not occur. The document, "Data Quality Objectives for the Waste Compatibility Program" (HNF-SD-WM-DQO-001, Rev. 3) discusses the criteria used to assess the compatibility of wastes before they are mixed. Most of the transfers discussed in this plan involve moving waste only to TK-108-AP, which normally contains a minimum heel of very dilute waste that should pose no compatibility problems. Transfers of waste from the six DST watch-list tanks require special approvals per OSD-T-151-00030.

In preparation for final waste retrieval, there is an ongoing Characterization Program within RPP to fully document the chemical and physical characteristics of the waste stored in each tank. This data will be used if available.

3.5.3 Review/Prepare Safety Documentation

All provisions of HNF-SD-WM-SAR-067, HNF-SD-WM-TSR-006 must be met during emergency pumping activities. The requirements of OSD-T-151-00030 would also be met if a DST Watch-List Tank is involved.

Provisions of Occupational Safety and Health procedures, Radiation Protection Procedures and Tank Farm Health and Safety Plan, apply to all work performed. Health physics shall assist in issuing special Radiation Work Permits as needed to safely pump waste from the DST primary or secondary tanks.

The emergency pumping procedures (see Appendix B) will be preapproved and will have unreviewed safety question (USQ) screening/determinations completed to assure that emergency pumping can be executed within the existing authorization basis. The USQ procedure is defined in the RPP Administration Manual, HNF-IP-0842, Volume IV, Section 5.4.

3.5.4 Ensure Equipment Readiness

Confirm proposed transfer route, destination of the waste, heat trace operability. A proposed transfer route for each tank is identified in Appendix A.

Obtain and install necessary jumpers in valve pits, if required. Ensure availability and readiness of transfer pumps.

3.6 Estimated Time to Start Pumping Tanks

To the extent practical, all equipment and documentation necessary to perform emergency transfers from the primary and secondary tanks of the DSTs have been prepared ahead of time.

The regulations require removing "Spilled or leaked waste and accumulated precipitation... from the secondary containment system within twenty-four hours, or in as timely a manner as possible to prevent harm to human health and the environment, if the owner or operator can demonstrate to the department that removal of the released waste or accumulated precipitation cannot be accomplished within twenty-four hours." In most cases, the nature of the leak will make a 24-hour response impossible.

An annulus pump is installed in a tank in each DST tank farm, except for AW tank farm. The annulus pump for the AW tank farm is in the 200E pump laydown area. Chances are 5 in 28, that a leak will occur in a tank that already has an annulus pump installed. If a leak occurs in a tank that does not have an annulus pump already installed; the pump installed in the same farm could be moved to the leaking DST. The major tasks involved in moving an annulus pump from one DST to another DST within the same tank farm include: preparing and approving a work package, validating the transfer procedure (s), performing dome loading calculations, preparing a critical lift procedure for the crane, setting up the crane, removing pit cover blocks, removing the pump, walking the crane to the leaking tank, inserting the pump, installing necessary pipe jumpers, making electrical connections and closing the pit. A rough order of magnitude for the time required to complete the major tasks necessary to move an annulus pump is two to three weeks. If the leaking tank were a Watch List Tank, an undetermined additional time would be required for ORP-RL and DOE-HDQTRS approval.

Instead of moving the existing turbine pump into a leaking tank annulus, an option is being pursued to install a submersible pump. The major tasks involved in installing a submersible annulus pump into a DST include: preparing and approving work packages, validating the transfer procedure, performing dome loading calculations, preparing a critical lift procedure for the crane, setting up the crane, removing pit cover blocks, inserting the pump, installing necessary pipe jumpers, making electrical connections and closing the pit. A rough order of magnitude for the time required to complete the major tasks necessary to install an annulus pumping system is ten days.

4. REFERENCES

40CFR, Part 256.193 (c) (4), "Containment and detection of releases."

HNF-IP-0842, RPP Administration Manual, Volume IV, Section 5.4, "Unreviewed Safety Questions."

HNF-SD-WM-AP-005, "Single-Shell Tank Leak Emergency Pumping Guide."

HNF-SD-WM-DQO-001, Rev. 3, "Data Quality Objectives for the Waste Compatibility Program."

HJNF-SD-WM-TSR-006, "Tank Waste Remediation System Technical Safety Requirements."

HNF-SD-WM-SAR-067, "Tank Waste Remediation System Final Safety Analysis Report"

OSD-T--151-00030, "Operating Specification for Watch-List Tanks."

Public Law 101-510, Section 3137, "Safety Measures for Waste Tanks at Hanford Nuclear Reservation."

Tank Farm Health & Safety Plan

WAC 173-303-640 (4) (iv) "Tank Systems."

WHC-SD-WM-OTP-027, "Jet-Pump Jumper Pressure Test."

Report No. 9905303-001, "Double-Shell Tank Annulus Pumping Alternative Evaluation," by ARES Corporation, March 1999.

RPP-5842 Revision 0, "Time to Deployment Study for Annulus Pumping," by CH2MHill Hanford Group, INC. February 2000.

Preventative Maintenance Procedure 5-MISC-331, "Servicing and Testing of Annulus Emergency Pumping Equipment"

ATP-001-001, "Acceptance Test Procedure Test Pump for Annulus Emergency Pumping"

APPENDIX A

**PROPOSED EMERGENCY PUMPING TRANSFER ROUTES
from PRIMARY TANK To
DESIGNATED AND ALTERNATE RECEIVER TANKS**

APPENDIX A

The proposed transfer routes described below are for the emergency pumping of the primary tanks. The transfer pipelines for pumping all DST primary tanks are pipe-in-pipe, or encased pipelines.

**TRANSFER ROUTES from 241-AN PRIMARY TANKS TO DESIGNATED
RECEIVER TANK 241-AP-108**

TK-101-AN Transfer Route to Designated Receiver Tank	
241-AN-01A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-261
241-AN-B Valve Pit	Nozzle R15 through Flex/Rigid Jumper to Nozzle R2 via E to Line SN-260
241-AZ-02B Pump Pit	Nozzle U7 through Flex Jumper to Nozzle U5 to Line SN-600
241-AX-A Valve Pit	Nozzle L16 through Flex Jumper to Nozzle L1 to Line SN-214/201
241-A-A Valve Pit	Nozzle L1 through Rigid Jumper Nozzle L2 to Line SN-220
241-AW-A Valve Pit	Nozzle L2 through Flex/Rigid Jumper to Nozzle L1 via D to Line SN-267
241-AW-02A Pump Pit	Nozzle J through Rigid Jumper to Nozzle V to Line SN-609
241-AP Valve Pit	Nozzle 14 through Rigid Jumpers to Nozzle 22 via P, M, H & J to Line SN-618
241-AP-08A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)
TK-102-AN Transfer Route to Designated Receiver Tank	
241-AN-02A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-262
241-AN-B Valve Pit	Nozzle R16 through Flex/Rigid Jumper to Nozzle R2 via E to Line SN-260
Same as 101-AN to AP-108	

APPENDIX A

TK-103-AN Transfer Route to Designated Receiver Tank	
241-AN-03A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-263
241-AN-B Valve Pit	Nozzle R14 through Flex/Rigid Jumper to Nozzle R2 via E to Line SN-260
Same as 101-AN to AP-108	
TK-104-AN Transfer Route to Designated Receiver Tank	
241-AN-04A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-246
241-AN-A Valve Pit	Nozzle L15 through Flex/Rigid Jumper to Nozzle L19 via D to Line SN-268
241-AN-B Valve Pit	Nozzle R19 through Rigid Jumper to Nozzle R2 Line SN-260
Same as 101-AN to AP-108	
TK-105-AN Transfer Route to Designated Receiver Tank	
241-AN-05A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-265
241-AN-A Valve Pit	Nozzle L16 through Flex/Rigid Jumper to Nozzle L19 via D to Line SN-268
241-AN-B Valve Pit	Nozzle R19 through Rigid Jumper to Nozzle R2 to Line SN-260
Same as 101-AN to AP-108	
TK-106-AN Transfer Route to Designated Receiver Tank	
241-AN-06A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-266
241-AN-A Valve Pit	Nozzle L14 through Flex/Rigid Jumper to Nozzle L19 via D to Line SN-268
241-AN-B Valve Pit	Nozzle R19 through Rigid Jumper to Nozzle R2 to Line SN-260
Same as 101-AN to AP-108	
TK-107-AN Transfer Route to Designated Receiver Tank	
241-AN -07A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-267
241-AN-A Valve Pit	Nozzle L1 through Flex/Rigid Jumper to Nozzle L19 via D to Line SN-268
241-AN-B Valve Pit	Nozzle R19 through Rigid Jumper to Nozzle R2 to Line SN-260
Same as 101-AN to AP-108	

APPENDIX A
TRANSFER ROUTES from 241-AN PRIMARY TANKS TO ALTERNATE
RECEIVER TANK 241-AP-107

TK-101-AN Transfer Route to Alternate Receiver Tank	
241-AN-01A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-261
241-AN-B Valve Pit	Nozzle R15 through Flex/Rigid Jumper to Nozzle R2 via E to Line SN-260
241-AZ-02B Pump Pit	Nozzle U7 through Flex Jumper to Nozzle U5 to Line SN-600
241-AX-A Valve Pit	Nozzle L16 through Flex Jumper to Nozzle L1 to Line SN-214/201
241-A-A Valve Pit	Nozzle L1 through Rigid Jumper to Nozzle L2 to Line SN-220
241-AW-A Valve Pit	Nozzle L2 through Flex/Rigid Jumper to Nozzle L1 via D to Line SN-267
241-AW-02A Pump Pit	Nozzle J through Rigid Jumper to Nozzle V to Line SN-609
241-AP Valve Pit	Nozzle 14 through Rigid Jumpers to Nozzle 23 via P, N,C,D & K to Line SN-617
241-AP-07A Pump Pit	Nozzle A Through Rigid Jumper to Nozzle E (Tank Return)
TK-102-AN Transfer Route to Alternate Receiver Tank	
241-AN-02A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-262
241-AN-B Valve Pit	Nozzle R16 through Flex/Rigid Jumper to Nozzle R2 via E to Line SN-260
Same as 101-AN to AP-107	
TK-103-AN Transfer Route to Alternate Receiver Tank	
241-AN-03A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-263
241-AN-B Valve Pit	Nozzle R14 through Flex/Rigid Jumper to Nozzle R2 via E to Line SN-260
Same as 101-AN to AP-107	
TK-104-AN Transfer Route to Alternate Receiver Tank	
241-AN-04A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-264
241-AN-A Valve Pit	Nozzle L15 through Flex/Rigid Jumper to Nozzle L19 via D to Line SN-268
241-AN-B Valve Pit	Nozzle R19 through Rigid Jumper to Nozzle R2 to Line SN-260
Same as 101-AN to AP-107	

APPENDIX A

TK-105-AN Transfer Route to Alternate Receiver Tank	
241-AN-05A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-265
241-AN-A Valve Pit	Nozzle L16 through Flex/Rigid Jumper to Nozzle L19 via D to Line SN-268
241-AN-B Valve Pit	Nozzle R19 through Rigid Jumper to Nozzle R2 to Line SN-260
Same as 101-AN to AP-107	
TK-106-AN Transfer Route to Alternate Receiver Tank	
241-AN-06A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-266
241-AN-A Valve Pit	Nozzle L14 through Flex/Rigid Jumper to Nozzle L19 via D to Line SN-268
241-AN-B Valve Pit	Nozzle R19 through Rigid Jumper to Nozzle R2 to Line SN-260
Same as 101-AN to AP-107	
TK-107-AN Transfer Route to Alternate Receiver Tank	
241-AN-07A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-267
241-AN-A Valve Pit	Nozzle L1 through Flex/Rigid Jumper to Nozzle L19 to Line SN-268
241-AN-B Valve Pit	Nozzle R19 through Rigid Jumper to Nozzle R2 to Line SN-260
Same as 101-AN to AP-107	

**TRANSFER ROUTES from 241-AP PRIMARY TANKS TO DESIGNATED
RECEIVER TANK 241-AP-108**

TK-101-AP Transfer Route to Designated Receiver Tank	
241-AP-01A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-611
241-AP Valve Pit	Nozzle 18 through Rigid Jumper to Nozzle 22 via J to Line SN-618
241-AP-08A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)
TK-102-AP Transfer Route to Designated Receiver Tank	
241-AP-02A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-612
241-AP Valve Pit	Nozzle 19 through Rigid Jumper to Nozzle 22 to Line SN-618
241-AP-08A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)
TK-103-AP Transfer Route to Designated Receiver Tank	
241-AP-03A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-613

241-AP Valve Pit	Nozzle 17 through Rigid Jumper to Nozzle 22 to Line SN-618
241-AP-08A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)

APPENDIX A

TK-104-AP Transfer Route to Designated Receiver Tank	
241-AP-04A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-614
241-AP Valve Pit	Nozzle 20 through Rigid Jumper to Nozzle 22 via D, C, N, P, M, H & J to Line SN-618
241-AP-08A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)
TK-105-AP Transfer Route to Designated Receiver Tank	
241-AP-05A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-615
241-AP Valve Pit	Nozzle 24 through Rigid Jumper to nozzle 22 via K to Line SN-618
241-AP-08A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)
TK-106-AP Transfer Route to Designated Receiver Tank	
241-AP-06A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-616
241-AP Valve Pit	Nozzle 21 through Rigid Jumper to Nozzle 22 to Line SN-618
241-AP-08A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)
TK-107-AP Transfer Route to Designated Receiver Tank	
241-AP-07A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-617
241-AP Valve Pit	Nozzle 23 through Rigid Jumper to Nozzle 22 to Line SN-618
241-AP-08A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)

APPENDIX A
TRANSFER ROUTES from 241-AP PRIMARY TANKS TO ALTERNATE
RECEIVER TANK 241-AP-107

TK-101-AP Transfer Route to Alternate Receiver Tank	
241-AP-01A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-611
241-AP Valve Pit	Nozzle 18 through Rigid Jumper to Nozzle 23 to Line SN-617
241-AP-07A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)
TK-102-AP Transfer Route to Alternate Receiver Tank	
241-AP-02A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-612
241-AP Valve Pit	Nozzle 19 through Rigid Jumper to Nozzle 23 to Line SN-617
241-AP-07A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)
TK-103-AP Transfer Route to Alternate Receiver Tank	
241-AP-03A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-613
241-AP Valve Pit	Nozzle 17 through Rigid Jumper to Nozzle 23 via K, D, C, N, P, M & H to Line SN-617
241-AP-07A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)
TK-104-AP Transfer Route to Alternate Receiver Tank	
241-AP-04A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-614
241-AP Valve Pit	Nozzle 20 through Rigid Jumper to Nozzle 23 via J to Line SN-617
241-AP-07A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)
TK-105-AP Transfer Route to Alternate Receiver Tank	
241-AP-05A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN 615
241-AP Valve Pit	Nozzle 24 through Rigid Jumper to Nozzle 23 via K, D, C, N, P, M & H to Line SN-617
241-AP-07A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)
TK-106-AP Transfer Route to Alternate Receiver Tank	
241-AP-06A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-616
241-AP Valve Pit	Nozzle 21 through Rigid Jumper to Nozzle 23 via D, C, N, P, M & H to Line SN-617
241-AP-07A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)

APPENDIX A

TK-108-AP Transfer Route to Alternate Receiver Tank	
241-AP-08A Pump Pit	Transfer Pump through Rigid Jumper to Nozzle A to Line SN-618
241-AP Valve Pit	Nozzle 22 through Rigid Jumper to Nozzle 23 via K to Line SN-617
241-AP-07A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)

TRANSFER ROUTES FROM 241-AW PRIMARY TANKS TO DESIGNATED RECEIVER TANK 241-AP-108

TK-101-AW Transfer Route to Designated Receiver Tank	
241-AW-01A Pump Pit	Pump Nozzle through Flex/Rigid Jumper to Nozzle A to Line SN-261
241-AW-A Valve Pit	Nozzle L16 through Rigid/Flex Jumper to Nozzle L1 via D to Line SN-267
TK-102-AW-02A Pump Pit	Nozzle J through Rigid Jumper to Nozzle V to Line SN-609
241-AP Valve Pit	Nozzle 14 through Rigid Jumper to Nozzle 22 via P, N, C, & D to Line SN-618
241-AP-08A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)
TK-102-AW Transfer Route to Designated Receiver Tank	
241-AW-02E Pump Pit	Pump Nozzle through Rigid Jumper to Nozzle D to Line SN-272
241-AW-02A Central Pump pit	Nozzle K through Flex Jumper to Nozzle V to Line SN-609
241-AP Valve Pit	Nozzle 14 through Rigid Jumper to Nozzle 22 via P,N, C, & D to Line SN-618
241-AP-08A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)
TK-103-AW Transfer Route to Designated Receiver Tank	
241-AW-03A Central Pump Pit	Pump Nozzle through Rigid Jumper to Nozzle A to Line SN-263
241-AW-A Valve Pit	Nozzle L14 through Rigid Jumper to Nozzle L1 via D to Line SN-267
241-AW-02A Central Pump Pit	Nozzle J through Rigid Jumper to Nozzle V to Line SN-609
241-AP Valve Pit	Nozzle 14 through Rigid Jumper to Nozzle 22 via P, N, C, & D to Line SN-618
241-AP-08 Central Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)

APPENDIX A

TK-104-AW Transfer Route to Designated Receiver Tank	
241-AW-04A Pump Pit	Pump Nozzle through Rigid Jumper to Nozzle A to Line SN-264
241-AW-B Valve Pit	Nozzle R-14 through Rigid Jumper to Nozzle R1 via D to Line SN-268
241-AW-02A Pump Pit	Nozzle H through Rigid Jumper to Nozzle U to Line SN-610
241-AP Valve Pit	Nozzle 13 through Rigid Jumper to Nozzle 22 via N, C & D to Line SN-618
241-AP-08A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)
TK-105-AW Transfer Route to Designated Receiver Tank	
241-AW-05A Pump Pit	Pump Nozzle through Rigid Jumper to Nozzle A and Line SN-265
241-AW-A Valve Pit	Nozzle L15 through Rigid Jumper to Nozzle L1 to Line SN-267
241-AW-02A Central Pump Pit	Nozzle J through Rigid Jumper to Nozzle V to Line SN-609
241-AP Valve Pit	Nozzle 14 through Rigid Jumper to Nozzle 22 via P, N, C, & D to Line SN-618
241-AP-08 Central Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)
TK-106-AW Transfer Route to Designated Receiver Tank	
241-AW-06A Pump Pit	Pump Nozzle through Rigid Jumper to Nozzle A to Line SN-266
241-AW-B Valve Pit	Nozzle R-15 through Rigid Jumper to Nozzle R-1 via D to Line SN-268
241-AW-02A Central Pump Pit	Nozzle H through Rigid Jumper to Nozzle U to Line SN-610
241-AP Valve Pit	Nozzle 13 through Rigid Jumper to Nozzle 22 via N, C, & D to Line SN-618
241-AP-08 Central Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)

APPENDIX A
TRANSFER ROUTES FROM 241-AW PRIMARY TANKS TO ALTERNATE
RECEIVER TANK 241-AP-107

TK-101-AW Transfer Route to Alternate Receiver Tank	
241-AW-01A Pump Pit	Pump Nozzle through Flex/Rigid Jumper to Nozzle A and SN-261
241-AW-A Valve Pit	Nozzle L16 through Rigid/Flex Jumper to Nozzle L1 via D to Line SN-267
TK-102-AW-02A Pump Pit	Nozzle J through Rigid Jumper to Nozzle V to Line SN-609
241-AP Valve Pit	Nozzle 14 through Rigid Jumper to Nozzle 23 via P, N, C, D, & K to Line SN-617
241-AP-07A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)
TK-102-AW Transfer Route to Alternate Receiver Tank	
241-AW-02E Pump Pit	Pump Nozzle through Rigid Jumper to Nozzle D to Line SN-272
241-AW-02A Central Pump Pit	Nozzle K through Flex Jumper to Nozzle V to Line SN-609
241-AP Valve Pit	Nozzle 14 through Rigid Jumper to Nozzle 23 via P, N, C, D, & K to Line SN-617
241-AP-07A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)
TK-103-AW Transfer Route to Alternate Receiver Tank	
241-AW-03A Central Pump Pit	Pump Nozzle through Rigid Jumper to Nozzle A to Line SN-263
241-AW-A Valve Pit	Nozzle L14 through Rigid Jumper to Nozzle L1 via D to Line SN-267
241-AW-02A Central Pump Pit	Nozzle J through Rigid Jumper to Nozzle V to Line SN-609
241-AP Valve Pit	Nozzle 14 through Rigid Jumper to Nozzle 23 via P, N, C, D, & K to Line SN-617
241-AP-07 Central Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)
TK-104-AW Transfer Route to Alternate Receiver Tank	
241-AW-04A Pump Pit	Pump Nozzle through Rigid Jumper to Nozzle A to Line SN-264
241-AW-B Valve Pit	Nozzle R-14 through Rigid Jumper to Nozzle R1 via D to Line SN-268
241-AW-02A Pump Pit	Nozzle H through Rigid Jumper to Nozzle U to Line SN-610
241-AP Valve Pit	Nozzle 13 through Rigid Jumper to Nozzle 23 via N, C, D, & K to Line SN-617
241-AP-07A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)

APPENDIX A

TK-105-AW Transfer Route to Alternate Receiver Tank	
241-AW-05A Pump Pit	Pump Nozzle through Rigid Jumper to Nozzle A and Line SN-265
241-AW-A Valve Pit	Nozzle L15 through Rigid Jumper to Nozzle L1 to Line SN-267
241-AW-02A Central Pump Pit	Nozzle J through Rigid Jumper to Nozzle V to Line SN 609
241-AP Valve Pit	Nozzle 14 through Rigid Jumper to Nozzle 23 via P, N, C, D, & K to Line SN-617
241-AP-07A Central Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)
TK-106-AW Transfer Route to Alternate Receiver Tank	
241-AW-06A Pump Pit	Pump Nozzle through Rigid Jumper to Nozzle A to Line SN-266
241-AW-B Valve Pit	Nozzle R-15 through Rigid Jumper to Nozzle R-1 via D to Line SN-268
241-AW-02A Central Pump Pit	Nozzle H through Rigid Jumper to Nozzle U to Line SN-610
241-AP Valve Pit	Nozzle 13 through Rigid Jumper to Nozzle 23 via N, C, D, & K to Line SN-617
241-AP-07A Central Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)

**TRANSFER ROUTES FROM 241-AY PRIMARY TANKS TO DESIGNATED
RECEIVER TANK 241-AP-108**

TK-101-AY Transfer Route to Designated Receiver Tank	
241-AY-01D Pump Pit	Pump Nozzle through Flex Jumper to Nozzle U2 to Line SL-504
241-AY-02A Pump Pit	Nozzle U8 through Rigid Jumper to Nozzle U3 to Line SL-503
241-AY-02D Pump Pit	Nozzle U2 through Rigid Jumper to Nozzle U3 to Line SL-502
241-AX-B Valve Pit	Nozzle R16 through Flex Jumper to Nozzle R1 to Line SN-213/200
241-A-B Valve Pit	Nozzle R1 through Rigid Jumper to Nozzle R19 to Line SN-204
241-A-A Valve Pit	Nozzle L19 through Rigid Jumper to Nozzle L2 to Line SN-220
241-AW-A Valve Pit	Nozzle L2 through Flex/Rigid Jumper to Nozzle L1 via D to Line SN-267
241-AW-02A Pump Pit	Nozzle J through Rigid Jumper to Nozzle V to Line SN-609
241-AP Valve Pit	Nozzle 14 through Rigid Jumpers to Nozzle 22 via P, N, C, & D to Line SN-618

241-AP-08A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)
TK-102-AY Transfer Route to Designated Receiver Tank	
241-AY-02E Pump Pit	Pump Nozzle through Rigid Jumper to Nozzle U2 to Line SN-200
241-C-106, Pit 06C	Nozzle 5 through Rigid Jumper to Tank Return
241-C-106, Pit 06A	Pump Nozzle through Rigid Jumper to Nozzle 9 to Line SN-100
241-AY-102, Pit 02A	Nozzle U11 through Rigid Jumper to Nozzle U3 to Line SL-503
241-AY-02D Pump Pit	Nozzle U2 through Rigid Jumper to Nozzle U3 to Line SL-502
Same as 101-AY to 108-AP	

TRANSFER ROUTES FROM 241-AY PRIMARY TANKS TO ALTERNATE RECEIVER TANK 241-AP-107

TK-101-AY Transfer Route to Alternate Receiver Tank	
241-AY-01D Pump Pit	Pump Nozzle through Flex Jumper to Nozzle U2 to Line SL-504
241-AY-02A Pump Pit	Nozzle U8 through Rigid Jumper to Nozzle U3 to Line SL-503
241-AY-02D Pump Pit	Nozzle U2 through Rigid Jumper to Nozzle U3 to Line SL-502
241-AX-B Valve Pit	Nozzle R16 through Flex Jumper to Nozzle R1 to Line SN-213/200
241-A-B Valve Pit	Nozzle R1 through Rigid Jumper to Nozzle R19 to Line SN-204
241-A-A Valve Pit	Nozzle L19 through Rigid Jumper to Nozzle L2 to Line SN-220
241-AW-A Valve Pit	Nozzle L2 through Flex/Rigid Jumper to Nozzle L1 via D to Line SN-267
241-AW-02A Pump Pit	Nozzle J through Rigid Jumper to Nozzle V to Line SN-609
241-AP Valve Pit	Nozzle 14 through Rigid Jumpers to Nozzle 23 via P, N, C, D & K to Line SN-617
241-AP-07A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)
TK-102-AY Transfer Route to Alternate Receiver Tank	
241-AY-02E Pump Pit	Pump Nozzle through Rigid Jumper to Nozzle U2 to Line SN-200

APPENDIX A

241-C-106, Pit 06C	Nozzle 5 through Rigid Jumper to Tank Return
241-C-106, Pit 06A	Pump Nozzle through Rigid Jumper to Nozzle 9 to Line SN-100
241-AY-102, Pit 02A	Nozzle U11 through Rigid Jumper to Nozzle U3 to Line SL-503
241-AY-02D Pump Pit	Nozzle U2 through Rigid Jumper Nozzle U3 to Line SL-502
Same as 101-AY to 107-AP	

TRANSFER ROUTES FROM 241-AZ PRIMARY TANKS TO DESIGNATED RECEIVER TANK 241-AY-101

TK-101-AZ Transfer Route to Designated Receiver Tank	
241-AZ-01C Pump Pit	Pump Nozzle through Flex Jumper to Nozzle U6 to Line SN-601
241-AZ-02B Pump Pit	Nozzle U6 through Flex Jumper to Nozzle U5 to Line SN-600
241-AX-A Valve Pit	Nozzle L16 through Flex Jumper to Nozzle L19 to Line SN-210
241-AX-B Valve Pit	Nozzle R19 through Flex Jumper to Nozzle R16 to Line SL-502
241-AY-02D Pump Pit	Nozzle U3 through Rigid Jumper to Nozzle U2 to Line SL-503
241-AY-02A Pump Pit	Nozzle U3 through Rigid Jumper to Nozzle U8 to Line SL-504
241-AY-01D	Nozzle U2 through Flex Jumper to the Tank Return Nozzle
TK-102-AZ Transfer Route to Designated Receiver Tank	
241-AZ-02B Pump Pit	Pump Nozzle through Flex Jumper to Nozzle U5 to Line SN-600
241-AX-A Valve Pit	Nozzle L16 through Flex Jumper to Nozzle L19 to Line SN-210
241-AX-B Valve Pit	Nozzle R19 through Flex Jumper to Nozzle R16 to Line SL-502
241-AY-02D Pump Pit	Nozzle U3 through Rigid Jumper to Nozzle U2 to Line SL-503
241-AY-02A Pump Pit	Nozzle U3 through Rigid Jumper to Nozzle U8 to Line SL-504
241-AY-01D	Nozzle U2 through Flex Jumper to the Tank Return Nozzle

APPENDIX A
TRANSFER ROUTES FROM 241-AZ PRIMARY TANKS TO ALTERNATE
RECEIVER TANK 241-AY-102

TK-101-AZ Transfer Route to Alternate Receiver Tank	
241-AZ-01C Pump Pit	Pump Nozzle through Flex Jumper to Nozzle U6 to Line SN-601
241-AZ-02B Pump Pit	Nozzle U6 through Flex Jumper to Nozzle U5 to Line SN-600
241-AX-A Valve Pit	Nozzle L16 through Flex Jumper to Nozzle L19 to Line SN-210
241-AX-B Valve Pit	Nozzle R19 through Flex Jumper to Nozzle R16 to Line SL-502
241-AY-02D Pump Pit	Nozzle U3 through Flex Jumper to Tank Return Nozzle
TK-102-AZ Transfer Route to Alternate Receiver Tank	
241-AZ-02B Pump Pit	Pump Nozzle through Flex Jumper to Nozzle U5 to Line SN-600
241-AX-A Valve Pit	Nozzle L16 through Flex Jumper to Nozzle L19 to Line SN-210
241-AX-B Valve Pit	Nozzle R19 through Flex Jumper to Nozzle R16 to Line SL 502
241-AY-02D Pump Pit	Nozzle U3 through Flex Jumper to Tank Return Nozzle

TRANSFER ROUTES FROM 241-SY PRIMARY TANKS TO DESIGNATED
RECEIVER TANK 241-AP-108

TK-101-SY Transfer Route to Designated Receiver Tank	
TK-SY-101, 42" Riser #007	Pump Nozzle through Flex Jumper to Over Ground Transfer Line
241-SY-02A	Flex Jumper to Nozzle E (Tank Return) into tank SY-102
Same as 102-SY to 108-AP	
TK-102-SY Transfer Route to Designated Receiver Tank	
241-SY-02A Pump Pit	Pump Nozzle through Flex Jumper to Nozzle J to Line SN-285
241-SY-A Valve Pit	Nozzle L11 through Rigid Jumper to Nozzle L12 to Line SNL-3150
244-A Lift Station	Through 6241-A Diversion Box & 6241-V Vent Station to Nozzle P17 through Rigid Jumper to Nozzle P9 to Line SN-216
241-A-B Valve Pit	Nozzle R16 through Rigid Jumper to Nozzle R19 to Line SN-204
241-A-A Valve Pit	Nozzle L19 through Rigid/Flex Jumper to Nozzle L2 to Line SN-220

241-AW-A Valve Pit	Nozzle L2 through Rigid/Flex Jumper to Nozzle L1 via D to Line SN-267
241-AW-02A Pump Pit	Nozzle J through Rigid Jumper to Nozzle V to Line SN-609
241-AP Valve Pit	Nozzle 14 through Rigid Jumper to Nozzle 22 via P, N, C, D & K to Line SN-618
241-AP-08A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)
TK-103-SY Transfer Route to Designated Receiver Tank	
241-SY-03A Pump Pit	Pump Nozzle through Flex Jumper to Nozzle A to Line SN-279
241-SY-B Valve Pit	Nozzle R14 through Rigid Jumper to Nozzle R19 to Line SN-280
241-SY-A Valve Pit	Nozzle L19 through Flex Jumper to Nozzle L16 via H to Line SN-277
241-SY-02A Pump Pit	Nozzle A through Rigid Jumper to Nozzle G (Tank Return) into Tank SY-102
Same as 102-SY to 108-AP Route	

**TRANSFER ROUTES FROM 241-SY PRIMARY TANKS TO ALTERNATE
RECEIVER TANK 241-AP-107**

TK-101-SY Transfer Route to Alternate Receiver Tank	
TK-SY-101, 42" Riser #007	Pump Nozzle through Flex Jumper to Over Ground Transfer Line
241-SY-02A	Flex Jumper to Nozzle E (Tank Return) into Tank SY-102
Same as 102-SY to 107-AP	
TK-102-SY Transfer Route to Alternate Receiver Tank	
241-SY-02A Pump Pit	Pump Nozzle through Flex Jumper to Nozzle J to Line SN-285
241-SY-A Valve Pit	Nozzle L11 through Rigid Jumper to Nozzle L12 to Line SNL-3150
244-A Lift Station	Through 6241-A Diversion Box & 6241-V Vent Station to Nozzle P17 through Rigid Jumper to Nozzle P9 to Line SN-216
241-A-B Valve Pit	Nozzle R16 through Rigid Jumper to Nozzle R19 to Line SN-204
241-A-A Valve Pit	Nozzle L19 through Rigid/Flex Jumper to Nozzle L2 to Line SN-220
241-AW-A Valve Pit	Nozzle L2 through Rigid/Flex Jumper to Nozzle L1 via D to Line SN-267
241-AW-02A Pump Pit	Nozzle J through Rigid Jumper to Nozzle V to Line SN-609
241-AP Valve Pit	Nozzle 14 through Rigid Jumper to Nozzle 23 via P, N, C, D & K to Line SN-617

241-AP-07A Pump Pit	Nozzle A through Rigid Jumper to Nozzle E (Tank Return)
TK-103-SY Transfer Route to Alternate Receiver Tank	
241-SY-03A Pump Pit	Pump Nozzle through Flex Jumper to Nozzle A to Line SN-279
241-SY-B Valve Pit	Nozzle R14 through Rigid Jumper to Nozzle R19 to Line SN-280
241-SY-A Valve Pit	Nozzle L19 through Flex Jumper to Nozzle L16 via H to Line SN-277
241-SY-02A Pump Pit	Nozzle A through Rigid Jumper to Nozzle G (Tank Return) into Tank SY-102
Same as 102-SY to 107-AP	

APPENDIX B

LIST OF IMPLEMENTING PROCEDURES AND RELEVANT DRAWINGS

APPENDIX B

DST PRIMARY TANK EMERGENCY PUMPING PROCEDURES		
TANK FARM	PROCEDURE NUMBER	PROCEDURE TITLE
AN	TO-001-181	Emergency Pumping Procedure for AN-Farm
AP	TO-001-182	Emergency Pumping Procedure for AP-Farm
AW	TO-001-183	Emergency Pumping Procedure for AW-Farm
AY	TO-001-188	Emergency Pumping Procedure for AY-Farm
AZ	TO-001-189	Emergency Pumping Procedure for AZ-Farm
SY	TO-001-184	Emergency Pumping Procedure for SY Farm

DST ANNULUS EMERGENCY PUMPING PROCEDURES		
TANK FARM	PROCEDURE NUMBER	PROCEDURE TITLE
AN	TO-001-281	Emergency Annulus Pumping Procedure for AN Farm
AP	TO-001-282	Emergency Annulus Pumping Procedure for AP Farm
AW	TO-001-283	Emergency Annulus Pumping Procedure for AW Farm
AY	TO-001-288	Emergency Annulus Pumping Procedure for AY Farm
AZ	TO-001-289	Emergency Annulus Pumping Procedure for AZ Farm
SY	TO-001-284	Emergency Annulus Pumping Procedure for SY Farm

APPENDIX B

PIPING AND INSTRUMENT DIAGRAMS		
TANK FARM	DWG. NO.	TITLE
AN	H 140020501	WASTE STORAGE TANK ANNULUS INSTM SYS WSTA O&M SYS P&ID
	H 140020601	WASTE STORAGE TANK INSTM SYSTEM WST O&M SYSTEM P&ID
	H140020801	WASTE TRANSFER SYSTEM-WST-O&M SYSTEM P&ID
AP	H 140020503	WASTE STORAGE TANK ANNULUS INSTM SYS WSTA O&M SYS P&ID
	H 140020603	WASTE STORAGE TANK INSTR SYSTEM WST O&M SYSTEM P&ID
	H 140020803	WASTE TRANSFER SYSTEM (WT) O&M SYSTEM P&ID
AW	H 140020502	WASTE STORAGE TANK ANNULUS INSTM SYS WSTA O&M SYS P&ID
	H 140020602	WASTE STORAGE TANK INSTM SYSTEM WST O&M SYSTEM P&ID
B-2		

	H 140020803M	WASTE TRANSFER SYSTEM-WT-O&M SYSTEM P&ID
AX	H 140020609	WASTE STORAGE TANK SYSTEM (WST) O&M SYSTEM P&ID
	H 140020809	WASTE TRANSFER SYSTEM (WT) O&M SYSTEM P&ID
AY	H 020064462	P&ID TANK 241-AY-102 ANNULUS
AZ	H 140020801	WASTE TRANSFER SYSTEM (WT) O&M SYSTEM P&ID
SY	H 140020531	WASTE STORAGE TANK ANNULUS SYSTEM (WSTA) O&M SYSTEM P&ID
	H 140020631	WASTE STORAGE TANK SYSTEM (WST) O&M SYSTEM P&ID
	H 140020831	WASTE TRANSFER SYSTEM (WT) O&M SYSTEM P&ID

APPENDIX C

IDENTIFICATION AND LOCATION OF DST PUMPS AND JUMPERS THAT WOULD BE USED FOR EMERGENCY PUMPING

Facility Location	Pump Pit	Pump Use	Pump # Currently Installed	Pump Length	Fab DWG	Pump Pit Clearance **	Pump Flange to Bottom of Tank	Jumpers install for transfer	Jumper DWG	Comments
241-AN Tank Farm										
TK-101	01A	Transfer	202P-TX1	48'-11"	H-2-91943	4'-5 3/32"	49'-9"	Yes	H-2-72026	long Property # FA 25586; Manufacture S/N 91-02164
	01B	Annulus	Open	46'-2 1/2"	H-2-95323	8'-2 7/32"	46'-5 1/4"	No, w/isolation blanks	H-2-72028 & H-2-72025	One Annulus pump for all of AN Tank Farm. No spare.
TK-102	02A	Transfer	65P-TX4	49'-0 1/2"	H-2-91943	4'-5 3/32"	49'-9"	Yes	H-2-72026	
	02B	Annulus	Open	46'-2 1/2"	H-2-95323	8'-2 7/32"	46'-5 1/4"	No, w/isolation blanks	H-2-72028 & H-2-72025	One Annulus pump for all of AN Tank Farm. No spare.
TK-103	03A	Transfer	202P-TX1	49'-0 3/8"	H-2-91943	4'-4 23/32"	49'-9 3/8"	No	H-2-94863	Tank is on "Watch List" due to possible Hydrogen content in tank. Pumping activity uncertain.
	03B	Annulus	Open	46'-2 1/2"	H-2-95323	8'-2 7/32"	46'-5 1/4"	No, w/isolation blanks	H-2-72028 & H-2-72025	One Annulus pump for all of AN Tank Farm. No spare.
TK-104	04A	Transfer	64P-TX4	49'-0 1/2"	H-2-91943	4'-4 23/32"	49'-9 31/64"	No	H-2-94863	Tank is on "Watch List" due to possible Hydrogen content in tank. Pumping activity uncertain.
	04B	Annulus	Open	46'-2 1/2"	H-2-95323	8'-2 7/32"	46'-5 1/4"	No, w/isolation blanks	H-2-72028 & H-2-72025	One Annulus pump for all of AN Tank Farm. No spare.
TK-105	05A	Transfer	84P-TX4/S	49'-0 3/8"	H-2-91943	4'-4 23/32"	49'-9 31/64"	No	H-2-94863	Tank is on "Watch List" due to possible Hydrogen content in tank. Pumping activity uncertain.
	05B	Annulus	Open	46'-2 1/2"	H-2-95323	8'-2 7/32"	46'-5 1/4"	No, w/isolation blanks	H-2-72028 & H-2-72025	One Annulus pump for all of AN Tank Farm. No spare.
TK-106	06A	Transfer	2P-TX1-XC	49'-0 3/8"	H-2-91943	4'-4 23/32"	49'-9 1/8"	No	H-2-72026	2P-TX1-XC (20HP) pump installed 3/19/92. Spare 25 HP Prop # FA 25592 Man. S/N 91-02165
	06B	Annulus	Open	46'-2 1/2"	H-2-95323	8'-2 7/32"	46'-5 1/4"	No, w/isolation blanks	H-2-72028 & H-2-72025	One Annulus pump for all of AN Tank Farm. No spare.
TK-107	07A	Transfer	Open	49'-0 3/8"	H-2-91943	4'-4 23/32"	49'-9 1/8"	No	H-2-72026	
	07B	Annulus	B5P-10	46'-2 1/2"	H-2-95323	8'-2 7/32"	46'-8 3/8"	No, w/isolation blanks	H-2-72028 & H-2-72025	One Annulus pump for all of AN Tank Farm. No spare.
** Pump Pit Clearance is taken from face of flange to bottom of cover block										

Facility Location	Pump Pit	Pump Use	Pump # Currently Installed	Pump Length	Fab DWG	Pump Pit Clearance **	Pump Flange to Bottom of Tank	Jumpers install for transfer	Jump per DWG	Comments
241-AP Tank Farm										
TK - 10	01A	Transfer	1P-AP-4	33'-0" Flex/Float	H-2-91943	4'-9 13/16"	49'-5 11/16"	Yes	H-2-90725	Spare is expected to be 49'-0 3/8"
	01B	Annulus	Open	46' 2 1/2"	H-2-90576	8'-9 3/4"	46'-4 11/16"	w/isolation blanks	H-2-90729 & H-2-90726	One Annulus pump for all of AP Tank Farm. No spare.
TK-102	02B	Annulus	Open	46' 2 1/2"	H-2-90576	8'-9 3/4"	46'-4 11/16"	w/isolation blanks	H-2-90729 & H-2-90726	One Annulus pump for all of AP Tank Farm. No spare.
	02D	Transfer	1-TX-XCF	44'-7" w/screen	H-2-91943	9'-3 19/64"	44'-8 13/64"	Yes	H-2-90725	
TK-103	03A	Transfer	2P-AP-3	49'-0 3/8"	H-2-91943	4'-9 25/64"	49'-5 23/32"	Yes	H-2-90725	Spare run - in completed 11/29/89. Has Graphite bearings. 30 HP. 160 GPM at 250' TDH
	03B	Annulus	1P-AP-1	46' 2 1/2"	H-2-90576	8'-9 3/4"	46'-4 11/16"	w/isolation blanks	H-2-90729 & H-2-90726	One Annulus pump for all of AP Tank Farm. No spare.
TK-104	04A	Transfer	4P-AP-3	49'-0 3/8"	H-2-91943	4'-9 27/32"	49'-5 21/32"	Yes	H-2-90725	
	04B	Annulus	Open	46' 2 1/2"	H-2-90576	8'-9 3/4"	46'-4 11/16"	NO, w/isolation	H-2-90729 & H-2-90726	One Annulus pump for all of AP Tank Farm. No spare.
TK-105	05A	Transfer	1P-AP-3	49'-0 3/8"	H-2-91943	4'-9 13/16"	49'-5 11/16"	Yes	H-2-90725	
	05B	Annulus	Open	46' 2 1/2"	H-2-90576	8'-9 3/4"	46'-4 11/16"	w/isolation blanks	H-2-90729 & H-2-90726	One Annulus pump for all of AP Tank Farm. No spare.
TK-106	06A	Transfer	2P-AP-4	33'-0" Flex Float	H-2-91943	4'-9 53/64"	49'-5 43/64"	Yes	H-2-90725	
	06B	Annulus	Open	46' 2 1/2"	H-2-90576	8'-9 3/4"	46'-4 11/16"	w/isolation blanks	H-2-90729 & H-2-90726	One Annulus pump for all of AP Tank Farm. No spare.
TK-107	07A	Transfer	Open	49'-0 3/8"	H-2-91943	4'-9 49/64"	49'-5 47/64"	Yes	H-2-90725	
	07B	Annulus	Open	46' 2 3/8"	H-2-90576	8'-9 3/4"	46'-4 11/16"	w/isolation blanks	H-2-90729 & H-2-90726	One Annulus pump for all of AP Tank Farm. No spare.
TK-108	08A	Transfer	Open	49'-0 3/8"	H-2-91943	4'-9 45/64"	49'-5 45/64"	Yes	H-2-90725	
	08B	Annulus	Open	46' 2 1/2"	H-2-90576	8'-9 3/4"	46'-4 11/16"	NO, w/isolation blanks	H-2-90729 & H-2-90726	One Annulus pump for all of AP Tank Farm. No spare.
** Pump Pit Clearance is taken from face of flange to bottom of cover block										

Facility Location	Pump Pit	Pump Use	Pump # Currently Installed	Pump Length	Fab DWG	Pump Pit Clearance **	Pump Flange to Bottom of Tank	Jumpers install for transfer	Jumper DWG	Comments
241-AW Tank Farm										
TK - 101	01A	Transfer	BOP-TX4 (Oil Lubed)	49'-0 3/8"	H-2-91943	4'-5 21/32"	49'-5 15/32"	Yes	H-2-70445	
	01B	Annulus	Open	46'-2 1/2"	H-2-95232	8'-3 25/64"	45'-4 15/32"	No, w/isolation blanks	H-2-70451 & H-2-70444	One Annulus pump for all of AW Tank Farm. No spare.
TK-102	02B	Annulus	Open	46'-2 1/2"	H-2-95232	8'-3 27/64"	46'-4 13/64"	No, w/isolation blanks	H-2-70451 & H-2-70444	One Annulus pump for all of AW Tank Farm. No spare.
TK-103	03A	Transfer	1P-TX1-XCR-1	33'-0" Flex Float	H-2-91943	4'-5 21/32"	49'-5 15/32"	Yes	H-2-70445	
	03B	Annulus	Open	46'-2 1/2"	H-2-95232	5'-3 3/16"	46'-4 7/16"	No, w/isolation blanks	H-2-70451 & H-2-70444	One Annulus pump for all of AW Tank Farm. No spare.
TK-104	04A	Transfer	BOP-TX4 (Oil Lubed)	49'-0 5/8"	H-2-91943	4'-5 55/64"	49'-5 45/64"	Yes	H-2-70445	
	04B	Annulus	Open	46'-2 1/2"	H-2-95323	8'-3 3/16"	45'-4 7/16"	No, w/isolation blanks	H-2-70451 & H-2-70444	One Annulus pump for all of AW Tank Farm. No spare.
TK-105	05A	Transfer	1P-TX1	33'-0" Flex Float	H-2-91943	4'-5 11/16"	49'-5 7/16"	Yes	H-2-70445	
	05B	Annulus	Open	46'-2 1/2"	H-2-95232	8'-3 13/64"	46'-4 27/64"	No, w/isolation blanks	H-2-70451 & H-2-70444	One Annulus pump for all of AW Tank Farm. No spare.
TK-106	06A	Transfer	1P-TX1-XCR-1	49'-0 3/8"	H-2-91943	4'-5 53/64"	49'-5 19/64"	Yes	H-2-70445	
	06B	Annulus	Open	46'-2 1/2"	H-2-95323	8'-3 3/16"	46'-4 7/16"	No, w/isolation blanks	H-2-70451 & H-2-70444	One Annulus pump for all of AW Tank Farm. No spare.

** Pump Pit Clearance is taken from face of flange to bottom of cover block

Facility Location	Pump Pk	Pump Use	Pump # Currently Installed	Pump Length	Fab DWG	Pump Pk Clearance **	Pump Flange to Bottom of Tank	Jumpers installed for transfer	Jumper DWG	Comments
241-AY Tank Farm										
TK-101	01B	Transfer	F64GT	Unknown		5-10 5/8"	49-0 1/8"	Yes	H2-64421	No info available on this pump
	01D	Transfer	122P-10	47-3 3/8"	H2-93179	5-10 5/8"	48-0 1/8"	Yes	H2-64421	
			2B-P10							
	01F	Annulus		46-1 9/16"	H2-68424	8-3 1/2"	46-4 1/2"	No	H2-64441 & H2-64421	One Annulus pump for all of AW Tank Farm No spare
TK-102	02D	Transfer	57P-TX-49PTX6	47-3 3/8"	H2-93179	5-10 5/8"	48-0 1/8"	Yes	H2-64421	
	02E	Transfer	PO621/PO622	Adjustable	H2-818494	5-10 5/8"	48-0 1/8"	Yes	H2-818503	W320 Project
			Open							
	02F	Annulus		46-1 9/16"	H2-68424	8-3 1/2"	46-4 1/2"	No	H2-64441 & H2-64421	One Annulus pump for all of AW Tank Farm No spare

** Pump Pk Clearance is taken from face of flange to bottom of cover block


Facility Location	Pump Pit	Pump Use	Pump # Currently Installed	Pump Length	Fab DWG	Pump Pit Clearance **	Pump Flange to Bottom of Tank	Jumpers install for transfer	Jumper DWG	Comments
241-AZ Tank Farm										
TK-101	01C	Transfer	74-TX4/1P-TX5	47'-3 3/8"	H-2-93179	7'-2 49/64"	47'-11 63/64"	Yes	H-2-68427	
										One Annulus pump for all of AW Tank Fam. No spare.
	01F	Annulus	108P-10	46'-1 9/16"	H-2-68424	8'-3 31/64"	46'-4 21/64"	No, w/isolation blanks	H-2-68430 & H-2-68433	
TK-102	02B	Transfer	Open	46'-1 9/16"	H-2-93179	7'-2 49/64"	47'-11 63/64"		H-2-68427	
										One Annulus pump for all of AW Tank Fam. No spare.
	02F	Annulus	Open	46'-1 9/16"	H-2-68424	8'-3 31/64"	46'-4 21/64"	No, w/isolation blanks	H-2-68430 & H-2-68433	
** Pump Pit Clearance is taken from face of flange to bottom of cover block										

Facility Location	Pump Pit	Pump Use	Pump # Currently Installed	Pump Length	Fab DWG	Spare Pump #	Pump Pit Clearance **	Pump Flange to Bottom of Tank	Jumpers install for transfer	Jumper DWG	Comments
241-SY Tank Farm											
TK-101	01A Riser 3A	Transfer	Open	TBD	H-2-75352 & H-2-46206		4'-5 11/16"	47'-6 9/16"	No	H-2-46215	
	01A Riser 2A	Mixer	N/A	48'-1 1/8"	H-2-821329	2 each	3'-8 1/4"	50'-2 11/16"	N/A	N/A	One of the spares is located in 400 area(FFTF), and the other is in 2101M
	01B	Annulus	Open	46'-2 1/2"	H-2-37794	No	8'-3 3/16"	46'-4 13/16"	No	H-2-68388 & H-2-37800	
TK-102	02A	X-Site	SY-02A-3	33' Flex Floa	H-2-75352 & H-2-46206	1P-Sy1-102-SY	4'-5 11/16"	47'-6 9/16"	Yes	H-2-37782	
	02B	Annulus	Open	46'-2 1/2"	H-2-37794	No	8'-3 3/16"	46'-4 13/16"	No	H-2-68388 & H-2-37800	35 feet of the old pump broke off in tank
	02E	Transfer	49-PTX-4	36'-8"	?	No	8'-4 15/16"	45'-8 3/16"	Yes	H-2-37812	
TK-103	03A	Transfer	116P-10	47'-0"	H-2-75352 & H-2-46206	No	4'-5 11/16"	47'-6 9/16"	No	H-2-46215	This pump can be moved to the two other pit in SY farm
	03B	Annulus	PTX-4	46'-2 1/2"	H-2-37794	No	8'-3 3/16"	46'-4 13/16"	No	H-2-68388 & H-2-37800	

** Pump Pit Clearance is taken from face of flange to bottom of cover block

APPENDIX D
VOLUME OF LIQUID IN ANNULUS OF DOUBLE-SHELL TANK
AT VARIOUS DEPTHS

CROSS-SECTION OF ANNULUS OF DOUBLE-SHELL TANK

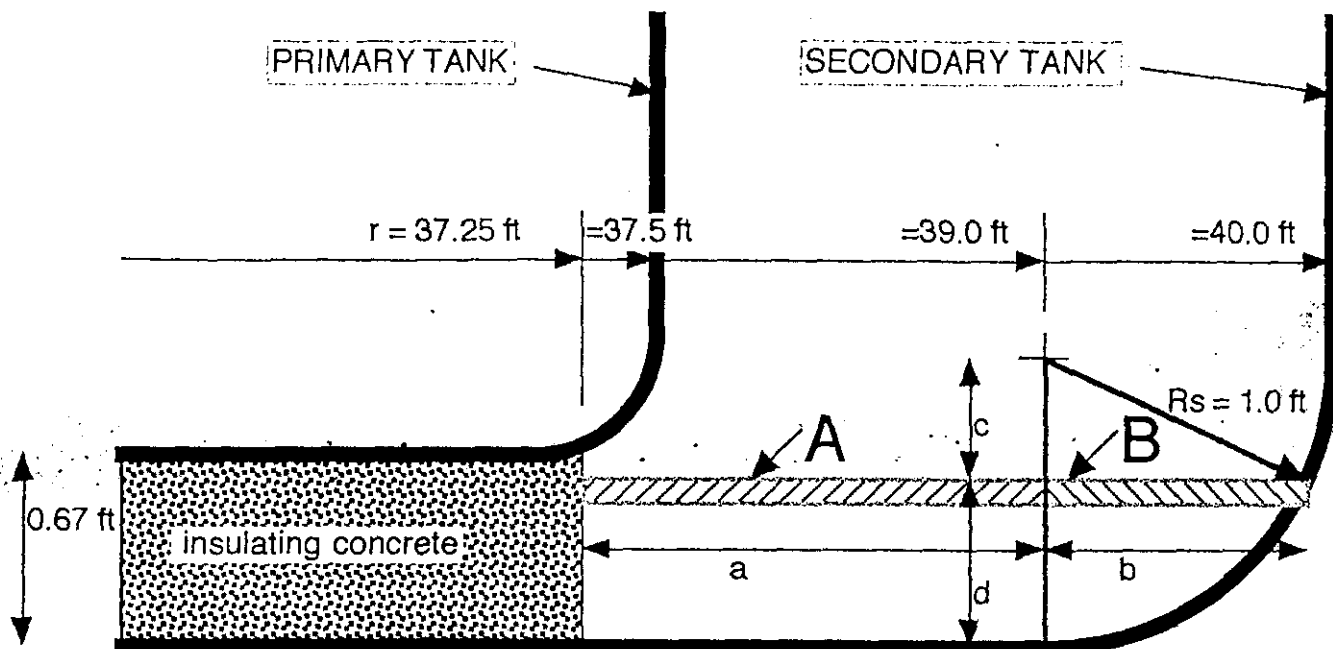

PROBLEM: Calculate volume of liquid in annulus at various depths.

ASSUMPTIONS: Reference drawings H-2-37772, and H-2-37705 are accurate.

Insulating concrete absorbs no liquid. SY-101 is representative of all DSTs.

Volume can be approximated by dividing annulus space into relatively simple geometric forms and calculating the volume of those forms.

Forms A & B are squat hollow cylinders where $\text{Volume} = \pi \text{ height } (\text{radius}_o^2 - \text{radius}_i^2)$.

$a = 1.75$ ft from 0 to 8 inches above bottom; $a = 1.50$ ft above 8 inches above bottom.

$R_s^2 = b^2 + c^2$; or $b = \text{square root } (R_s^2 - c^2)$

$\text{Volume}_{\text{insulating concrete}} = \pi \cdot \text{height } (\text{radius}^2) = \pi (0.67)(37.25)^2 = 2,908 \text{ ft}^3 \approx 21,780 \text{ gal}$.

Volume per inch in annulus above 12 inches above bottom is constant at 380 gal/inch.

	A	B	C	D	E	F	G	H	I
1	d (inches)	a (ft)	c (ft)	b (ft)	Vol A (ft ³)	Vol B (ft ³)	Vol A+B (ft ³)	Vol (gal)	Vol cum(gal)
2	1	1.75	0.92	0.40	34.9	8.2	43	323	323
3	2	1.75	0.83	0.55	34.9	11.4	46	347	670
4	3	1.75	0.75	0.66	34.9	13.6	49	364	1,034
5	4	1.75	0.67	0.75	34.9	15.4	50	377	1,410
6	5	1.75	0.58	0.81	34.9	16.8	52	387	1,797
7	6	1.75	0.50	0.87	34.9	17.9	53	396	2,193
8	7	1.75	0.42	0.91	34.9	18.8	54	402	2,595
9	8	1.75	0.33	0.94	34.9	19.5	54	408	3,003
10	9	1.50	0.25	0.97	30.0	20.0	50	375	3,378
11	10	1.50	0.17	0.99	30.0	20.4	50	378	3,756
12	11	1.50	0.08	1.00	30.0	20.6	51	379	4,135
13	12	1.50	0.00	1.00	30.0	20.7	51	380	4,515
14	13	1.50	0.00	1.00	30.0	20.7	51	380	4,895

APPENDIX E

**PROPOSED ANNULUS EMERGENCY PUMPING TRANSFER ROUTES
TO
DESIGNATED AND ALTERNATE RECEIVER TANKS**

APPENDIX E

The proposed route for emergency pumping of the annulus, will be from the Annulus Pump Pit through rigid/flex jumpers to an encased, below-grade pipeline to the Central Pump Pit. The route would be jumpered through the central pump pit to the same route used for transferring waste from the primary tank to the designated receiver tank as outlined in Appendix B. The transfer pipelines from the Annulus Pump Pit to the Central Pump Pit for all DST tanks are pipe-in-pipe or encased pipelines except for AY-101, AY-102 and AZ-102. The two tanks in AY farm have direct-buried, unencased pipelines from the annulus pump pits to the central pump. Tank AZ-102 also has a direct-buried unencased pipeline from the annulus pump pit to the central pump pit.

**TRANSFER ROUTES from 241-AN ANNULUS TO DESIGNATED OR
ALTERNATE RECEIVER 108/107-AP**

TK-101-AN Annulus Transfer Route to Designated/Alternate Receiver Tank	
241-AN-01B Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle A to Line PW-471
241-AN-01A Central Pump Pit	Nozzle E through Rigid/Flex Jumper to nozzle A
Same as Designate or Alternate Tank Transfer Route 101-AN to 108/107-AP	
TK-102-AN Annulus Transfer Route to Designated/Alternate Receiver Tank	
241-AN-02B Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle A to Line PW-472
241-AN-02A Central Pump Pit	Nozzle E through Rigid/Flex Jumper to nozzle A
Same as Designated or Alternate Tank Transfer Route 102-AN to 108/107-AP	
TK-103-AN Annulus Transfer Route to Designated/Alternate Receiver Tank	
241-AN-03B Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle A to Line PW-473
241-AN-03A Central Pump Pit	Nozzle E through Rigid/Flex Jumper to nozzle A
Same as Designated or Alternate Tank Transfer Route 103-AN to 108/107-AP	
TK-104-AN Annulus Transfer Route to Designated/Alternate Receiver Tank	
241-AN-04B Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle A to Line PW-474
241-AN-04A Central Pump Pit	Nozzle E through Rigid/Flex Jumper to nozzle A
Same as Designated or Alternate Tank Transfer Route 104-AN to 108/107-AP	
TK-105-AN Annulus Transfer Route to Designated/Alternate Receiver Tank	
241-AN-05B Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle A to Line PW-475

241-AN-05A Central Pump Pit	Nozzle E through Rigid/Flex Jumper to nozzle A
Same as Designated or Alternate Tank Transfer Route 105-AN to 108/107-AP	
TK-106-AN Annulus Transfer Route to Designated/Alternate Receiver Tank	
241-AN-06B Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle A to Line PW-476
241-AN-06A Central Pump Pit	Nozzle E through Rigid/Flex Jumper to nozzle A
Same as Designated or Alternate Tank Transfer Route 106-AN to 108/107-AP	
TK-107-AN Annulus Transfer Route to Designated/Alternate Receiver Tank	
241-AN-07B Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle A to Line PW-477
241-AN-07A Central Pump Pit	Nozzle E through Rigid/Flex Jumper to nozzle A
Same as Designated or Alternate Tank Transfer Route 107-AN to 108/107-AP	

**TRANSFER ROUTES from 241-AP ANNULUS TO DESIGNATED OR
ALTERNATE RECEIVER 108/107-AP**

TK-101-AP Annulus Transfer Route to Designated/Alternate Receiver Tank	
241-AP-01B Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle A to Line PW-811
241-AP-01A Central Pump Pit	Nozzle C through Rigid/Flex Jumper to nozzle A
Same as Designate or Alternate Tank Transfer Route 101-AP to 108/107-AP	
TK-102-AP Annulus Transfer Route to Designated/Alternate Receiver Tank	
241-AP-02B Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle A to Line PW-812
241-AP-02A Central Pump Pit	Nozzle C through Rigid/Flex Jumper to nozzle A
Same as Designated or Alternate Tank Transfer Route 102-AP to 108/107-AP	
TK-103-AP Annulus Transfer Route to Designated/Alternate Receiver Tank	
241-AP-03B Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle A to Line PW-813
241-AP-03A Central Pump Pit	Nozzle C through Rigid/Flex Jumper to nozzle A
Same as Designated or Alternate Tank Transfer Route 103-AP to 108/107-AP	
TK-104-AP Annulus Transfer Route to Designated/Alternate Receiver Tank	

241-AP-04B Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle A to Line PW-814
241-AP-04A Central Pump Pit	Nozzle C through Rigid/Flex Jumper to nozzle A
Same as Designated or Alternate Tank Transfer Route 104-AP to 108/107-AP	
TK-105-AP Annulus Transfer Route to Designated/Alternate Receiver Tank	
241-AP-05B Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle A to Line PW-815
241-AP-05A Central Pump Pit	Nozzle C through Rigid/Flex Jumper to nozzle A
Same as Designated or Alternate Tank Transfer Route 105-AP to 108/107-AP	
TK-106-AP Annulus Transfer Route to Designated/Alternate Receiver Tank	
241-AP-06B Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle A to Line PW-816
241-AP-06A Central Pump Pit	Nozzle C through Rigid/Flex Jumper to nozzle A
Same as Designated or Alternate Tank Transfer Route 106-AP to 108/107-AP	
TK-107-AP Annulus Transfer Route to Designated Receiver Tank	
241-AP-07B Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle A to Line PW-817
241-AP-07A Central Pump Pit	Nozzle C through Rigid/Flex Jumper to nozzle A
Same as Designated Tank Transfer Route 107-AP to 108-AP	
TK-108-AP Annulus Transfer Route to Alternate Receiver Tank	
241-AP-08B Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle A to Line PW-818
241-AP-08A Central Pump Pit	Nozzle C through Rigid/Flex Jumper to nozzle A
Same as Alternate Tank Transfer Route 108-AP to 107-AP	

**TRANSFER ROUTES from 241-AW ANNULUS TO DESIGNATED OR
ALTERNATE RECEIVER 108/107-AP**

TK-101-AW Annulus Transfer Route to Designated/Alternate Receiver Tank	
241-AW-01B Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle A to Line PW-471
241-AW-01A Central Pump Pit	Nozzle E through Rigid/Flex Jumper to nozzle A
Same as Designate or Alternate Tank Transfer Route 101-AW to 108/107-AP	
TK-102-AW Annulus Transfer Route to Designated/Alternate Receiver Tank	
241-AW 02B Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper

	to Nozzle A to Line PW-472
241-AW-02A Central Pump Pit	Nozzle E through Rigid/Flex Jumper to nozzle V to line SN 609
Same as Designated or Alternate Tank Transfer Route 102-AW to 108/107-AP	
TK-103-AW Annulus Transfer Route to Designated/Alternate Receiver Tank	
241-AW-03B Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle A to Line PW-473
241-AW-03A Central Pump Pit	Nozzle E through Rigid/Flex Jumper to nozzle A
Same as Designated or Alternate Tank Transfer Route 103-AW to 108/107-AP	
TK-104-AW Annulus Transfer Route to Designated/Alternate Receiver Tank	
241-AW-04B Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle A to Line PW-474
241-AW-04A Central Pump Pit	Nozzle E through Rigid/Flex Jumper to nozzle A
Same as Designated or Alternate Tank Transfer Route 104-AW to 108/107-AP	
TK-105-AW Annulus Transfer Route to Designated/Alternate Receiver Tank	
241-AW 05B Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle A to Line PW 475
241-AW-05A Central Pump Pit	Nozzle E through Rigid/Flex Jumper to nozzle A
Same as Designated or Alternate Tank Transfer Route 105-AW to 108/107-AP	
TK-106-AW Annulus Transfer Route to Designated/Alternate Receiver Tank	
241-AW-06B Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle A to Line PW-476
241-AW-06A Central Pump Pit	Nozzle E through Rigid/Flex Jumper to nozzle A
Same as Designated or Alternate Tank Transfer Route 106-AW to 108/107-AP	

**TRANSFER ROUTES from 241-AY ANNULUS TO DESIGNATED OR
ALTERNATE RECEIVER 108/107-AP**

TK-101-AY Annulus Transfer Route to Designated/Alternate Receiver Tank	
241-AY-01F Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle to Line PW-4531
241-AY-01A Central Pump Pit	Nozzle U10 through Rigid/Flex Jumper to nozzle U12 to Line SL-505
241-AY-01D	Nozzle U3 through Rigid/Flex Jumper to Nozzle U2 to line SL-504
Same as Designated or Alternate Tank Transfer Route 101-AY to 108/107-AP	
TK-102-AY Annulus Transfer Route to Designated/Alternate Receiver Tank	

241-AY-02F Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle to Line PW-4532
241-AY-02A Central Pump Pit	Nozzle U10 through Rigid/Flex Jumper to Nozzle U3 to line SL-503
Same as Designated or Alternate Tank Transfer Route 101-AY to 108/107-AP	

**TRANSFER ROUTES from 241-AZ ANNULUS TO DESIGNATED OR
ALTERNATE RECEIVER 101/102-AY**

TK-101-AZ Annulus Transfer Route to Designated/Alternate Receiver Tank	
241-AZ-01F Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle to Line PW-4623
241-AZ-01A Central Pump Pit	Nozzle U3 through Rigid/Flex Jumper to Nozzle U10 to Line SL-501
241-AZ-02A Central Pump Pit	Nozzle U11 through Rigid/Flex Jumper to Nozzle U10 to line SL-500
241-AX-A Valve Pit	Nozzle L5 through Rigid/Flex Jumper to Nozzle L19 to Line SN-210
Same as Designated or Alternate Tank Transfer Route 101-AZ to 101/102-AY	
TK-102-AZ Annulus Transfer Route to Designated/Alternate Receiver Tank	
241-AZ-02F Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle U1 to Line PW-4609
241-AZ-02A Central Pump Pit	Nozzle U11 through Rigid/Flex Jumper to Nozzle U10 to line SL-500
241-AX-A Valve Pit	Nozzle L5 through Rigid/Flex Jumper to Nozzle L19 to Line SN-210
Same as Designated or Alternate Tank Transfer Route 102-AZ to 101/102-AY	

**TRANSFER ROUTES from 241-SY ANNULUS TO DESIGNATED OR
ALTERNATE RECEIVER 108/107-AP**

TK-101-SY Annulus Transfer Route to Designated/Alternate Receiver Tank	
241-SY-01B Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle A to Line PW -478
241-SY-01A Central Pump Pit	Nozzle E through Rigid/Flex Jumper to nozzle A to Line SN-278
241-SY-B Valve Pit	Nozzle R16 through Rigid/Flex jumper to Nozzle R19 to line SN-280
241-SY-A Valve Pit	Nozzle L19 through Rigid/Flex jumper to Nozzle L16 via H to Line 277
241-SY-02A Pump Pit	Nozzle A through Rigid/Flex Jumper to Nozzle G into Tank SY-102
Same as Designate or Alternate Tank Transfer Route 101-SY to 108/107-AP	
TK-102-SY Annulus Transfer Route to Designated/Alternate Receiver Tank	

241-SY-02B Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle A to Line PW-475
241-SY-02A Central Pump Pit	Nozzle E through Rigid/Flex Jumper to nozzle G into Tank 102-SY
Same as Designated or Alternate Tank Transfer Route 102-SY to 108/107-AP	
TK-103-SY Annulus Transfer Route to Designated/Alternate Receiver Tank	
241-SY 03B Annulus Pump Pit	Transfer Pumps through Rigid/Flex Jumper to Nozzle A to Line PW-479
241-SY-03A Central Pump Pit	Nozzle E through Rigid/Flex Jumper to nozzle A to line SN-279
241-SY-B Valve Pit	Nozzle R16 through Rigid/Flex jumper to Nozzle R19 to line SN-280
241-SY-A Valve Pit	Nozzle L19 through Rigid/Flex jumper to Nozzle L16 via H to line SN-277
241-SY-02A Central Pump Pit	Nozzle A through Rigid jumper to Nozzle G into Tank 102-SY
Same as Designated or Alternate Tank Transfer Route 103-SY to 108/107-AP	

Annulus Pumping Riser Availability

Annulus Pump Location		
Annulus Pump Pit	Riser	Pump
241-AN-01B	12 inch	
241-AN-02B	12 inch	
241-AN-03B	12 inch	
241-AN-04B	12 inch	
241-AN-05B	12 inch	
241-AN-06B	12 inch	
241-AN-07B	12 inch	85P-10
241-AP-01B	12 inch	
241-AP-02B	12 inch	
241-AP-03B	12 inch	1P-AP-1
241-AP-04B	12 inch	
241-AP-05B	12 inch	
241-AP-06B	12 inch	
241-AP-07B	12 inch	
241-AP-08B	12 inch	
241-AW-01B	12 inch	
241-AW-02B	12 inch	
241-AW-03B	12 inch	
241-AW-04B	12 inch	
241-AW-05B	12 inch	
241-AW-06B	12 inch	
241-AY-01F	12 inch	28-P10

241-AY-02F	12 inch	
241-AZ-01F	12 inch	108P-10
241-AZ-02F	12 inch	
241-SY-01B	12 inch	
241-SY-02B	12 inch	
241-SY-03B	12 inch	PTX-4

APPENDIX F

APPLICABLE ANNULUS EQUIPMENT

APPENDIX F

FLEX JUMPERS FOR ANNULUS PUMPING			
Jumper Identification	Drawing	Quantity	Location
9900-4254-2001	H-2-92058 SH. 1	3	2101-M: E E XL 140 000
9900-4254-2002	H-2-92058 SH. 5	2	2101-M: E E XL 140 000
9900-4254-2003	H-2-92058 SH. 9	1	2101-M: E E XL 140 000

ANNULUS PUMPING EQUIPMENT		
Equipment	Storage Location	
Components for 2 Complete Jumpers	Trailer HO-64-07008	
4 Submersible Pumps	Trailer HO-64-07008	
2 Reciprocating Pumps	Trailer HO-64-07008	
Components for Pump Assemblies	Trailer HO-64-07008	
Skid for Air and Electrical	Trailer HO-64-07008	

DISTRIBUTION SHEET

[illegible]