



Observations and properties of the first laboratory fusion experiment to exceed target gain of 1

B. Bachmann, K. L. Baker, S. D. Bhandarkar, J. Biener, R. M. Bionta, N. W. Birge, T. Braun, T. M. Briggs, D. A. Callahan, D. T. Casey, P. M. Celliers, H. Chen, C. Choate, A. R. Christopherson, D. S. Clark, C. Danly, E. Dewald, L. Divol, T. Doppner, M. Durocher, M. J. Edwards, M. Erickson, D. Fittinghoff, M. Freeman, M. Gatu Johnson, N. Gharibyan, S. Haan, K. D. Hahn, E. Hartouni, M. Hohenberger, J. P. Holder, H. Huang, O. A. Hurricane, N. Izumi, J. Jeet, S. M. Kerr, S. F. Khan, Y. H. Kim, H. Geppert Kleinrath, V. Geppert Kleinrath, C. Kong, B. Kozioziemski, A. L. Kritcher, K. M. Lamb, O. L. Landen, N. C. Lemos, B. J. MacGowan, A. J. Mackinnon, A. G. MacPhee, E. V. Marley, K. Meaney, M. Millot, J. Moody, A. S. Moore, K. Newman, J. M. G. Di Nicola, A. Nikroo, R. Nora, A. Pak, et al.

October 17, 2023

Physical Review E

Disclaimer

This document was prepared as an account of work sponsored by an agency of the United States government. Neither the United States government nor Lawrence Livermore National Security, LLC, nor any of their employees makes any warranty, expressed or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States government or Lawrence Livermore National Security, LLC. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States government or Lawrence Livermore National Security, LLC, and shall not be used for advertising or product endorsement purposes.

Observations and properties of the first laboratory fusion experiment to exceed target gain of 1

A. Allen,¹ B. Bachmann,² K. L. Baker,² S. H. Baxamusa,² S. D. Bhandarkar,² R. M. Bionta,² N. W. Birge,³ T. Braun,² T. M. Briggs,² D. T. Casey,² C. Choate,² D. S. Clark,² J. W. Crippen,¹ C. Danly,³ E. Dewald,² L. Divol,² T. Döppner,² M. Durocher,³ M. Erickson,² T. Fehrenbach,⁴ D. Fittinghoff,² M. Freeman,³ M. Gatu Johnson,⁵ K. D. Hahn,² M. Havre,¹ T. Hilsabeck,² M. Hohenberger,² J. P. Holder,² O. A. Hurricane,² S. M. Kerr,² S. F. Khan,² Y.H. Kim,³ H. Geppert Kleinrath,³ V. Geppert Kleinrath,³ B. Koziolowski,² A. L. Kritcher,² K. M. Lamb,³ O. L. Landen,² N. C. Lemos,² B. J. MacGowan,² A. J. Mackinnon,² A. G. MacPhee,² E. V. Marley,² K. Meaney,³ M. Millot,² J. D. Moody,² A. S. Moore,² J.-M. G. Di Nicola,² A. Nikroo,² R. Nora,² A. Pak,² M. Ratledge,¹ J. E. Ralph,² M. S. Rubery,² D. J. Schlossberg,² S. J. Shin,² M. Stadermann,² S. Stoupin,² T. Suratwala,² R. Tommasini,² C. Trosseille,² B. Van Wonterghem,² P. L. Volegov,³ C. R. Weber,² C. Wild,⁴ C. Wilde,³ C. V. Young,² and A. B. Zylstra²

¹*General Atomics, San Diego, California 92186, USA*

²*Lawrence Livermore National Laboratory, P.O. Box 808, Livermore, California 94551-0808, USA*

³*Los Alamos National Laboratory, Mail Stop F663, Los Alamos, New Mexico 87545, USA*

⁴*Diamond Materials GmbH, 79108 Freiburg, Germany*

⁵*Massachusetts Institute of Technology, Cambridge, Massachusetts 02139, USA*

(Dated: October 10, 2023)

An indirect-drive inertial fusion experiment on the National Ignition Facility (N221204) was driven using 2.05MJ of 3ω laser light and produced 3.1 ± 0.3 MJ of total fusion yield, producing a target gain $G = 1.5$ exceeding unity for the first time in a laboratory experiment [Phys. Rev. Lett. XX, YY (2023)]. Herein we describe the experimental evidence for the increased drive on the capsule using additional laser energy and control over known degradation mechanisms, which are critical to achieving high performance. Improved fuel compression relative to previous MJ-yield experiments is observed. Novel signatures of the ignition and burn propagation to high yield can now be studied in the laboratory for the first time.

I. INTRODUCTION

A laboratory fusion experiment recently produced more energy from the nuclear fusion reactions than the laser energy required to drive the target giving a target gain G of 1.5[1]. The experiment was done at the National Ignition Facility (NIF)[2] using the inertial confinement fusion approach[3] designated laser indirect drive[4]. The NIF comprises 192 individual Nd glass laser beams that provide frequency-tripled (3ω or 351 nm) light in a specified pulse shape to the target. The target consists of a cylindrical high- Z ‘hohlraum’ in which the laser energy is converted to a thermal x-ray environment with a peak radiation temperature reaching ~ 300 eV. These x-rays ablate the surface of a spherical capsule at the center of the hohlraum, which then rapidly implodes. Only $\sim 1\%$ of the initial laser energy is converted into kinetic energy of the implosion, which stagnates at the center rapidly heating the deuterium-tritium fuel by PdV work. A small fraction of the fuel mass, the ‘hot spot,’ is heated to the point at which self-heating from the DT fusion reaction’s α products dominates over bremsstrahlung x-ray losses ($\gtrsim 4.3$ keV), and other energy loss mechanisms, starting fusion burn which then propagates into the surrounding colder fuel.

An overview of results from this experiment are described in Ref. 1, while Ref. 5 offers details on the computational design and post-shot modeling and Ref. 6 gives additional physical theory underpinning ICF. Here

we present additional data and interpretations and describe the unique features of this experiment relative to previous ones[7]. Key to achieving these results was utilizing additional laser drive energy, evidenced below in data of additional radiation drive experienced by the capsule. Simultaneously well-known sources of degradation must be controlled; herein we describe how the low-mode asymmetry, especially modes 1 and 2, adequate for gain exceeding unity was reached and discuss the target quality relative to previous experiments. Evidence for increased compression of the fuel is discussed. Lastly at high fusion yield these experiments enter a novel physical regime that is observable for the first time in laboratory experiments with key data shown, for example of the increasing ion temperature and decreasing burn duration, increased energy and pressure in the igniting fuel, and novel signatures in x-ray emission.

The paper is organized as follows: Section II provides details of the experimental changes made from the previous high performing NIF experiment, Section III describes key ignition metrics important in guiding these changes and interpreting the data, Section IV presents the most important observations related to the achievement of high performance, Section V details data-driven inferences of conditions reached in the ignited hot spot, and Section VI summarizes the results.

II. EXPERIMENTAL DETAILS

An implosion design called ‘Hybrid E’ (HyE)[8, 9] was developed over the past several years based on a strategy for achieving higher performance implosions given in Ref. 10. Essentially, the capsule to hohlraum size (or case to capsule ratio, CCR) is gradually increased relative to previous well-performing implosions while hot spot symmetry is controlled using cross-beam energy transfer (CBET)[11]. In late 2020 through early 2021, Hybrid E implosions reached the burning plasma regime[12, 13] in which the fusion self-heating from deuterium-tritium fusion generated alphas exceeds the initial PdV work done on the fuel. This marked a significant milestone in which the self-heating begins to dominate energetically. A parallel series of NIF experiments showed that reducing the size of the laser entrance hole (LEH) on the hohlraum increased the radiation drive on the capsule by 7%. Utilizing this result enabled a substantial increase in performance in an August 2021 NIF shot N210808 (NIF shot notation being NYMMDD where N = NIF, YY = year, MM = month, DD = day when the shot countdown began) in which the hot-spot exceeded Lawson’s criterion for ignition[7, 14, 15]. That experiment produced a fusion yield of 1.33 ± 0.13 MJ with 1.89 MJ of 3ω laser light ($G \sim 0.7$).

Recent upgrades to NIF’s laser capability enabled delivering an additional 7% of 3ω laser energy[16, 17], which we use here to increase the hohlraum drive and implode a thicker capsule. Specifically the total energy delivered to the target increased from 1.9 MJ, as on N210808, to 2.05 MJ, as on N221204; the peak power remained limited to 440 TW. The key design changes implemented, as discussed in Ref. 5, were to use this higher laser energy to increase the peak radiation temperature and drive a thicker (higher ablator mass) capsule. Relative to N210808, the total thickness of the high-density-carbon (HDC) ablator was increased by $+6 \mu\text{m}$ (additional details in appendix). The shape of the laser pulse was also adjusted, since the thicker capsule requires a longer ‘foot’ (low-amplitude portion of the laser pulse) to maintain equivalent shock timing, as the shock transit time increases through a thicker ablator. For additional details of the physics design see Ref. 5.

The measured total laser power versus time is shown in Fig. 1 for N210808 compared to N220919 and N221204. Experiment N220919 is included because it is identical to N221204 except that the hot spot had a significant shape asymmetry. Both the longer foot and longer time at peak power are apparent. The time-dependent radiation drive is shown in Fig. ?? bottom, quantified as an equivalent blackbody radiation temperature T_{rad} measured through a laser entrance hole (LEH) using the Dante instrument[18], a multi-channel soft x-ray spectrometer. During the foot at low T_{rad} the data has a large uncertainty with this configuration but the characteristics through the peak of the drive are clearly shown. Dante did not produce data for N210808 due to a hard-

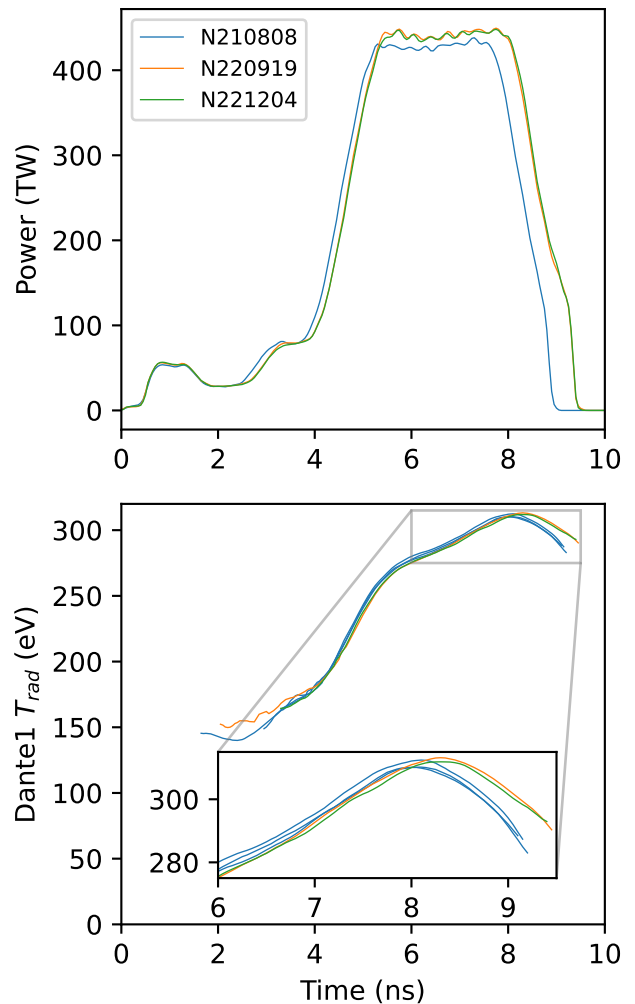


FIG. 1. Top: Laser pulses as delivered for N220919 and N221204 versus N210808. Bottom: Measured radiation temperature (T_{rad}) from Dante 1 versus time. Since the Dante 1 data are not available for N210808, data from several shots that repeated the same laser pulse and hohlraum conditions as N210808. These results can be directly compared to the data for N220919 (orange) and N221204 (green). The additional drive at the end of the pulse is clearly manifested by a slightly higher peak T_{rad} . This demonstrates the drive increase when using the additional laser energy. Additional analysis of the hohlraum conditions and radiation temperature are given in Ref. 19.

ware problem encountered during the experiment. Instead, the blue line shows equivalent data for several subsequent shots that utilized the same laser pulse and hohlraum conditions as N210808. These results can be directly compared to the data for N220919 (orange) and N221204 (green). The additional drive at the end of the pulse is clearly manifested by a slightly higher peak T_{rad} . This demonstrates the drive increase when using the additional laser energy. Additional analysis of the hohlraum conditions and radiation temperature are given in Ref. 19.

III. ITFX

As discussed in the companion design paper[5], radiation hydrodynamic simulations indicated that to achieve higher fusion yields from the increase in laser energy at a fixed peak laser power an increase in the ablator thickness / mass was desirable. Simulations suggested that despite the decrease in implosion velocity due to the larger implosion mass, the yield amplification ($Y_{amp} = \text{Yield} / \text{Yield}_{no\ \alpha}$) of the system could be improved by increasing the areal density, $\rho R = \int dr \rho(r)$, while approximately maintaining the energy coupled to the hot spot. While radiation hydrodynamic simulations include the myriad of physical processes that impact the fusion yield, it can also be instructive to parameterize the yield amplification into a few principal variables and associated observables to gain insight into the scaling of the yield.

Previous analysis describes how the yield amplification in simulations increases rapidly at the onset of ignition (e.g. Ref. 20); this is sometimes described as the ignition “cliff.” One particular analysis parameterizes the yield amplification as a function of a so-called generalized ignition threshold factor (ITFX). The term $ITFX_{no\ \alpha}$ is used to describe the incident conditions of the plasma and confining fuel shell that occur at minimum volume, or stagnation for an implosion in the absence of α -particle self-heating. In this model, ITFX is given by,

$$ITFX_{no\ \alpha} \propto \frac{Y_{no\ \alpha}}{M_{DT}} (\rho R_{no\ \alpha})^{2.1} \quad (1)$$

Here, M_{DT} is the DT fuel mass and $Y_{no\ \alpha}$ and $\rho R_{no\ \alpha}$ are the unscattered yield of DT fusion neutrons and emission weighted total areal density of the DT hot spot and fuel that occurs without α -particle self-heating, respectively. In this framework, ignition is defined when $ITFX_{no\ \alpha} = 1$, where the hot spot conditions are sufficient to trigger a level of α -particle self-heating that can initially overcome all of the power losses from the plasma leading to a rapid increase in the yield amplification (Y_{amp}). On the ignition cliff at the current areal density, $Y_{amp} \propto ITFX_{no\ \alpha}^5$ [20]. For a fixed amount of DT fuel, this indicates that relatively small changes in $Y_{no\ \alpha}$ or $\rho R_{no\ \alpha}$ can lead to large changes in the fusion performance. For example, on the ignition cliff, a 10% increase in $Y_{no\ \alpha}$ or $\rho R_{no\ \alpha}$ can lead to about a factor of 2 increase in fusion yield.

The $Y_{no\ \alpha}$ of the system can be rewritten as, $Y_{no\ \alpha} \propto n_{DT}^2 \langle \sigma v \rangle V \tau \propto E_{hs} T_i^{1.5} P \tau$ given that the expected temperature in the absence of alpha-heating on the cusp of ignition is of 4.3 keV where the DT reactivity $\langle \sigma v \rangle \propto T_i^{3.5}$. Here, E_{hs} , is the energy coupled to the hot spot, T_i is the plasma ion temperature, P is the plasma pressure and τ is the duration over which the burn rate can be sustained. Asymmetries in compression, or increased radiative loss from higher atomic number mix, can reduce the energy coupled to the hot spot, E_{hs} , and reduce the temperature and pressure[21], lowering the $Y_{no\ \alpha}$, the $ITFX_{no\ \alpha}$ and

the Y_{amp} .

Within this framework, experimental observables associated with an increased $ITFX_{no\ \alpha}$ and higher yield amplifications include an increase in the areal density and the ability to achieve higher yield amplifications than prior work despite having higher levels of observed degradations (defined below) that reduce the energy coupled to the reacting plasma.

IV. KEY DATA AND RESULTS

A. Mode 1 symmetry

A major source of performance degradation arises from implosion asymmetries having low spatial-mode number. Here, mode number refers to a spatial-decomposition of hot spot shape into Legendre polynomials [22], where mode 1 and mode 2 correspond to a simple linear translation and an oblate/prolate distortion from spherical, respectively. Typical seeds for the mode 1 asymmetries include small asymmetries in the multi-beam laser drive[23], capsule thickness variations[24], asymmetric hohlraum features (e.g., diagnostic windows[25, 26]), and thickness variations in the cryogenic DT ice layer. Mitigating these seeds was a necessary step to reach ignition.

Figure 2 shows neutron emission data used to assess mode-1 amplitude and infer its impact on implosion performance. The color map shows the angular asymmetry in the 13-15 MeV neutron emission, while the overall shape represents a “skymap” of the target chamber. Each small circle shown is a measurement location of the 13-15 MeV yield using activation[27, 28]. The color map represents an $L \leq 2$ spherical harmonic fit to the yield data from up to 48 locations. The variation in 13-15 MeV yield corresponds to asymmetries in areal density (ρR) around the fusing plasma. An approximation for how yield variation maps to areal density is given by $\delta \tilde{Y}_l^m / Y_{avg} \sim (-0.24 \times (\delta \tilde{\rho R}_l^m)) \times \tilde{P}_l^m$, where the fractional difference in yield is proportional to the variation in ρR multiplied by the appropriate Legendre coefficient[29]. This estimate for the four implosions is given below each image.

Another measure of mode 1 asymmetry is the observed shifts in mean kinetic energy of the emitted neutrons. A mode 1 asymmetry gives rise to bulk motion of the hot spot leading to a translation in space; this corresponds to a Doppler shift in emitted neutron energy. By using multiple lines-of-sight to measure the spectrum, it is possible to resolve the bulk motion into a velocity vector[30, 31]. The hot spot velocity vector (magnitude and direction) are shown below each implosion and denoted on the skymap as black Xs. This motion exemplifies residual kinetic energy (RKE) that is not converted to compression and heating of the hot spot, and indicates a reduction from ideal performance.

The implosions shown in Fig. 2, moving from left to right, exhibit decreasing mode 1 asymmetries and corre-

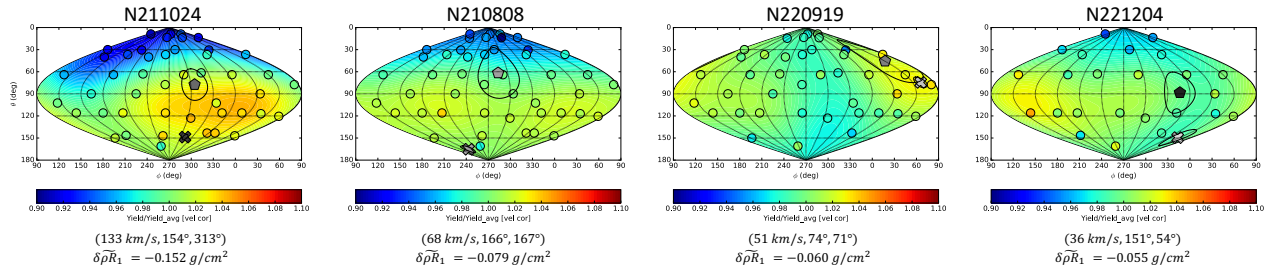


FIG. 2. Progression of ρR skymaps (L-R) toward robust, ignition platform. Below each subplot is shown the hot spot velocity and maximum difference in yield. On the figures, X = hot spot velocity, pentagon = mode-1 drive, circle = RT-NAD locations.

spondingly lower levels of associated degradation. Fig. 2(a,b) used 1.90 MJ laser drive while Fig. 2(c,d) used 2.05 MJ; N221204 is the gain > 1 implosion (move this earlier). As mentioned above, mitigating these low mode asymmetries was important for achieving $G > 1$. Here we have quantified the impact of mode 1 and the next section will examine the impact of mode 2 asymmetries.

B. Mode 2 symmetry

Mode 2 asymmetries can arise from an imbalance in the radiation drive between the poles and equator of the capsule. This distorts the desired spherical implosion symmetry and reduces the rate of PdV/dt work and energy coupled to the reacting plasma, reducing IITFX. Furthermore, such asymmetries increase the areal density variations of the confining fuel reducing the confinement time and the associated yield amplification of the implosion.

As discussed, the increase in the available laser energy from 1.9 MJ to 2.05 MJ was used to implode a $\sim 7\%$ thicker capsule target. This was expected to achieve higher yield amplifications by using further increasing the areal density and hot spot pressure while maintaining the amount of energy coupled to the hot spot. This design change was expected to result in implosions that can reach higher fusion yields for similar or higher levels of low mode asymmetries and mix degradations[32] as compared to the 1.9 MJ design.

By examining the observed mode 1 and mode 2 asymmetries, it becomes clear that the 2.05 MJ design can indeed achieve higher levels of fusion yield for higher levels of asymmetry than the 1.9 MJ design. Figure 3 shows neutron emission-weighted images and how the mode 2 symmetry and fusion yield vary for pairs of experiments, N211024/N210808 and N220919/N221204, conducted with 1.9 MJ and 2.05 MJ, respectively. The hot spot symmetry is evaluated by fitting the 17% contour of peak emission with a Legendre polynomial. The mode 2 asymmetry is quantified by taking the amplitude of the P_2 coefficient and is a measure of the ellipticity of the hot spot. The total low mode symmetry degradation is a combination of both the mode 1, shown in Fig. 2, and the mode 2 asymmetry.

Experiment N211024 was an attempt to repeat the 1.9 MJ experiment N210808 and resulted in a total fusion yield of 0.43 MJ as compared to 1.33 MJ for N210808. N211024 was observed to have a P_2 amplitude of $6.5 \pm 1.1 \mu\text{m}$ as compared to N210808 with a P_2 amplitude of $-2.3 \pm 0.5 \mu\text{m}$. Scalings obtained from simulations indicate that the $\sim 3\times$ increase in the $|P_2|$ amplitude is expected to reduce the fusion performance of N211024 by $\sim 0.6\times$ as compared to N210808. This in conjunction with the mode 1 asymmetry difference as seen in Fig. 2, are the dominant degradations that contribute to the fusion yield of N211024 being $\sim 0.3\times$ of N210808[33].

In contrast, as seen in Fig. 3 c) N220919 was the first experiment conducted with 2.05 MJ of laser energy and had a $|P_2|$ magnitude of $10.8 \pm 1.6 \mu\text{m}$. This is a larger mode 2 asymmetry than observed on N211024, but the implosion still produced 1.19 MJ of fusion yield. Using the prior P_2 sensitivity of the 1.9 MJ laser design, this level of P_2 asymmetry is expected to reduce the 1.33 MJ of fusion yield obtained on N210808 by $>10\times$. The modest, $\sim 0.9\times$ reduction in yield on N220919 relative to N210808, despite the nearly $2\times$ increase in the P_2 asymmetry from N211024, is direct evidence that the design changes associated with 2.05 MJ have increased the IITFX and yield amplification allowing for higher yields to be obtained despite the presence of degradations that would have significantly degraded the prior 1.9 MJ design. To improve the symmetry following the N220919 experiment, an increase in the wavelength separation of the inner and outer laser cones from 2.5\AA to 2.75\AA was made[11]. This increases the relative amplitude of the equatorial x-ray drive by transferring more energy from the outer to inner laser cones.

As seen in Fig. 3d), this change resulted in a near round hot spot with a reduced P_2 asymmetry of $0.3 \pm 0.1 \mu\text{m}$ and a fusion yield of 3.14 MJ. The improvement in mode 2 hot spot symmetry between N220919 and N221204 is found to be the primary reason for the $2.6\times$ increase in fusion yield as these experiments had comparable levels of mode 1 asymmetry and hot spot mix.

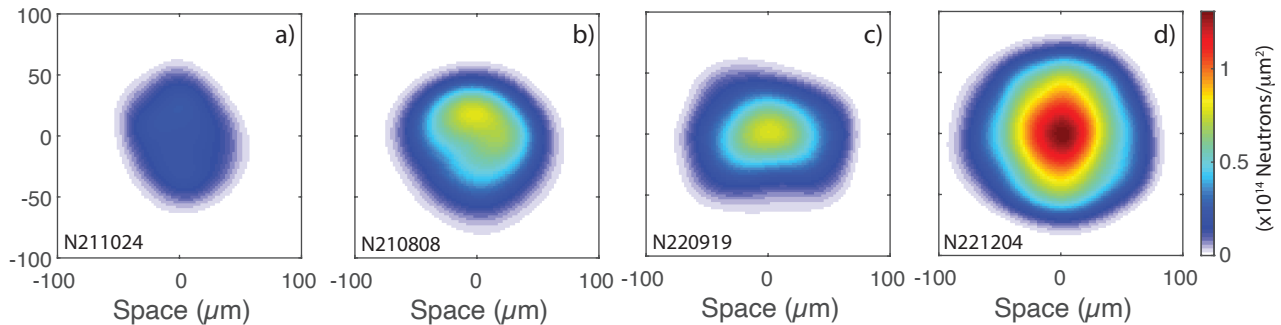


FIG. 3. Equatorial view of the time integrated neutron emission showing the impact of low mode asymmetries on the fusion yield for pairs of experiments conducted with 1.9 MJ of laser energy a-b) and 2.05 MJ of laser energy c-d).

C. Areal Density

The change in areal density of the DT fuel between the 1.9 MJ and the 2.05 MJ laser energy designs provides further evidence for the improved implosion at higher laser energy. As described in the companion paper, one of the 2.05 MJ laser energy design goals was to further increase the DT fuel areal density ρR_{DT} at stagnation over prior work, in order to increase the IFFX and yield amplification.

The neutron emission weighted areal density of the DT fuel can be inferred from experimental observations. It is proportional to the relative number of neutrons that are scattered by the hot spot, denser shell of DT fuel and remaining ablator. In the experiments discussed here, the dominant contribution to the scattering is from with DT fuel, followed by the DT hot spot with a small contribution from the remaining ablator. The areal density can be related to the observed down scattered ratio given by the number of neutrons scattered into the 13-15 MeV energy band divided those scattered to lower 10-12 MeV energies by the hot spot and dense shell of DT fuel. In this work the inference of the total DT areal density is given by $\rho R_{DT}(g/cm^2) = C \times DSR$ with C a coefficient between 18-19 derived from static MCNP calculations and dynamic radiation hydrodynamic calculations[34]. To account for uniformity variations in the areal density when comparing experiments, multiple measurements of the DSR are averaged over the solid angle of emission and a so-called 4π average DSR value is used.

As previously discussed, experiments which approach the ignition threshold experience sustained α -particle self-heating which causes the vast majority of neutrons to be produced as the hot spot expands[35]. Higher levels of self-heating allow for the neutron emission to be sustained to larger hot spot radii, thereby causing the

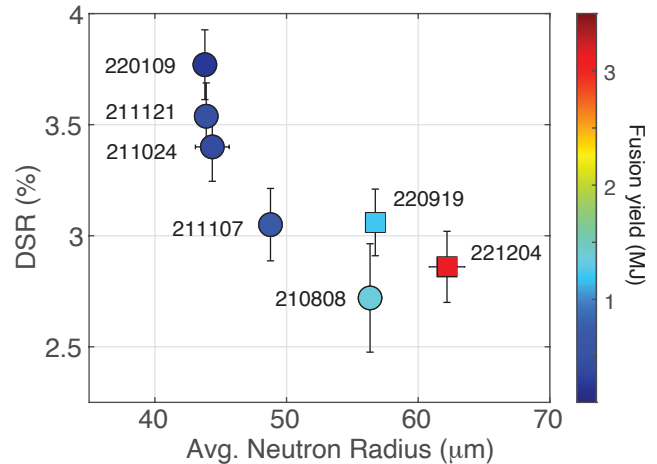


FIG. 4. The 4π averaged down scattered ratio (DSR) vs. the average radius of neutron emission for the 1.9 MJ design (circles) and 2.05 MJ design (squares). The color of the datum correspond to the fusion yield of the experiment.

neutron emission weighted areal densities to decrease. This dynamic explains the trend seen by the circles in Fig. 4 that indicates for the 1.9 MJ design, as the fusion yield increases the emission weighted neutron radius and DSR are observed to increase and decrease, respectively. Therefore, to compare the relative increase in the ρR_{DT} between the 1.9 and 2.05 MJ laser energy designs it is important to compare experiments at comparable yield and hot spot radii.

As seen in Fig. 4, the first 2.05 MJ laser energy experiment, N220919, achieved a similar yield and emission weighted hot spot radius as N210808 (the highest performing 1.9 MJ design) but with a 4π averaged DSR of $3.06 \pm 0.14\%$ as compared to $2.72 \pm 0.24\%$. Addi-

tionally, Fig. 4 shows that for the highest fusion yield experiment, N221204, a larger neutron emission radius was achieved than for N210808, while at the same time achieving a higher DSR. Both of these observations are consistent with the design goal of the 2.05 MJ design to achieve a higher yield amplification by reaching a higher areal density at stagnation. Following Eqn. 1, if the level of observed areal density increase at a fusion yield of ~ 1.2 MJ is consistent with that achieved at minimum volume / no α conditions, then the average increase in the $ITFX_{no\ \alpha}$ and Y_{amp} between the 1.9 MJ and 2.05 MJ laser design can be estimated to be $1.28\times$ and $3.4\times$, respectively. These estimates only consider how the change in areal density impacts the ignition threshold metric and does not yet account for other effects such as low mode asymmetries and mix which can reduce the $Y_{no\ \alpha}$.

Future experiments will be conducted to quantify changes in the dynamics from the design changes between the 1.9 MJ and 2.05 MJ laser designs that are not directly observable on integrated ignition experiments. These include measurements of the relative velocities and in-flight symmetry will help to constrain the expected changes in the ignition threshold metric. Additional experiments using duded fusion fuel to minimize the effect of α -particle self heating will also inform the improvement of $\rho R_{DT\ no\ \alpha}$.

D. Ion Temperature, Burn Width and hot spot mass

Figure 5 shows the evolution in the plasma temperature, the neutron emission duration and the DT plasma mass change with increasing fusion yield for three experiments that span the range of yields achieved in the 1.9 MJ and 2.05 MJ laser energy designs. Figure 5 a) shows that as the yield increases from 0.25 MJ on N220109 to 3.14 MJ on N221204 the neutron spectra broaden significantly. The apparent DT ion temperature associated with the neutron spectra width more than doubles, increasing from 6.03 to 13.1 keV. This dramatic increase in temperature is consistent with α -particle self-heating initially dominating the radiative and expansion losses. Figure 5 b) shows that as previously predicted and observed, the full width at half maximum (FWHM) of the neutron emission duration decreases from 104 to 74 ps as the yield increases from 0.25 to 3.14 MJ. This observation is consistent with simulations which show that the FWHM neutron emission duration decreases owing to the rapid increase in hot spot pressure upon ignition as the temperature rapidly increases due to α -particle hot spot self heating. Furthermore, as the temperature increases, more and more mass is ablated from the cooler surrounding dense shell of DT fuel into the the higher temperature hot spot where fusion occurs. Increasing the contributing DT mass, while increasing the temperature, in turn boosts the α -heating and pressure of the hot spot until the resulting higher values of PdV/dt expan-

sion losses eventually blow the hot-spot apart resulting in a shortening of the FWHM duration of fusion energy production. The mass of the reacting hot spot can be estimated using an emission weighted static model[36]. Figure 5 c) indicates that as the yield and temperature increase from N220109 to N221204, the hot spot mass is inferred to increase nearly $3\times$ to $84 \pm 10\ \mu\text{g}$ or $\sim 40\%$ of the initial DT ice mass. For N221204, over the emission duration, the fraction of the total DT fuel which fuses and burns is $\sim 4.3\%$.

E. X-ray and Neutron Observations

As the fusion yield and target gain increased, a significant change in the relative morphology of the x-ray and neutron emission was observed. Understanding such changes are important as they can inform our understanding of symmetry, coupling, burn dynamics, and important quantities such as x-ray emission duration.

Figure 6 a)-d) show the time-integrated self-emission data obtained using x-ray and neutron imagers for experiments N210808 ($E_{laser} = 1.9$ MJ) and N221204, ($E_{laser} = 2.05$ MJ) and the $+6\ \mu\text{m}$ thicker capsule. To allow for a direct comparison, the neutron images have been oriented to match the line of sight of the x-ray image, specifically at $(\theta, \phi) = (7^\circ, 180^\circ)$, with the polar angle (θ) and the azimuthal angle (ϕ) measured in degrees from the top of the target chamber. For N210808, Fig. 6 a) and c) show that the x-ray and neutron emission are similar in size and shape. However, comparing the x-ray emission of N221204 in Fig. 6 b) to the neutron emission in Fig. 6 d) shows that the x-ray emission has evolved into a four-fold pattern with a central spot and expanded to a much larger size than the neutron emission.

To better understand how the morphology evolves as the fusion yield increases from 1.33 MJ to 3.14 MJ, Figure-6 d) and e) show the overlay of contours that enclose 50%-of-total of the neutron and x-ray emitting regions for N210808 and N221204, respectively. In the case of N221204, the x-ray contour traces the four-fold pattern far outside the neutron contour. This is evidence that this part of the x-ray emitting volume originates from the higher-Z ablator material that surrounds the DT fuel and emits strongly in x rays but does not produce fusion burn. The x-ray emission volume is estimated to be 12% larger than the neutron emission volume in the case of N210808, and 5 times larger than the neutron emission volume in the case of N221204. This stark difference in morphology suggests that for the 2.05 MJ laser energy design, the conditions and x-ray emissivity of the surrounding ablator were significantly different than for the 1.9 MJ laser design. This could arise from both differences in the central hot spot pressure and temperature that were achieved as well as from differences in the composition, density and temperature conditions of the surrounding ablator. Finally, we note that the four-fold pattern in the x-ray image of N221204 suggests that

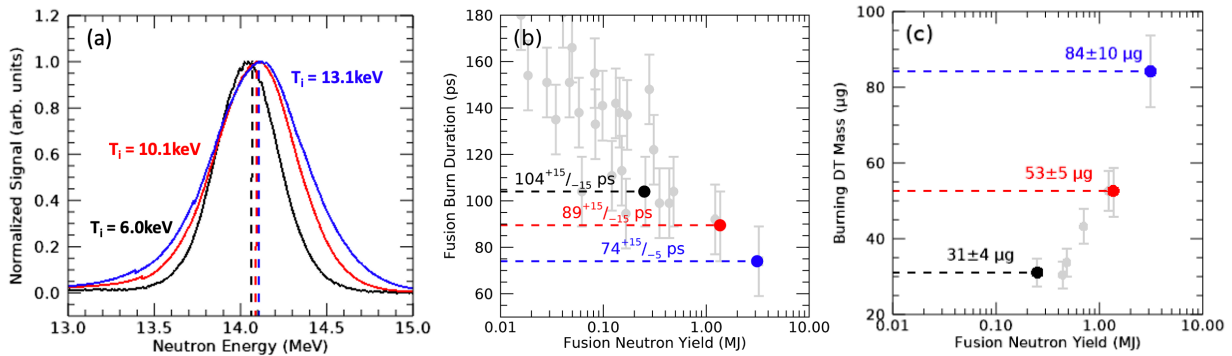


FIG. 5. a) Neutron spectra and apparent DT ion temperature, from 1.9 MJ laser energy experiments N220109 (black) and N210808 (red), and from a 2.05 MJ laser energy experiment N221204 (blue). b) Neutron emission duration as fusion yield. c) Inferred hot spot mass for 1.9 and 2.05 MJ laser experiments. In b) and c) experiments N220109 (black), N210808 (red), and N221204 (red) have been highlighted.

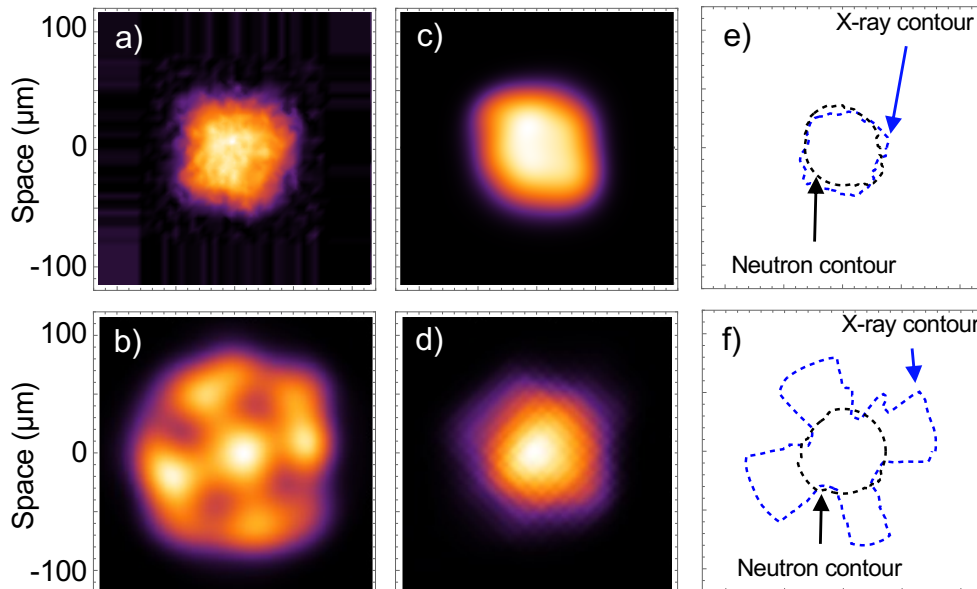


FIG. 6. X-ray and neutron emission measurements from N210808 (top row) and N221204 (bottom row). Time integrated x-ray emission (> 10 keV) from N210808, a), and from N221204, b). Time integrated neutron emission from N210808 c) and from N221204, d). Comparison of contours that enclosed 50% of the x-ray and neutron emission for N210808 e), and for N221204, f).

asymmetries still exist. Correcting this in future work could improve energy coupling and decrease areal density variations to further improve performance.

V. INFERRED CONDITIONS AND METRICS

Conditions reached in the hot spot are important for evaluating implosion improvement and burn physics. Here we follow the hot-spot condition inference methodology developed in Refs. 12, 37, 38. A useful parameter space for evaluating the hot spot conditions is the ion temperature (T_i) and areal density (ρR_{hs}) axes as shown

in Fig. 7. A criteria for reaching the burning plasma regime, where self-heating surpasses the initial PdV work to form the hot spot, can be cast in this space[39] and is shown in Fig. 7 as the solid curve. The first NIF experiments to enter the burning-plasma regime[12] appear with $T_i \sim 5$ keV and $\rho R_{hs} \sim 0.35$ g/cm². The “variability” experiments with several hundred kJ yields are the next points which clearly surpass the static self-heating boundary, shown by the dashed curve, which is when alpha heating exceeds bremsstrahlung and thermal conduction losses but PdV losses on expansion are neglected. The experiments with yields exceeding a MJ (N210808 and N220919) that appear at $T_i \sim 9$ keV and $\rho R_{hs} \sim 0.45$

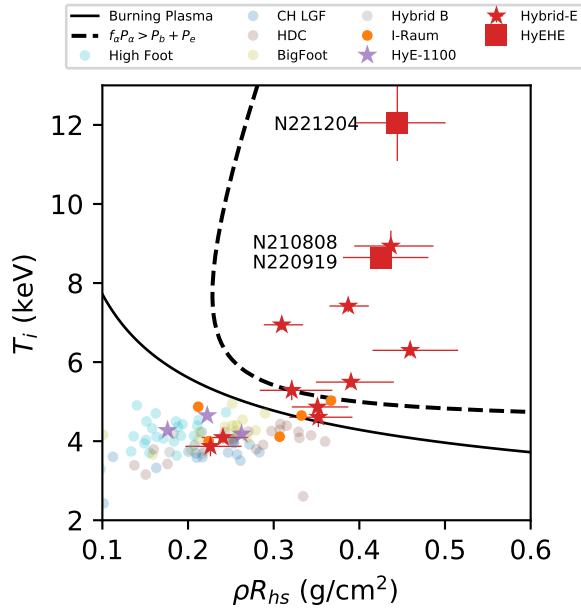


FIG. 7. Hot-spot ion temperature and areal density. Thresholds for the burning-plasma criteria and static self-heating are shown with NIF data.

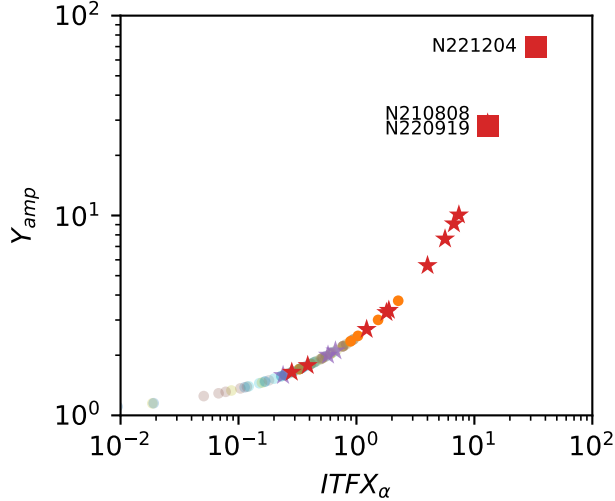


FIG. 8. Inferred yield amplification and $ITFX_\alpha$ for NIF experiments culminating in N221204.

exhibit a modest increase in areal density but a dramatic increase in ion temperature as the hot spot ignites and begins burn propagation[7, 14, 15]. N221204 exhibits a further increase in temperature by ~ 3 keV at a similar ρR_{hs} ; since the burn occurs during further expansion of the hot spot the additional hot-spot mass and volume are compensating to result in a similar ρR .

Figure 8 shows the experimentally-inferred ignition threshold factor with self heating ($ITFX_\alpha$) [20], its no- α counterpart introduced in Section III. Shot N221204 is

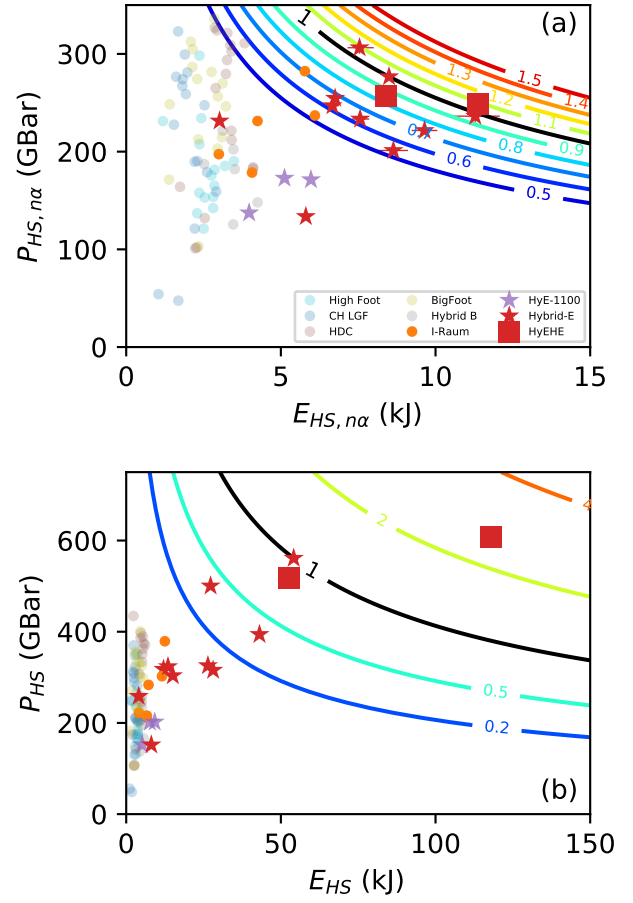


FIG. 9. Inferred hot-spot pressure and energy, inferred without the presence of self-heating (top, a) and directly for the burn-on experiments (bottom, b). Contours of EP^2 relative to N210808 in both cases are shown.

the farthest to the right and clearly surpasses the $ITFX_\alpha$ achieved previously on N210808. The yield amplification is inferred from Ref. 37 for the lower performing experiments ($\lesssim 10$) and uses simulated values[5] for the experiments with yields above 1 MJ ($Y_{amp} \gtrsim 30$).

Fig. 9 shows the hot-spot energy and pressure. In experiments where there is self-heating and burn, the quantities with α -heating are directly physical and shown in Fig. 9(b). The equivalent quantities that an experiment would have achieved in the absence of self-heating requires an inference[37] and are shown in Fig. 9(a). As in previous figures N220919 and N221204 are shown by red square markers and the contours represent constant values of EP^2 relative to N210808. N220919 exhibits a similar pressure and energy to N210808 for both burn on and off. For N221204 we observe a substantial increase in the inferred burn-off energy, likely related to the mitigation of low-mode asymmetry that caused significant residual kinetic energy on N220919. In burn-on conditions N221204 has a slightly higher inferred pressure than previous NIF shots and, like the hot-spot areal density, this is in part

due to the fact that the expansion (larger P_0 observed) is reducing the apparent burn-averaged pressure. However, the hot-spot energy content is more than twice as large as the previous record experiment N210808.

These inferred quantities provide additional context for the performance of the N221204 experiment increasing substantially from its predecessors. The $ITFX_\alpha$ increase is consistent with the yield amplification from self-heating increasing by more than a factor of two. The hot-spot areal density is approximately maintained while the ion temperature increases ~ 3 keV which results in a $\sim 2\times$ increase in the DT fusion reactivity. Lastly, the hot-spot pressure increases modestly while the internal energy content of the hot spot increases more than a factor of two.

VI. CONCLUSION

In conclusion, the experimental configuration, key observations, inferred conditions, and metrics from the first laboratory experiment to produce more fusion energy than laser energy used to initiate it have been presented. The target gain of this experiment, N221204, is inferred to be 1.5 with a fraction of burned DT fuel of 4.3%. These results were enabled by a design[5] that utilized the $\sim 1.08\times$ increase in the available laser energy and a $\sim 1.07\times$ thicker capsule target to further increase fusion yield by increasing the DT fuel areal density and hot spot pressure. To achieve this result, activation and neutron imaging diagnostics show that asymmetries in compression arising from laser delivery, hohlraum absorption dynamics, and capsule target wall non-uniformity had to be adjusted and minimized. Observations of a $\sim 1.1\times$ increase in the areal density and higher fusion yields from prior work[7], even in the presence of degradations, are consistent with the design goals and previously discussed ignition threshold framework[20]. Consistent with increasing rates of α -particle self heating, average measurements of the DT neutron spectra show an increase in the inferred ion temperature from 10.1 to 13.1 keV as the fusion yield increased from 1.33 MJ on N210808 to 3.14 MJ on N221204. As the temperature was observed to rise, the radius and mass of the reacting DT hot spot plasma were inferred to increase by $\sim 1.1\times$ and $\sim 1.6\times$, respectively. Also consistent with expectations of higher fusion yields and hot spot pressures is the observation

of reduced neutron emission duration from $89^{+15}/_{-15}$ ps to $74^{+15}/_{-5}$ ps. Inferences of the hot spot areal density, ρR_{hs} , show that as the fusion yield is increased, the DT plasma maintains a nearly constant $\rho R_{hs} \sim 0.45$ g/cm² while the plasma temperature rises rapidly. For N221204, the hot spot is inferred to be approximately twice as far from the static self-heating threshold as N210808. Using nuclear observations, the hot spot energy and pressure were inferred to be ~ 125 kJ and ~ 600 Gbar, respectively for N221204.

Following N221204, a series of three near repeat experiments were performed. Each experiment obtained a fusion yield greater than 1 MJ while experiencing various levels of low mode and mix degradations. Future work will study how the sensitivity of this design to known degradations changes from the prior 1.9 MJ laser energy design. Additionally, to achieve still higher fusion yields, future work will focus on utilizing further increases in the available laser energy, developing higher efficiency radiation cavities[40, 41] to increase coupling and higher compression designs[42]. Additionally, work will be undertaken to better understand how the dynamics and observations, such as the x-ray emission morphology and duration, change as higher temperatures, pressures and burn fractions are obtained.

This work was performed under the auspices of U.S. Department of Energy by Lawrence Livermore National Laboratory under Contract DE-AC52-07NA27344. This document was prepared as an account of work sponsored by an agency of the United States government. Neither the United States government nor Lawrence Livermore National Security, LLC, nor any of their employees makes any warranty, expressed or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States government or Lawrence Livermore National Security, LLC. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States government or Lawrence Livermore National Security, LLC, and shall not be used for advertising or product endorsement purposes. LLNL-JRNL-xxx.

-
- [1] H. Abu-Shawareb et al. Tbd. *submitted to Phys. Rev. Lett.*, 2023.
- [2] E. I. Moses et al. The national ignition facility: Transition to a user facility. *Journal of Physics: Conference Series*, 688:012073, mar 2016. doi:10.1088/1742-6596/688/1/012073. URL <https://doi.org/10.1088/1742-6596/688/1/012073>.
- [3] John Nuckolls, Lowell Wood, Albert Thiessen, and

- George Zimmerman. Laser compression of matter to super-high densities: Thermonuclear (ctr) applications. *Nature*, 239(5368):139–142, 1972. doi:10.1038/239139a0. URL <https://doi.org/10.1038/239139a0>.
- [4] J. Lindl. Development of the indirect-drive approach to inertial confinement fusion and the target physics basis for ignition and gain. *Phys. Plasmas*, 2(11):3933–4024, 1995. doi:10.1063/1.871025.

- [5] A. L. Kritcher et al. Design paper. *submitted to Phys. Rev. E*, 2023.
- [6] O. Hurricane et al. Theory paper. *submitted to Phys. Rev. E*, 2023.
- [7] H. Abu-Shawareb et al. Lawson criterion for ignition exceeded in an inertial fusion experiment. *Phys. Rev. Lett.*, 129:075001, Aug 2022. doi:10.1103/PhysRevLett.129.075001. URL <https://link.aps.org/doi/10.1103/PhysRevLett.129.075001>.
- [8] A. B. Zylstra et al. Record energetics for an inertial fusion implosion at nif. *Phys. Rev. Lett.*, 126:025001, Jan 2021. doi:10.1103/PhysRevLett.126.025001. URL <https://link.aps.org/doi/10.1103/PhysRevLett.126.025001>.
- [9] A. L. Kritcher et al. Achieving record hot spot energies with large hdc implosions on nif in hybrid-e. *Phys. Plasmas*, 28(7):072706, 2021. doi:10.1063/5.0047841.
- [10] O. A. Hurricane et al. Beyond alpha-heating: driving inertially confined fusion implosions toward a burning-plasma state on the National Ignition Facility. *Plasma Phys. Control. Fusion*, 61, 2019. URL <http://iopscience.iop.org/10.1088>.
- [11] P. Michel, L. Divol, E. A. Williams, et al. Tuning the implosion symmetry of icf targets via controlled crossed-beam energy transfer. *Phys. Rev. Lett.*, 102:025004, Jan 2009. doi:10.1103/PhysRevLett.102.025004. URL <https://link.aps.org/doi/10.1103/PhysRevLett.102.025004>.
- [12] A.B. Zylstra, O.A. Hurricane, et al. Burning plasma achieved in inertial fusion. *Nature*, 601(X):542–548, 2022. doi:X/X. URL <https://doi.org/10.1038/s41586-021-04281-w>.
- [13] A.L. Kritcher, C. Young, H.F. Robey, et al. Design of implosions reaching the burning plasma regime. *Nature Physics*, 18:251, 2022.
- [14] A. L. Kritcher, A. B. Zylstra, D. A. Callahan, O. A. Hurricane, C. R. Weber, D. S. Clark, C. V. Young, J. E. Ralph, D. T. Casey, A. Pak, O. L. Landen, B. Bachmann, K. L. Baker, L. Berzak Hopkins, S. D. Bhandarkar, J. Biener, R. M. Bionta, N. W. Birge, T. Braun, T. M. Briggs, P. M. Celliers, H. Chen, C. Choate, L. Divol, T. Döppner, D. Fittinghoff, M. J. Edwards, M. Gatu Johnson, N. Gharibyan, S. Haan, K. D. Hahn, E. Hartouni, D. E. Hinkel, D. D. Ho, M. Hohenberger, J. P. Holder, H. Huang, N. Izumi, J. Jeet, O. Jones, S. M. Kerr, S. F. Khan, H. Geppert Kleinrath, V. Geppert Kleinrath, C. Kong, K. M. Lamb, S. Le Pape, N. C. Lemos, J. D. Lindl, B. J. MacGowan, A. J. Mackinnon, A. G. MacPhee, E. V. Marley, K. Meaney, M. Millot, A. S. Moore, K. Newman, J.-M. G. Di Nicola, A. Nikroo, R. Nora, P. K. Patel, N. G. Rice, M. S. Rubery, J. Sater, D. J. Schlossberg, S. M. Sepke, K. Sequoia, S. J. Shin, M. Stadermann, S. Stoupin, D. J. Strozzi, C. A. Thomas, R. Tommasini, C. Trosseille, E. R. Tubman, P. L. Volegov, C. Wild, D. T. Woods, and S. T. Yang. Design of an inertial fusion experiment exceeding the lawson criterion for ignition. *Phys. Rev. E*, 106:025201, Aug 2022. doi:10.1103/PhysRevE.106.025201. URL <https://link.aps.org/doi/10.1103/PhysRevE.106.025201>.
- [15] A. B. Zylstra, A. L. Kritcher, O. A. Hurricane, D. A. Callahan, J. E. Ralph, D. T. Casey, A. Pak, O. L. Landen, B. Bachmann, K. L. Baker, L. Berzak Hopkins, S. D. Bhandarkar, J. Biener, R. M. Bionta, N. W. Birge, T. Braun, T. M. Briggs, P. M. Celliers, H. Chen, C. Choate, D. S. Clark, L. Divol, T. Döppner, D. Fittinghoff, M. J. Edwards, M. Gatu Johnson, N. Gharibyan, S. Haan, K. D. Hahn, E. Hartouni, D. E. Hinkel, D. D. Ho, M. Hohenberger, J. P. Holder, H. Huang, N. Izumi, J. Jeet, O. Jones, S. M. Kerr, S. F. Khan, H. Geppert Kleinrath, V. Geppert Kleinrath, C. Kong, K. M. Lamb, S. Le Pape, N. C. Lemos, J. D. Lindl, B. J. MacGowan, A. J. Mackinnon, A. G. MacPhee, E. V. Marley, K. Meaney, M. Millot, A. S. Moore, K. Newman, J.-M. G. Di Nicola, A. Nikroo, R. Nora, P. K. Patel, N. G. Rice, M. S. Rubery, J. Sater, D. J. Schlossberg, S. M. Sepke, K. Sequoia, S. J. Shin, M. Stadermann, S. Stoupin, D. J. Strozzi, C. A. Thomas, R. Tommasini, C. Trosseille, E. R. Tubman, P. L. Volegov, C. Wild, D. T. Woods, and C. V. Young. Experimental achievement and signatures of ignition at the national ignition facility. *Phys. Rev. E*, 106:025202, Aug 2022. doi:10.1103/PhysRevE.106.025202. URL <https://link.aps.org/doi/10.1103/PhysRevE.106.025202>.
- [16] JM Di Nicola, T Bond, M Bowers, L Chang, M Hermann, R House, T Lewis, K Manes, G Mennerat, B MacGowan, et al. The national ignition facility: laser performance status and performance quad results at elevated energy. *Nuclear Fusion*, 59(3):032004, 2018.
- [17] Jean-Michel G. Di Nicola, Steven T. Yang, Tiziana C. Bond, Mark W. Bowers, Leyen S. Chang, Simon J. Cohen, Michael A. Erickson, Catalin V. Filip, Jim A. Folta, Abe D. Handler, Tom E. Lanier, Ken R. Manes, Brian L. Olejniczak, Shahida I. Rana, Mike J. Shaw, Stanley Sommer, Mary L. Spaeth, Bruno M. Van Wonterghem, Pam K. Whitman, Clay Widmayer, J. Nan Wong, Paul J. Wegner, Dan Kalantar, David Alessi, Saroja Ammula, Brandon Buckley, Alica Calonico Soto, Wren Carr, Jason Chou, Alex Deland, Peter DeVore, Gaylen Erbert, Nathan Gottesman, Apurva Gowda, John Heebner, Charles Orth, Vincent Hernandez, Sandrine Herriot, Ron House, Chris Kinsella, Brian MacGowan, Kathleen McCandless, Ryan Muir, Mario Ordonez, Ernesto Padilla, Alan Pao, Larry Pelz, Brett Raymond, Tayyab Suratwala, Alex Wargo, Lei Wang, and Doug Larson. The National Ignition Facility laser performance status. In Abdul A. S. Awwal and Constantin L. Haefner, editors, *High Power Lasers for Fusion Research VI*, volume 11666, page 1166604. International Society for Optics and Photonics, SPIE, 2021. doi:10.1117/12.2586868. URL <https://doi.org/10.1117/12.2586868>.
- [18] John L Kline et al. The first measurements of soft x-ray flux from ignition scale hohlraums at the national ignition facility using dante. *Rev. Sci. Instrum.*, 81(10):10E321, 2010.
- [19] M. Rubery et al. Hohlraum reheating from burning nif implosions. *submitted to Phys. Rev. Lett.*, 2023.
- [20] J. D. Lindl et al. Progress toward a self-consistent set of 1d ignition capsule metrics in icf. *Phys. Plasmas*, 25(12):122704, 2018.
- [21] P.T. Springer et al. A 3d dynamic model to assess the impacts of low-mode asymmetry, aneurysms and mix-induced radiative loss on capsule performance across inertial confinement fusion platforms. *Nucl. Fusion*, 59(3):032009, 2018.
- [22] G. A. Kyrala, J. L. Kline, S. Dixit, S. Glenzer, D. Kalantar, D. Bradley, N. Izumi, N. Meezan, O. Landen, D. Callahan, S. V. Weber, J. P. Holder, S. Glenn, M. J. Edwards, J. Koch, L. J. Suter, S. W. Haan, R. P. J.

- Town, P. Michel, O. Jones, S. Langer, J. D. Moody, E. L. Dewald, T. Ma, J. Ralph, A. Hamza, E. Dzenitis, and J. Kilkenny. Symmetry tuning for ignition capsules via the symcap technique. *Phys. Plasmas*, 18(5):056307, 2011. doi:10.1063/1.3574504. URL <https://doi.org/10.1063/1.3574504>.
- [23] Hans G. Rinderknecht, D. T. Casey, R. Hatarik, R. M. Bionta, B. J. MacGowan, P. Patel, O. L. Landen, E. P. Hartouni, and O. A. Hurricane. Azimuthal drive asymmetry in inertial confinement fusion implosions on the national ignition facility. *Phys. Rev. Lett.*, 124:145002, Apr 2020. doi:10.1103/PhysRevLett.124.145002. URL <https://link.aps.org/doi/10.1103/PhysRevLett.124.145002>.
- [24] D. T. Casey et al. Evidence of three-dimensional asymmetries seeded by high-density carbon-ablator nonuniformity in experiments at the national ignition facility. *Phys. Rev. Lett.*, 126:025002, Jan 2021. doi:10.1103/PhysRevLett.126.025002. URL <https://link.aps.org/doi/10.1103/PhysRevLett.126.025002>.
- [25] B. J. MacGowan et al. Trending low mode asymmetries in nif capsule drive using a simple viewfactor metric. *High Energy Density Physics*, 40:100944, 2021. ISSN 1574-1818. doi:<https://doi.org/10.1016/j.hedp.2021.100944>. URL <https://www.sciencedirect.com/science/article/pii/S1574181821000197>.
- [26] J L Milovich et al. Understanding asymmetries using integrated simulations of capsule implosions in low gas-fill hohlraums at the national ignition facility. *Plasma Phys. Control. Fusion*, 63(2):025012, dec 2020. doi:10.1088/1361-6587/abcfdb.
- [27] C. B. Yeamans and D. L. Bleuel. The spatially distributed neutron activation diagnostic fnaads at the national ignition facility. *Fusion Science and Technology*, 72(2):120–128, 2017. doi:10.1080/15361055.2017.1320499.
- [28] R. M. Bionta et al. Real-time nuclear activation detectors for measuring neutron angular distributions at the national ignition facility (invited). *Rev. Sci. Instrum.*, 92(4):043527, 2021. doi:10.1063/5.0042869.
- [29] D. T. Casey, O. L. Landen, E. Hartouni, R. M. Bionta, K. D. Hahn, P. L. Volegov, D. N. Fittinghoff, V. Geppert-Kleinrath, C. H. Wilde, J. L. Milovich, V. A. Smalyuk, J. E. Field, O. A. Hurricane, A. B. Zylstra, A. L. Kritcher, D. S. Clark, C. V. Young, R. C. Nora, D. A. Callahan, B. J. MacGowan, D. H. Munro, B. K. Spears, J. L. Peterson, J. A. Gaffney, K. D. Humbird, M. K. G. Kruse, A. S. Moore, D. J. Schlossberg, M. Gatu-Johnson, and J. A. Frenje. Three dimensional low-mode areal-density non-uniformities in indirect-drive implosions at the national ignition facility. *Phys. Plasmas*, 28(4):042708, 2021. doi:10.1063/5.0043589. URL <https://doi.org/10.1063/5.0043589>.
- [30] R Hatarik et al. Analysis of the neutron time-of-flight spectra from inertial confinement fusion experiments. *J. Appl. Phys.*, 118(18):184502, 2015.
- [31] A. S. Moore, D. J. Schlossberg, E. P. Hartouni, D. Sayre, M. J. Eckart, R. Hatarik, F. Barbosa, J. Root, C. Waltz, B. Beeman, M. S. Rubery, and G. P. Grim. A fused silica cherenkov radiator for high precision time-of-flight measurement of dt and neutron spectra (invited). *Review of Scientific Instruments*, 89(10):10I120, 2018. doi:10.1063/1.5039322. URL <https://doi.org/10.1063/1.5039322>.
- [32] A. Pak et al. Impact of localized radiative loss on inertial confinement fusion implosions. *Phys. Rev. Lett.*, 124:145001, Apr 2020.
- [33] Laurent Divol. 3d isobaric hotspot reconstruction from multiple neutron and xray views on the nif: quantifying radiative loss impact on dt implosion and other insights. In *APS Division of Plasma Physics Meeting Abstracts*, volume 2019, pages DI3–001, 2019.
- [34] A. R. Christopherson et al. Theory of ignition and burn propagation in inertial fusion implosions. *Phys. Plasmas*, 27:052708, 2020.
- [35] A. Pak, L. Divol, D. T. Casey, S. F. Khan, A. L. Kritcher, J. E. Ralph, R. Tommasini, C. Trosseille, A. B. Zylstra, K. L. Baker, N. W. Birge, R. Bionta, B. Bachmann, E. L. Dewald, T. Doepfner, M. S. Freeman, D. N. Fittinghoff, V. Geppert-Kleinrath, H. Geppert-Kleinrath, K. D. Hahn, M. Hohenberger, J. Holder, S. Kerr, Y. Kim, B. Kozioziemski, K. Lamb, B. J. MacGowan, A. G. MacPhee, K. D. Meaney, A. S. Moore, D. J. Schlossberg, S. Stoupin, P. Volegov, C. Wilde, C. V. Young, O. L. Landen, and R. P. J. Town. Dynamics and power balance of near unity target gain inertial confinement fusion implosions. *Phys. Rev. Lett.*, 131:065101, Aug 2023. doi:10.1103/PhysRevLett.131.065101. URL <https://link.aps.org/doi/10.1103/PhysRevLett.131.065101>.
- [36] C. Cerjan, P.T. Springer, and S.M. Sepke. Integrated diagnostic analysis of inertial confinement fusion capsule performance. *Phys. Plasmas*, 20:056319, MAY 2013.
- [37] P. K. Patel et al. Hotspot conditions achieved in inertial confinement fusion experiments on the national ignition facility. *Phys. Plasmas*, 27:050901, 2020.
- [38] A.B. Zylstra et al. Model validation for inferred hot-spot conditions in national ignition facility experiments. *Phys. Plasmas*, 28(12):122703, 2021. doi:10.1063/5.0069366.
- [39] O. A. Hurricane et al. Approaching a burning plasma on the nif. *Phys. Plasmas*, 26(5):052704, 2019. doi:10.1063/1.5087256.
- [40] Peter Amendt, Darwin Ho, Yuan Ping, Vladimir Smalyuk, Shahab Khan, John Lindl, David Strozzi, Riccardo Tommasini, Mikhail Belyaev, Charles Cerjan, Oggie Jones, William Krueer, Nathan Meezan, Harry Robey, Frank Tsung, Chris Weber, and Chris Young. Ultra-high (>30%) coupling efficiency designs for demonstrating central hot-spot ignition on the national ignition facility using a frusturam. *Phys. Plasmas*, 26(8):082707, 2019. doi:10.1063/1.5099934. URL <https://doi.org/10.1063/1.5099934>.
- [41] K. L. Baker, P. A. Amendt, J. S. Ross, V. A. Smalyuk, O. L. Landen, D. D. Ho, S. Khan, S. W. Haan, J. D. Lindl, D. Mariscal, J. L. Milovich, S. MacLaren, Y. Ping, D. J. Strozzi, R. M. Bionta, D. T. Casey, P. M. Celliers, D. N. Fittinghoff, H. Geppert-Kleinrath, V. Geppert-Kleinrath, K. D. Hahn, M. Gatu Johnson, Y. Kim, K. Meaney, M. Millot, R. Nora, P. L. Volegov, and C. H. Wilde. First large capsule implosions in a frustum-shaped hohlraum. *Physics of Plasmas*, 30(9):092708, 09 2023. ISSN 1070-664X. doi:10.1063/5.0163396. URL <https://doi.org/10.1063/5.0163396>.
- [42] D. S. Clark, D. T. Casey, C. R. Weber, O. S. Jones, K. L. Baker, E. L. Dewald, L. Divol, A. Do, A. L. Kritcher, O. L. Landen, M. Millot, J. L. Milovich, V. A. Smalyuk, D. J. Strozzi, A. E. Pak, R. Tommasini, and M. J. Edwards. Exploring implosion designs for increased compression on the National Ignition Facility using high density carbon ablators. *Physics of Plasmas*, 29(5):052710,

- 05 2022. ISSN 1070-664X. doi:10.1063/5.0087052. URL <https://doi.org/10.1063/5.0087052>.
- [43] T. Braun, S.O. Kucheyev, S.J. Shin, Y.M. Wang, J. Ye, N.E. Teslich Jr, C.K. Saw, D.B. Bober, E.M. Sedillo, N.G. Rice, K. Sequoia, H. Huang, W. Requieron, A. Nikroo, D.D. Ho, S.W. Haan, A.V. Hamza, C. Wild, and J. Biener. Tungsten doped diamond shells for record neutron yield inertial confinement fusion experiments at the national ignition facility. *Nuclear Fusion*, 63(1):016022, dec 2022. doi:10.1088/1741-4326/aca4e4. URL <https://dx.doi.org/10.1088/1741-4326/aca4e4>.
- [44] S. W. Haan et al. Point design targets, specifications, and requirements for the 2010 ignition campaign on the National Ignition Facility. *Phys. Plasmas*, 18(5), MAY 2011.
- [45] D. S. Clark, S. W. Haan, A. W. Cook, M. J. Edwards, B. A. Hammel, J. M. Koning, and M. M. Marinak. Short-wavelength and three-dimensional instability evolution in national ignition facility ignition capsule designs. *Phys. Plasmas*, 18(8):082701, 2011. doi:10.1063/1.3609834. URL <https://doi.org/10.1063/1.3609834>.
- [46] T. Ma et al. Onset of hydrodynamic mix in high-velocity, highly compressed inertial confinement fusion implosions. *Phys. Rev. Lett.*, 111:085004, Aug 2013. doi:10.1103/PhysRevLett.111.085004. URL <https://link.aps.org/doi/10.1103/PhysRevLett.111.085004>.
- [47] A. B. Zylstra et al. Hot-spot mix in large-scale hdc implosions at nif. *Phys. Plasmas*, 27(9):092709, 2020. doi:10.1063/5.0003779.
- [48] B. Bachmann et al. Localized mix-induced radiative cooling in a capsule implosion at the national ignition facility. *Phys. Rev. E*, 101:033205, Mar 2020. doi:10.1103/PhysRevE.101.033205.

VII. APPENDIX

Table I summarizes several of the relevant properties for the capsule targets used on the experiments discussed in this work. Each capsule had an inner undoped layer of high density carbon (HDC) starting at a radius of 1050 μm , followed by a tungsten doped layer of HDC and an outer undoped layer[43]. On average, the capsules used for the 1.9 MJ laser experiments had a total ablator thickness of 79.5 μm as while those used with 2.05 MJ of laser energy had a average thickness of 85.4 μm . The central doped layer absorbs the higher energy M-band hohlraum x-ray ($>1.8\text{-}2$ keV) emission that passes through the outer undoped HDC. If not attenuated, these high energy x-rays can pre-heat the DT fuel, increasing

the entropy and thereby reduce the achievable compression and rate of work done[44]. Additionally, pre-heating of the inner undoped HDC layer can increase the Atwood number at the interface. This makes the interface more unstable and can enhance the mixing of ablator material into the ice[45]. As noted in Table I, the optical depth of the capsules used with 2.05 MJ of laser energy was increased by $1.19\times$ as compared to those used previously with 1.9 MJ of laser energy. This increase in optical depth is expected to improve the stability of the DT ice and inner undoped HDC interface [5]. However, as noted this also has the consequence of reducing the ablation front scale length, making the implosion more susceptible to ablation front instabilities. This balance, in conjunction with the differences in instability seeds and changes in growth rates associated with differences in the implosion dynamics (i.e. deceleration rates, etc), will determine the relative implosion stability. Future experiments will explore the sensitivity of implosion performance to such changes in optical depth of the doped layer.

Table I also details capsule characteristics that can lead to performance degradations. As previously discussed, non-uniformity in the capsule ablator wall thickness can lead to an asymmetry in compression and a reduction in the rate of PdV/dt work and fusion yield.[23–25]. Along the principal axis, the wall thickness non-uniformity is fit by a Legendre decomposition, and is quantified by the amplitude of the mode 1 coefficient. For all the experiments discussed here, the capsule mode 1 was below 0.2 μm , or $\sim 0.25\%$ of the capsule wall thickness. The impact of the capsule non-uniformity on the fusion performance in these experiments will be discussed in detail in a later publication. Higher atomic number ablator material that is injected into the reacting hot spot can increase the radiative loss, reducing the temperature and fusion yield [46]. Table I shows the number and volume distribution of surface pits, internal voids as well details of the capsule fill tube assembly. Each of these has been identified as a perturbation which can inject higher atomic number ablator material into the reacting hot spot[32, 47, 48]. Also seen in Table I, the number of higher atomic number inclusions was $\sim 100\times$ larger for the capsules used with 2.05 MJ of laser energy and that achieved target gain >1 . The impact of these inclusions on both hot spot and DT fuel-ablator mix is a work in progress. Future experiments using higher quality capsules with reduced numbers of inclusions will also be performed to quantify the impact.

| Experiment | N210808 | N211024 | N220919 | N221204 |
|--|---------|---------|---------|---------|
| Capsule batch-number | 789-08 | 789-06 | 952-03 | 952-01 |
| Capsule Mass (μg) | 3927 | 3916 | 4258 | 4253.1 |
| Inner undoped layer thickness (μm) | 6 | 6.3 | 7.9 | 7.7 |
| Doped layer thickness (μm) | 18.7 | 18.1 | 15 | 15.1 |
| Outer undoped layer thickness (μm) | 54.9 | 55 | 62.5 | 62.6 |
| Capsule dopant areal density (%W μm) | 7.9 | 7.6 | 9.2 | 9.2 |
| Capsule mode 1 (μm) | 0.2 | 0.1 | 0.07 | 0.13 |
| Capsule surface pits (0-1 μm^3) | 270 | 101 | 40 | 69 |
| Capsule surface pits (1-3 μm^3) | 0 | 0 | 1 | 1 |
| Capsule surface pits (>3 μm^3) | 0 | 1 | 0 | 0 |
| Voids (0-10 μm^3) | 0 | 0 | 80 | 20 |
| Voids (>10 μm^3) | 1 | 0 | 12 | 15 |
| Inclusions (< 200 μm^3) | 31 | 42 | 3744 | 4313 |
| Inclusions (> 200 μm^3) | 5 | 2 | 75 | 105 |
| Fill tube diameter (μm) | 2 | 2 | 2 | 2 |
| Fill tube glue mass(ng) | 2.5 | 0.9 | 4.1 | 3.4 |
| Fill tube mass deficit (ng) | 5.3 | 5.7 | 5.1 | 4.3 |

TABLE I. Table of capsule properties for N210808 and N211024 used with 1.9 MJ of laser energy and N220919 and N221204 used with 2.05 MJ of laser energy