

Conf. 930205 -- 75

OAK RIDGE NATIONAL LABORATORY
HEALTH AND SAFETY RESEARCH DIVISION
Pollutant Assessments Group
Grand Junction, Colorado

AN APPLICATION OF THE ULTRASONIC RANGING AND DATA
SYSTEM (USRADS) AS A VERIFICATION TOOL
POSTER SESSION
WM '93 SYMPOSIUM
MARCH 2, 1993
TUCSON, ARIZONA

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

S. M. Smith
Oak Ridge Institute for Science and Education

M. J. Wilson
Oak Ridge National Laboratory

M. L. Espgren
Oak Ridge National Laboratory

MARTIN MARIETTA ENERGY SYSTEMS, INC.
for the
U.S. DEPARTMENT OF ENERGY
under Contract No. DE-AC05-84OR21400

MASTER

ABSTRACT

The Ultrasonic Ranging and Data System (USRADS) is a computerized data collection system that enables the correlation between geographic location and data gathered at that location. The USRADS employs ultrasonics, radio frequency transmission, and microcomputers to gather data for site characterization. In the case of a radiological survey, radiation measurements are gathered to confirm that remedial action has successfully removed contamination to levels below applicable guidelines or standards. Chemrad Tennessee Corporation currently holds the license to manufacture or lease commercial versions of the USRADS.

The Pollutant Assessments Group of Oak Ridge National Laboratory (ORNL), Grand Junction, Colorado, was directed by the Department of Energy (DOE) to verify the adequacy of remedial action taken at various sites throughout the western United States. The USRADS was utilized at the Monticello Remedial Action Program, a National Priorities List site in Monticello, Utah, following remedial action of approximately 15 cm of soil contaminated by wind-dispersed uranium mill tailings. The verification was conducted in a 15,300 square meter property that resides on the periphery of the mill site and was vacant land. Remedial action at this location was conducted to bring the site's radiation levels below those specified in 40 CFR 192.

The radiological verification survey was conducted following excavation of the contaminated material. The USRADS was configured with a Victoreen gamma scintillometer and was operated by a two-man survey team. There are several advantages to verifying with the USRADS over conventional gamma radiation survey methods. First, survey coverage can be instantly verified, allowing the survey team to confirm complete survey coverage. Second, the data may be analyzed on site, enabling the team to identify areas of elevated gamma radiation exposure rates and to select biased sample locations. Finally, the USRADS provides both high quality graphical illustrations for permanent documentation and data storage that can be easily retrieved for site certification.

"The submitted manuscript has been authored by a contractor of the U.S. Government under contract No. DE-AC05-84OR21400. Accordingly, the U.S. Government retains a nonexclusive, royalty-free license to publish or reproduce the published form of this contribution, or allow others to do so, for U.S. Government purposes."

*Research sponsored by U.S. Department of Energy, under contract DE-AC05-84OR-21400 with Martin Marietta Energy Systems, Inc.

ACKNOWLEDGMENTS

This project was sponsored by the U.S. DOE, Office of Environmental Restoration (ER), Southwestern Area Programs Office. The authors wish to acknowledge W. H. Burke, D. B. Ertel, S. K. Mather, G. A. Pierce, E. P. Schlauger, and G. K. Stowe for field, analytical, and administrative support.

INTRODUCTION

Independent verification (IV) on ER Program sites has become a formal requirement of the DOE. The ORNL/Pollutant Assessments Group (PAG) is one independent verification contractor (IVC) for the DOE Southwestern Area Programs. The ORNL/PAG was directed by DOE Headquarters in July 1988 to provide IV for vicinity properties associated with the Monticello Remedial Action Project (MRAP), which entails the remediation of the former uranium mill site at Monticello, Utah. The site was placed on the National Priorities List in 1987 (U.S. DOE 1990a).

The ORNL/PAG performed a radiological verification survey of a property on the periphery of the Monticello mill site to support the adequacy of remedial action and confirm the site's compliance with Environmental Protection Agency (EPA) criteria and DOE guidelines (USEPA 1978; USDOE 1990b). The survey employed the USRADS to gather gamma radiation exposure rate measurements as part of the verification. This state-of-the-art method proved to be advantageous over conventional gamma radiation survey methods. Results of the survey verified that the radiological condition of the site indeed met DOE's remedial action objectives.

USRADS is a patented, computerized data acquisition system developed by ORNL to correlate the radiological surveyor's location with instantaneous radiation data taken during walk-on surveys (Berven et al. 1991). The system patent is currently held by Chemrad, Inc. One major application of USRADS includes verification of remediated and uncontaminated areas. It is especially applicable to radiological verification as it provides documented proof that no surface areas were missed during the walking scans.

INDEPENDENT VERIFICATION PROCESS

The property that is the subject of this report consisted of an alfalfa field containing no buildings and lying approximately .4 km (1500 ft) north of the Monticello mill site. The property encompasses over 15,000 m² (4 acres).

The process of independent verification was initiated with a document review of the characterization report and remedial action plan. This was followed by the site survey which employed USRADS and soil sampling. A document review of the remedial action contractor's (RAC) post-remedial action report (or completion report) and confirmatory analysis will follow the site survey. Finally, samples will be chosen and archived to support the site's certification. The RAC has not yet issued the completion report.

Review of the remedial action design report on the subject property prepared by the RAC indicated the property was evaluated by DOE on the basis of EPA standards and that excess residual radioactive materials were present. Thus, it was appropriate to designate this property for remedial action.

During May 1992, Chem-Nuclear Geotech, the RAC for MRAP, performed remedial action on the property. The remedial action plan required excavation of all exterior contamination, backfilling with uncontaminated material, and restoration to a condition comparable to that existing prior to remedial action. When the excavation stage was completed, the property was resurveyed. Soil samples were collected by the IVC to verify the data supporting the adequacy of remedial action and to confirm the site's compliance with DOE guidelines.

INDEPENDENT VERIFICATION SURVEY

The radiological verification survey was conducted immediately following excavation of the contaminated material. Measurement and analytical procedures followed were from the PAG procedures manual (ORNL 1992). Gamma radiation exposure rates were measured by USRADS, which provided documented proof that no surface areas were missed during the walking scan.

USRADS is configured with a Victoreen gamma scintillometer and is operated by a two-man survey team. One person acts as the surveyor, traversing grid blocks on 1.5 m centers and wearing a special survey backpack containing the electronic data gathering and telemetry equipment. The other team member operates the host computer and master receiver. As the surveyor traverses the block, an ultrasonic signal is emitted from the surveyor's data pack each second. Simultaneously, radio frequency transmissions containing the field data are broadcast from the surveyor's data pack to the master receiver. Stationary receivers placed within the grid block contain ultrasonic receivers and radio frequency transmitters. The radio frequency signal is transmitted to the master receiver each time a stationary receiver hears and identifies an ultrasonic signal emitted from the data pack. The microcomputer then calculates the distance between the surveyor and each stationary receiver. By this method, the location of the surveyor and the gamma radiation exposure rate data are established and recorded each second.

The property was divided into grid blocks based on the areal extent of the excavations performed by the RAC. The USRADS coordinate system was determined prior to the survey with the 0,0 base point for all coordinates arbitrarily chosen as the southeast corner of the property.

Fieldwork was conducted in two phases. The first phase involved surveying blocks 1 to 3, and the second phase examined blocks 4 to 7. Each block consisted of two to three verification areas (V areas). The V areas are subdivided into 9 to 11 grids for the purpose of soil sampling by the large area protocol method. These sampling grid blocks are designated with a letter within their respective V areas (Fig. 1).


Following the survey of each block, data were analyzed in the field to locate a biased sampling location that exhibited at least one of the highest outdoor gamma (HOG) radiation measurements. After data analysis, a field printout was produced to illustrate the HOG locations within the sampling grid blocks enabling the sampling team to pinpoint sampling locations based on the USRADS coordinate system (Fig. 2).

Gamma radiation measurements taken by ORNL over the ground surface in each verification block prior to backfilling were tabulated for analysis. These data were extracted from the USRADS data files following completion of field activities and correlated with sample analysis data. When the entire verification survey was complete, a track map of the property verifying complete survey coverage was produced (Fig. 3), demonstrating the reproducibility of the USRADS method.

CONCLUSION

The results of the IVC analyses of this property showed that gamma radiation exposure rates and radionuclide concentrations were within applicable DOE guidelines. Currently, the RAC is preparing a completion report documenting the cleanup of the property in compliance with DOE guidelines. The IVC has yet to examine the completion report to compare and confirm analytical results, at which point an IV statement and report will be issued.

USRADS as a verification tool has a number of advantages over conventional survey methods. First, survey coverage is instantly verified by viewing the track map, allowing the survey team to confirm that the entire property was surveyed and that no areas were missed. Second, the data are analyzed on site, enabling the team to identify areas of elevated gamma radiation exposure rates and select biased sample locations. Finally, USRADS provides high quality, graphical illustrations and data storage in an electronic format that provides easy retrieval and reproduction for IV and ultimate certification of the site.

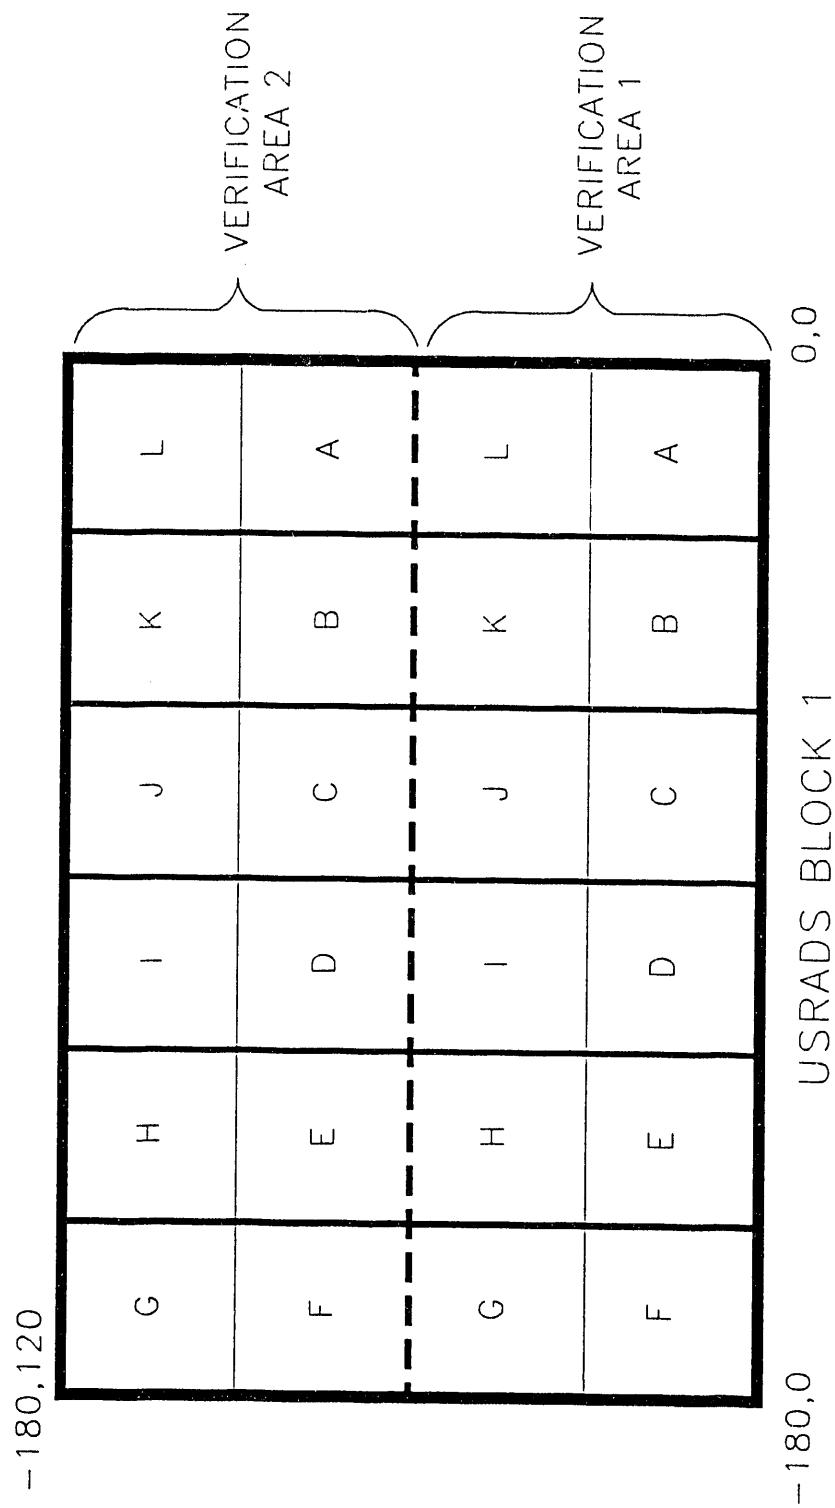

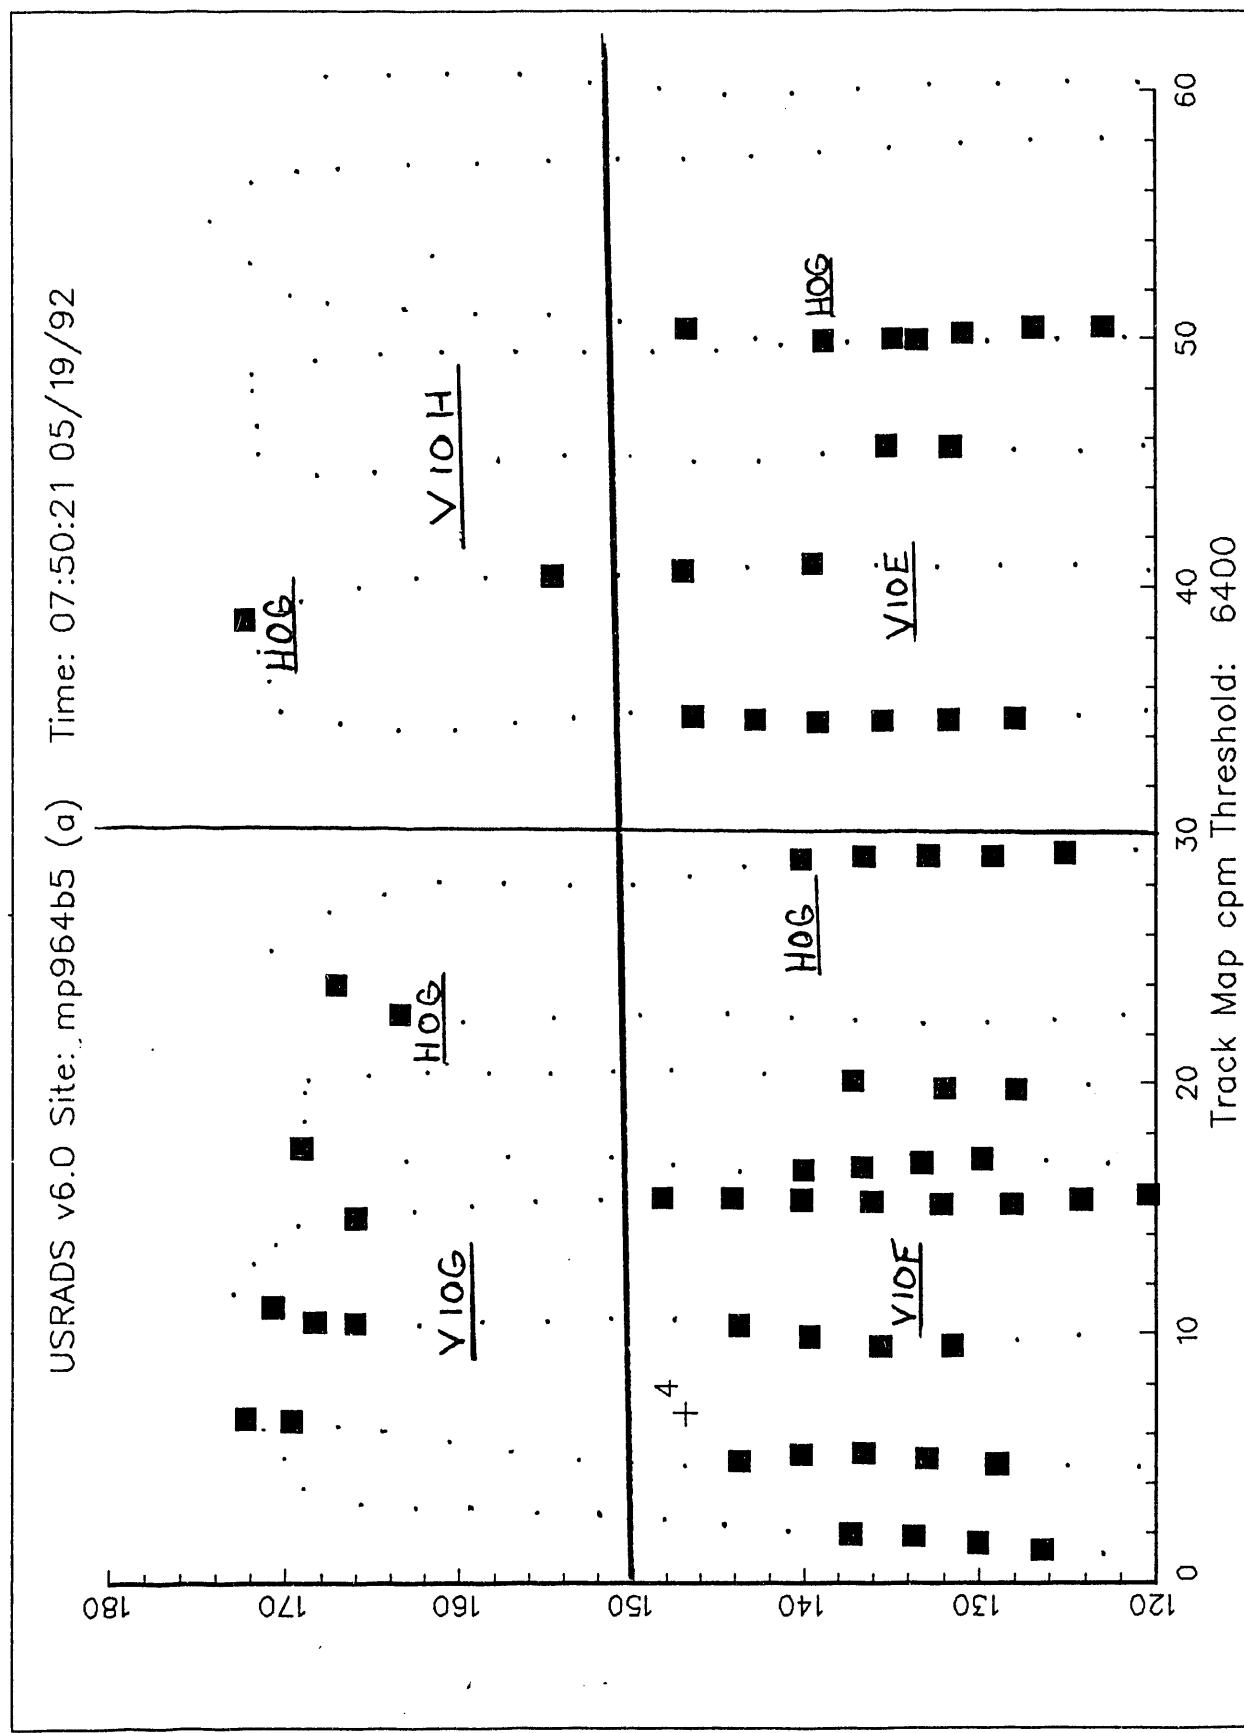


Fig. 2. Example of USRADS block with track map and high outdoor gamma (HOG) sample locations.

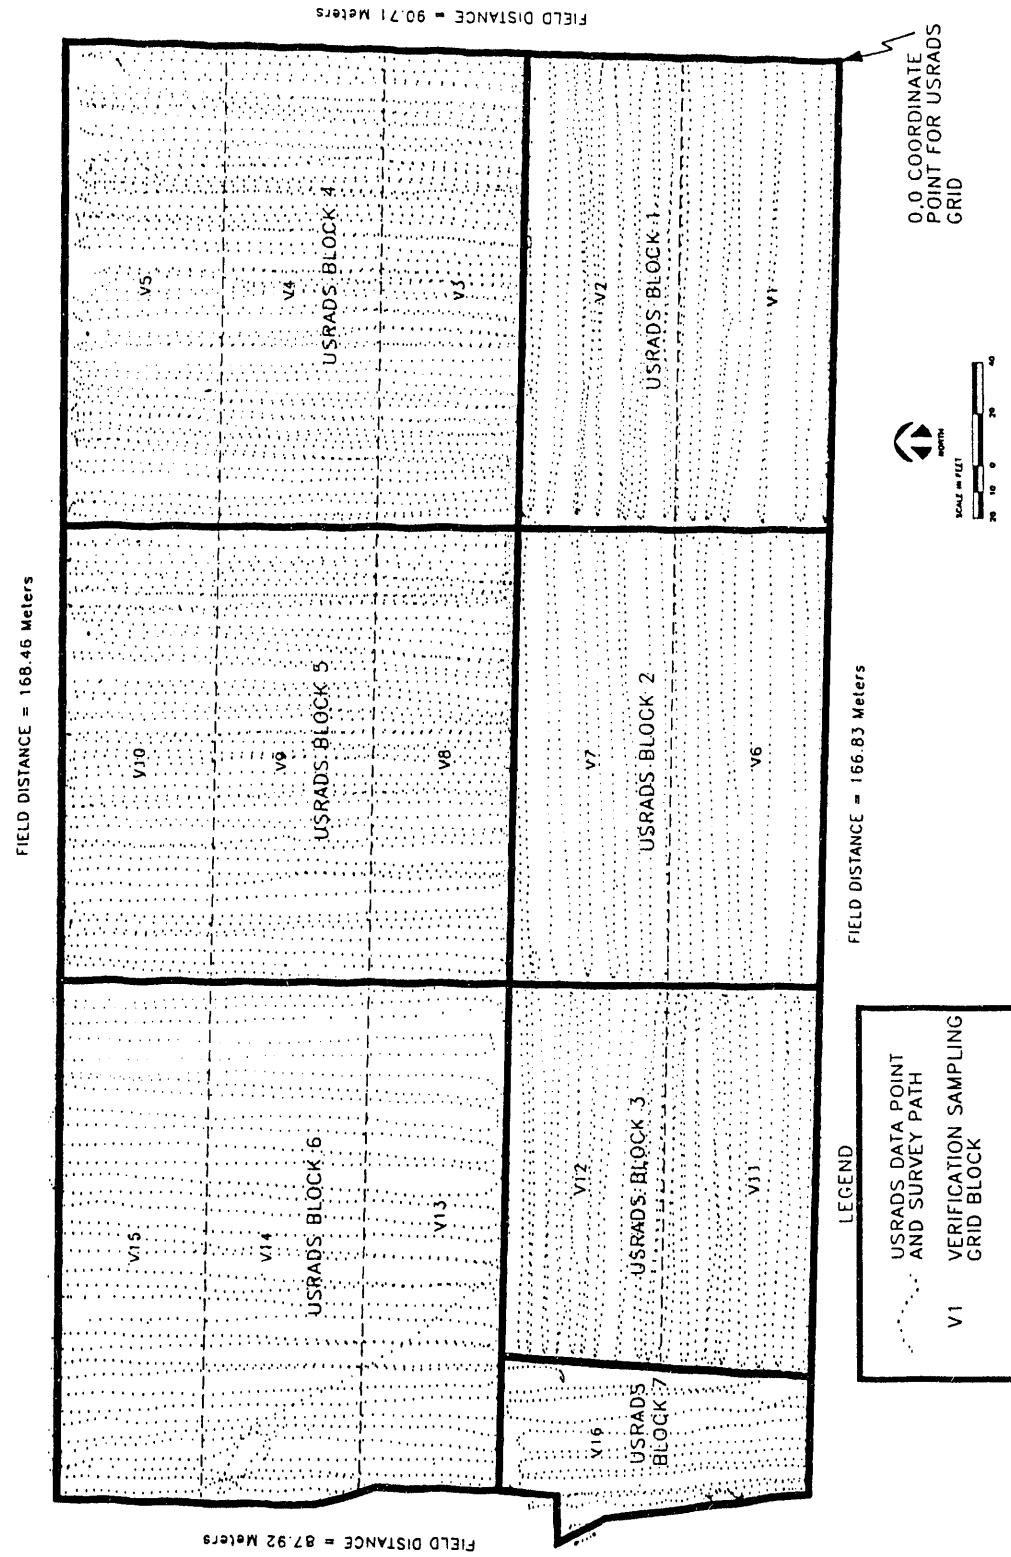


Fig. 3. Track map of entire property showing complete survey coverage.

REFERENCES

Berven, B. A., C. A. Little, and M. S. Blair. 1991. A method to automate radiological surveys: The ultrasonic ranging and detecting system. *Health Physics*, 60(3):367.

ORNL 1992. *Pollutant Assessments Group Procedures*. ORNL/TM-6645/R1. Oak Ridge National Laboratory, Grand Junction, Colo.

U.S. DOE. 1990a. *Monticello Mill Tailings Site Declaration for the Record of Decision and Record of Decision Summary*. U.S. Department of Energy, Grand Junction Projects Office, Grand Junction, Colo.

U.S. DOE. 1990b. *Radiation Protection of the Public and the Environment*. DOE Order 5400.5. U.S. Department of Energy.

U.S. EPA. 1978. 40 CFR 192. *Health and Environmental Protection Standards for Uranium and Thorium Mill Tailings*.

END

DATE
FILMED
9/7/193

