

*To be presented at the Second International  
Conference on Infrared Physics, Zurich,  
Switzerland, March 5-9, 1979.*

LBL-8777c.2

RECEIVED  
LAWRENCE  
BERKELEY LABORATORY


APR 11 1979

LIBRARY AND  
DOCUMENTS SECT

TWO-WEEK LOAN COPY

This is a Library Circulating Copy  
which may be borrowed for two weeks.  
For a personal retention copy, call  
Tech. Info. Division, Ext. 6782

**Energy and Environment Division**

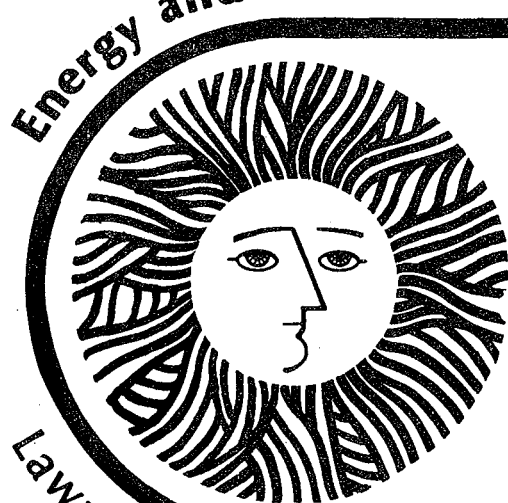

Routine Spectral Measurements  
of Infrared Radiation  
From the Atmosphere

*Paul Berdahl*

March 1979

**Lawrence Berkeley Laboratory University of California/Berkeley**

Prepared for the U.S. Department of Energy under Contract No. W-7405-ENG-48

LBL-8777c.2

— LEGAL NOTICE —

This report was prepared as an account of work sponsored by the United States Government. Neither the United States nor the Department of Energy, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness or usefulness of any information, apparatus, product or process disclosed, or represents that its use would not infringe privately owned rights.

ROUTINE SPECTRAL MEASUREMENTS OF INFRARED  
RADIATION FROM THE ATMOSPHERE\*

Paul Berdahl

Energy and Environment Division  
Lawrence Berkeley Laboratory  
Berkeley, California 94720

Infrared radiative cooling is a natural process continually underway in our environment. Thus, this process contributes in an important manner to the heat balance of buildings. An increase in radiative losses during the summer or a reduction of radiative losses during the winter will reduce energy consumption. A quantitative knowledge of the infrared radiative transfer between the atmosphere and a building's surface requires detailed information regarding the angular and spectral distribution of the radiation from the atmosphere. Routine information of this type has apparently never been gathered; most observations are limited to several days in time. The filter spectrometer system described here is intended to provide data records at 30 minute intervals for weeks and months of continuous operation.

The spectrometer design incorporates a Barnes Corporation model 12-880 radiometer equipped with an eight-position filter wheel, germanium lens, and pyroelectric detector. Of the eight filter positions, one is an open hole and one is a closed hole used to determine the instrument's zero offset. The remaining 6 filter positions contain infrared interference filters with "halfpower" cuton and cutoff points given in microns by (8.1, 13.7), (8.3, 9.1), (9.4, 9.9), (10.0, 11.4), (14.0, 15.8), and (16.6, 21.6). In addition to a stepping mechanism

which allows the filter wheel to be positioned automatically, the instrument contains a rotating mirror assembly which allows the instrument's  $2^\circ$  field of view to be directed into the vertical direction or into a  $70^\circ\text{C}$  black body cavity. The entire instrument is under microprocessor control and is accessible to Lawrence Berkeley Laboratory through a MODEM telephone link. The accumulating data is transmitted over this link at intervals of one to three days.

Three radiometers are located in the field at the time of this writing. Systems were installed at Tucson, Arizona in August, 1978; at San Antonio, Texas in September, 1978; and at Gaithersburg, Maryland in November, 1978. At the end of January, 1979, these instruments will be recalled for maintenance, and will be modified to make radiance measurements at several non-zero zenith angles. The instruments will then be relocated in the field for the summer of 1979, to obtain data during periods of high air conditioning load.


The Figures show preliminary samples of the radiometer data, superimposed on calculated spectra for similar meteorological conditions (identical air temperature and dewpoint). The measured radiances are assumed to be constant within each filter passband, or to be a segment of a black body curve, whichever is more appropriate. The calculated spectra are obtained from a modification of the computer program LOWTRAN 3B.<sup>1</sup> This program produces low-resolution infrared transmittances based on the water vapor, carbon dioxide, ozone and temperature along atmospheric paths. A careful use of Kirchoff's law permits an evaluation of the corresponding infrared radiances. Except as

constrained by surface air temperature and humidity, the atmospheric constituents were assigned typical midlatitude summer values. Thus the agreement obtained here is an indication that reasonable accuracy can be obtained from calculations which do not employ radiosonde data.

---


1. J. Selby et al., "Atmospheric Transmittance from 0.25 to 28.5 $\mu$ : Supplement LOWTRAN 3B". Available from the U.S. National Technical Information Service, Springfield, Virginia 22161.

\* This work has been supported by the Solar Heating and Cooling Research and Development Branch, Office of Conservation and Solar Applications, U.S. Dept. of Energy. The author also appreciates the cooperation of the institutions at which the radiometers are sited: Kitt Peak National Observatory (Tucson), Trinity University (San Antonio), and the National Bureau of Standards (Gaithersburg). The radiometers were designed and constructed by the Special Projects Group at Lawrence Berkeley Laboratory.

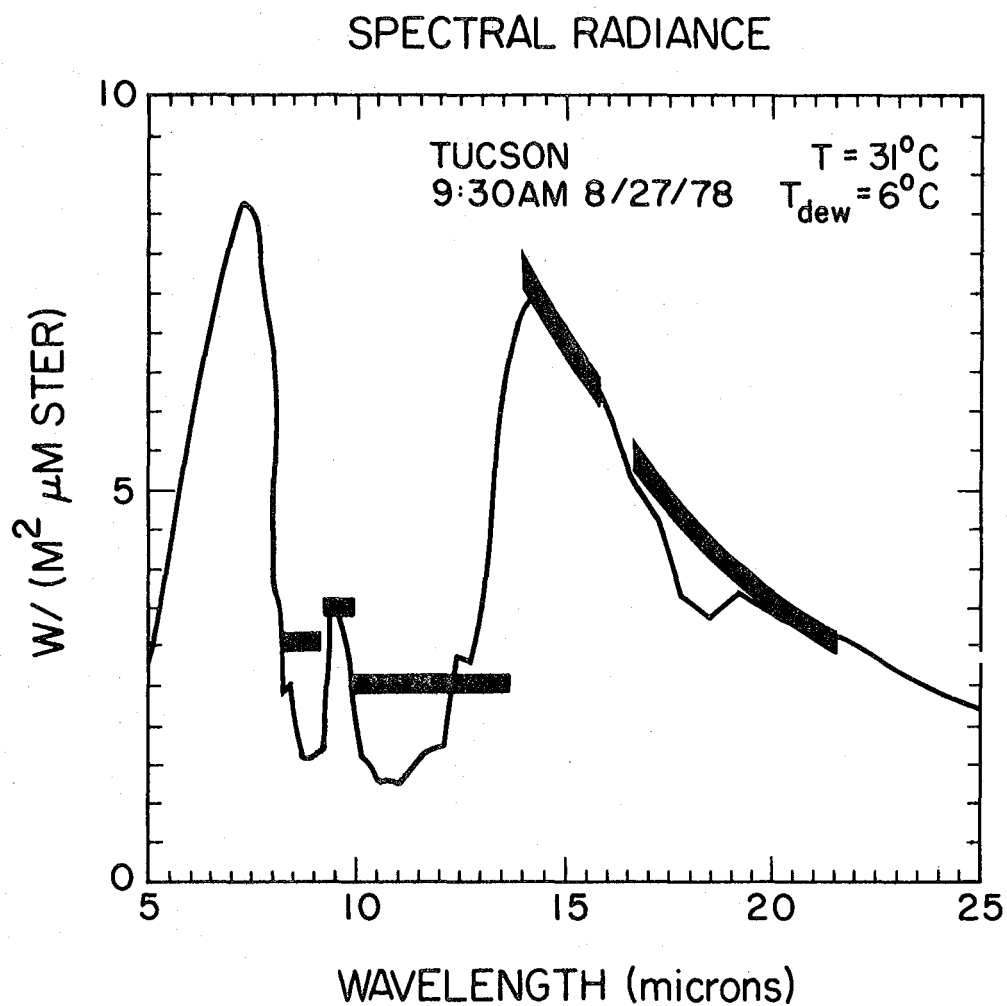


XBL 792 322

Figure 1: Spectral radiance, computed and measured for clear sky conditions at Tucson, Arizona. The 10.7 micron filter is absent. Radiance in the 9.9 to 13.7 micron band is deduced from the 8.1 to 13.7 filter, after adjusting for the filters at 8.7 and 9.6 microns.

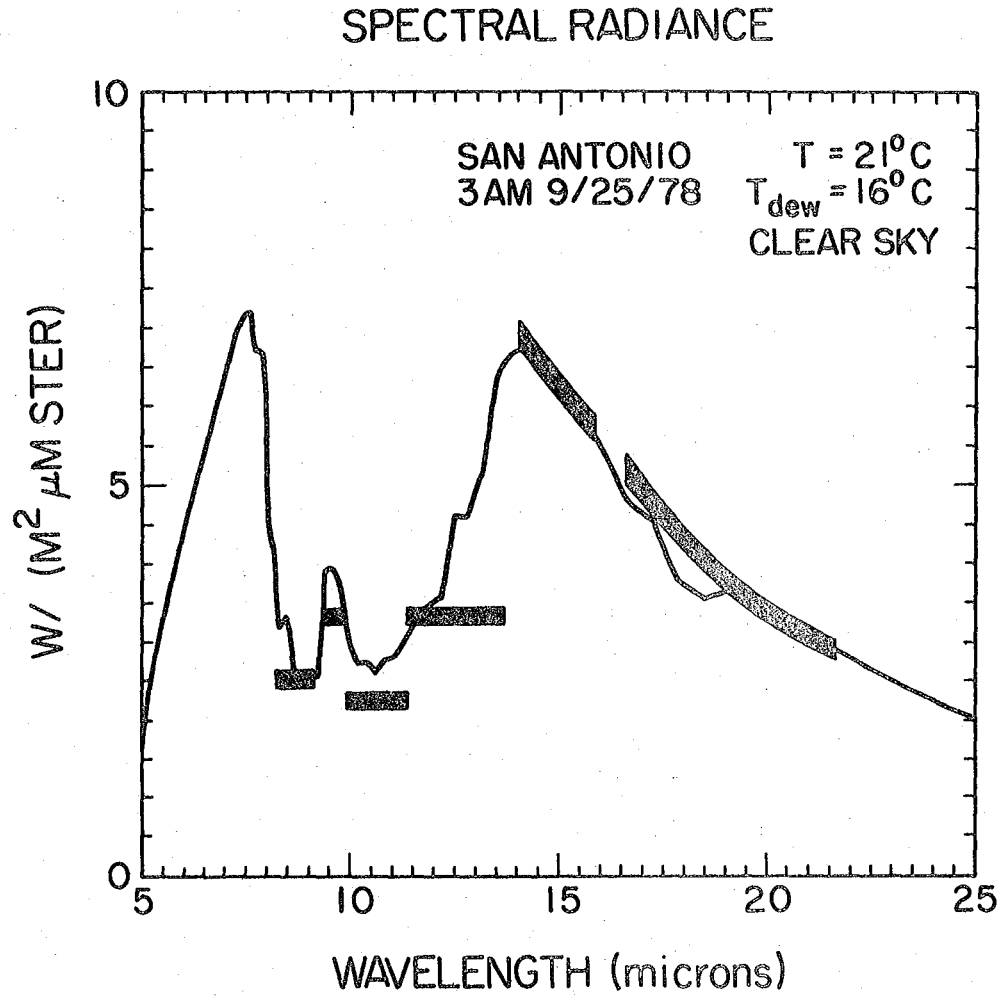

XBL 792 323

Figure 2: Spectral radiance, both computed and measured, for clear sky conditions at San Antonio, Texas. Radiance in the 11.4 to 13.7 micron band is deduced from the 8.1 to 13.7 filter, after adjusting for the filters at 8.7, 9.6, and 10.7 microns.

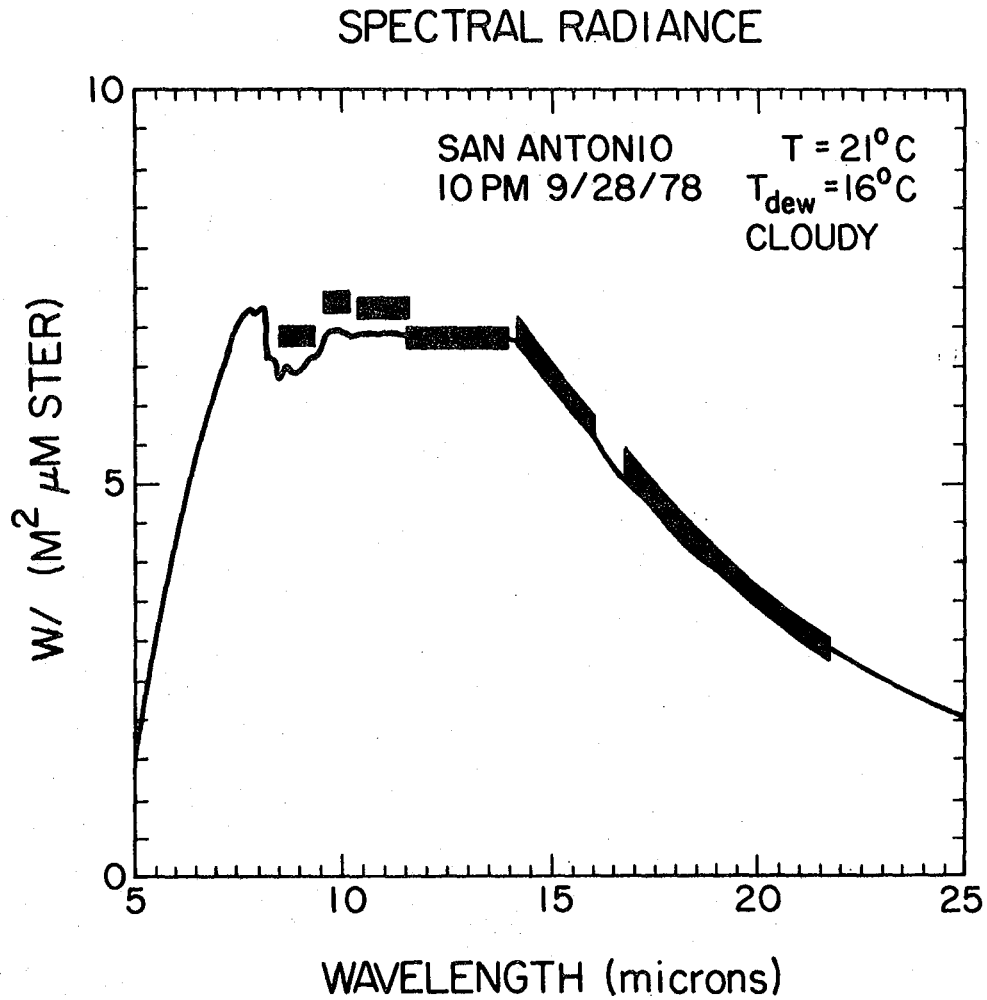

XBL 792 324

Figure 3: Spectral radiance, computed and measured under conditions virtually identical to those of Figure 2, but with a cloud in the field of view. In the computed spectrum, the cloud is regarded as a black body with an elevation of 4 km.

This report was done with support from the Department of Energy. Any conclusions or opinions expressed in this report represent solely those of the author(s) and not necessarily those of The Regents of the University of California, the Lawrence Berkeley Laboratory or the Department of Energy.

Reference to a company or product name does not imply approval or recommendation of the product by the University of California or the U.S. Department of Energy to the exclusion of others that may be suitable.

TECHNICAL INFORMATION DEPARTMENT  
LAWRENCE BERKELEY LABORATORY  
UNIVERSITY OF CALIFORNIA  
BERKELEY, CALIFORNIA 94720