

**Geologic Carbon Sequestration as a Global Strategy to Mitigate CO₂ Emissions:
Sustainability and Environmental Risk**

Curtis M. Oldenburg

Earth Sciences Division

Lawrence Berkeley National Laboratory

Berkeley, CA 94720

Glossary

Carbon dioxide capture and storage (CCS) - The capture of CO₂ from fossil-fuel power plants and other industrial point sources and its injection through wells into deep geologic formations for permanent storage.

Consequence - An impact arising from the occurrence of an event or process. For example, the consequence of high CO₂ concentrations in the atmosphere is global warming.

Geologic carbon sequestration (GCS) = Geologic CO₂ storage (GCS) - The last step of CCS in which CO₂ is injected through wells into deep subsurface formations for permanent storage.

Hazard - A potential impact or consequence of an event or process. For example, high CO₂ emissions are a hazard to climate because CO₂ is a greenhouse gas.

Likelihood - The probability or degree of potential for an event or process to occur. For example, the likelihood of CO₂ emissions to increase is very high given population growth and worldwide increases in standard of living.

Risk - The product of likelihood and consequence of an event or process. For example, the risk of climate change is very high because both the likelihood and the consequences are high.

Storage Resource (capacity) - Physical pore-space volume available for CO₂ storage irrespective of economics or regulations.

Storage Reserve (capacity) - Pore-space volume available for CO₂ storage including reductions accounting for economic, legal, environmental, and regulatory factors.

1. Definition of Subject and Its Importance

Carbon dioxide (CO₂) capture and storage (CCS) is a combination of technologies that addresses climate change by directly reducing the net CO₂ emissions arising from the use of fossil fuels as the main global primary energy source (1). In CCS as commonly envisioned, CO₂ will be captured from flue gases at point sources such as coal-fired power plants, compressed, transported by pipeline, and injected into deep geologic formations for permanent storage (i.e., geologic sequestration) (Figure 1).

The capture of CO₂ involves use of liquid sorbents, membranes, or other advanced materials that can extract CO₂ from a mixture of gases associated with power generation or other industrial processes in which CO₂ is often a minor component at relatively low pressure. Few such capture operations exist currently at more than the pilot scale. However, CO₂ occurs in many natural gas (methane, CH₄) fields at concentrations above those required for delivery to customers. Gas processing to remove CO₂ from natural gas has been carried out for decades, and at two gas fields nearly two million tonnes of captured CO₂ are re-injected annually for geologic sequestration (2, 3).

In power-plant capture, extraction of CO₂ can be done after combustion, so-called post-combustion capture, or during precombustion steps, which has the advantage of higher pressures and higher CO₂ concentrations (1). There are also direct-air capture approaches for CCS that make use of solid sorbents to capture CO₂ from ambient air rather than specifically at point sources (e.g., 4, 5). Direct-air capture has the advantage that it addresses emissions from all sources, including mobile CO₂ sources such as automobiles and trucks, but also the disadvantages of much lower CO₂ concentration and pressure.

Regardless of how CO₂ capture is accomplished, the process must be capable of providing a stream of CO₂ for compression and transport to sequestration sites. Although direct injection of CO₂ into the deep oceans has received a large amount of attention (e.g., 6), and numerous processes to accelerate uptake of atmospheric CO₂ by the oceans have been discussed (e.g., 7, 8, 9), concerns about permanence and impact to marine ecosystems are larger for ocean sequestration than for geologic sequestration (e.g., 10). This leaves geologic sequestration as the main approach under consideration for isolating from the atmosphere the vast quantities of CO₂ that will need to be captured and stored for CCS to play a role in mitigating climate change.

The extra expense involved in capturing, transporting, and injecting CO₂ in the CCS process can be expressed in terms of an energy penalty, i.e., the amount of energy that must be expended above business-as-usual fossil-fuel energy use. Estimates of the energy penalty for CCS vary over a wide range depending on combustion process, age of facility, distance to geologic storage site, etc., but are likely around 40% (1, 11). Whether stated in terms of dollars or energy penalty, the largest expense in CCS is capture (which also includes compression), currently projected to account for more than 60% of the cost of CCS (12).

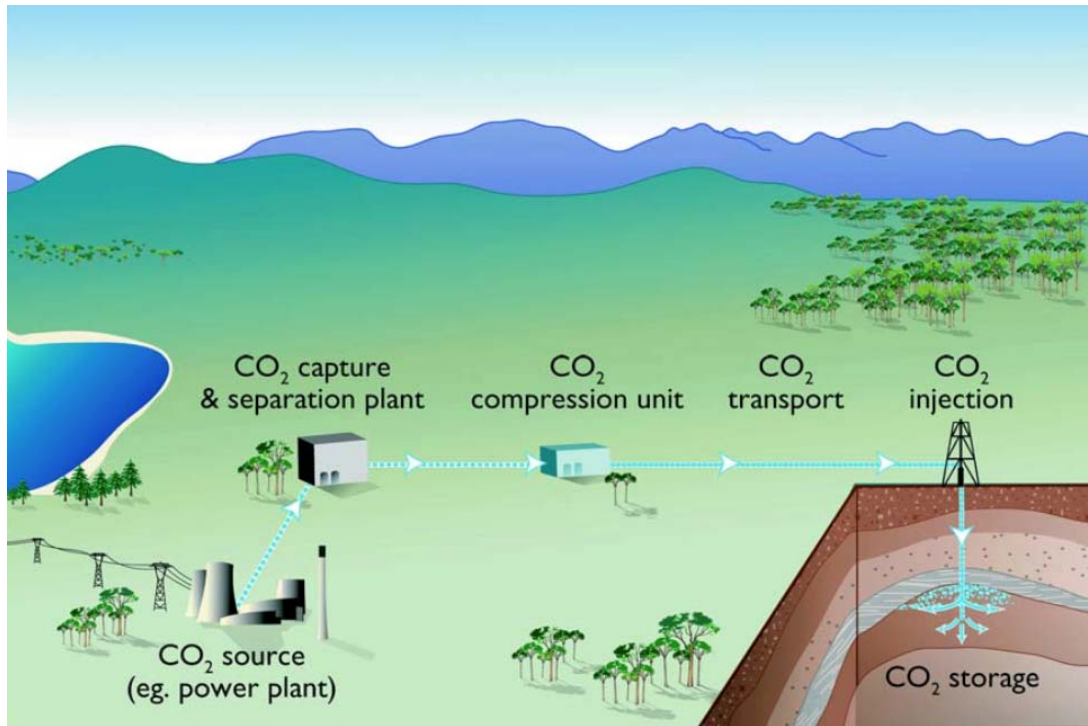


Figure 1. Schematic of the Carbon dioxide Capture and Storage (CCS) process (CO2CRC, <http://www.co2crc.com.au/aboutccs/>).

2. Introduction

Fossil fuels are abundant, inexpensive to produce, and are easily converted to usable energy by combustion as demonstrated by mankind's dependence on fossil fuels for over 80% of its primary energy supply (13). This reliance on fossil fuels comes with the cost of carbon dioxide (CO_2) emissions that exceed the rate at which CO_2 can be absorbed by terrestrial and oceanic systems worldwide resulting in increases in atmospheric CO_2 concentration as recorded by direct measurements over more than five decades (14). Carbon dioxide is the main greenhouse gas linked to global warming and associated climate change, the impacts of which are currently being observed around the world, and projections of which include alarming consequences such as water and food shortages, sea level rise, and social disruptions associated

with resource scarcity (15). The current situation of a world that derives the bulk of its energy from fossil fuel in a manner that directly causes climate change equates to an energy-climate crisis.

Although governments around the world have only recently begun to consider policies to avoid the direst projections of climate change and its impacts, sustainable approaches to addressing the crisis are available. The common thread of feasible strategies to the energy-climate crisis is the simultaneous use of multiple approaches based on available technologies (e.g., 16). Efficiency improvements (e.g., in building energy use), increased use of natural gas relative to coal, and increased development of renewables such as solar, wind, and geothermal, along with nuclear energy, are all available options that will reduce net CO₂ emissions. While improvements in efficiency can be made rapidly and will pay for themselves, the slower pace of change and greater monetary costs associated with increased use of renewables and nuclear energy suggests an additional approach is needed to help bridge the time period between the present and a future when low-carbon energy is considered cheap enough to replace fossil fuels. Carbon dioxide capture and storage (CCS) is one such bridging technology (1).

CCS has been the focus of an increasing amount of research over the last 15-20 years and is the subject of a comprehensive IPCC report that thoroughly covers the subject (1). CCS is currently being carried out in several countries around the world in conjunction with natural gas extraction (e.g., 2, 3) and enhanced oil recovery (17). Despite this progress, widespread deployment of CCS remains the subject of research and future plans rather than present action on the scale needed to mitigate emissions from the perspective of climate change. The reasons for delay in deploying CCS more widely are concerns about cost (18), regulatory and legal uncertainty (19), and potential environmental impacts (21).

This chapter discusses the long-term (decadal) sustainability and environmental hazards associated with the geologic CO₂ storage (GCS) component of large-scale CCS (e.g., 20). Discussion here barely touches on capture and transport of CO₂ which will occur above ground and which are similar to existing engineering, chemical processing, and pipeline transport activities and are therefore easier to evaluate with respect to risk assessment and feasibility. The focus of this chapter is on the more uncertain part of CCS, namely geologic storage. The primary concern for sustainability of GCS is whether there is sufficient capacity in sedimentary basins worldwide to contain the large of amounts of CO₂ needed to address climate change. But there is also a link between sustainability and environmental impacts. Specifically, if GCS is found to cause unacceptable impacts that are considered worse than its climate-change mitigation benefits, the approach will not be widely adopted. Hence, GCS has elements of sustainability insofar as capacity of the subsurface for CO₂ is concerned, and also in terms of whether the associated environmental risks are acceptable or not to the public.

3. Carbon Dioxide (CO₂) Capture and Storage (CCS): How Does it Work?

In order to understand the main environmental hazards and sustainability issues associated with GCS, the basic principles of CCS must be understood. First, CO₂ gas compresses into a relatively high-density form at the pressures and temperatures encountered below approximately 1 km in the earth's crust. In this dense form, called its *supercritical* form because it is neither strictly liquid nor strictly gas, a larger amount of CO₂ can be stored per unit volume than if CO₂ is stored as a gas at shallower levels in the crust. The density of CO₂ at depths greater than 1 km in the crust ranges from around 600 kg/m³ to 850 kg/m³ depending on the geothermal gradient. The maximum depths targeted for GCS are typically in the range of 1-4 km, with the maximum depth dictated by the economics of deep wells and the decreasing

permeability of deep sedimentary rock. The density of CO₂ is nearly constant at these depths as the effects on CO₂ density of increasing temperature approximately compensate for increasing pressure in typical sedimentary basins (21). Although CO₂ is very dense at depth relative to its gaseous form at the ground surface and can therefore be volumetrically sequestered very efficiently in the deep subsurface, it will always be buoyant relative to the native fluids (saline groundwater or brine) in the subsurface and tend to rise up through them if a flow path is available.

Second, global tectonics have created sedimentary basins on all of the continents in which sediment deposition over geologic time scales has produced thick sequences of sedimentary rock capable of storing CO₂ (22). There is a vast amount of pore space in these sedimentary rocks arising from the imperfect packing of individual rock grains and incomplete cement filling of the space (pores) between the grains. Significant space can also sometimes arise from pervasive fracturing of the rock. In addition, sedimentary rocks commonly exist in alternating sequences of sandstones (relatively coarse-grained, with high porosity and permeability) and shales (fine-grained, with low permeability) making a configuration in which some sedimentary layers are porous and permeable and others are relatively impermeable. The fine-grained and low-permeability formations are the cap rocks that provide the upper seal for the high-porosity and permeability reservoirs into which CO₂ can be injected in the process of GCS.

Four different primary trapping mechanisms are recognized to occur in the deep subsurface to permanently sequester CO₂ (20). These include:

1. Structural and stratigraphic trapping, which occurs when buoyant CO₂ flows up and becomes trapped against fine-grained and very low-permeability overlying cap rock often in dome-shaped structures. This is the same mechanism that traps oil and natural gas.
2. Residual gas trapping, the process in which CO₂ bubbles are left trapped in the pores of the rock as CO₂ and water flows through the reservoir (e.g., by buoyancy forces) and water in-fills the pores previously occupied by CO₂. This is the same process that occurs in oil reservoirs as water replaces oil and prevents full recovery motivating various enhanced oil recovery approaches.
3. Solubility trapping, the process in which CO₂ dissolves into the saline water or brine in the reservoir rock. This same process of CO₂ dissolution occurs to create both natural and man-made carbonated beverages.
4. Mineral trapping, which occurs as CO₂ dissolved in the native water reacts with minerals and other dissolved constituents to form new carbonate minerals. This is analogous to the precipitation of travertine that forms in some hot (and cold) spring waters after discharge.

CO₂ injected into the deep subsurface will tend to be trapped by all four of these mechanisms in proportions that vary over time. For example, mineral trapping depends on dissolution (e.g., 23) and precipitation of mineral phases that can take on the order of 100's to 1,000's of years (24, 25). Considered together, the fractions of trapping by residual gas and solubility and mineral precipitation processes tend to increase over time, while the fraction of CO₂ trapped by structural and stratigraphic trapping decreases (20). As sequestered CO₂ progresses over time through the sequence of structural and stratigraphic, residual gas, solubility,

and mineral trapping mechanisms, CO₂ storage is considered to become more permanent over time (20).

One process that has similarities to GCS is natural gas storage, carried out at over 450 sites in the U.S. (26). In this process, methane (CH₄) produced from natural gas reservoirs in one location is re-injected into depleted natural gas reservoirs or aquifer storage reservoirs for temporary storage until market demand (e.g., a cold or hot spell) exceeds supply at which time extra gas is produced from the storage reservoir. In the U.S., the amount of natural gas stored is much smaller than the amount of CO₂ that is produced from fossil-fuel power plants (approximately six times less CH₄ by volume (7.5 Tcf = 1.4×10^8 tonnes (27)) is stored overall than there is CO₂ produced at fossil-fuel power plants (47 Tcf = 2.4×10^9 tonnes) per year). Furthermore, the natural gas storage industry uses the same reservoir for decades of injection and production cycles, whereas the GCS industry would need to continuously develop new reservoirs. So while the processes are very similar and much can be learned from the natural gas storage industry, the scale of the GCS industry will need to be much larger (e.g., 28, 29) in order for it to have an effect on climate change mitigation.

4. Opportunity and Capacity

As mentioned above, sedimentary basins in the U.S. and around the world are the primary targets for large-scale GCS (22, 1). Shown in Figure 2 are sedimentary basins (blue) in the U.S. and Canada with hydrocarbon-producing regions shown in red. As shown, there are large areas of the U.S. and Canada that are potential sinks for CO₂. Most of the opportunity is in sedimentary basins on the continent, but offshore opportunities are also being pursued (e.g., 30). Economics and regulatory and environmental considerations will govern the extent to which

offshore options are viable. Current efforts in North America are mostly aimed at onshore GCS opportunities, while in Europe primarily off-shore opportunities are pursued.

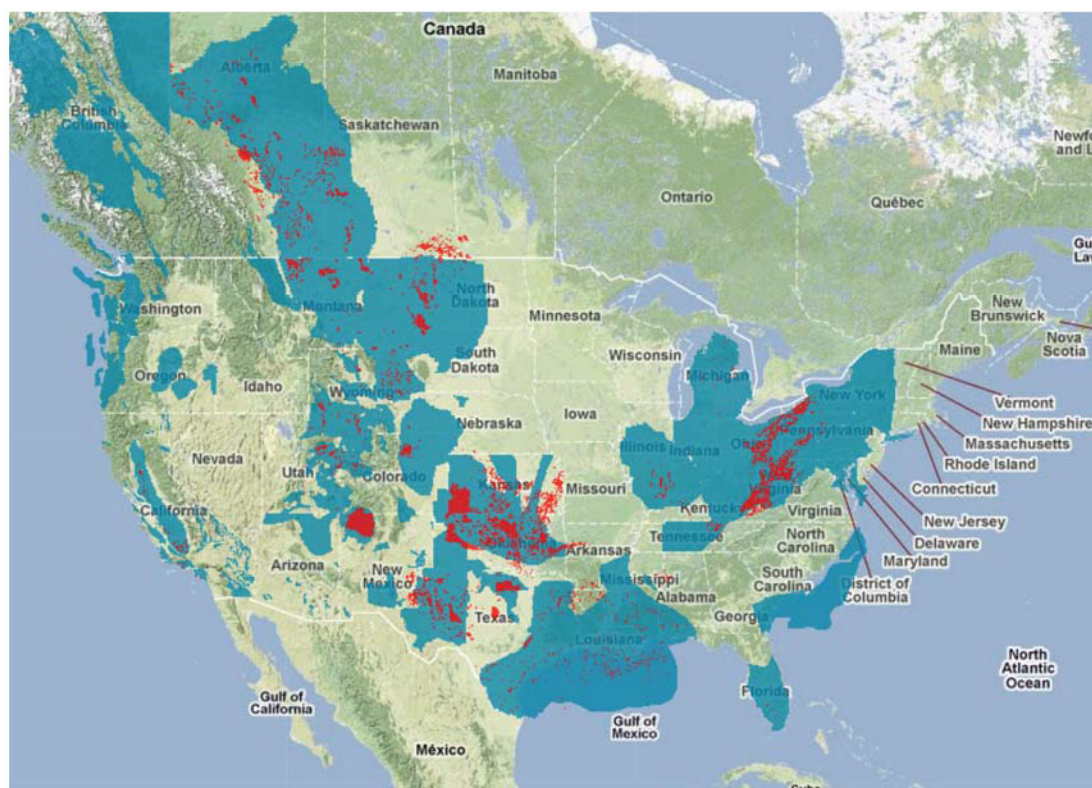


Figure 2. Sedimentary basins (blue) in the U.S. and Canada considered good targets for potential geologic storage of CO₂, with oil and gas producing regions shown in red (31).

Sustainability and feasibility of GCS are largely dependent on capacity. Evaluations have shown there is more than enough capacity to store point-source CO₂ emissions for hundreds of years or more (e.g., 1). However, large capacity is a necessary but not sufficient condition for GCS feasibility. First, large capacity does not equate to adequate injectivity, i.e., there may be large porosity in some formations that have low permeability or are highly compartmentalized

which would require more wells to inject CO₂ than the economics of a project could support. Second, capacity may not be available in close proximity to large CO₂ sources necessitating long pipeline transport distances and associated extra costs (32). Some of this transport cost can be accommodated under reasonable projections of CO₂ storage economics, but clearly the closer the sink is to the source, the better. Finally, this discussion points out that there are two different types of capacity, namely, resource and reserve capacity (e.g., 33). Most evaluations to date have focused on resource capacity, i.e., the total amount of pore space available regardless of where it is located or what it takes to access it. As described in the glossary, reserve capacity is the more practical measure of capacity, because it includes not only economics but also policy, environmental, and regulatory restrictions and limitations on capacity. By this definition, reserve capacity is a fraction of resource capacity, and reserve capacity can change over time as economics or regulations change.

Although different methods to estimate capacity have led to wide variations in capacity estimates over various regions (e.g., 34), there is no doubt that there is an enormous amount of resource capacity available. In short, resource capacity does not at present appear to limit the long-term (decadal) sustainability of GCS. On the other hand, resource capacity is not the only measure of feasibility. One must take into account potential environmental impacts associated with GCS such as the possibility of groundwater contamination and induced seismicity, since the environmental risks and costs may be unacceptable to the public.

5. Potential impacts

The injection of large quantities of CO₂ into the deep subsurface through wells is clearly a large perturbation to the local natural system in terms of changing the composition and

pressure of the native fluids. Specifically, CO₂ will partially dissolve into the native saline groundwater or brine while also pushing these native fluids outward away from the well as a relatively fast-moving pressure wave. The deep fluid injection process is very well known and practiced widely for injection of various fluids today (35, 26, 19) —and the reverse, production of fluids through wells such as oil, gas, and groundwater are similarly practiced widely under regulatory frameworks aimed at protecting against adverse consequences. Nevertheless, the novelty of CCS associated with the large volume of CO₂ that needs to be injected motivates discussion of what can go wrong and what general impacts are possible. This discussion will serve to evaluate which impacts are the most likely and which have the greatest consequences. This in turn will allow focus to be placed on the highest environmental risks so they can be avoided altogether, or assessed and mitigated if unavoidable.

Broadly, impacts of CCS can be broken down into those occurring at depth with no discharge of CO₂ into the atmosphere (i.e., the CO₂ storage objective is achieved even as other consequences occur), and those that involve CO₂ discharging into the atmosphere. Presented in Table 1 are potential impacts of geologic CO₂ storage broken down into these two broad categories.

Table 1. Shallow (top part of table) and deep (bottom part of table, shaded) processes and potential impacts of GCS (Oldenburg, 2007).

Category	Scenario	Significance	References
CO ₂ enters the atmosphere	Root zone impacts	Profound, visible impact on plants, trees, crops	(36, 37)
	Migration in to vadose zone	May include root zone and entry into buildings	(38)
	Bubbling through surface water	Alters water quality (e.g., lowering pH)	(39)
	Accumulation in topographic lows	Very hazardous due to possibility of asphyxiation	(40, 38)
	Seepage into basements and homes	Very hazardous due to possibility of asphyxiation	(41)
	Ground plumes	Very hazardous due to possibility of asphyxiation	(40, 42, 43)
CO ₂ may or may not enter atmosphere	Intrusion of CO ₂ into potable water	Lowers pH, dissolves minerals potentially releasing heavy metals	(44, 45)
	Intrusion of CO ₂ into hydrocarbon, mineral, or geothermal resources	Lowers value of natural gas or mineral resources such as potash	
	Displacement of saline groundwater or brine into potable water by regional pressurization	Saline water intrusion into potable water degrades water quality	(45, 46, 47)
	Induced seismicity	CO ₂ injection pressure may cause felt earthquakes	(48, 49)

While the impacts arising from CO₂ leaking upward into the vadose zone, root zone, surface water, and out of the ground may be very serious, such occurrences all require a conduit or flow pathway from the deep injection zone to the near-surface environment, such as an improperly abandoned well or conductive fault. Any GCS project that had moderate to high potential for the leakage scenarios in the upper part of Table 1 would presumably not be

undertaken assuming effective risk management, insurance, and regulatory processes are in place. Furthermore, theoretical studies aimed at finding ways that CO₂ could be catastrophically released from CO₂ storage sites leading to the most serious impacts at the ground surface have found self-limiting fluid interference behaviors rather than run-away behaviors (50). Finally, the impacts described in the upper part of Table 1 are associated with failures of GCS in that CO₂ will enter the atmosphere negating the sequestration objective. Assuming an adequate monitoring program is in place, these leakage events would be relatively obvious and appropriate changes in operations and remedial actions could be carried out.

In the exceptional case of the occurrence of an uncontrolled CO₂ leak from a well into the atmosphere, the main consequence of concern is asphyxiation of workers or bystanders. Documented CO₂ well blowouts associated with oil production indicate the asphyxiation hazard is low for blowouts occurring in open environments (e.g., 51, 52). Modeling studies of open-air scenarios have also found that the area of asphyxiation hazard around a blowout is small because dispersion acts to rapidly decrease concentrations (53).

In contrast to a well blowout or the scenarios in the upper part of Table 1, it may be much more difficult to detect the onset and development of the scenarios listed in the lower part of the table in order to take early action to limit impacts. Although the scenarios listed in the lower part of Table 1 do not involve CO₂ entering the atmosphere and thus do not involve outright failure of GCS, the intrusion of CO₂ or saline groundwater or brine into groundwater resources and injection-induced seismicity are considered the main hazards associated with GCS that are likely enough to warrant risk assessment and related regulatory measures in order to minimize the likelihood of their occurrence and their consequences. These two categories of risk, described in

more detail below, must be assessed and managed as part of widespread, long-term, and sustainable GCS deployment.

6. Potential impacts to potable groundwater

CO₂ that leaks upward out of the storage region through wells (e.g., 54, 55), or faults and fractures (56), can potentially enter potable groundwater resources as shown schematically in Figure 3a. Degradation of the groundwater quality is possible through indirect contamination. As CO₂ dissolves into groundwater, it partitions into species comprising dissolved inorganic carbon (DIC) as CO₂(aq), HCO₃⁻, and CO₃²⁻, resulting in a decrease in the solution pH. At the same time, alkalinity is controlled by HCO₃⁻ and CO₃²⁻, which can increase upon CO₂ dissolution. Control over the geochemical changes in the water is provided by the composition and mineralogy of the mineral grains, coatings, and cements present in the rock. For example, a carbonate mineral in the rock such as calcite (CaCO₃) will dissolve by the reaction $\text{CO}_2 + \text{H}_2\text{O} + \text{CaCO}_3 = \text{Ca}^{2+} + 2\text{HCO}_3^-$, resulting in the doubling of dissolved inorganic carbon (DIC) (i.e., one mole of CO₂ reacts to produce two moles of HCO₃⁻) and a release of Ca²⁺ to solution. Similar reactions are possible involving alteration of biotite, plagioclase and alkali feldspar, and other common minerals in sedimentary rocks (e.g., 25).

CO₂ or saline groundwater and brine leakage into groundwater aquifers will also give rise to impacts on microbiological communities (57). Although cell density declines by 3-6 orders of magnitude from the ground surface to 4 km depth, microbes at the depths of potable groundwater can be affected if CO₂ or brine intrudes into this region. The alteration of minerals such as feldspars by acidic groundwater can release iron which can stimulate Fe³⁺-reducing communities

and result in methanogenesis. Clearly, microbial processes can affect geochemistry and vice versa.

Assuming the reaction kinetics allow it, geochemical reactions can further alter pH, DIC, isotopic composition, and trace element concentrations in solution. For example, trace elements in the minerals, in coatings, or in ion exchange sites in clays (including heavy metals such as lead) may be released into groundwater as biogeochemical conditions change with associated degradation of groundwater quality (58, 44). Observations of such effects have been made during CO₂ injection experiments at field sites (e.g., 59, 60) and in the laboratory (61). Recent work has further assessed the potential for such reactions by examining actual groundwater compositions and aquifer mineralogy from across the U.S., and found that increases in the concentration of As and Pb could be a concern if widespread CO₂ leakage into groundwater resources were to occur (45). Buffering reactions may serve to moderate pH decline and may serve to diminish groundwater degradation as observed in a natural analog study in New Mexico (62). In summary, it is recognized that impacts of CO₂ leakage on potable groundwater may be significant and costly if they occur, and therefore careful monitoring, GCS operations, and site selection (e.g., 63) are essential to reduce groundwater contamination risk.

Another hazard to groundwater resources is the potential intrusion of displaced saline groundwater or brine or CO₂-charged water into potable groundwater as shown in Figure 3b. In addition to the above biogeochemical impacts arising from the CO₂ itself, there is the first-order degradation arising from the presence of dissolved solids (e.g., NaCl, CaCl₂, KCl) in the saline groundwater or brine along with whatever trace elements it may contain. Potable groundwater in the U.S. is defined on the basis of total dissolved solids (TDS) content equal to 10,000 mg/L or less. Injection into deep aquifers is regulated in the U.S. by the Environmental Protection

Agency (EPA) under the Underground Injection Control (UIC) program to protect potable groundwater from degradation (e.g., 64, 35). The hazard arising from GCS is that deep saline water or brine pressurized by CO₂ injection may tend to migrate upward into potable groundwater aquifers, thereby increasing TDS and degrading the resource.

The main reason that saline groundwater or brine intrusion arising from GCS is such a concern is that pressure increases associated with CO₂ injection can occur at great distances (~10-100 km) from the injection site (65, 46, 47, 66). So while characterization of a given site may have demonstrated that CO₂ will be contained within a well-defined CO₂ storage region, there will generally be a large region of pressure increase in the formation that may not have been characterized to the same degree because of the large distance from the injection site. Because of this, it is possible that the cap rock may not be continuous over these large distances, or may not have the same integrity as the region targeted for CO₂ storage. Nevertheless, in order for upward saline groundwater or brine intrusion to occur, there must be a driving force in addition to the conduit or pathway (e.g., improperly abandoned well, or fault or fracture zone). Although pressure rise is high near the CO₂ injection wells, it falls off rapidly away from the injection wells. In addition, dense brines with high TDS require overpressures to be driven upward into potable groundwater through wells or other conduit (e.g., conductive fault) due to their high density and resistance to flow (67). Furthermore, once in the potable aquifer, the higher density of the brine will tend to limit the extent of its mixing with potable groundwater (68).

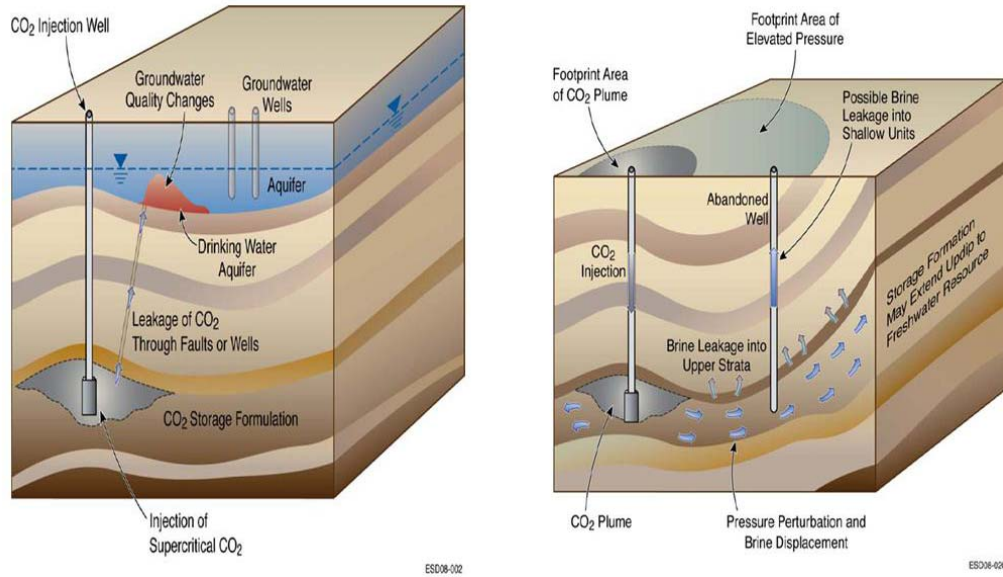


Figure 3. Potential groundwater impact scenarios. Left-hand figure from (45), right-hand figure from (47).

7. Induced seismicity

The phenomenon of induced seismicity due to fluid injection has been recognized for approximately 50 years starting with the well-known example of injected fluid waste disposal at the Rocky Mountain Arsenal in Colorado (69, 70, 71). Induced seismicity is well understood from experience in the fields of injection for deep disposal of liquid waste, and injection for geothermal energy extraction (72, 48, 49). Induced seismicity is caused by the reduction in effective stress that accompanies an increase in pore pressure. The potential for induced seismicity is determined by the Mohr-Coulomb criterion which quantifies the amount of normal stress beyond that provided by fluid pressure that is needed before shear failure occurs (i.e., reactivation of existing faults or slippage along fractures). The Mohr-Coulomb criterion is given by the relation $\tau = C + \mu (\sigma_n - p)$ where τ is the shear strength of the rock, C is the Coulomb criterion, μ is the coefficient of internal friction, σ_n is the normal stress, and p is the fluid

pressure (e.g., 73). When the right-hand side (normal stress) is smaller than the left-hand side (shear strength), the rock is likely to slip along fracture planes of optimal orientation, which releases seismic energy (i.e., causes an earthquake). The Mohr-Coulomb equation shows that injection pressure reduces the effective normal stress in the rock, hence the tendency for injection to cause slippage along existing faults and fractures as shown in Figure 4a.

A simple graphical representation of pressures as a function of depth helps elucidate the processes active near an injection well. Shown in Figure 4b are the variations with depth of hydrostatic pressure, so-called fracture pressure (or commonly frac pressure), and lithostatic pressure. As shown, fluid pressure at an injection well must be larger than hydrostatic pressure in order for injection to occur. However, if the pressure exceeds the frac pressure at a given depth, the injection process will tend to fracture the formation. By the Mohr-Coulomb criterion, seismicity can be induced at injection pressures below the frac pressure as effective stress decreases and existing faults are reactivated. Either the generation of new fractures, or slippage along existing faults and fractures, is manifest as induced seismicity.

It is important to note that while the word *earthquake* evokes fear and a certain image of destruction in most people's minds, the term encompasses a wide range of magnitudes, from microseismic earthquakes that cannot be felt by humans, to great earthquakes that imperil life and damage structures. Earthquakes tend to follow a logarithmic frequency distribution such that very small earthquakes are orders of magnitude more frequent than very large earthquakes (74). Experience from water injection into geothermal systems shows that the majority of induced seismicity is microseismicity, with felt earthquakes much rarer, and moderate to large earthquakes rarer still (48). Despite the fact that large earthquakes are not expected to be

induced by CO₂ injection in carefully chosen sites (75), the hazard of induced seismicity is looming large at present in the area of public acceptance of GCS.

Aside from the hazard of ground acceleration at the surface, induced seismicity also creates the possibility that a cap rock seal could fracture or a fault could become permeable giving rise to a leakage pathway for CO₂ (e.g., 76, 73). This is a well-recognized failure mode, and injection regulations are aimed at preventing fracturing from happening. However, induced seismicity of critically stressed rocks on pre-existing faults and fractures is still possible even when the frac pressure is not exceeded. The extent to which the risk of induced seismicity, objectively considered to be a small risk, outweighs the benefits in terms of risk reduction of climate change that CCS affords, is one of the questions that must be addressed by the public and decision-makers to guide their acceptance of CCS.

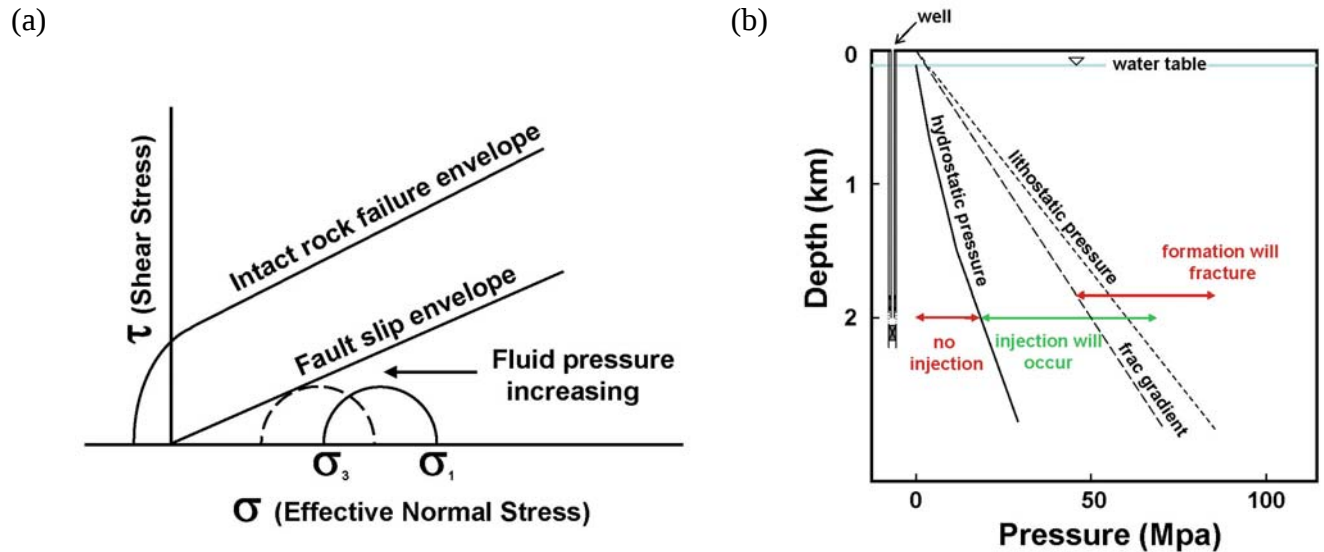


Figure 4. Mohr Circle representation of fault slip (induced seismicity) as fluid pressure increases, and (b) pressure-depth depiction showing hydrostatic, frac, and lithostatic pressure gradients.

8. Future Directions

As the discussion here suggests, one approach that can aid in addressing the energy-climate crisis is CCS. There are significant costs to CCS, primarily associated with capture, and CCS also brings with it recognized environmental risks the most uncertain of which are associated with the geologic storage component of the process. The main risks in GCS are threat to potable groundwater and induced seismicity, two areas of active research. Despite the need for greater understanding of these hazards, mitigation measures are available today. For example, if contamination of groundwater were to occur, the water could be treated, or alternate sources could be found if treatment is found impractical (63). As for induced seismicity, the hazard can be reduced by reducing injection pressure (e.g., through use of more wells for a given CO₂ source), carrying out pressure management through saline groundwater or brine extraction, by careful site selection that avoids heavily faulted and tectonically active areas, and by establishing and enforcing building codes.

The path forward for demonstrating and deploying CCS, as a sustainable part of the portfolio of energy production and use changes that are needed to mitigate the energy-climate crisis, can be described as follows. First, testing and demonstration projects (e.g., 77, 78) that include CO₂ capture from anthropogenic sources need to expand rapidly and by many factors so that the technology can be perfected in different regions and geologic settings. These multiple demonstration projects will show how GCS works, and if GCS continues to perform as envisioned, additional CCS deployments can be added over time. Second, research on capture and alternative combustion approaches that enable more efficient capture should be accelerated. Third, a large program of site characterization and capacity studies (e.g., 79) should be undertaken so that the well-known large basin-scale sites are understood and operational plans

can be put in place quickly at the time when large-scale capture facilities come on line and anthropogenic CO₂ streams become available for sequestration. Fourth, research on injection, trapping, migration, long-term fate, leakage impacts, mitigation, monitoring, and modeling should be continued so that GCS can be optimized and related technologies can be commercialized and deployed in a cost-effective manner. Fifth, governments at all levels should promulgate regulatory and economic policies that answer the current questions and uncertainty faced by businesses who foresee the broad outlines of a carbon-constrained future but do not yet have the clear ground rules (e.g., policies on carbon pricing, injection regulations, and legal frameworks) provided by government that are necessary for making the large capital investments required for CCS.

The decision to take on the costs and risks of GCS, with the accompanying promise of contributing to reductions in the extent of climate change, should be made based on an objective comparison against the climate and environmental risks of carrying on business as usual with fossil-fuel use and unabated CO₂ emissions. The public and decision-makers should keep in mind that the environmental risks of CCS are local to the basin where GCS is carried out, whereas the projected impacts of climate change are global-to-regional in scale and are expected to have profound consequences for the social, physical, and natural systems on Earth. Support for GCS technology will come in the form of policy decisions about carbon pricing, injection regulations, and legal frameworks that encourage commercial applications of CCS. The decision about whether to adopt these policies will ultimately fall on the public or its representatives. The risks to the Earth's environment and social systems of doing nothing about the energy-climate crisis must be communicated effectively to the public and the decision makers so that they can

make an informed decision about acceptable risks and costs of the various options available for avoiding the worst impacts of climate change.

Bibliography

Primary Literature

1. IPCC Special Report on Carbon Dioxide Capture and Storage (2005a) B. Metz, O. Davidson, H.C. de Coninck, M. Loos and L.A. Meyer, Editors,. Prepared by Working Group III of the Intergovernmental Panel on Climate Change, Cambridge University Press, Cambridge, UK.
2. Torp, TA and J Gale (2004) Demonstrating storage of CO₂ in geological reservoirs: The Sleipner and SACS projects, *Energy*, 29(9-10), 1361-1369.
3. Mathieson, A, J Midgley, K Dodds, I Wright, P Ringrose and N Saoul (2010) CO₂ sequestration monitoring and verification technologies applied at Krechba, Algeria, *The Leading Edge*; 29(2), 216-222.
4. Keith, DW, M Ha-Duong and JK Stolaroff (2006) Climate Strategy with CO₂ Capture from the Air, *Climatic Change*, 74(1-3), 17-45.
5. Lackner, K (2010) Washing Carbon Out of the Air, *Scientific American Magazine*, *Scientific American* 302, 66 – 71, doi:10.1038/scientificamerican0610-66.
6. Brewer, PG, G Friederich, ET Peltzer, FM Orr Jr (1999) Direct experiments on the ocean disposal of fossil fuel CO₂, *Science*, 284(5416), 943-945.
7. Caldeira, K and GH Rau (2000) Accelerating carbonate dissolution to sequester carbon dioxide in the ocean: Geochemical implications, *Geophysical Research Letters*, 27(2), 225-228.
8. Chisholm, SW, PG Falkowski and JJ Cullen (2001) Dis-crediting ocean fertilization, *Science* 294(5541), 309-310.
9. Buesseler, KO and PW Boyd (2003) Will Ocean Fertilization Work?, *Science*, 300(5616), 67-68.
10. Shaffer, G (2010) Long-term effectiveness and consequences of carbon dioxide sequestration, *Nature Geoscience* 3, 464 - 467.
11. House, KZ, CF Harvey, MJ Aziz and DP Schrag (2009) The energy penalty of post-combustion CO₂ capture & storage and its implications for retrofitting the U.S. installed base, *Energy Environ. Sci.*, 2009 DOI: 10.1039/b811608c.
12. McKinsey and Co. (2008) Carbon capture and storage: Assessing the economics, McKinsey&Company, 49 pp.
13. IEA, Key World Energy Statistics (2009) International Energy Agency (IEA), Paris, http://www.iea.org/textbase/nppdf/free/2009/key_stats_2009.pdf
14. Keeling, RF, SC Piper, AF Bollenbacher and JS Walker (2009) Atmospheric CO₂ records from sites in the SIO air sampling network. In *Trends: A Compendium of Data on Global*

- Change. Carbon Dioxide Information Analysis Center, Oak Ridge National Laboratory, U.S. Department of Energy, Oak Ridge, Tenn., U.S.A. doi: 10.3334/CDIAC/atg.035.
15. IPCC, Climate Change 2007: Synthesis Report. Contribution of Working Groups I, II and III to the Fourth Assessment Report of the Intergovernmental Panel on Climate Change (2007) [Core Writing Team, Pachauri, RK and Reisinger, A (Eds.)]. IPCC, Geneva, Switzerland, 104 pp.
 16. Pacala, S and R Socolow (2004) Stabilization wedges: solving the climate problem for the next 50 years with current technologies, *Science*, 13 (vol. 305. no. 5686), 968 – 972.
 17. Preston, C, M Monea, W Jazrawi, K Brown, S Whittaker, D White, D Law, R Chalaturnyk and B Rostron (2005) IEA GHG Weyburn CO₂ monitoring and storage project, Fuel Processing Technology, 86(14-15), 1547-1568.
 18. Rubin, ES, C Chen and AB Rao (2007) Cost and performance of fossil fuel power plants with CO₂ capture and storage, *Energy Policy*, 35(9), 4444-4454.
 19. Wilson, EJ and D Gerard (2007) Risk Assessment and Management for Geologic Sequestration of Carbon Dioxide, in *Carbon Capture and Sequestration Integrating Technology, Monitoring, and Regulation*, EJ Wilson and D Gerard (Eds.), pp 101-125, Blackwell Publishing.
 20. IPCC Special Report on CO₂ Capture and Storage, Chap. 5, S.M. Benson and P.J. Cook (Eds.) (2005b) Cambridge University Press, UK.
 21. Oldenburg, CM (2007) “Migration mechanisms and potential impacts of CO₂ leakage and seepage,” in Wilson and Gerard, editors, *Carbon Capture and Sequestration Integrating Technology, Monitoring, and Regulation*, pp 127-146, Blackwell Publishing, LBNL-58872.
 22. Bachu, S (2003) Screening and ranking of sedimentary basins for sequestration of CO₂ in geological media in response to climate change, *Environmental Geology*, 44(3), 277-289.
 23. Spycher, N, J Ennis-King and K Pruess (2003) CO₂-H₂O mixtures in the geological sequestration of CO₂. Assessment and calculation of mutual solubilities from 12 to 100 C and up to 600 bar. *Geochemica et Cosmochimica Acta*, 67, 3015-3031.
 24. Gunter, WD, S Bachu and S Benson (2004) The role of hydrogeological and geochemical trapping in sedimentary basins for secure geological storage of carbon dioxide, Geological Society, London, Special Publications, 233, 129-145.
 25. Xu, T, JA Apps and K Pruess (2005) Mineral sequestration of CO₂ in a sandstone-shale system, *Chemical Geology*, 217(1-4), 295–318.
 26. Benson, SM, R Hepple, J Apps, C-F Tsang and M Lippmann (2002) Lessons learned from natural and industrial analogues for storage of carbon dioxide in deep geological formations, E.O. Lawrence Berkeley National Laboratory Report LBNL-51170.
 27. Katz, DL and MR Tek (1981) Overview on Underground Storage of Natural Gas, *Journal of Petroleum Technology*, 33(6), 943-951.
 28. USGS (2010) http://energy.er.usgs.gov/health_environment/co2_sequestration/co2_illustrations.html (accessed October 6, 2010)
 29. Haszeldine, RS (2009) Carbon Capture and Storage: How Green Can Black Be?, *Science*, 325(5948), 1647 – 1652.
 30. Shrag, DP (2009) Storage of carbon dioxide in offshore sediments, *Science*, 325, 1658-1659.

31. NATCARB (2008) U.S. Department of Energy, Carbon Sequestration Atlas of the United States and Canada, Office of Fossil Energy, National Energy Technology Laboratory. <http://geoportal.kgs.ku.edu/natcarb/atlas08/gsinks.cfm> (accessed October 6, 2010)
32. McCoy, ST and ES Rubin (2008) An engineering-economic model of pipeline transport of CO₂ with application to carbon capture and storage, *International Journal of Greenhouse Gas Control*, 2(2), 219-229.
33. Brennan, ST, Burruss, RC, Merrill, MD, Freeman, PA and Ruppert, LF (2010) A probabilistic assessment methodology for the evaluation of geologic carbon dioxide storage: U.S. Geological Survey Open-File Report 2010–1127, 31 p., available only at <http://pubs.usgs.gov/of/2010/1127> (accessed October 6, 2010)
34. Bradshaw, J, S Bachu, D Bonijoly, R Burruss, S Holloway, NP Christensen and OM Mathiassen (2007) CO₂ storage capacity estimation: Issues and development of standards, *Int. J. of Greenhouse Gas Control*, 1, 62-68.
35. USEPA (United States Environmental Protection Agency), Technical Program Overview, Underground injection control regulations, Office of Water 4606, EPA 816-R-02-025, revised July 2001. <http://www.epa.gov/safewater/uic/index.html> (accessed October 10, 2010)
36. Qi, J, JD Marshall and KG Matson (1994) High soil carbon dioxide concentrations inhibit root respiration of Douglas Fir, *New Phytology*, 128, 435-441.
37. Farrar, CD, ML Sorey, WC Evans, JF Howie, BD Kerr, BM Kennedy, C-Y King and JR Southon (1995). Forest-killing diffuse CO₂ emission at Mammoth Mountain as a sign of magmatic unrest, *Nature*, 376, 675-677.
38. Oldenburg, CM and AJA Unger (2003). On leakage and seepage from geologic carbon sequestration sites: unsaturated zone attenuation, *Vadose Zone Journal*, 2(3), 287-296.
39. Oldenburg, CM and JL Lewicki (2005) Leakage and seepage of CO₂ from geologic carbon sequestration sites: CO₂ migration into surface water, *Lawrence Berkeley National Laboratory Report LBNL-57768*.
40. Giggenbach, WF, Y Sano and HU Schmincke (1991) CO₂-rich gases from Lakes Nyos and Monoun, Cameroon; Laacher See, Germany, Dieng, Indonesia, and Mt. Gambier, Australia- variations on a common theme, *J. Volcanol. Geotherm. Res.*, 45, 311-323.
41. Robinson, AL, RG Sextro and WJ Riley (1997) Soil-gas entry into houses driven by atmospheric pressure fluctuations—the influence of soil properties, *Atmospheric Environment*, 31(10), 1487–1495.
42. Hanna, SR and KW Steinberg (2001) Overview of Petroleum Environmental Research Forum (PERF) Dense Gas Dispersion Modeling Project, *Atmospheric Environment*, 35, 2223-2229.
43. Britter, RE (1989) Atmospheric dispersion of dense gases, *Ann. Rev. Fluid Mech.*, 21, 317–344.
44. Wang, S and PR Jaffe (2005) Dissolution of a mineral phase in potable aquifers due to CO₂ releases from deep formations; effect of dissolution kinetics, *Energy Conversion and Management*, 45, 2833–2848.
45. Apps, JA, L Zheng, Y Zhang, T Xu and JT Birkholzer (2010) Evaluation of potential changes in groundwater quality in response to CO₂ leakage from deep geological storage, *Transport in Porous Media*, 82, 215-246.

46. Birkholzer, JT, Q Zhou, C-F Tsang (2009) Large-scale impact of CO₂ storage in deep saline aquifers: a sensitivity study on the pressure response in stratified systems. *International Journal of Greenhouse Gas Control* 3(2), 181–194.
47. Birkholzer, JT and Q Zhou (2009) Basin-Scale Hydrogeologic Impacts of CO₂ Storage: Capacity and Regulatory Implications, *International Journal of Greenhouse Gas Control*, 3(6), 745-756.
48. Majer, EL, R Baria, M Stark, S Oates, J Bommer, B Smith and H Asanuma (2007) Induced seismicity associated with Enhanced Geothermal Systems, *Geothermics* 36(3), 185-222.
49. Majer, E, R Baria and M Stark (2008) Protocol for induced seismicity associated with enhanced geothermal systems. Report produced in Task D Annex I (9 April 2008), International Energy Agency-Geothermal Implementing, Agreement (incorporating comments by: C Bromley, W Cumming, A Jelacic and L Rybach) (<http://www.iea-gia.org/publications.asp>.)
50. Pruess, K (2005) Numerical studies of fluid leakage from a geologic disposal reservoir for CO₂ show self-limiting feedback between fluid flow and heat transfer, *Geophys. Res. Lett.*, 32(14), L14404.
51. Skinner, L (2003) CO₂ blowouts: An emerging problem. *World Oil*, 224 (1), 38–42.
52. Gouveia, FJ, M Johnson, RN Leif and SJ Friedmann (2005) Aerometric measurement and modeling of the mass of CO₂ emissions from Crystal Geyser, Utah. NETL 4th Annual Carbon Capture and Sequestration Conference, Alexandria, VA, May 2-5.
53. Aines, RD, MJ Leach, TH Weisgraber, MD Simpson, SJ Friedman and CJ Bruton (2008) Quantifying the potential exposure hazard due to energetic releases from a failed sequestration well. In *Proceedings of the Ninth International Conference on Greenhouse Gas Control Technologies GHGT-9, Washington DC, November 16 -20, 2008*.
54. Gasda, SE, S Bachu and MA Celia (2004) Spatial characterization of the location of potentially leaky wells penetrating a deep saline aquifer in a mature sedimentary basin, *Environ. Geology*, 46, 707-720.
55. Scherer, GW, MA Celia, J-H Prevost, S Bachu, R Bruant, A Duguid, R Fuller, SE Gasda, M Radonjic and W Vichit-Vadakan (2005) Leakage of CO₂ through abandoned wells: role of corrosion of cement, in *Carbon Dioxide Capture for Storage in Deep Geologic Formations, Vol. 2*, DC Thomas and SM Benson (eds.) 827–848, Elsevier.
56. Shipton, ZK, JP Evans, D Kirschner, PT Kolesar (2004) AP Williams and J Heath. Analysis of CO₂ leakage through ‘low-permeability’ faults from natural reservoirs, Geological Society, London, Special Publications, 233, 43-58.
57. Onstott, TC (2005) Impact of CO₂ injections on deep subsurface microbial ecosystems and potential ramifications for the surface biosphere, in *Carbon Dioxide Capture for Storage in Deep Geologic Formations, Vol. 2*, DC Thomas and SM Benson (eds.) 1217–1249, Elsevier.
58. Schuett, H, M Wigand and E Spangenberg (2005) Geophysical and geochemical effects of supercritical CO₂ on sandstones, in *Carbon Dioxide Capture for Storage in Deep Geologic Formations, Vol. 2*, DC Thomas and SM Benson (eds.) 767–786, Elsevier.
59. Kharaka, Y, DR Cole, SS Hovorka, WD Gunther, KG Knauss, BM Freifield (2006) Gas-water-rock interactions in Frio formation following CO₂ injection: implications for the storage of greenhouse gases in sedimentary basins. *Geology*, **34**, 577–580.

60. Kharaka, YK, JJ Thordsen, E Kakouros, G Ambats, WN Herkelrath, JT Birkholzer, JA Apps, NF Spycher, L Zheng, RC Trautz, HW Rauch, K Gullickson (2010) Changes in the Chemistry of Shallow Groundwater Related to the 2008 Injection of CO₂ at the ZERT Field Site, Bozeman, Montana, *Environmental Earth Sciences*, 60, 273-284.
61. Carroll, S (2009) Trace metal release from Frio sandstone reacted with CO₂ and 1.5 N NaCl Brine at 60°C, in *Proceedings 8th Annual Conference on Carbon Capture and Sequestration*, Pittsburgh, PA, USA, May 2009.
62. Keating, EH, J Fessenden, N Kanjorski, DJ Koning and R Pawar (2010) The impact of CO₂ on shallow groundwater chemistry: observations at a natural analog site and implications for carbon sequestration, *Environmental Earth Sciences*, 60(3), 521-536.
63. Price, PN and CM Oldenburg (2009) The consequences of failure should be considered in siting geologic carbon sequestration projects, *International Journal of Greenhouse Gas Control*, 3(5).
64. Wilson, EJ, TL Johnson and DW Keith (2003) Regulating the Ultimate Sink: Managing the Risks of Geologic CO₂ Storage, *Environ. Sci. Technol.*, 37 (16), 3476–3483.
65. Nicot, J-P (2008) Evaluation of large-scale CO₂ storage on fresh-water sections of aquifers: An example from the Texas Gulf Coast Basin, *International Journal of Greenhouse Gas Control*, 2(4), 582-593.
66. Zhou, Q, JT Birkholzer, E Mehnert, Y-F Lin and K Zhang, K (2009) Modeling Basin- and Plume-Scale Processes of CO₂ Storage for Full-Scale Deployment, *Ground Water*, 48(4), 494-514.
67. Nicot, J-P, CM Oldenburg, SL Bryant and SD Hovorka (2009) Pressure perturbations from geologic carbon sequestration: Area-of-review boundaries and borehole leakage driving forces, *Energy Procedia*, 1(1), 47-54.
68. Oldenburg, CM and AP Rinaldi (2011) Buoyancy effects on upward brine displacement caused by CO₂ injection, *Transport in Porous Media*, 87(2), p. 525-540..
69. Hollister, JC and RJ Weimer (Editors) (1968) Geophysical and geological studies of the relationships between the Denver earthquakes and the Rocky Mountain Arsenal well, *Q. Colorado School of Mines* 63, Golden, 251 pp.
70. Hoover, DB and JA Dietrich (1969) Seismic Activity During the 1968 Test Pumping at the Rocky Mountain Arsenal Disposal Well, Circular 613, U.S. Geological Survey, Washington, DC.
71. Herrmann, RB, S-K Park and C-Y Wang (1981) The Denver earthquakes of 1967-1968, *Bulletin of the Seismological Society of America*; 71(3); 731-745.
72. Cypser, DA and SD Davis (1998) Induced seismicity and the potential for liability under U.S. law, *Tectonophysics*, 289(1-3), 239-255.
73. Rutqvist, J, J Birkholzer, F Cappa and C-F Tsang (2007) Estimating maximum sustainable injection pressure during geological sequestration of CO₂ using coupled fluid flow and geomechanical fault-slip analysis, *Energy Conversion and Management*, 48(6), 1798-1807.
74. Gutenberg, B and CF Richter (1944) Frequency of earthquakes in California, *Bull. Seismol. Soc. Am.* 17, 185–188.
75. Sminchak, J, N Gupta, C Byrer and P Bergman (2003) Aspects of induced seismic activity and deep-well sequestration of carbon dioxide, *Environmental Geosciences*; 10(2), 81-89.

76. Wiprut, D and M Zoback (2000) Fault reactivation and fluid flow along a previously dormant normal fault in the northern North Sea, *Geology*, 28(7), 595-598.
77. Hovorka, SD, SM Benson, C Doughty, BM Freifeld, S Sakurai, TM Daley, YK Kharaka, MH Holtz, RC Trautz, HS Nance, LR Myer and KG Knauss (2006) Measuring permanence of CO₂ storage in saline formations: the Frio experiment, *Environmental Geosciences*, 13(2), 105-121.
78. Litynski, J, S Plasynski, HG McIlvried, C Mahoney and RD Srivastava (2008) The United States Department of Energy's Regional Carbon Sequestration Partnerships Program Validation Phase, *Environment International*, 34(1), 127-138.
79. Friedmann, SJ, JJ Dooley, H Held and O Edenhof (2006) The low cost of geological assessment for underground CO₂ storage: Policy and economic implications, *Energy Conversion and Management*, 47(13-14, 1894-1901).

Books and Reviews

- Baines, SJ and RH Worden (eds.) (2004) *Geologic Storage of Carbon Dioxide*, Geological Society, London, Special Publications, 233, 1-247.
- Eide, LI (2009) *Carbon Dioxide Capture for Storage in Deep Geological Formations*, Volume 3, CPL Press and BP, Newbury, Berkshire, UK.
- Thomas, DC and SM Benson (eds.) (2007) *Carbon Dioxide Capture for Storage in Deep Geologic Formations-Results from the CO₂ Capture Project*, Vol. 2, Elsevier, Kidlington, Oxford, UK.
- Wilson, EJ and D Gerard, (editors) (2007) *Carbon Capture and Sequestration Integrating Technology, Monitoring, and Regulation*, Blackwell Publishing, Ames, Iowa, USA.

Acknowledgements

This chapter greatly benefitted from suggestions and comments by my LBNL colleagues Karsten

Pruess, Jens Birkholzer and Preston Jordan.

This work was supported by the U.S. Department of Energy and LBNL under Contract No. DE-AC02-05CH11231.

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor The Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or The Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or The Regents of the University of California.

Ernest Orlando Lawrence Berkeley National Laboratory is an equal opportunity employer.