



# Rapid Flaw Detection in Wind Turbine Blade Assemblies Using Phased Array Ultrasonics

SAND2012-5436C

## *Wind Turbine Blade Workshop*




**Dennis Roach, Stephen Neidigk  
Randy Duvall, Tom Rice  
Sandia National Labs**



# Blade Reliability Collaborative Advanced Manufacturing Initiative Objectives

*Create the ability for manufacturers to determine the quality of their product before it leaves the factory*


- Develop inspection methods for composite blades
- Plan for manufacturing process validation
- Provide uncertainty quantification

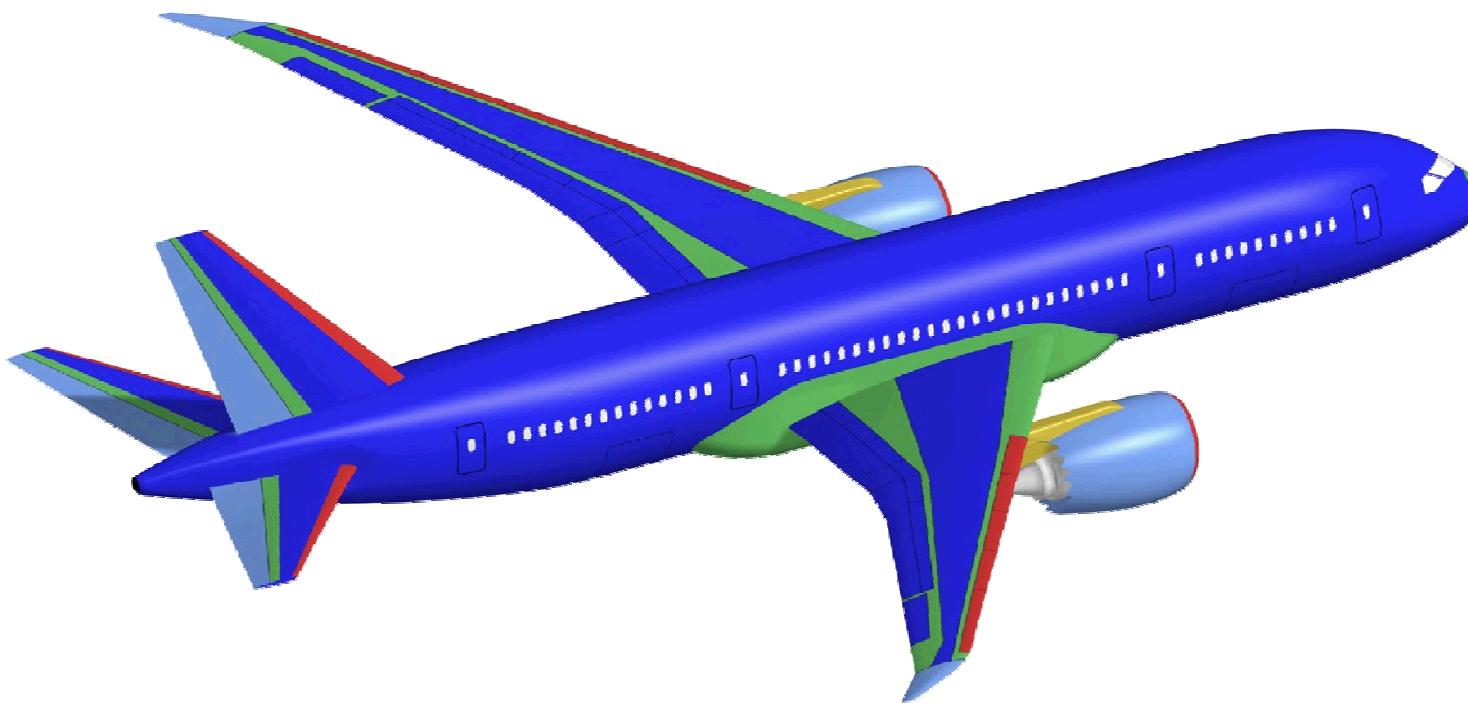

ne  
ice and  
res  
detect


FAA Airworthiness Assurance Center operated by Sandia Labs



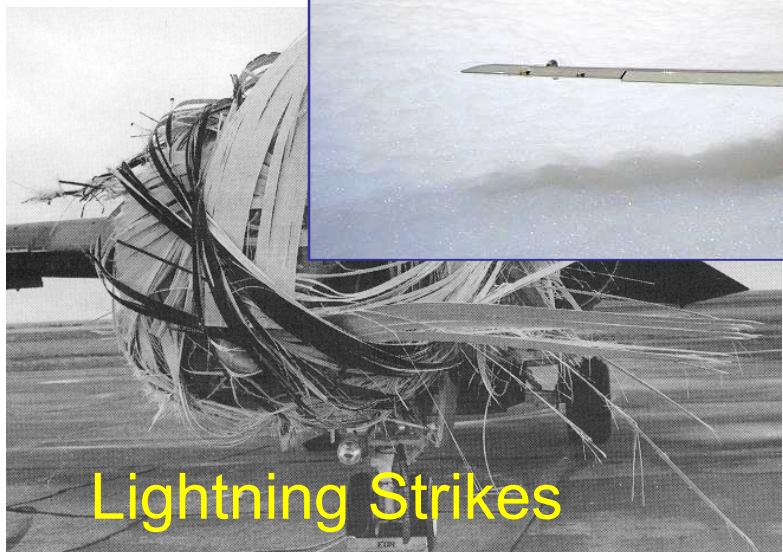



# Program Thrusts to Improve Wind NDI

- Use of NDI reference standards to form sound basis of comparison & ensure proper equipment set-up
- Use of material property & calibration curves (attenuation, velocity)
- Human factors – adjust procedures, automate, streamline
- Improved flaw detection:
  - Advanced NDI – max signal-to-noise; **image-based**; sensitivity
  - Hybrid inspection approach - stack multiple methods which address array of flaw types (data fusion)

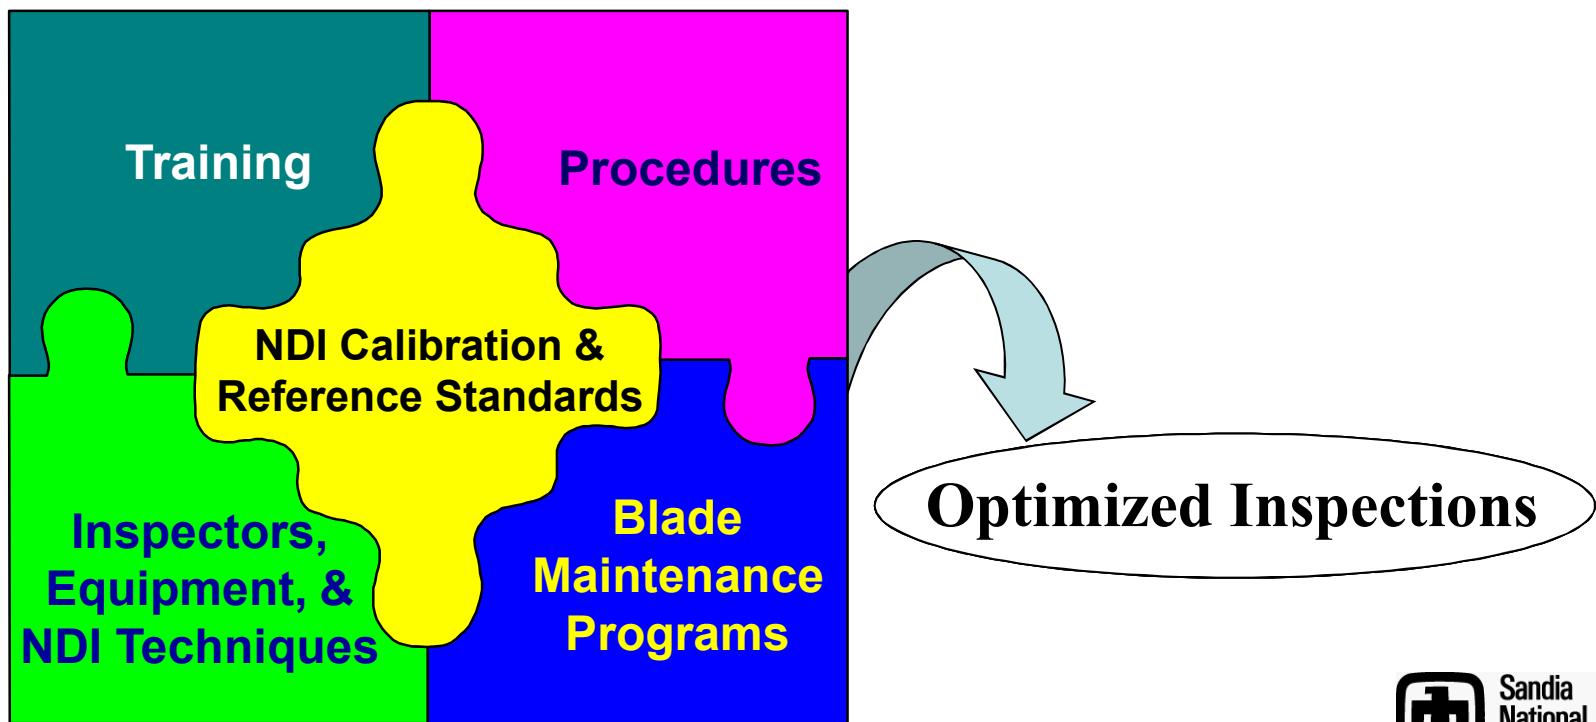




# Required Relationship Between Structural Integrity and Inspection Sensitivity

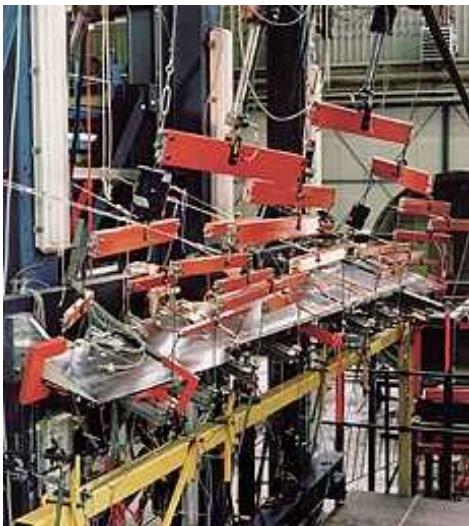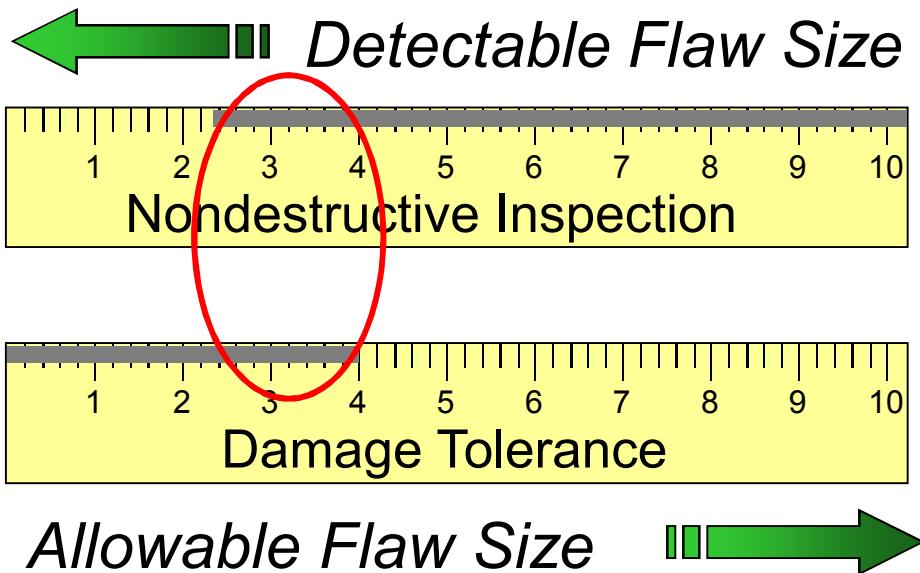



# Engineered Flaws in NDI Feedback Specimens

## Shear Web & Foam Core Specimens

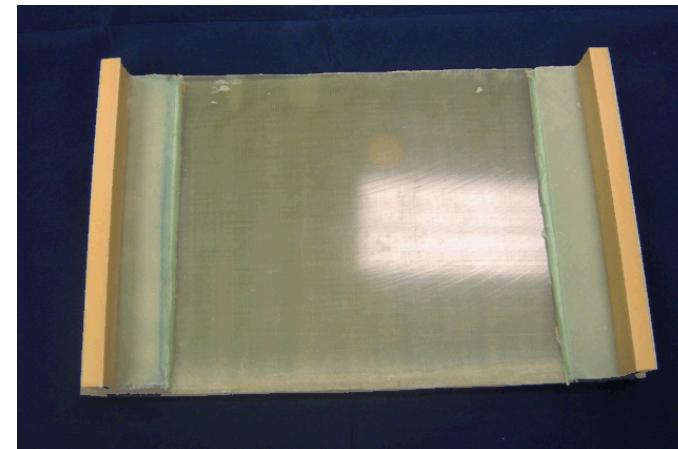

Shear Web/Spar with Disbonds and Delaminations



Dry fabric areas



Grease



Mold Release



Pillow Insert

***Materials inserted into multiple layers***


# Samples of Different Flaw Types Engineered into Carbon NDI Ref Standards



Pillow Insert



Pull Tab Disbonds

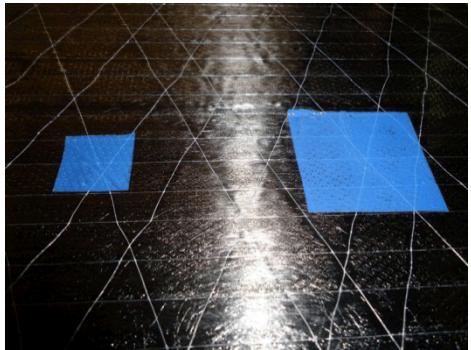

Pre-Preg Backing



Grease Contamination



Adhesive Void



Flaws were placed at varying depths and locations using a template



Glass Microballoons in Bond Line




Fiberglass FOD

# Carbon NDI Reference Standards

## Carbon Fiber Spar Cap Assembly




- Pre-Preg Carbon Material
- Up to ~ 2" thick
- Quality assurance cannot visually inspect through carbon
- **Greater need for NDI during manufacturing**

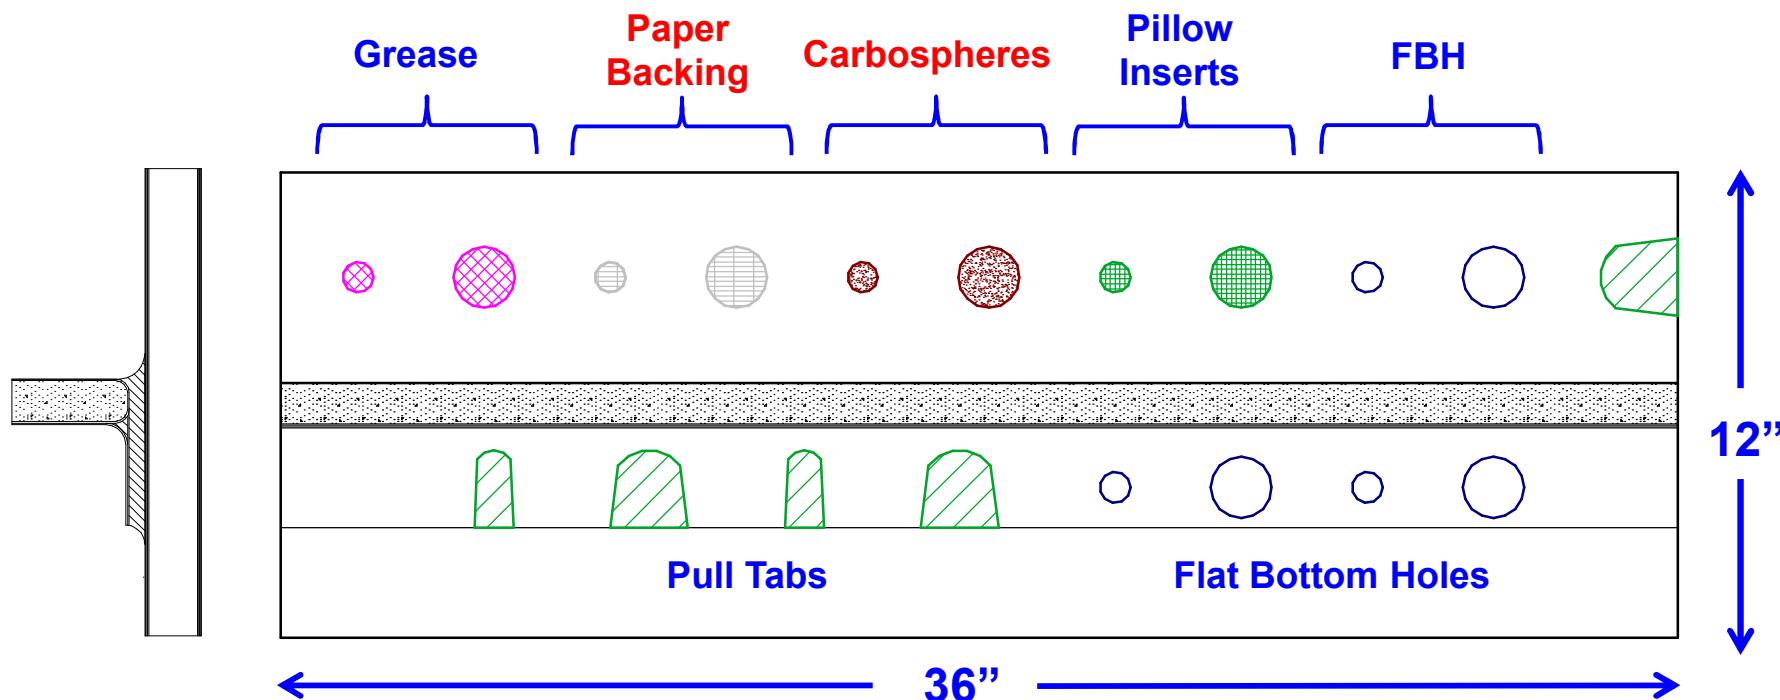




# Completed NDI Reference Standards for Use at Blade Manufacturing Facilities

- Develop and test NDI technology
- Train inspectors and familiarize them with carbon material
- Calibrate and set up NDI equipment
- Ultrasonic flaw signal characterization
- Inspection procedure development

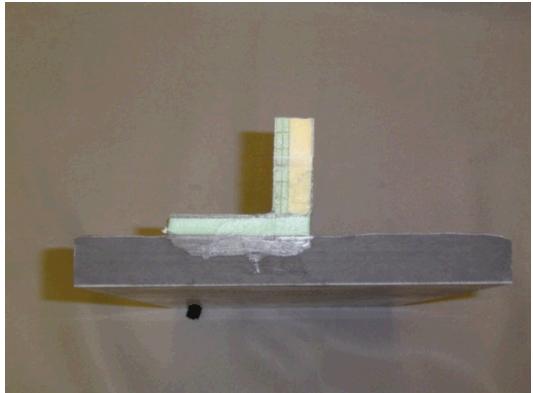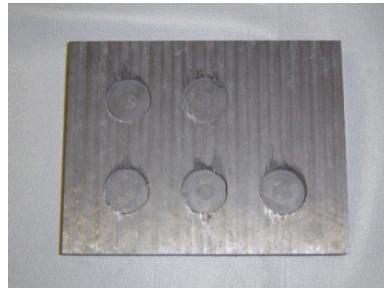

# MAUS P-E UT with Focused Probe (1 MHz/2") and Adjustable Water Path


Flat Bottom Holes Pillow Inserts

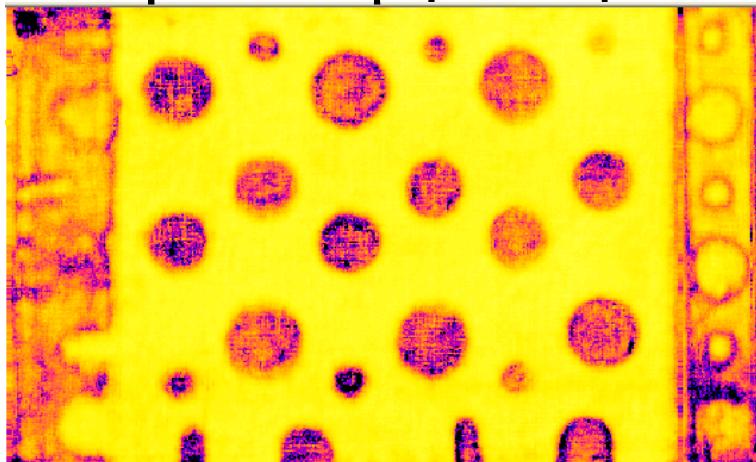



New  
“Immersion”  
Probe Holder  
Allows for  
Adjustable  
Water Path




REF-STD-6-202-250-SNL-1

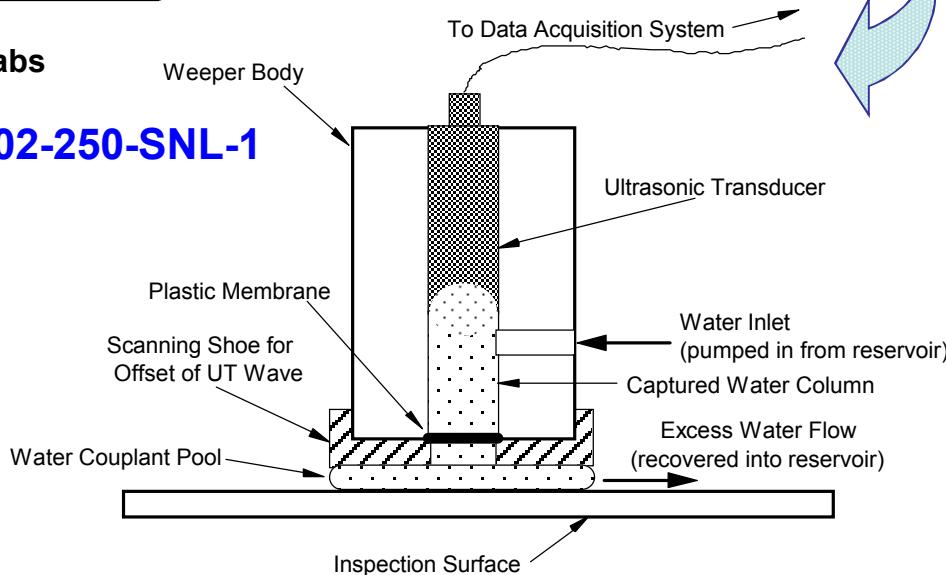


# Pulse-Echo Inspection of Bond Joint

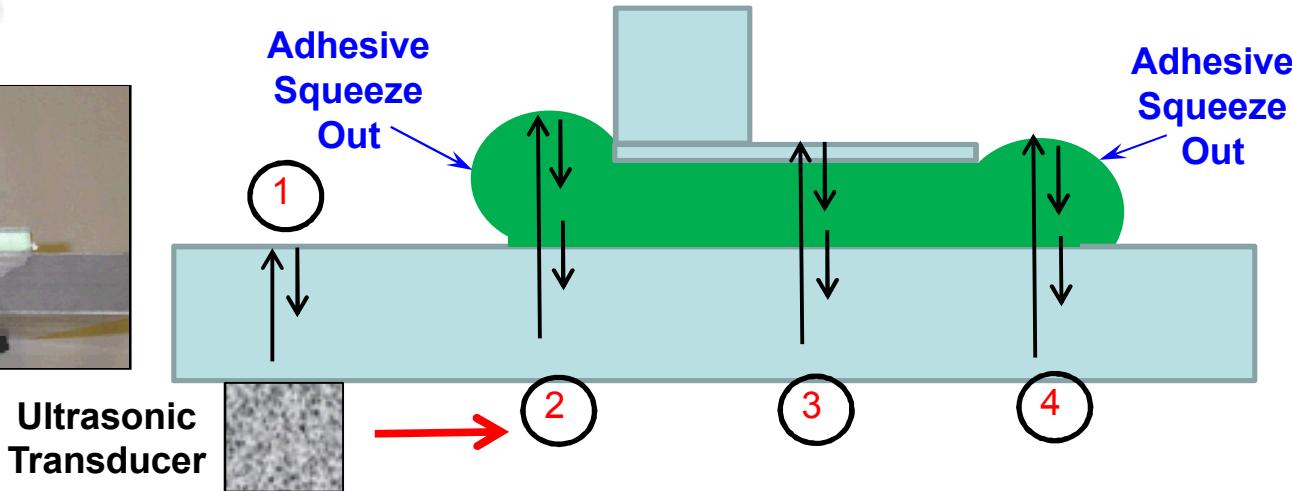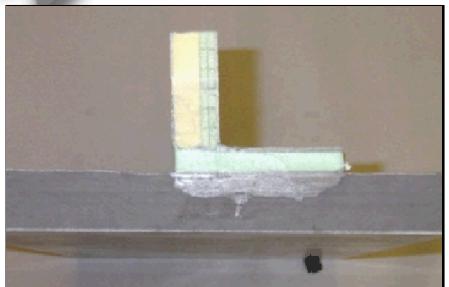

Spar Cap - 1

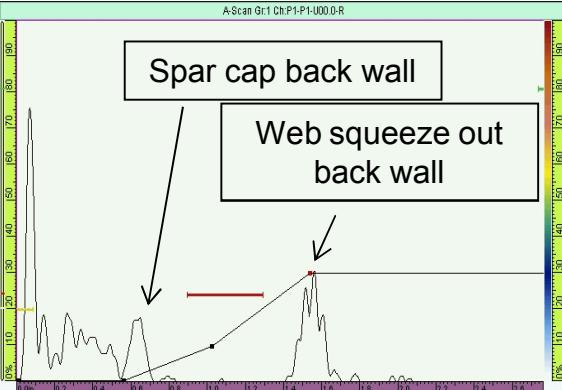


Web Squeeze Out- & 2 4

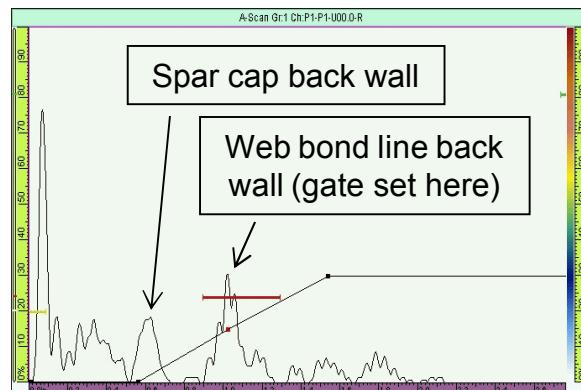

Web Bond Line- 3

## A-Scan Signals

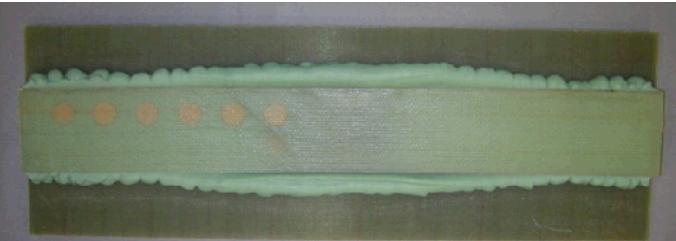


# Phased Array UT Using Water Shoe





## Advantages of using water shoe:

- Better/cleaner **scanning signal response (less noise)** which results in a better signal-to-noise ratio for flaw detection
- Better coupling - no signal dropout and easier clean-up than couplant
- Easier to deploy over scanned surface

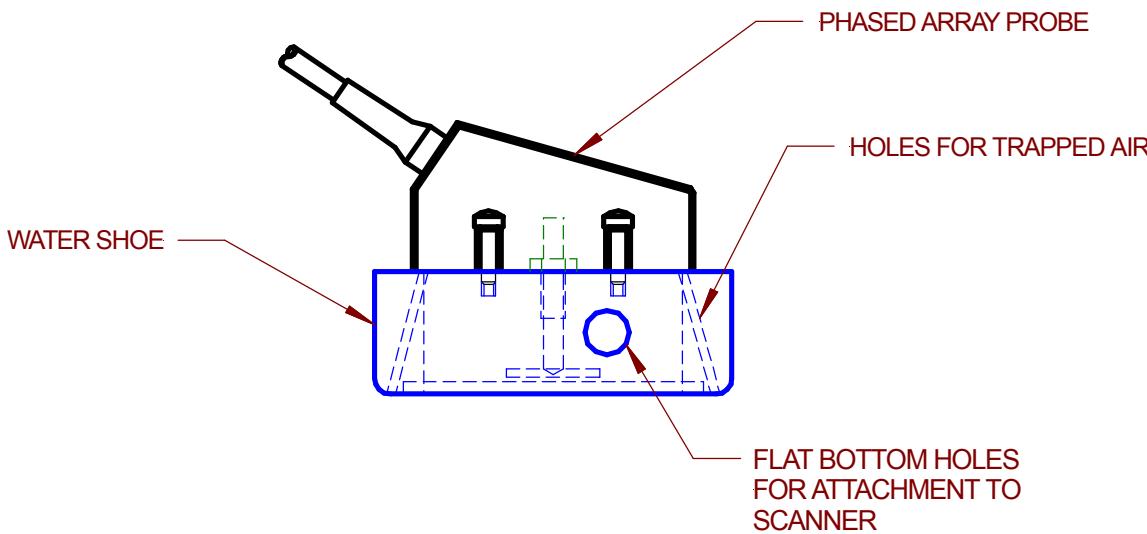

**Challenges – Requires custom contour, cannot tolerate thick foam seal at base, difficult to maintain seal when deploying vertically**

# On-Blade Bond Line Testing with Phased Array UT Scanning

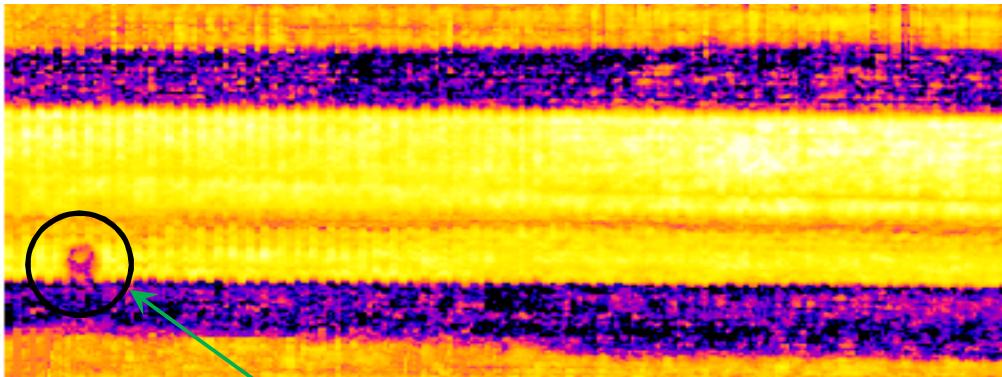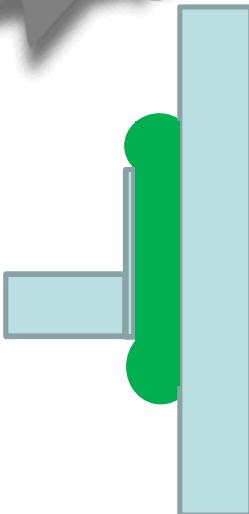


Anomaly in Bond Line



Phased Array Inspection


Inspections must address all field deployment issues:

- Vertical and horizontal inspection surfaces
- Hand scan vs. attachable scanner
- Signal coupling – water flow, air bubbles
- Wide range of thicknesses (gate adjustments)
- Quantitative information
- Ease and rate of inspection

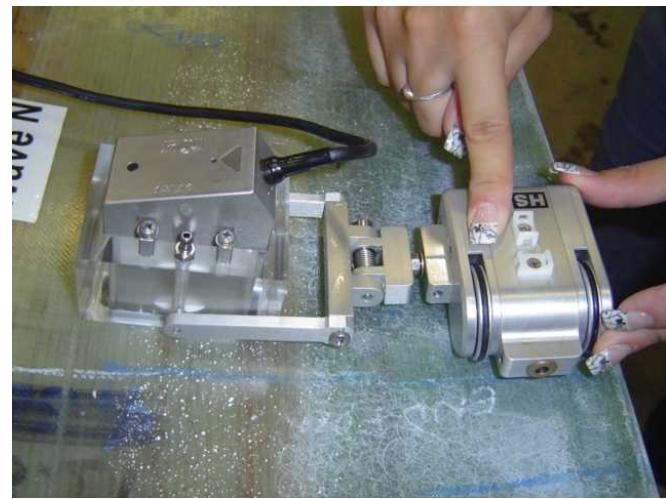




Use of Position Encoder

# NDI Ref Std – Adhesive Step Wedge

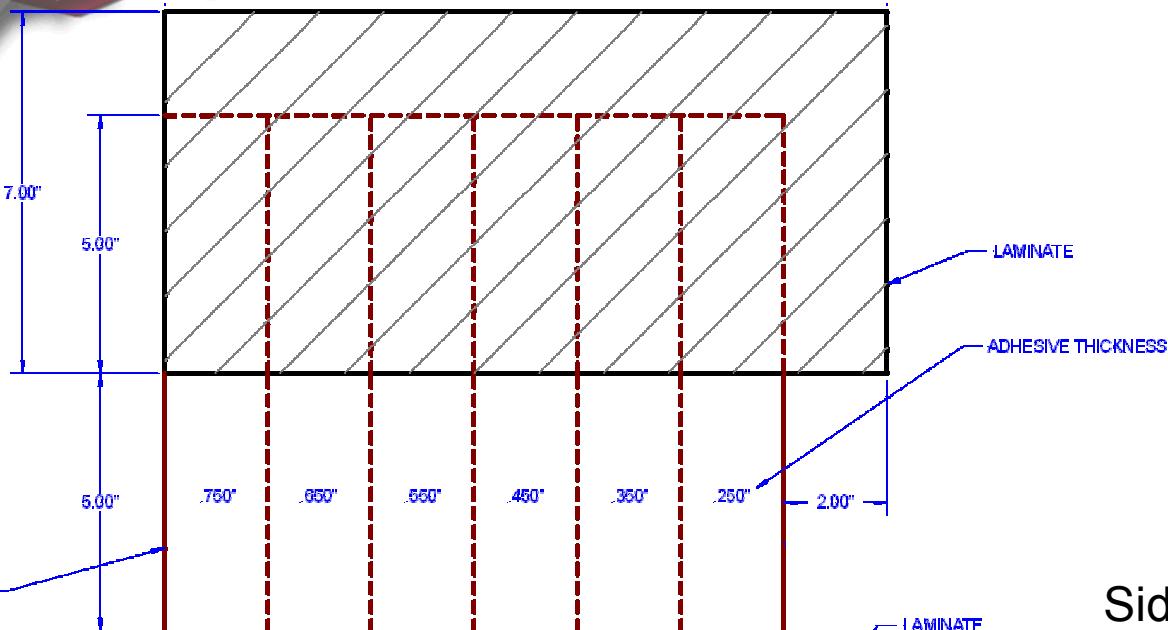

Bottom View

Side View - Adhesive Area

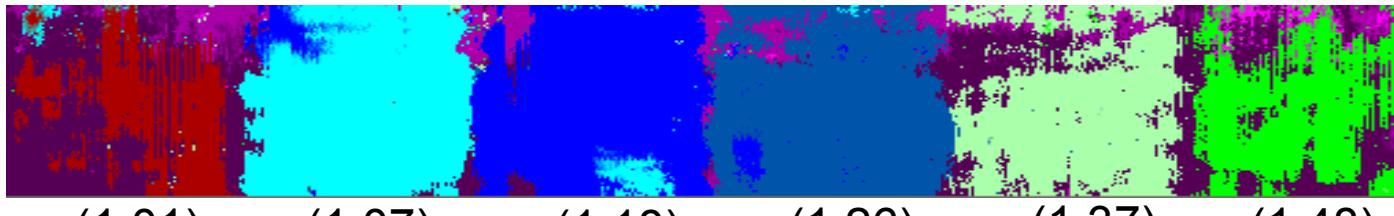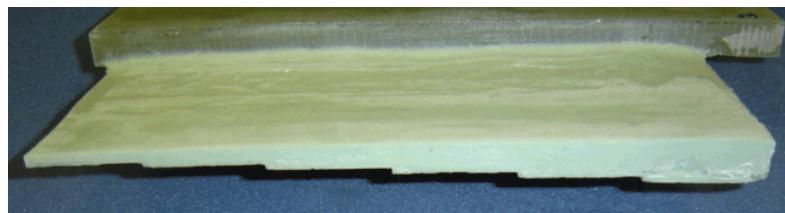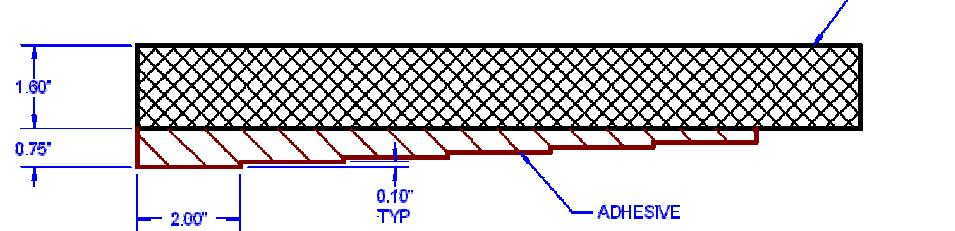



(1.01) (1.07) (1.18) (1.26) (1.37) (1.48)

Thin

Thick

# Adhesive Wedge NDI Reference Standard

Goal: Develop and assess methods to rapidly inspect/quantify bond line thickness

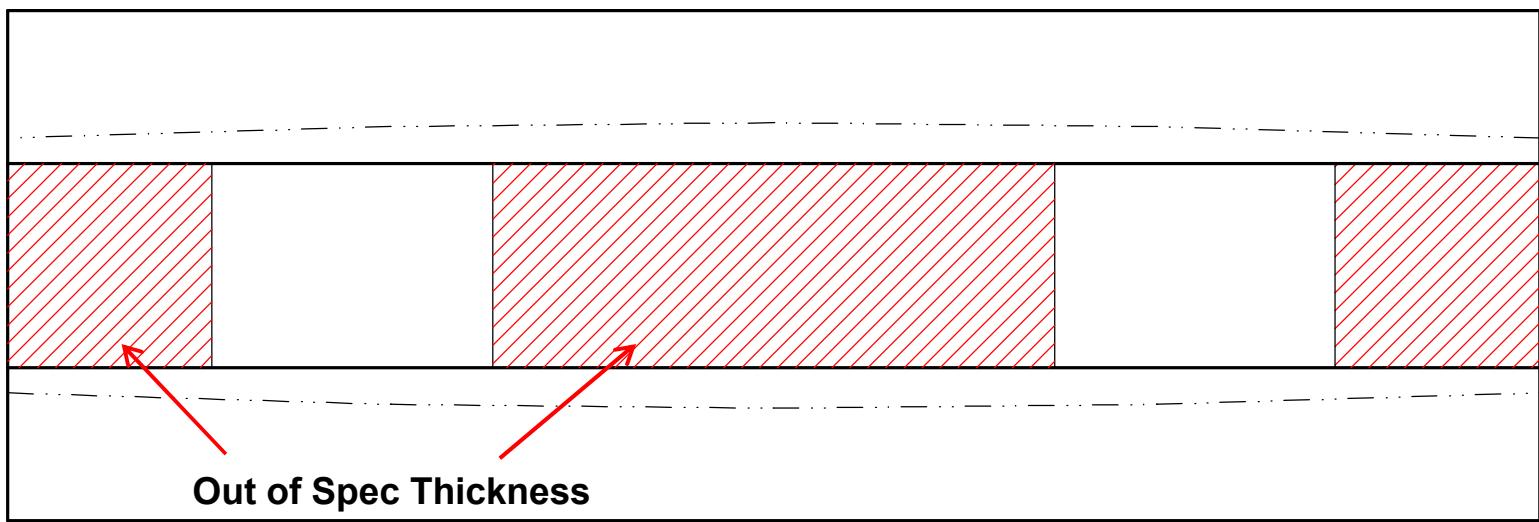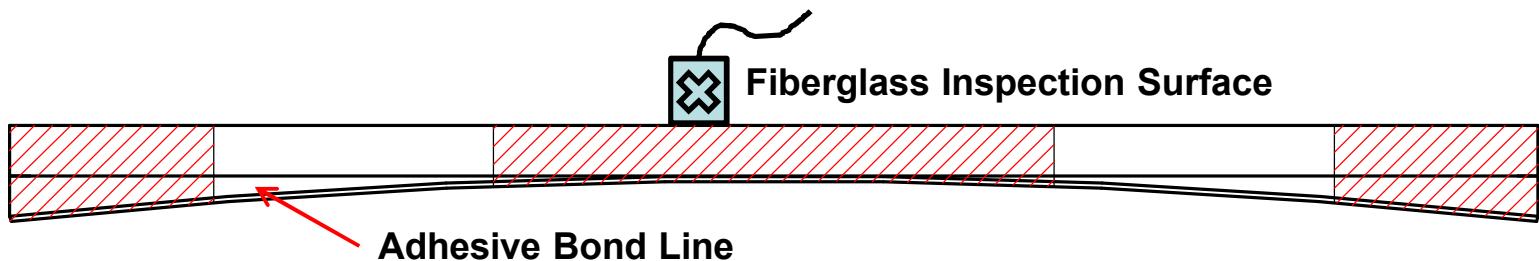


**Tapered Adhesive Wedge**


# Adhesive Thickness Measurements with Phased Array UT

Omniscan UT Device 1.5L16 (1.5 MHZ) Phased Array Water Box  
REF-STD-F6-086-TW-A

Use of Dual  
Gates to  
Quantify Bond  
Thickness

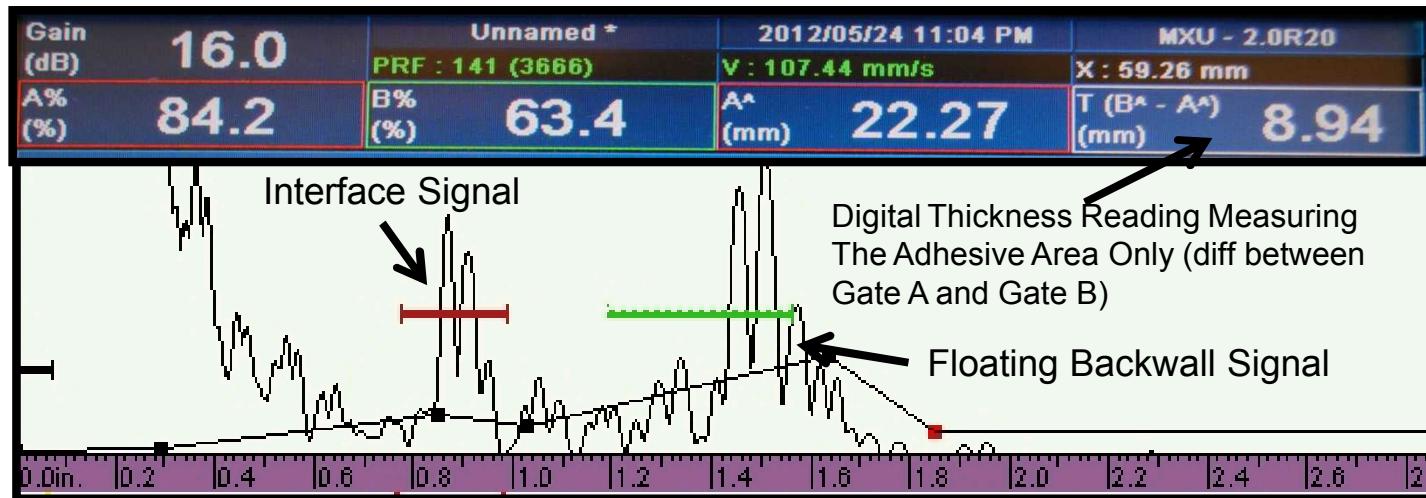

Amplitude C-Scan  
Produced by Green  
(B) Gate Set Across  
Proper Bond Line  
Thickness


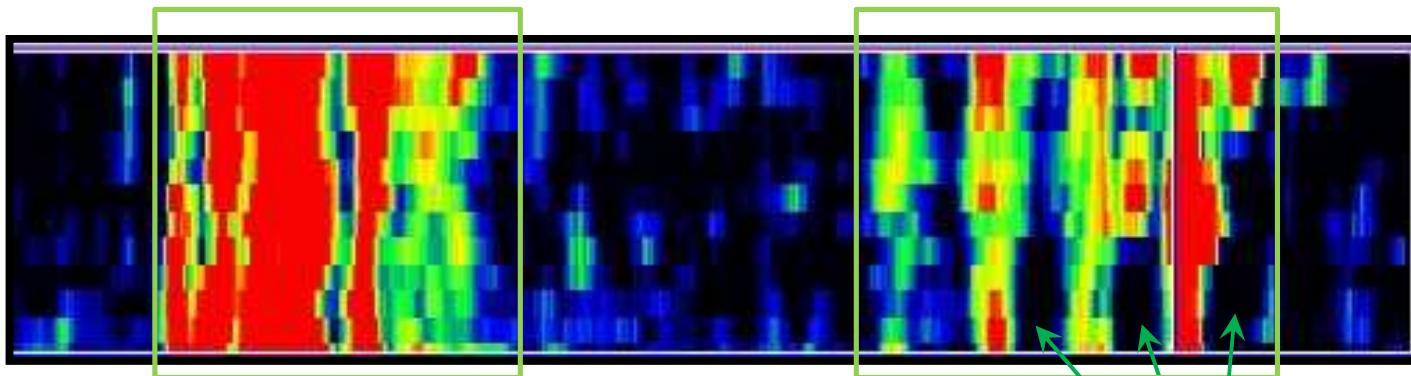


Good  
Bond Line  
Thickness

Anomalies  
in Bond Line

# Design of Delay Lines to Avoid Signal Interference

Water Box Signal Analysis - 25mm compared to 40mm;  
Moves harmonic return signal outside area of interest.

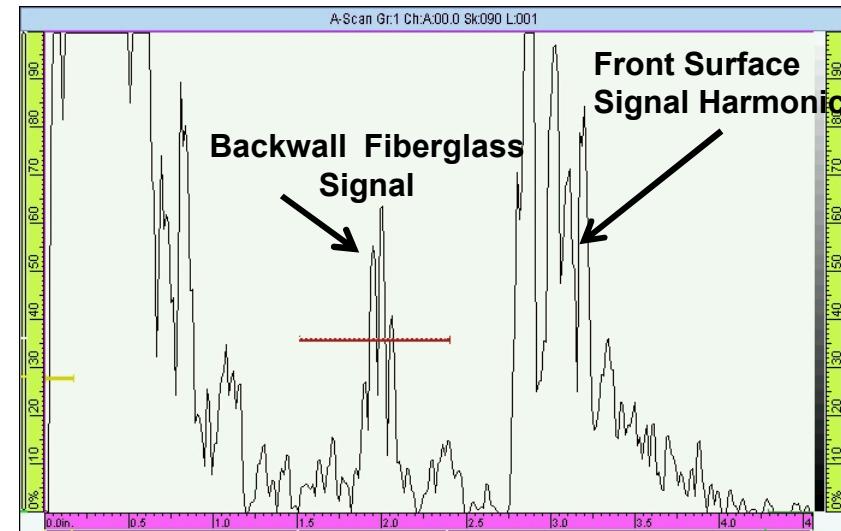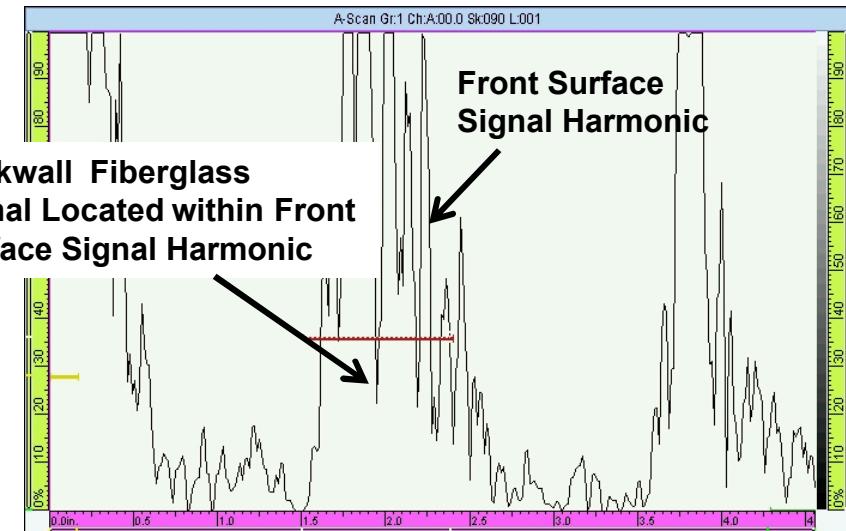

Sandia has focused on a sealed couplant box that:

- Adjusts to slight curvature in surfaces
- Eliminates water flow to open box
- Maximizes signal strength
- Accommodates necessary standoffs for signal clarity
- Easily saves scanned images for reference using a wheel encoder



# Probe Housing Development for Factory/Field Deployment





Goal is to develop a sealed water path that produces clear signal through a wide range of thicknesses (up to 2.5 inches) and curvatures



25 mm Sealed Box




40 mm Sealed Box

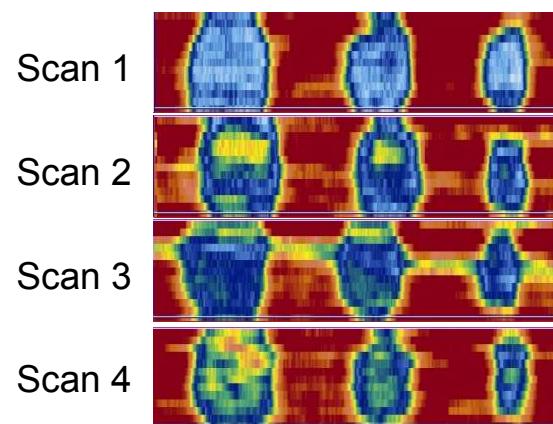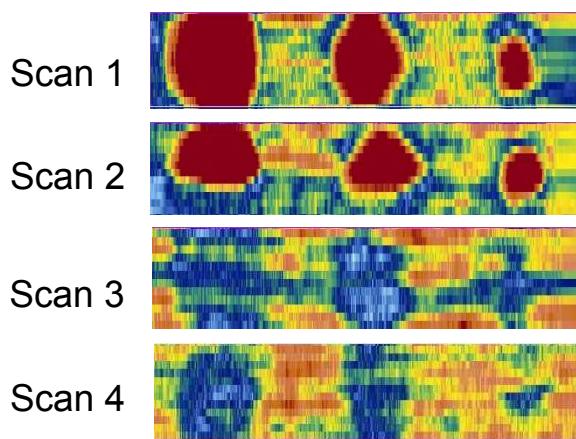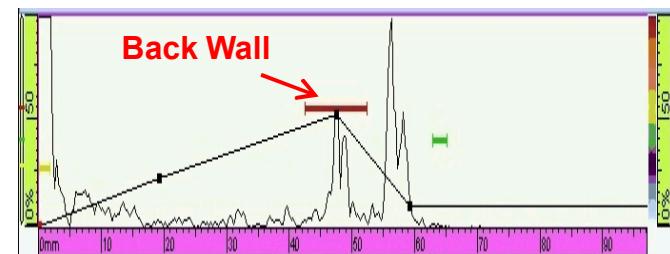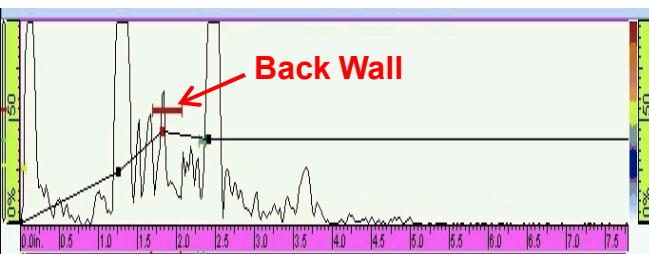

# Spar Cap and Shear Web NDI Feedback Specimen No. 6






Thicker specimen: REF-STD-6-202-250-SNL-1

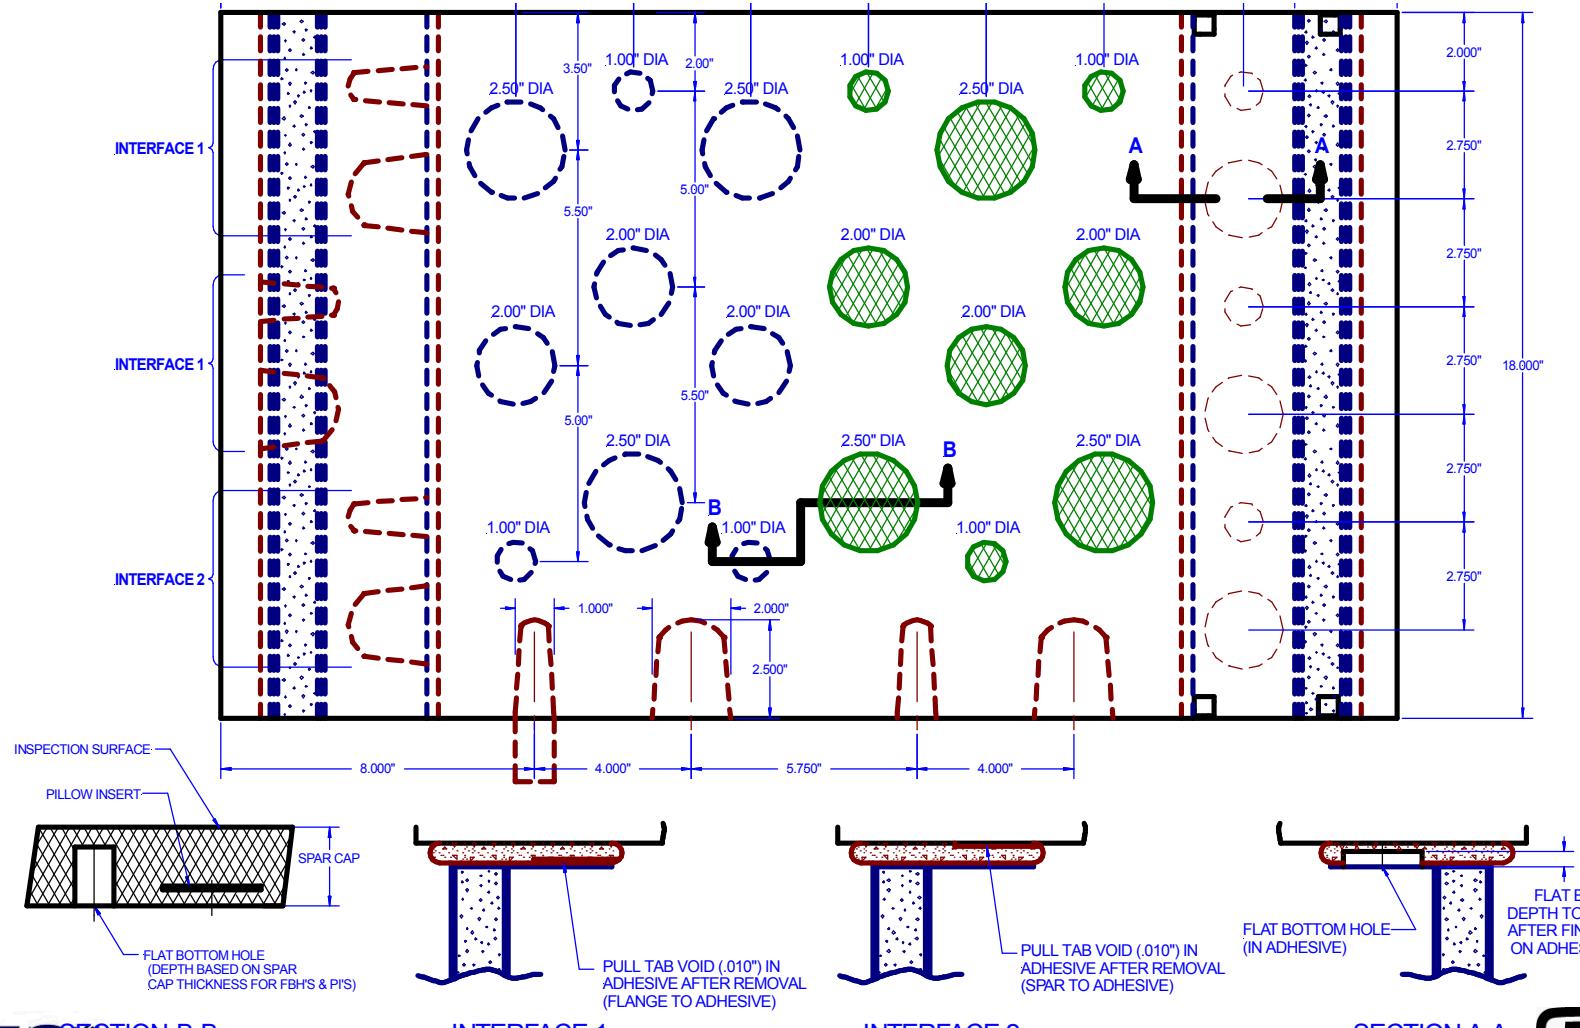

# Spar Cap and Shear Web NDI Feedback Specimen No. 6


REF-STD-6-202-250-SNL-1

Omniscan Phased Array with 1.5 MHz & 40 mm Water Box

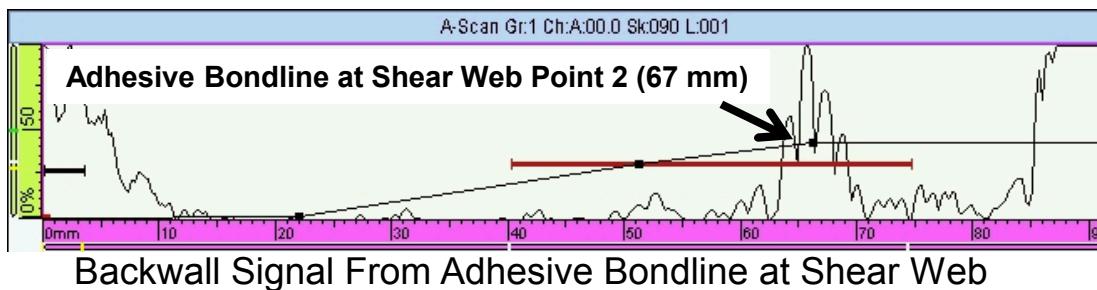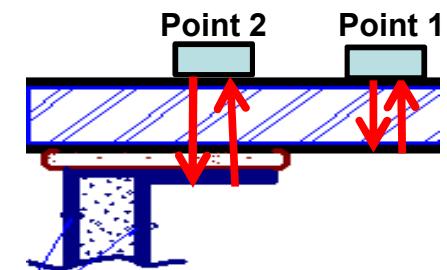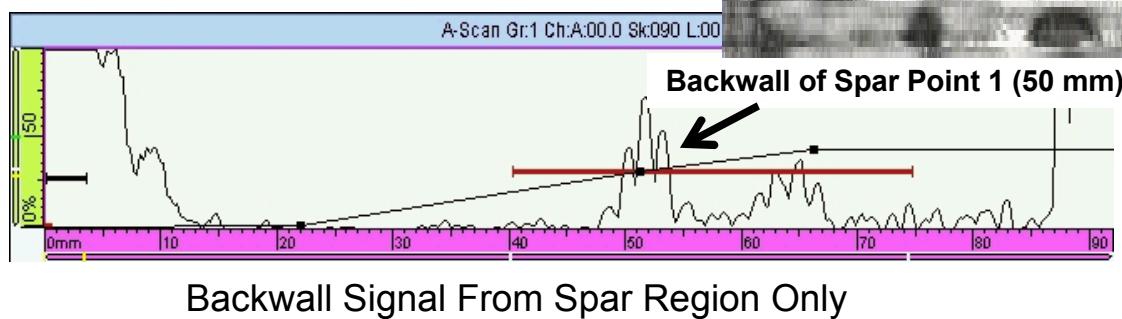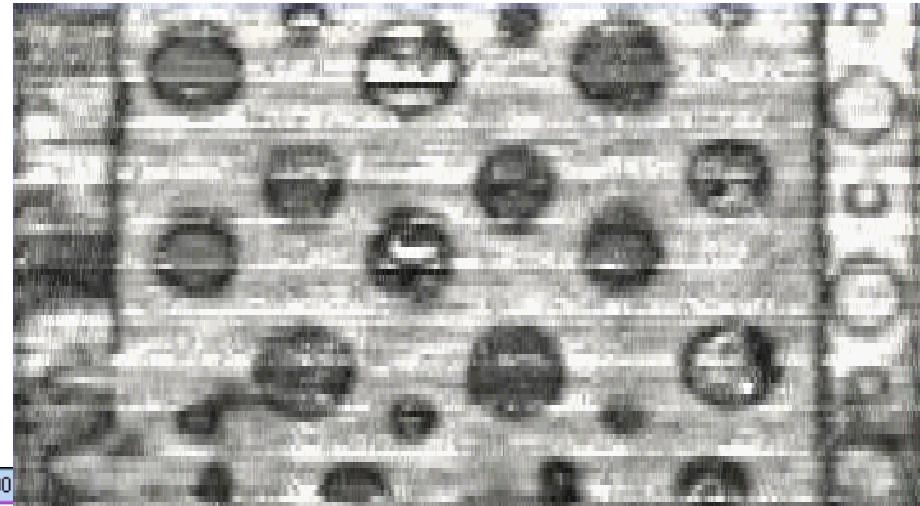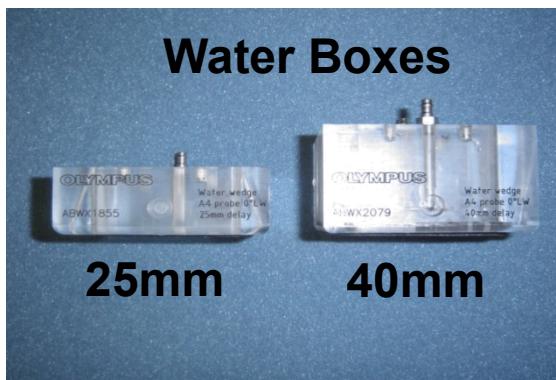


# Frequency Characteristics of UT Pulser

NNSA

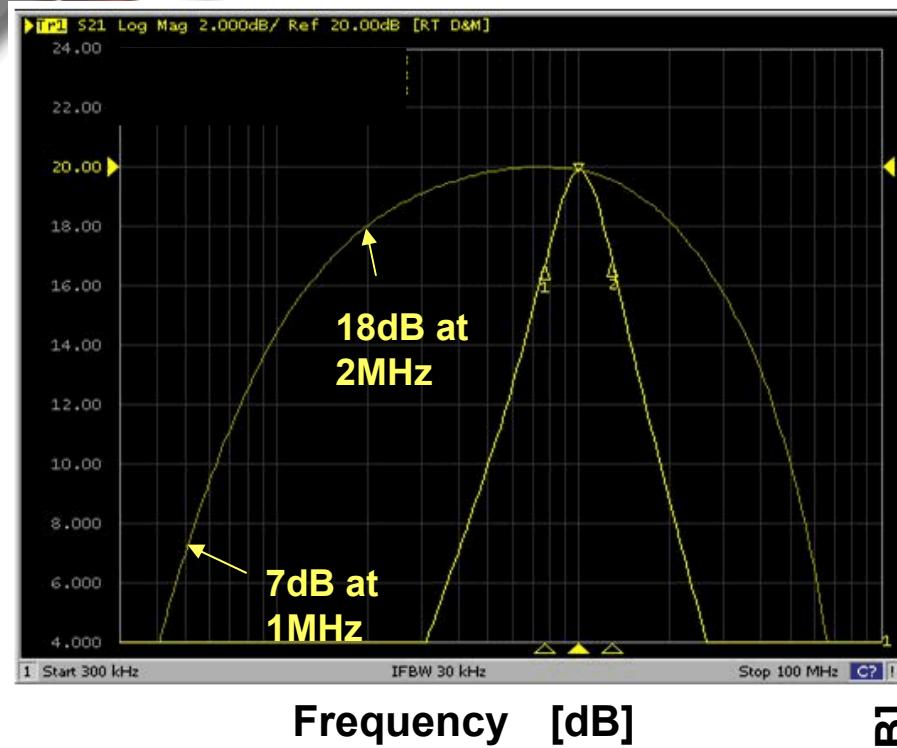


Sandia has requested increase of pulse width to 1 micro second, which is half of 0.5MHz wave length

Optimal excitation for depth of penetration


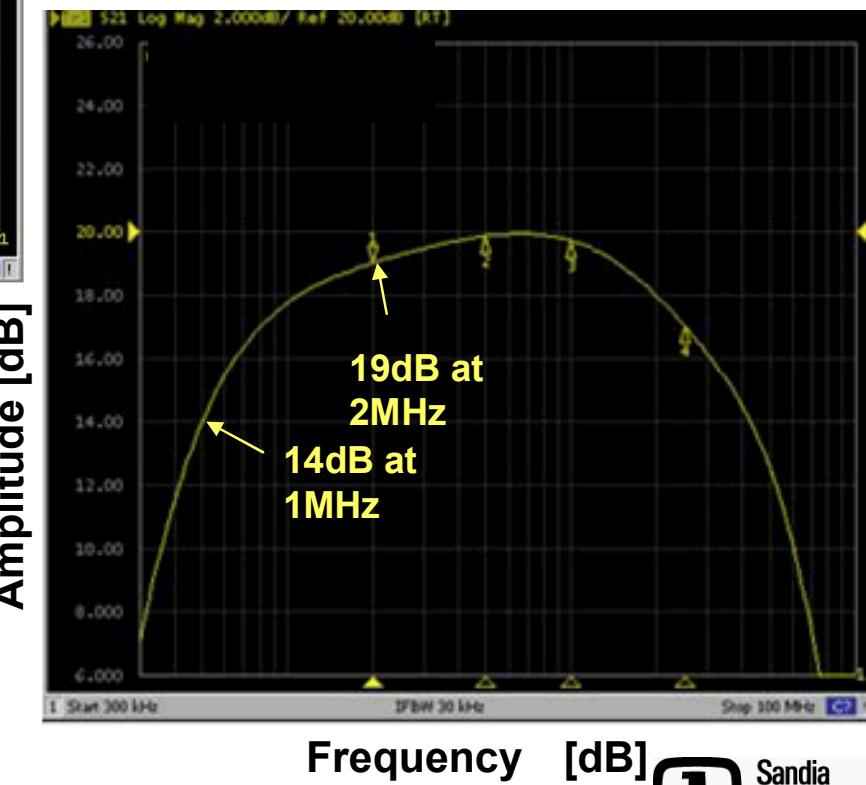


# Ultrasonic Characterization of Solid Laminates and Adhesive - Porosity

Goal: work with wind blade manufacturing sites to accumulate a series of porosity measurements, along with corresponding UT attenuation and velocity and UT property measurements to generate calibration curves for use in production QA

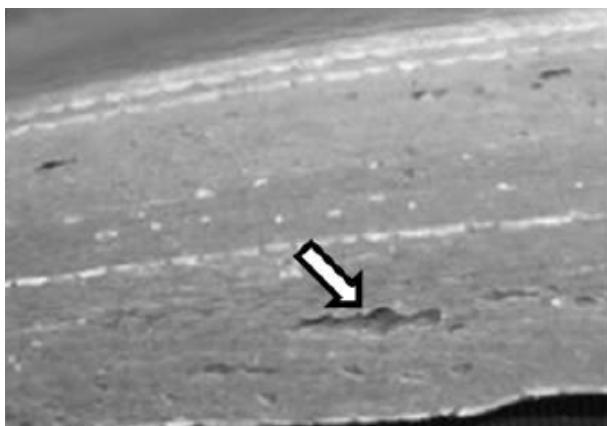


Porosity Measurements -  
Optical Microscopy and  
Ignition Loss of  
Fiber/Resin

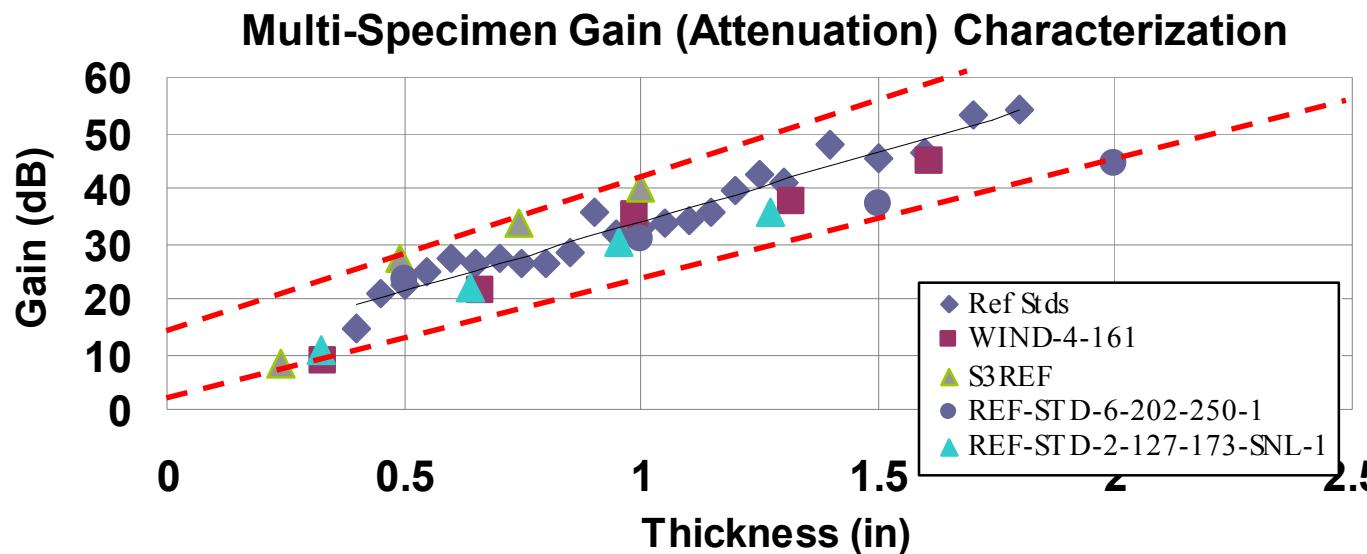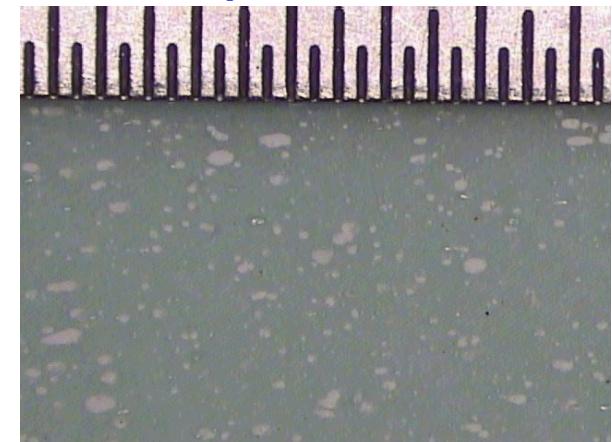

# Quality Assurance Calibration Curves

How could quality assurance curves be used by inspectors to determine the quality of a blade?

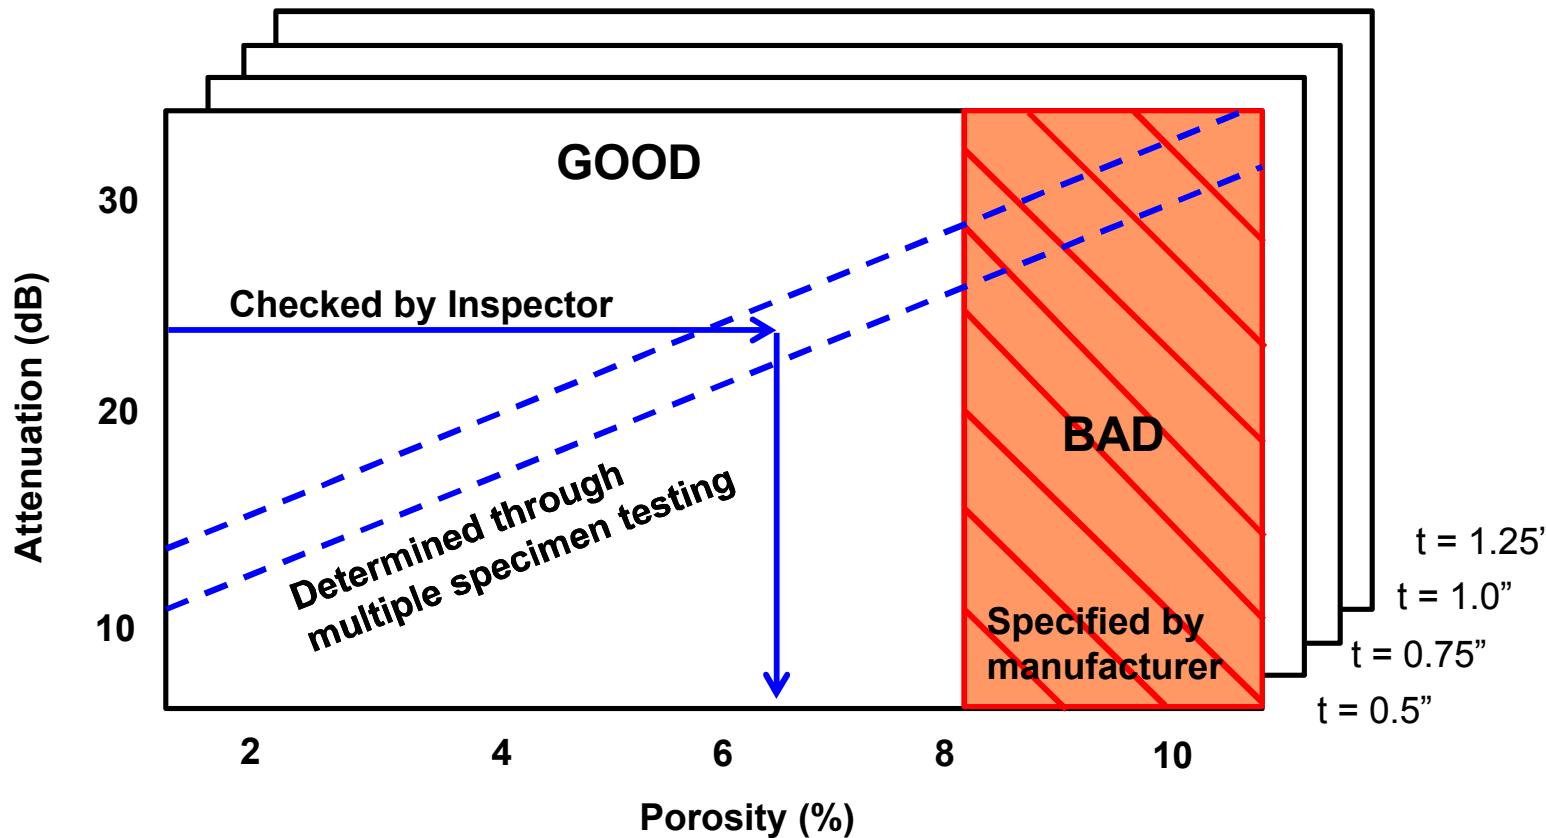

Response calibration curve that can be used for QA – family of curves could produce an envelope of acceptable attenuation levels



# Evolution of NDI for Wind Turbine Blades



- Develop array of inspection tools to comprehensively assess blade integrity (determine needs, challenges, and NDI limitations)
- Achieve this while considering time, cost, & sensitivity issues (minimize production & maintenance costs)
- Develop NDI solutions in concert with related studies: effects of defects, field surveys, analysis, certification, standards
- Identification of impediments to be overcome and develop NDI ref stds
- NDI investigation has produced promising results thus far & may lead to hybrid approach with multiple NDI tools
- NDI to extend blade design life (??)

# Wind Blade Probability of Detection Experiment


- Representative blade specimens; realistic flaw types
- Blind experiment: type, location and size of flaws are not known by inspector
- Statistically relevant flaw distribution – Probability of Detection (POD)
- Used to analytically determine the performance of NDI techniques – hits, misses, false-calls, flaw sizing

## Review Committee

NREL  
UpWind  
DOE  
Clipper  
LM Wind Power  
Gamesa  
Molded Fiberglass  
SNL  
TPI Composites  
GE – Global Research  
Vestas  
Sandia

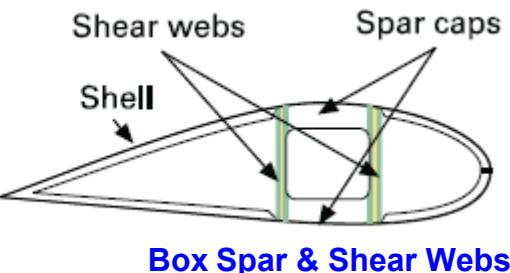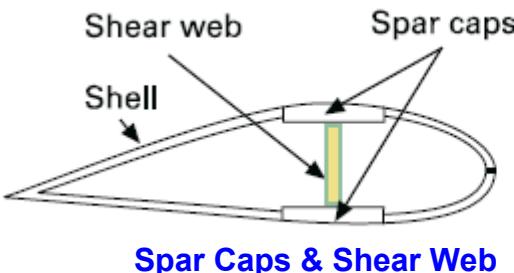

GE Global Research



# WINDE – Advanced NDI Screening Activity

**OLYMPUS®**

**TOSHIBA**

Leading Innovation >>>



**PHYSICAL  
ACOUSTICS  
CORPORATION**

**Thermal Wave  
Imaging** A red and white logo consisting of the words 'Thermal Wave Imaging' and a stylized red 'W'.

**Resodyn**  
CORPORATION

**Sonatest**

**DANTEC**  
DYNAMICS






**MISTRAS**  
GROUP, INC.

**BOEING®**

**moviMED**  
custom imaging solutions

**VISTA**  
ENGINEERING TECHNOLOGIES

**Sandia**  
National  
Laboratories

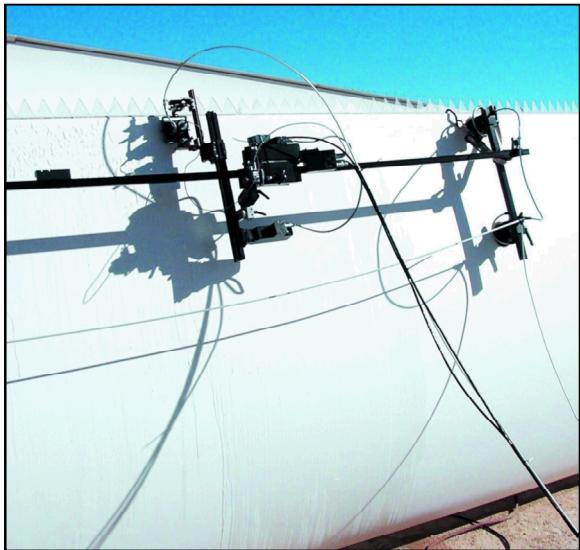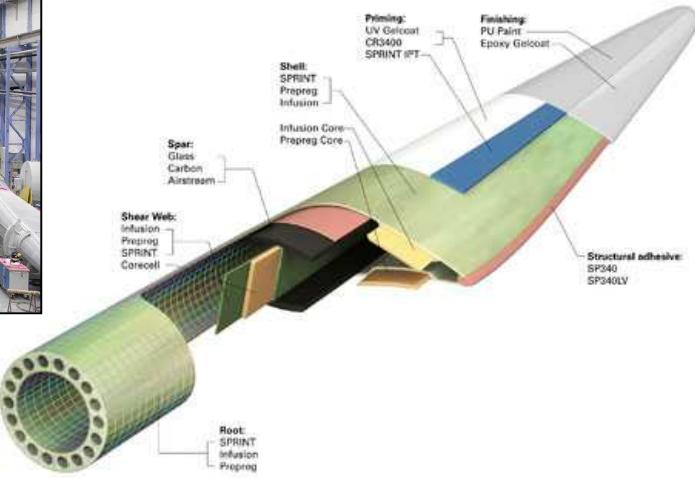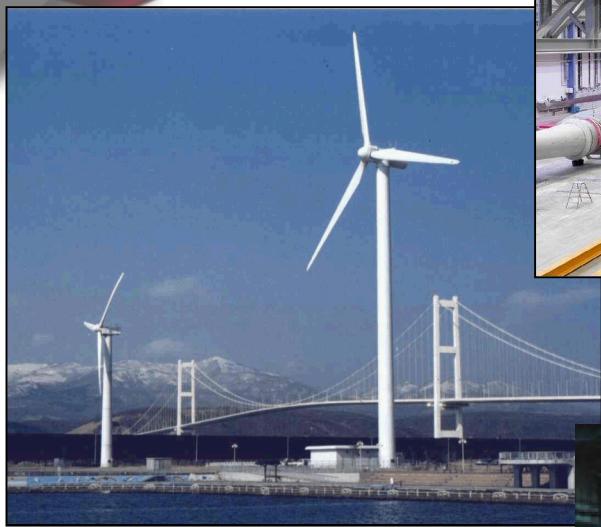

**Dennis Roach**  
**Sandia National Labs**  
**(505)844-6078**  
**dproach@sandia.gov**