

Implementation of Enhanced Attenuation at the DOE Mound Site OU-1 Landfill: Accelerating Progress and Reducing Costs - 16270

Gwendolyn Hooten*, Rebecca Cato**, Brian D Riha*** and Brian Looney***

*US DOE Office of Legacy Management, Harrison, Ohio

**Navarro Research and Engineering, Inc., Weldon Spring, Missouri

***Savannah River National Laboratory, Aiken, South Carolina

ABSTRACT

A field demonstration of enhanced attenuation (EA) was initiated in 2014 to expedite the remediation of industrial solvents in the groundwater impacted by the former landfill Operable Unit 1 (OU-1) at the US Department of Energy (DOE) Mound, Ohio, Site. EA uses active engineering solutions to alter the target site so that the contaminant plume will passively stabilize and shrink. For OU-1, the EA was implemented by targeted injection of an electron donor (vegetable oil) to create “structured geochemical zones.” Volatile organic compounds (VOCs) in the altered subsurface system encounter alternating anaerobic and aerobic environments along the plume flow path. The effect of these structured geochemical zones is effective and rapid degradation of parent compounds such as trichloroethene (TCE) and tetrachloroethene (PCE), and daughter compounds such as *cis*-1,2-dichloroethene and vinyl chloride. EA at Mound OU-1 provides a transition to natural attenuation and is an alternative to the baseline pump-and-treat (P&T) system.

Industrial solvents (primarily TCE) and other VOCs that originated from the former solid-waste landfill contaminated the groundwater in the Buried Valley Aquifer beneath the Mound site. A groundwater P&T system was initiated in 1996 to control the plume, and a soil vapor extraction system was installed and operated from 1997 to 2003 to remove the bulk of the VOC sources from the vadose zone. Physical removal of the landfill waste and contaminated soil was performed between 2006 and 2010. Approximately 76,100 cubic meters (99,500 cubic yards) of material were removed from the OU-1 landfill area. Operation of the groundwater P&T system continued throughout this period.

The principles and technical basis of the ongoing EA field demonstration were developed by the Interstate Technology and Regulatory Council. The goal of the EA implementation is to provide a bridge between active groundwater treatments and monitored natural attenuation. EA relies on understanding and manipulating the contaminant mass balance. Technologies are applied to sustainably reduce the contaminant loading from the source and/or increase the rate of natural attenuation processes within the plume.

In 2014, a core team that included DOE, the US Environmental Protection Agency (EPA), the Ohio EPA, and technical support organizations evaluated remedial options for OU-1. During the 2014 evaluation, the team projected a cleanup time frame for the baseline P&T system of 26 additional years and a cleanup time frame for the EA remedy of 13 years. On the basis of that evaluation, EPA approved the

implementation of the EA remedy that required the shutdown of the P&T system. The combination of technologies implemented for OU-1 EA included (a) neat vegetable oil in the vadose zone in the former landfill and (b) emulsified vegetable oil within the footprint of the groundwater plume. In the first part of the deployment, neat oil spreads laterally and forms a thin layer on the water table beneath residual soil sources to intercept and reduce future VOC loading and to reduce oxygen inputs to the local groundwater. In the second part of the deployment, emulsified oil forms active bioremediation anaerobic treatment zones within the plume footprint to degrade existing groundwater contaminants (via reductive dechlorination, cometabolism, or both) and stimulates long-term attenuation capacity in the downgradient aerobic plume (via cometabolism).

The results from the first year of the field demonstration indicate that the dissolved TCE and PCE plumes have decreased in size and mass. Statistical tests indicate that the VOC concentrations in the majority of the source-area wells are decreasing. The VOC concentrations throughout the plume are projected to be below the target maximum contaminant level of 2 to 5 µg/L within 5 to 10 years—sooner than the design projection of 13 years. The biogeochemistry and microbial community within the structured geochemical zones are consistent with the design and appear to be stable. At Mound OU-1, EA has accelerated progress toward the remedial action objectives and reduced costs. Ongoing monitoring will determine whether the EA remedy has transitioned the site into monitored natural attenuation status and whether the EA will continue to be effective, timely, and sustainable.

INTRODUCTION

At the US Department of Energy (DOE), Office of Legacy Management, Mound, Ohio, Site, chlorinated organic contaminants (cVOCs) originating from the former solid-waste landfill have impacted groundwater in Operable Unit 1 (OU-1). The baseline groundwater remedy was groundwater pump and treat (P&T). Since the source materials have been removed from the landfill, the Mound core team, which consists of DOE, US Environmental Protection Agency (US EPA), Ohio EPA, and other stakeholders, is assessing the feasibility of switching from the active P&T remedy to a passive attenuation-based remedy. Toward this end, an enhanced attenuation (EA) strategy based on the creation of structured geochemical zones was developed. This EA strategy addresses the residual areas of elevated cVOCs in soil and groundwater while minimizing the rebound of groundwater concentrations above regulatory targets (e.g., maximum contaminant levels [MCLs]) and avoiding plume expansion while the P&T system is turned off. The EA strategy has improved confidence and reduced risk on the OU-1 groundwater transition path to monitored natural attenuation (MNA).

To better evaluate the EA strategy, DOE is conducting a field demonstration to evaluate the use of edible oils to enhance the natural attenuation processes. The field demonstration is designed to determine whether structured geochemical zones can be established that expedite the attenuation of cVOCs in the OU-1 groundwater. The EA approach at OU-1 was designed based on “structured geochemical zones” and relies on groundwater flow through a succession of

anaerobic and aerobic zones. The anaerobic zones stimulate relatively rapid degradation of the original solvent source compounds (e.g., cVOCs such as tetrachloroethene [PCE] and trichloroethene [TCE]). The surrounding aerobic areas encourage relatively rapid degradation of daughter products (such as dichloroethene [DCE] and vinyl chloride [VC]) as well as enhanced cometabolism of TCE resulting from the utilization of methane and other reduced hydrocarbons that are formed and released from the anaerobic zones.

PROCESS AND RESULTS

Operable Unit 1 Field Demonstration

The OU-1 groundwater field demonstration of EA was initiated in 2014 and will continue for a three-year period. For OU-1, the EA was implemented by targeted injection of an electron donor (vegetable oil) to create “structured geochemical zones.” VOCs in the altered subsurface system encounter alternating anaerobic and aerobic environments along the plume flow path. The goal of these structured geochemical zones is the effective and rapid anaerobic degradation of parent compounds such as TCE and PCE and aerobic degradation daughter compounds such as *cis*-dichloroethene (cDCE) and VC. The principles and technical basis of EA were initially developed by Savannah River National Laboratory, and the regulatory guidance for EA was developed by the Interstate Technology and Regulatory Council. The goal of EA is to provide a bridge between active groundwater treatments and MNA. EA relies on understanding and manipulating the contaminant mass balance. Technologies are applied to sustainably reduce the contaminant loading from the source and/or increase the rate of natural attenuation processes within the plume. As described below, the OU-1 EA strategy includes actions that address both contaminant loading and natural attenuation rates.

An advantage of the structured geochemical zone concept compared to traditional bioremediation is that aerobic conditions are maintained in much of the aquifer so that negative impacts associated with creating reducing conditions over a large area are minimized. The EA strategy based on structured geochemical zones is consistent with the existing aquifer conditions in OU-1 where zones of reducing geochemistry are present in the areas of cVOC impact.

The combination of technologies implemented for OU-1 EA included the injection of emulsified vegetable oil within the footprint of the groundwater plume and the injection of neat soybean oil in the vadose zone beneath the former landfill. In the first part of the deployment, emulsified oil forms active bioremediation anaerobic treatment zones within the plume footprint to degrade existing groundwater contaminants (via reductive dechlorination, cometabolism, or both) and stimulates long-term attenuation capacity in the downgradient aerobic plume (via cometabolism and direct metabolism). In the second part of the deployment, neat (pure) soybean oil spreads laterally and forms a thin layer on the water table beneath residual soil sources to intercept and reduce future VOC loading and to reduce oxygen inputs to the local groundwater.

First-Year Data Evaluation

The injection of emulsified oil and blending water began on August 25, 2014, and was completed on September 22, 2014. Injection of neat soybean oil started on September 22, 2014, and was completed on December 7, 2014. Routine sampling was performed to assess the performance of the deployment strategy and for long-term attenuation as well as to assess the effectiveness of natural attenuation in terms of lines of evidence similar to those outlined in EPA's document *Use of Monitored Natural Attenuation at Superfund, RCRA Corrective Action, and Underground Storage Tanks Sites* (OSWER 9200.4-17P).

First Line of Evidence: *Groundwater data demonstrate clear and meaningful trends of decreasing contaminant mass and/or concentration over time and the presence of degradation (daughter) products at appropriate monitoring points.*

The results from the first year of the field demonstration indicate that the dissolved TCE plume has decreased in size and mass (Figures 1 and 2). Statistical tests indicate the VOC concentrations in the majority of the source-area wells are decreasing. The VOC concentrations throughout the plume are projected to be below the target maximum contaminant level of 2 to 5 µg/L within 5 to 10 years—sooner than the design projection of 13 years.

Figures 3 and 4 depict the concentration of parent and daughter cVOCs in OU-1 monitoring wells located in the anaerobic treatment zones and downgradient of those areas. Data provide clear confirmation of reductive dechlorination in the anaerobic treatment zones. The lack of DCE (or vinyl chloride) in wells downgradient of the treatment zones is consistent with aerobic metabolism or cometabolism (Figures 5 and 6).

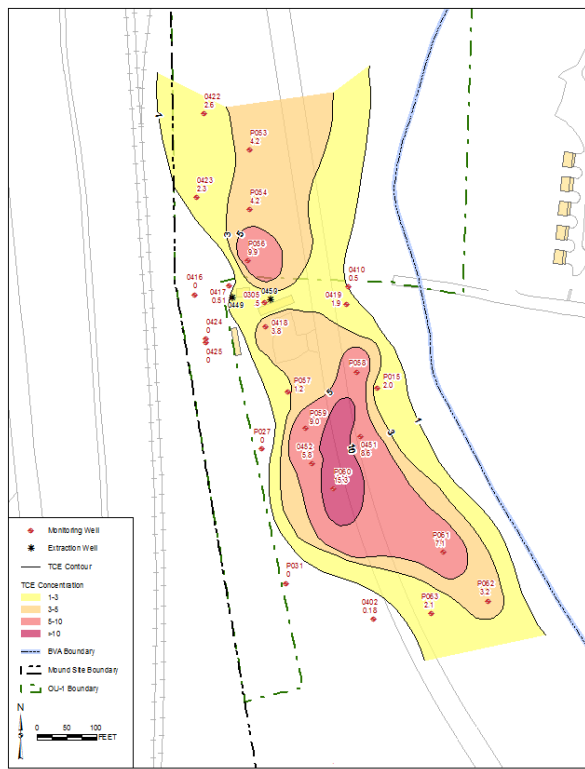


Figure 1. OU-1 TCE Plume Distribution in August 2014 (in $\mu\text{g/L}$ concentration)

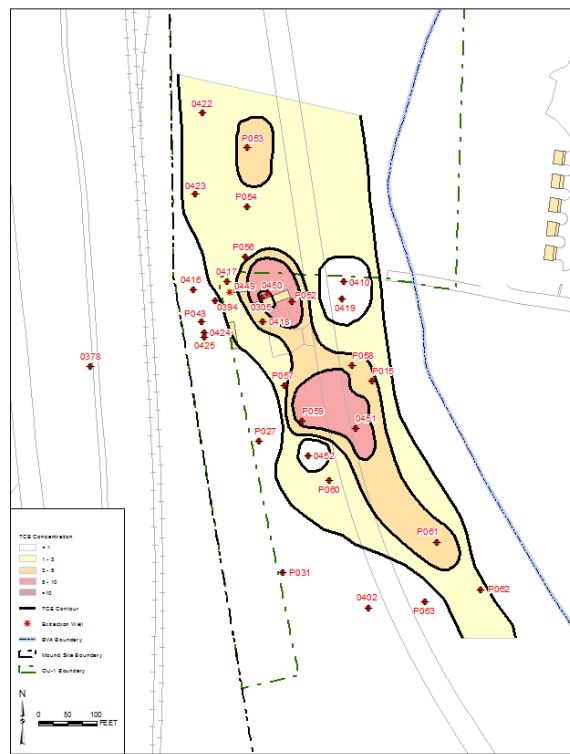


Figure 2. OU-1 TCE Plume Distribution in August 2015 (in $\mu\text{g/L}$ concentration)

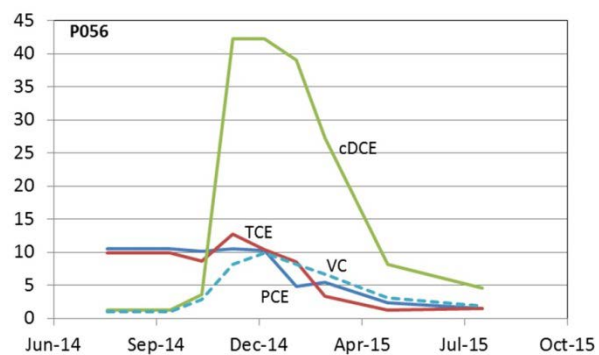


Figure 3. cVOC Concentrations in Treatment-Zone Monitoring Well P056 (in $\mu\text{g/L}$ concentration)

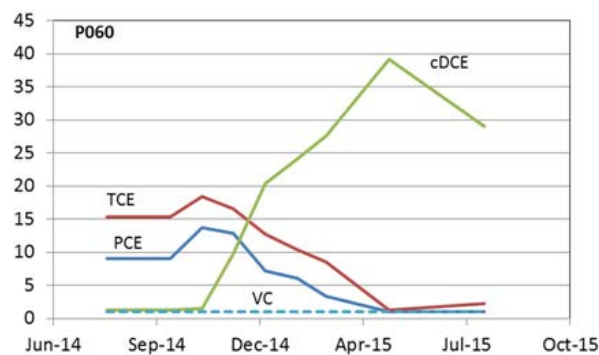


Figure 4. cVOC Concentrations in Treatment-Zone Monitoring Well P060 (in $\mu\text{g/L}$ concentration)

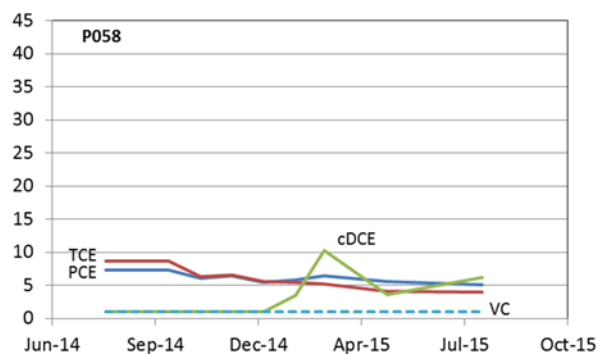


Figure 5. cVOC Concentrations in Intermediate Well P058 (in µg/L concentration)

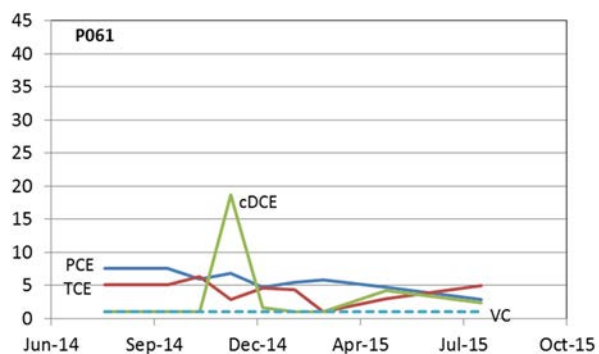


Figure 6. cVOC Concentrations in Downgradient Well P061 (in µg/L concentration)

The numbers of exceedances of regulatory limits (e.g., MCL or MCL guidelines) and how these change over time is an important line of evidence that documents progress toward specific end state goals. The following graphs provide additional detail, depicting the number of total exceedances of cVOC MCLs (Figure 7) and the total number of monitoring wells with one or more cVOC MCL exceedances (Figure 8) as a function of time. The trend evaluation covered the period from August 2014 through August 2015, which is considered the first year of the field demonstration. In Figure 7, multiple contaminant exceedances in a single well contribute to the totals for the sampling event, while in Figure 8, the total indicates the number of wells (i.e., locations) where one or more compounds is above the MCL. The exceedance trends provide an emergent metric that responds to all of the complex process and flow dynamics occurring in the field (e.g., contaminant degradation and ingrowth, partitioning, flushing, varying well locations relative to the source/plume/injection, increasing and decreasing concentrations, etc.).

An exponential (first-order) approximation provides a reasonable fit to the exceedance trends measured in the OU-1 monitoring wells for the period of the enhanced attenuation deployment. Assuming that the observed trends continue and using the exponential fit equations (projecting to a value of 0.01), the data suggest

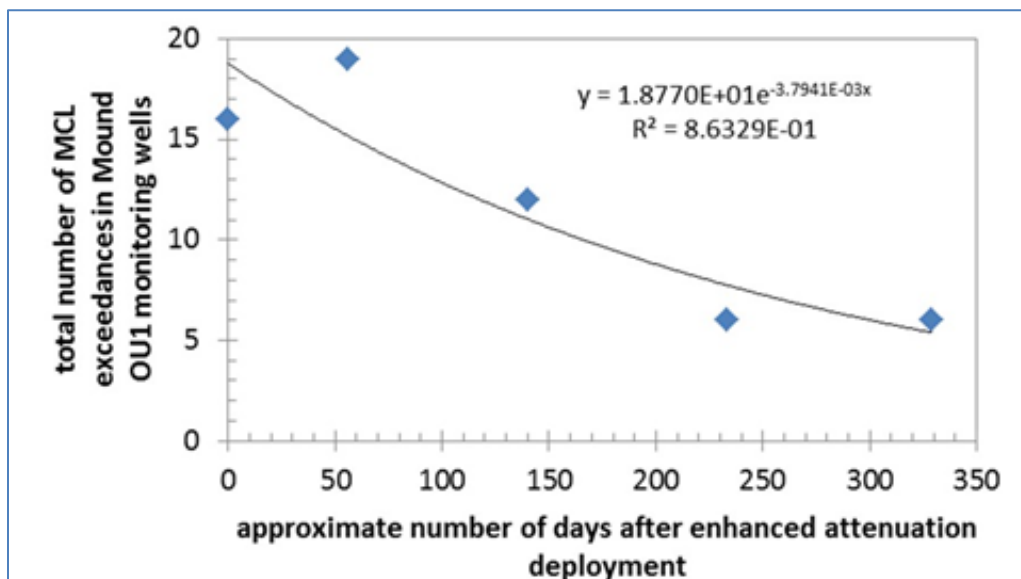


Figure 7. Total Number of MCL Exceedances for all cVOC Contaminants and Daughter Products in the Quarterly OU-1 Monitoring Well Sampling Results

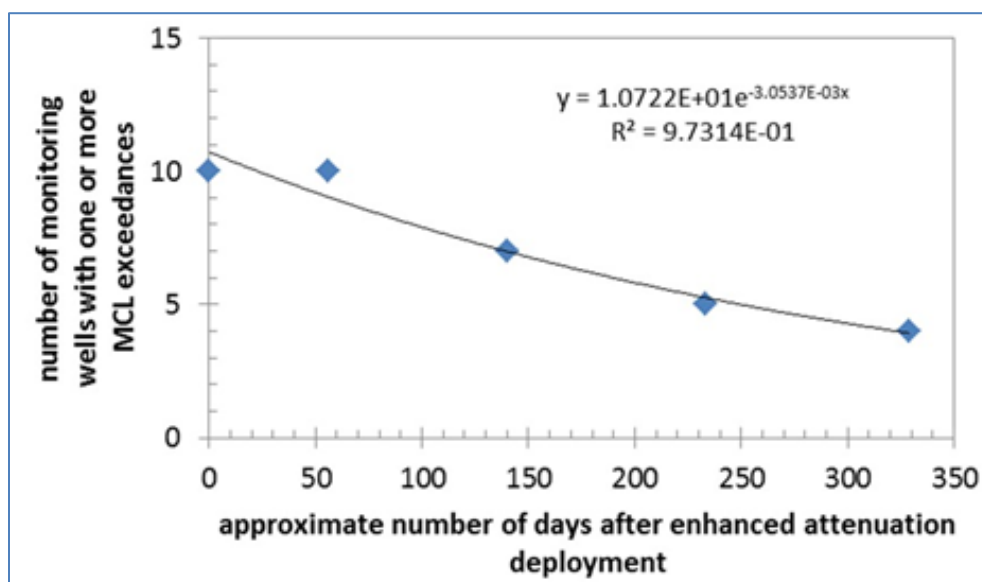


Figure 8. Total Number of Wells (locations) in Which One or More of the cVOC Contaminants or Daughter Products Exceeded MCL in the Quarterly OU-1 Monitoring Well Sampling Results

that OU-1 groundwater will reach MCL goals for all locations and constituents in approximately 7 years or less (circa 2020). This projected remediation time frame is generally consistent with meeting the Mound OU-1 core team design assumption of 13 years.

Concentrations and concentration trends in the downgradient sentinel wells are an important metric related to potential plume expansion. The concentrations and trends in these wells demonstrate that the cVOC plume is not expanding. The

concentrations of both PCE and TCE in well P061, which is located between the cVOC plume and the downgradient wells, have decreased since the EA deployment; both constituents were above the MCL in the baseline sampling event and were below the MCL in the most recent sampling event. In the other distal downgradient sentinel wells, concentrations of all constituents have remained below MCL in all samples.

Second Line of Evidence: *Hydrologic and geochemical data that can be used to indirectly demonstrate the types of natural attenuation processes.*

Several monitoring parameters can be indicative of anaerobic biodegradation processes:

- Decreases in oxidation-reduction potential (ORP) and negative ORP indicate areas transitioning to anaerobic conditions.
- Decreases in dissolved oxygen (DO) indicate oxygen utilization from increases in microbial activity.
- Increases in metabolic byproducts (methane and alkalinity) indicate the initiation of fermentation and associated microbial activity.

ORP and DO data from monitoring wells support the interpretation that aquifer geochemistry is changing from oxidizing to reducing conditions and that depletion of oxygen is occurring within the treatment zones. Also, alkalinity data as well as increased methane concentrations in treatment-zone wells indicate areas where microbial activity has increased since injection of the edible oils. The chemistry of the aquifer at the downgradient wells continues to have higher ORP values and DO concentrations.

Third Line of Evidence: *Specific attenuation processes, such as microbial communities, demonstrate or quantify the occurrence of a particular natural attenuation process and ability to degrade cVOCs.*

To assess the biological response of the subsurface in representative areas of OU-1, quantitative polymerase chain reaction measurements of microbial community DNA isolated from groundwater samples were performed. Samples were collected prior to edible oil injection, and then the wells were resampled 3 and 6 months after the baseline samples. Six wells that represent different biogeochemical settings were sampled to provide information on changes within and downgradient of the reductive treatment zones, as well as provide insights on changes near the original source and in the distal portion of the plume.

All of the microbial counts have increased following the EA deployment: total bacteria, chlorinated-solvent-reducing bacteria, aerobic cometabolic bacteria, methanogens, and sulfate reducers. Reasonable target results for classes of related organisms to support the structured geochemical zones paradigm at low-concentration cVOC sites would generally be in the 10^3 to 10^5 per mL range (Figure 9); this range would be appropriate for both reductive dechlorination and aerobic (co)metabolism organisms/genes. This range would correspond to acceleration of

reductive dechlorination of contaminants in the anaerobic zones while allowing the presence of the surrounding near-field aerobic zones for completing the degradation process to nontoxic end products.

The wells in the treatment zones have shown significant increases in chlorinated-solvent-reducing bacteria that are capable of degrading TCE and PCE. Side-gradient, intermediate, and downgradient wells have also shown increases in chlorinated-solvent-reducing bacteria counts.

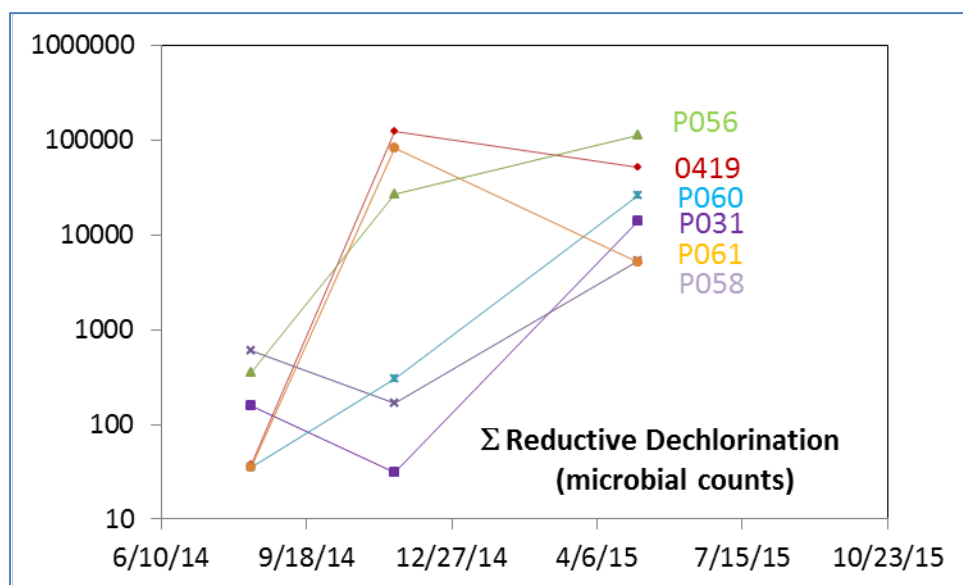


Figure 9. Sum of Reductive Dechlorinating Microbes Counts, per mL

COST

The results from the first year of the field demonstration indicate that the dissolved TCE and PCE plumes have decreased in size and mass. The VOC concentrations throughout the plume are projected to be below the target MCL of 2 to 5 µg/L within 5 to 10 years (calendar year [CY] 2019 to CY 2024)—somewhat faster than the original design projection of 13 years (CY 2027). Note that the estimated timeframe to reach target MCLs using the baseline P&T system was 26 years (CY 2040) at a projected total cost of \$7 million to \$9 million. The projected total cost for the EA remedy was \$1.7 million to \$2.6 million based on the original 13 year EA design timeframe - a cost savings approximately \$4 million to \$7 million versus the baseline. The data from the first year of the field demonstration, and the shorter projected timeframe to reach MCLs suggest further cost reductions are possible (approximately \$0.4 million to \$2 million).

CONCLUSIONS

The hybrid structured geochemical zone approach supports reasonable progress toward remedial goals based on the complementary strengths of the processes that occur in the two redox conditions. S structured geochemical zones allow the

microbial communities to work in sequence in environments to allow the overall degradation to be relatively rapid and robust (easing the requirements for specific microorganisms).

The results from the first year of the field demonstration support that the development of the structured geochemical zones is progressing as anticipated. Aquifer geochemistry is changing from an oxidizing to a reducing condition. The initiation of fermentation and associated microbial activity is indicated by increases in metabolic byproducts in groundwater samples. Microbial counts have increased (total bacteria, chlorinated-solvent-reducing bacteria, aerobic cometabolic bacteria, and methanogens). Chlorinated-solvent-reducing bacterial counts showed significant increases in treatment zones. Within these structured geochemical zones, the dissolved TCE plume has decreased in size, and statistical tests indicate the cVOC concentrations in the majority of the source-area wells are decreasing.

The cVOC concentrations throughout the plume are projected to be below the target maximum contaminant level of 2 to 5 µg/L within 5 to 10 years. This is sooner than the design projection of 13 years and significantly sooner than the projected cleanup time frame of 26 years for the baseline P&T system.

Implementation of Enhanced Attenuation at the DOE Mound Site OU-1 Landfill: Accelerating Progress and Reducing Cost – 16270

Authors:

Gwen Hooten, Site Manager

U.S. Department of Energy Office of Legacy Management (LM)

Rebecca Cato – Navarro Research and Engineering, Inc., *LM Contractor*

Brian D Riha, Brian Looney – Savannah River National Laboratory, Aiken, South Carolina

Waste Management Conference • March 2016



U.S. DEPARTMENT OF
ENERGY

Legacy
Management

Implementation of *Enhanced Attenuation* at the DOE Mound Site



- Introduction
- Enhanced Attenuation
- Implementation
- 1st year monitoring using “Multiple Lines of Evidence”
- Results and Path Forward




U.S. DEPARTMENT OF
ENERGY

Legacy
Management


Introduction

- Operable Unit 1 (OU-1) soil and groundwater contaminated by chlorinated volatile organic compounds (cVOCs)
 - 65 year history
 - Baseline remedy is Pump and Treat [P&T] – projected timeframe $\cong$ 2040
 - DOE LM, regulators and stakeholders evaluating alternatives ranging from continued P&T to Monitored Natural Attenuation (MNA)
- Team Selected Enhanced Attenuation (EA)
 - projected remedial timeframe reduced $\cong$ 2027

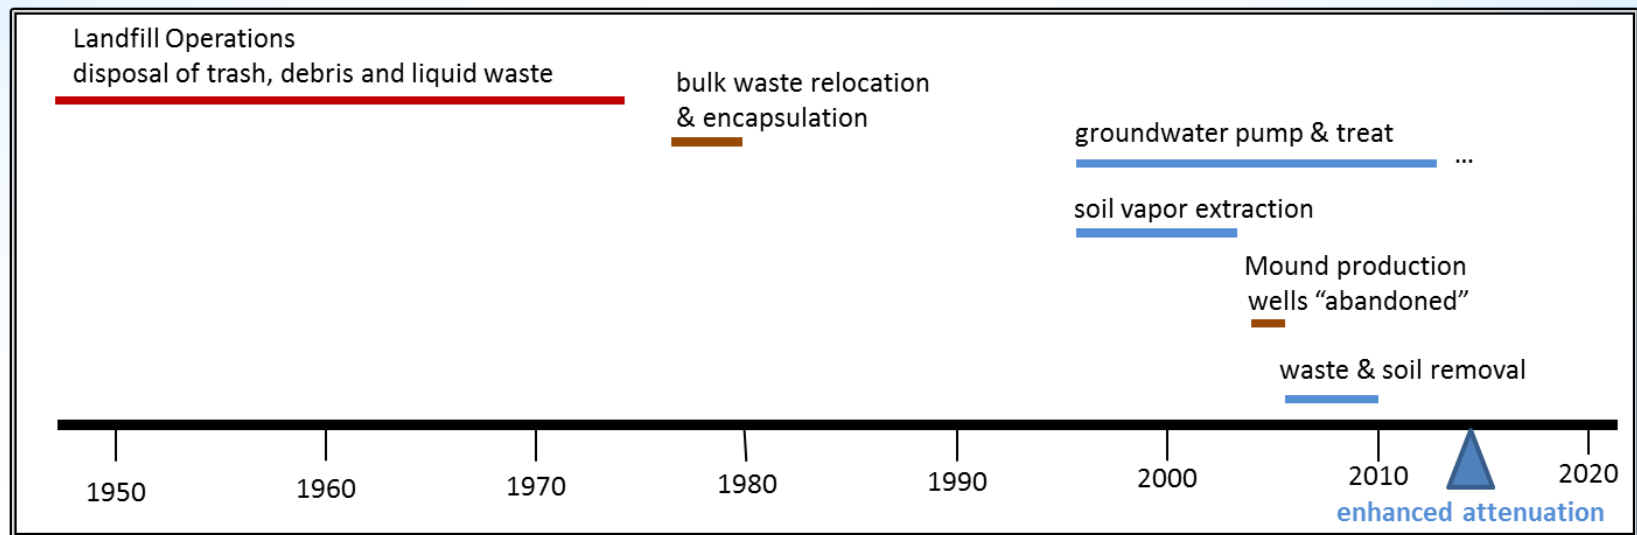


The Enhanced Attenuation Process

Enhanced attenuation is a plume remediation strategy to achieve groundwater restoration goals by providing a “bridge” between source-zone treatment and Monitored Natural Attenuation (MNA) and/or between MNA and more active methods.

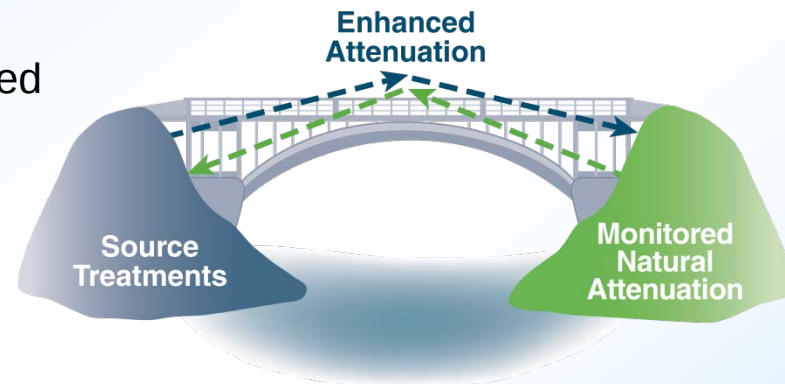

Processes and the role of Mass Balance:

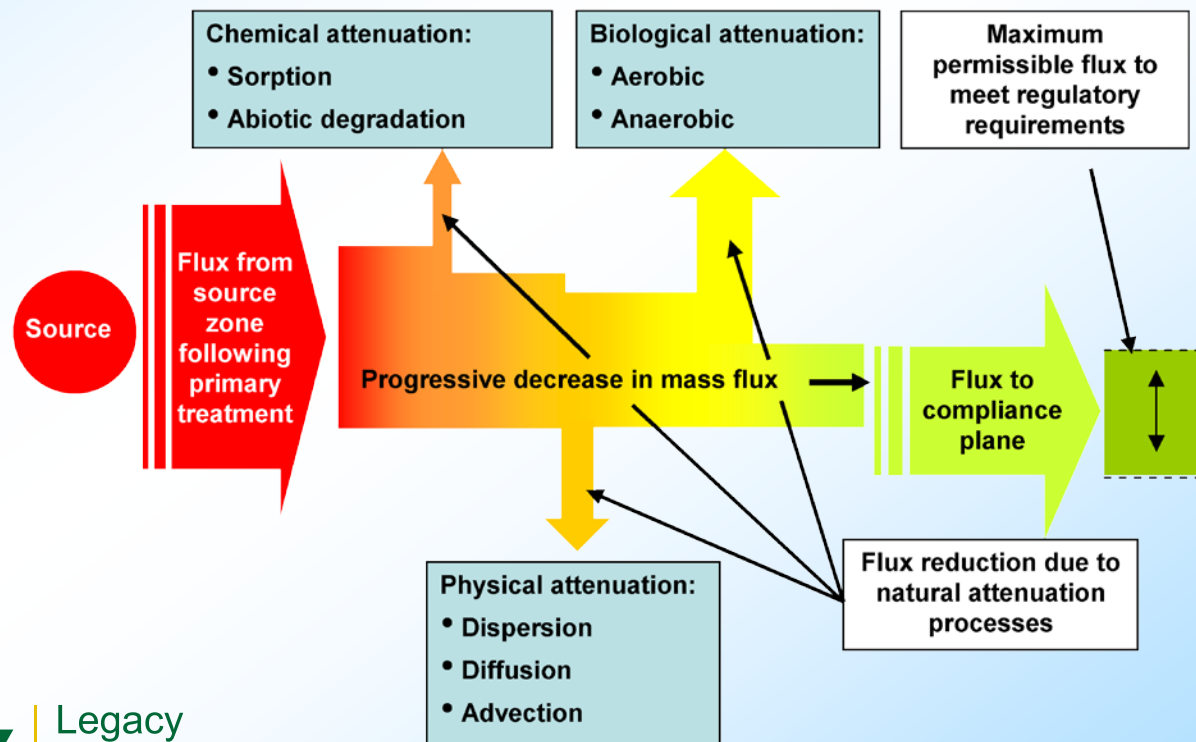

(ITRC, 2008)




U.S. DEPARTMENT OF
ENERGY

Legacy
Management

Synopsis of recent regulatory decision

- Selected EA using edible-oils to create “structured geochemical zones” and support passive natural attenuation process for VOCs in soil and groundwater
 - Minimize / suppress rebounding groundwater concentrations
 - Avoid plume expansion while P&T system is turned off
 - Meet remediation goals faster and to reduce costs
- Initiated 3 year Field Demonstration
 - Included performance criteria and contingencies
 - Data from Year 1 are in – encouraging

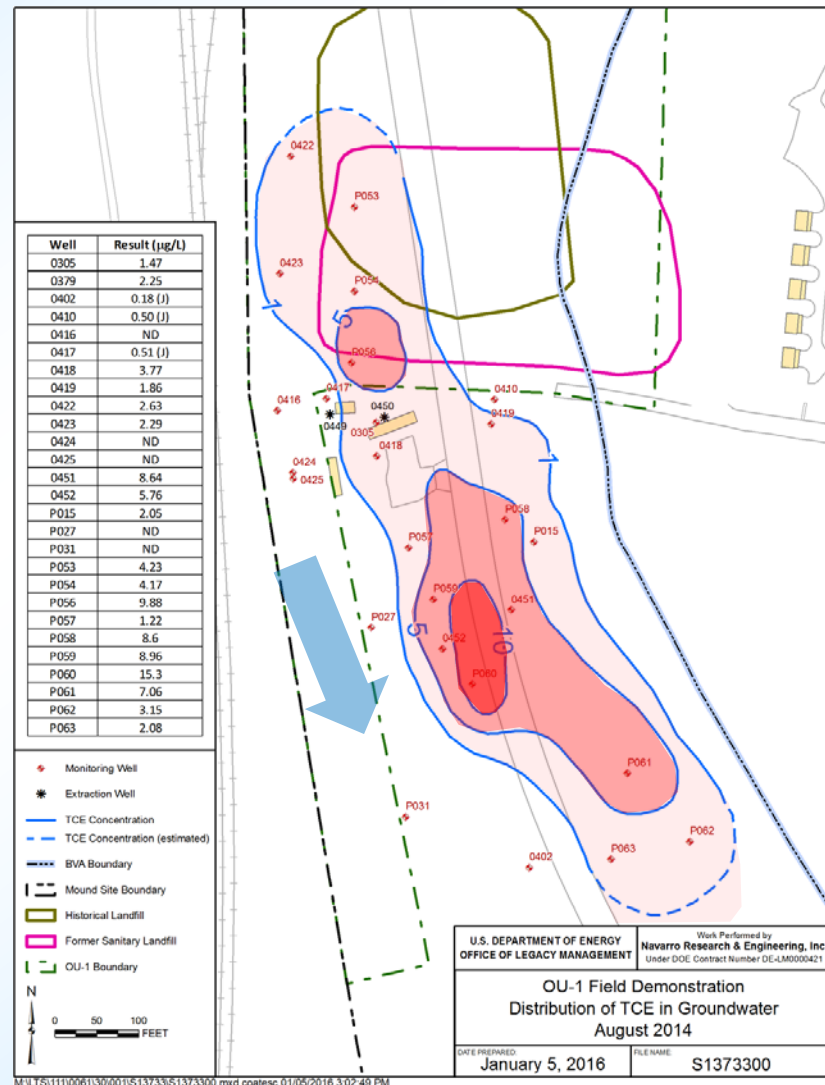


2014 Plume of Trichloroethene (TCE)

Design Approach

■ Structured geochemical zones

- Relies on groundwater flow through succession of anaerobic and aerobic zones
- Anaerobic zones stimulate rapid parent-compounds degradation
- Aerobic areas encourage rapid daughter-products degradation
- Basis for utilizing structured zones: relative degradation rate of various cVOCs under anaerobic and aerobic conditions

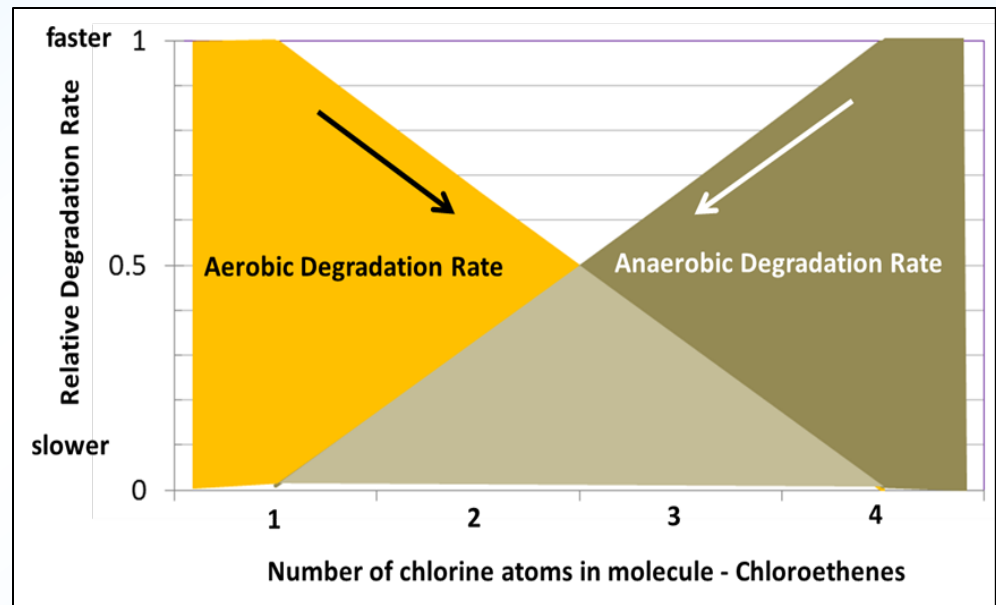


Design Approach (continued)

■ Groundwater (E-series)

- Flow paths originating from beneath former landfill
- Groundwater impact area downgradient of former landfill

■ Soil (N-series)

- Areas with elevated PCE and TCE soil concentrations

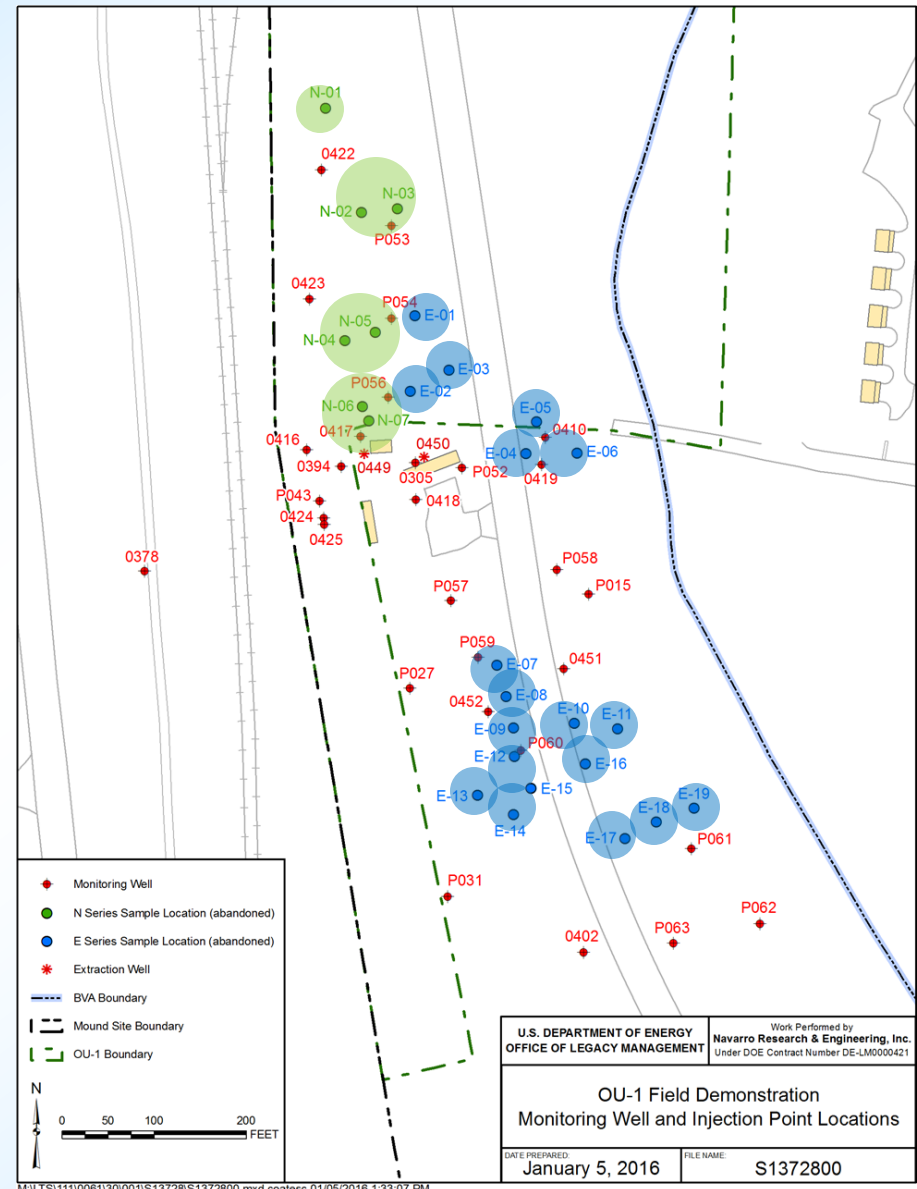

U.S. DEPARTMENT OF
ENERGY

Legacy
Management

EA Deployment



U.S. DEPARTMENT OF
ENERGY

Legacy
Management

Field Demonstration – Year 1 Results

- Data generated from August 2014 through August 2015 used to:
 - Support multiple lines of evidence (EPA MNA Guidance)
 - Support establishment of structured geochemical zones
 - Provide initial assessment of progress toward remediation goals
- Lines of evidence:
 - Trends and changes in cVOC mass and concentration
 - Geochemical footprint
 - Microbial community
- Degradation/attenuation rates



First Line of Evidence



Trends and Changes in cVOCs

- Changes in parent compound concentrations 1 year after injection completion
- Trends in cVOC parents and daughters - concentration and mass



First Line of Evidence

Changes in PCE and TCE distribution

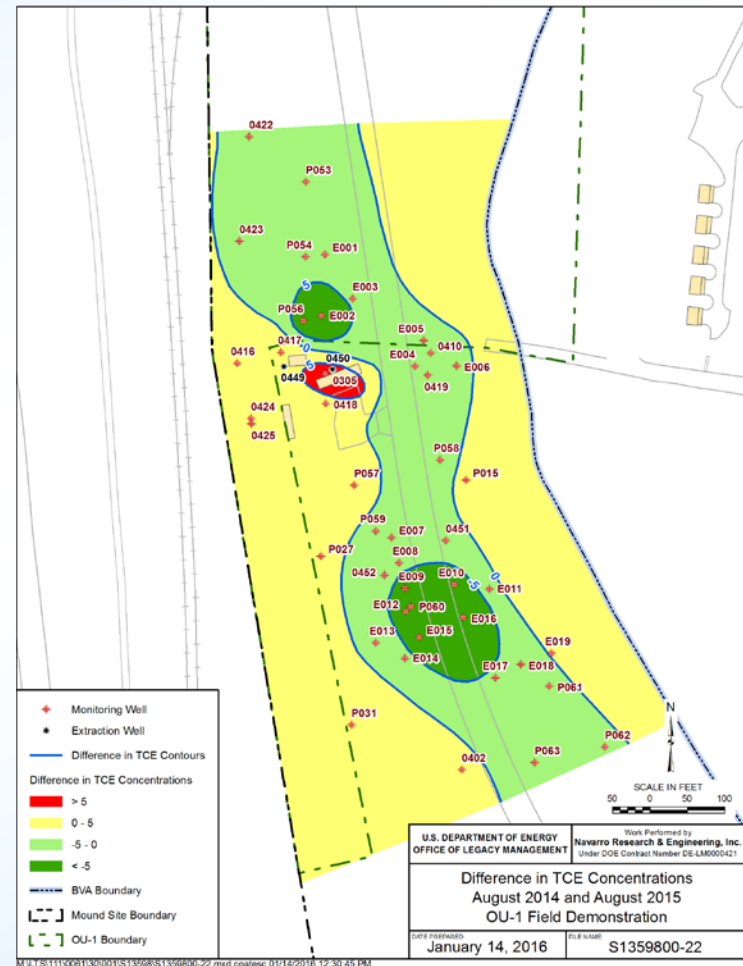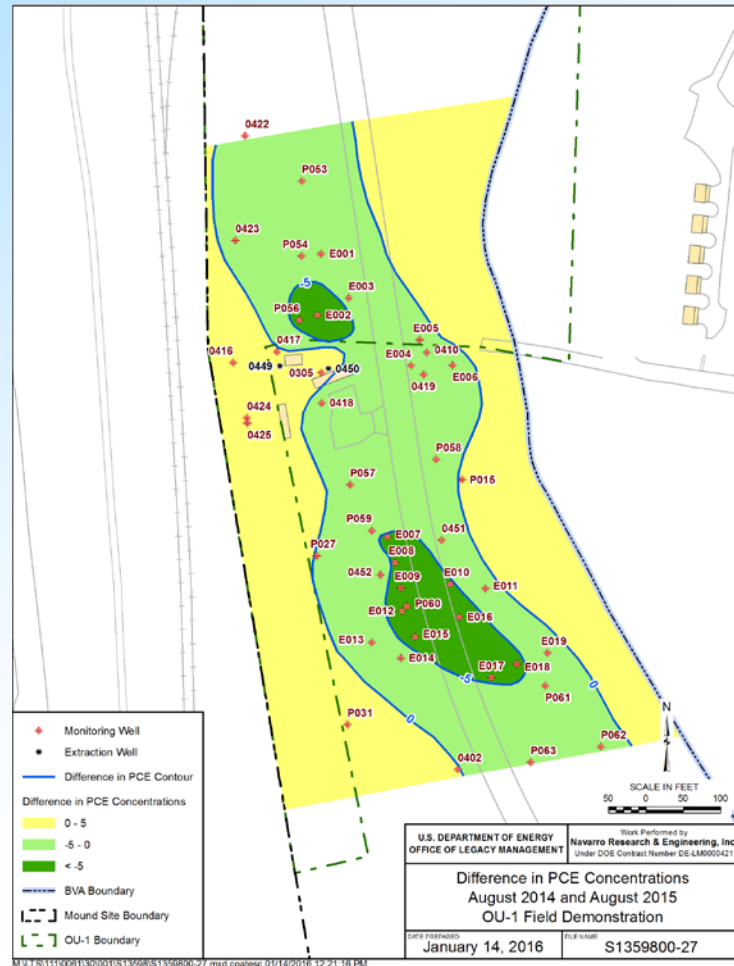






U.S. DEPARTMENT OF
ENERGY

Legacy
Management

First Line of Evidence

Trends in Parent and Daughter Products

- Monitoring and Remediation Optimization Software (MAROS) evaluation
- MAROS trends in individual well concentrations
 - Generally decreasing for parent cVOCs (PCE and TCE) - except one well (0305)
 - *Generally increasing in treatment zones for cis-1,2-dichloroethene (cDCE) indicating reductive dechlorination of parent cVOCs*
- MAROS plume analysis (estimated mass, center of mass, and spread of mass) indicates PCE and TCE plumes are shrinking



Second Line of Evidence

Geochemical Footprint

- Document that the conditions are in place for attenuation
- Indirect measure of potential attenuation process in different areas as structured geochemical zones are developed
 - Biogeochemical Setting
 - Dissolved oxygen (DO)
 - Oxidation-reduction potential (ORP)
 - pH
 - TOC
 - Competing electron acceptors (anaerobic zones)
 - DO and sulfate
 - Diagnostic indicators
 - Methane and iron





Third Line of Evidence

Microbial Information – Site Specific Processes


- Confirm that one or more recognized attenuation processes are occurring
- Attenuation mechanism(s) studied are site specific – for OU1 and Mound we focus on structured geochemical zones (alternating anaerobic and aerobic zones)
 - Presence and pattern of daughter products
 - Subsurface microbial response



Third Line of Evidence Conclusions

Presence and Pattern of Daughter Products

- Anaerobic treatment zone
 - Parent products decrease
 - Daughter products observed
- Plume interior
 - Parent products concentrations relatively stable – one well increased
 - Daughter products detected in several wells
- Downgradient/sentinel wells
 - Parent products concentrations stable or decreasing
 - Daughter products detected at low levels
- Temporal patterns support establishment of structured geochemical zones

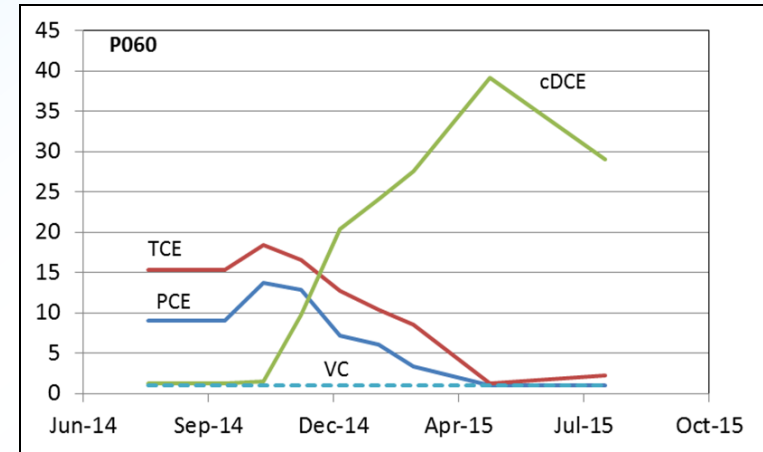

Third Line of Evidence

Subsurface Microbial Response

- Quantitative polymerase chain reaction (qPCR) measurements of microbial community DNA isolated from groundwater samples
 - Three sampling events in six wells representing different biogeochemical settings
- Results provide three classes of microbial data:
 - Total microbial counts and information on community structure
 - Microbial counts contributing to cVOC reduction
 - Microbial counts contributing to cVOC oxidation
 - Counts of organisms that have the capability to produce specific enzymes that facilitate known attenuation processes



Third Line of Evidence


Subsurface Microbial Response

- Wells near injection sites
 - Increase in several organism classes that contribute to anaerobic attenuation
 - Increase in several organism classes that contribute to aerobic (co)metabolism
- Wells mid-plume and downgradient
 - Increase in organism classes that contribute to anaerobic attenuation of PCE and TCE
 - Increase in organism classes that contribute to aerobic (co)metabolism but typically not to “significant” levels



Degradation/Attenuation Rates

- Assess progress toward remediation goals and project remediation time frames:
 - Individual wells trends and changes in contaminant mass
 - Determine degradation rate constants estimates
 - Concentration patterns as contamination moves downgradient – longsects
 - Downgradient water quality data -- field confirmation that plume not expanding

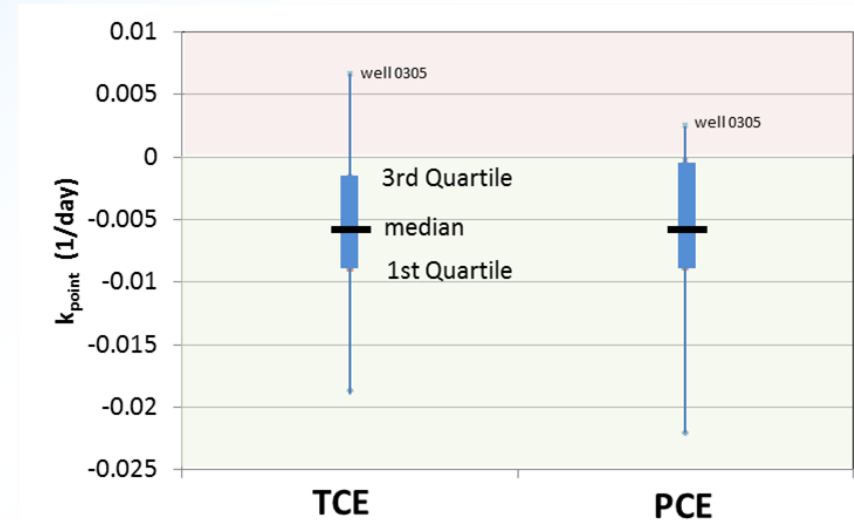

Degradation/Attenuation Rates

Downgradient Water Quality

- All concentrations have remained below MCL in terminal sentinel wells
- PCE and TCE concentrations in an intermediate sentinel well have decreased below MCL
- Stable and downward trends in mass provide field-scale evidence that attenuation rates sufficient to degrade mass fluxes from source zones



Summary Results from Year 1

- PCE and TCE plumes decreased in both size and mass – plumes not expanding
- Concentrations projected to be below MCLs within 5 to 10 years - in keeping with the 13-year projection
- Biogeochemistry and microbial community confirm establishment of structured geochemical zones
- Enhanced attenuation has accelerated progress toward remedial objectives and will significantly reduce costs



U.S. DEPARTMENT OF
ENERGY

Legacy
Management



100 ft

Performance Metrics and Path Forward

Development of structured geochemical zones:

Acceptable performance	Unacceptable Performance
Reducing conditions at injection points	Lack of reducing conditions at injection points
Aerobic conditions along downgradient and lateral fringes	Lack of aerobic conditions along downgradient and lateral fringes
Decrease in cVOC concentrations	No change in cVOC concentrations.
Increase in cVOC daughter products	Lack of cVOC daughter products.
Stability or shrinking of the plume	Expansion of the plume

cVOC concentrations and trends in intermediate sentinel wells:

Acceptable performance	Unacceptable Performance
Stable or decreasing cVOC concentrations	Upward trends in cVOC concentrations.
Concentration below 2x MCL for TCE and PCE	Sustained exceedance of 2× MCL for TCE or PCE.
Aerobic conditions	Indication of geochemical change to anaerobic
Low VOC daughter products	Appearance of significant (above MCL) cVOC daughter products.

cVOC concentrations and trends in terminal sentinel wells:

Acceptable performance	Unacceptable Performance
cVOCs below MCL	Sustained exceedance of MCL.
Stable or decreasing cVOC concentrations	Upward trends in cVOC concentrations.
Aerobic conditions	Indication of geochemical change to anaerobic
Low VOC daughter products	Appearance of significant (above MCL) cVOC daughter products.

