

Hydrogen Combustion Research for Gas Turbine Engines

SAND2006-4858C



**Jay Keller¹, George Richards²,
Robert Schefer¹, Tim Williams¹, Pete Strakey²
Steve Woodruff² and Daniel Maloney²**

**¹Combustion Research Facility
Sandia National Laboratories
Livermore, CA 94551-0969**

**²National Energy Technology Laboratory
U.S. Department of Energy
Morgantown, WV 26507-0880**

**IEA Task Leaders Meeting
August 25, 2004**


Partnering with National Energy Technology Laboratory (NETL)



Approach:

- Extend data base for lean premixed swirl burners to realistic pressures and temperature. Emphasis on H₂-enriched fuels.
- Atmospheric-pressure tests in SimVal burner at Sandia; high-pressure tests at NETL.
- Utilize Sandia's diagnostic expertise for the development of high pressure diagnostics in realistic gas turbine environments.

SimVal Burner

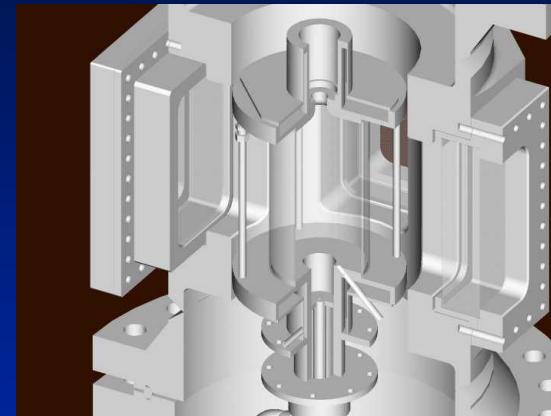

Sandia Burner


- Atmospheric pressure operation
- Design optimized for Sandia CRF laboratory facilities
- Full optical access for optimal use advanced diagnostics




NETL Burner

- Operation to 30 atmospheres
- Inlet temperature to 800 K
- Optical access
- Limited datasets at elevated pressure

SimVal Combustor Geometry

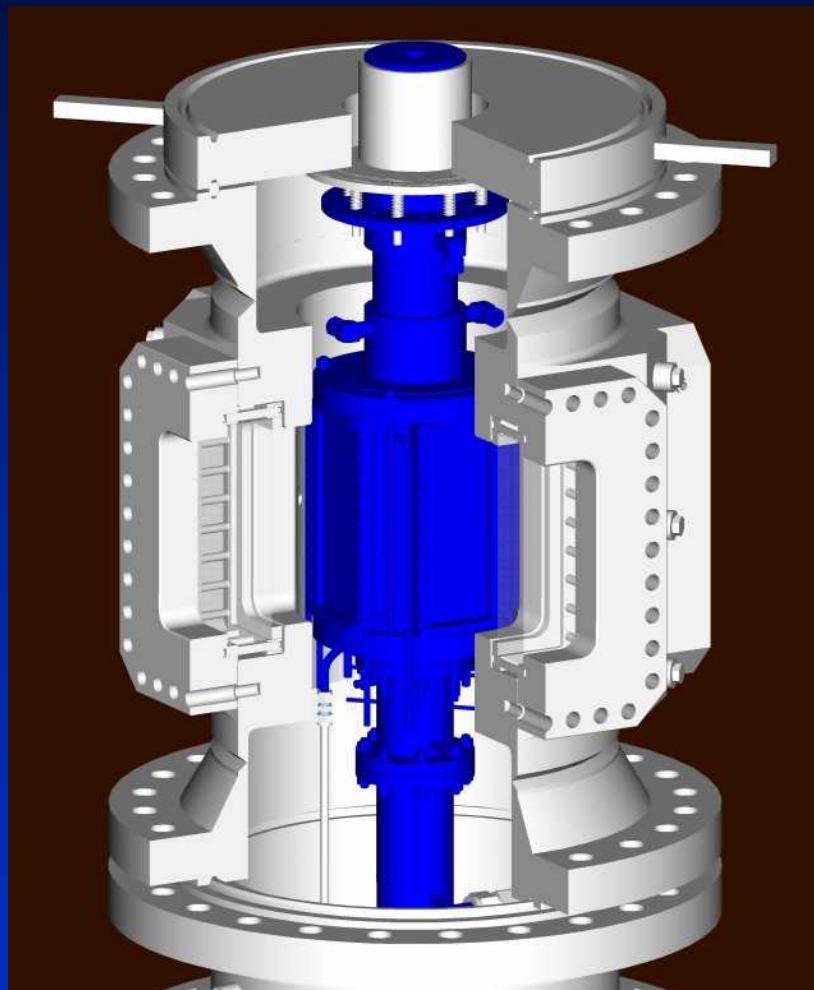

Fuel Injection
(future)

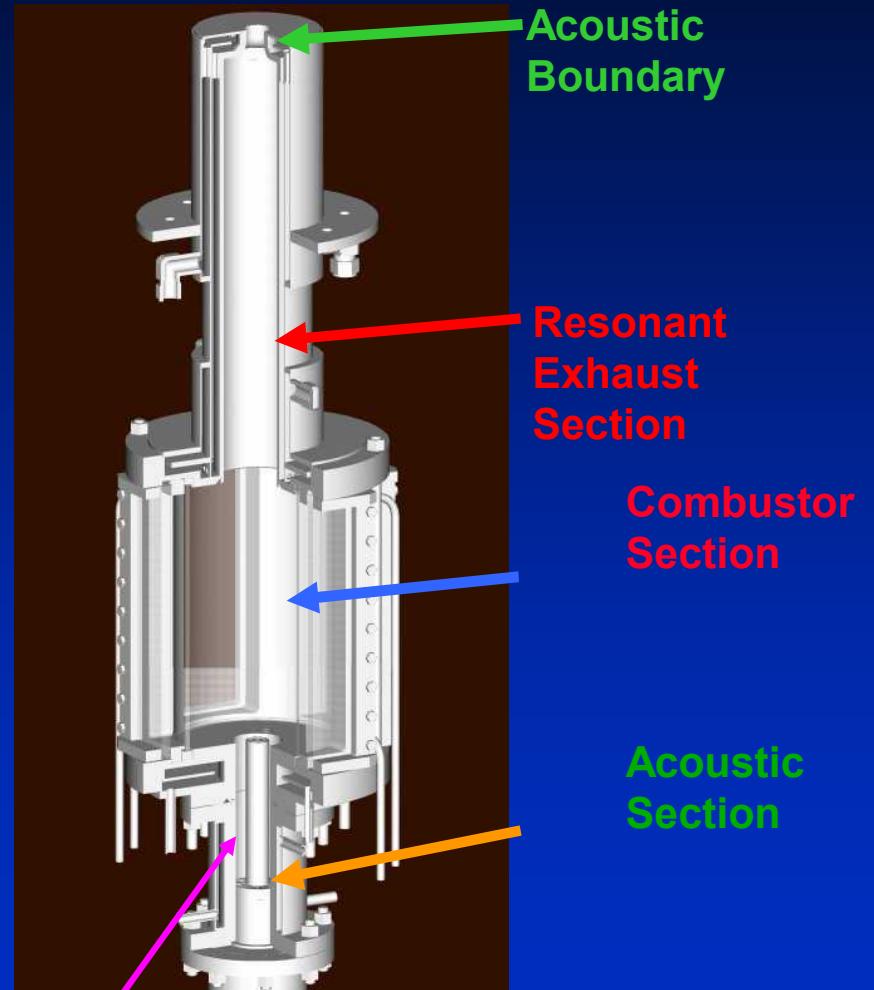

Fuel Injection
(current)

Sandia National Laboratories



SimVal Facility Test Capabilities



⇒ Combustion Air

- Flow Rate: 0 - 70,000 slm (0 – 1.1 kg/s)
- Preheat Temperature: 0 – 800 °K

⇒ Natural Gas

- Flow Rate: 0 - 4,700 slm

⇒ Hydrogen

- Hydrogen flow rate: 0 - 470 slm

⇒ Test Section Operating Conditions


- Pressure: 0 - 2,200 kPa (22 atm)
- Temperature: 0 – 800 °K



Experimental System



OH PLIF System

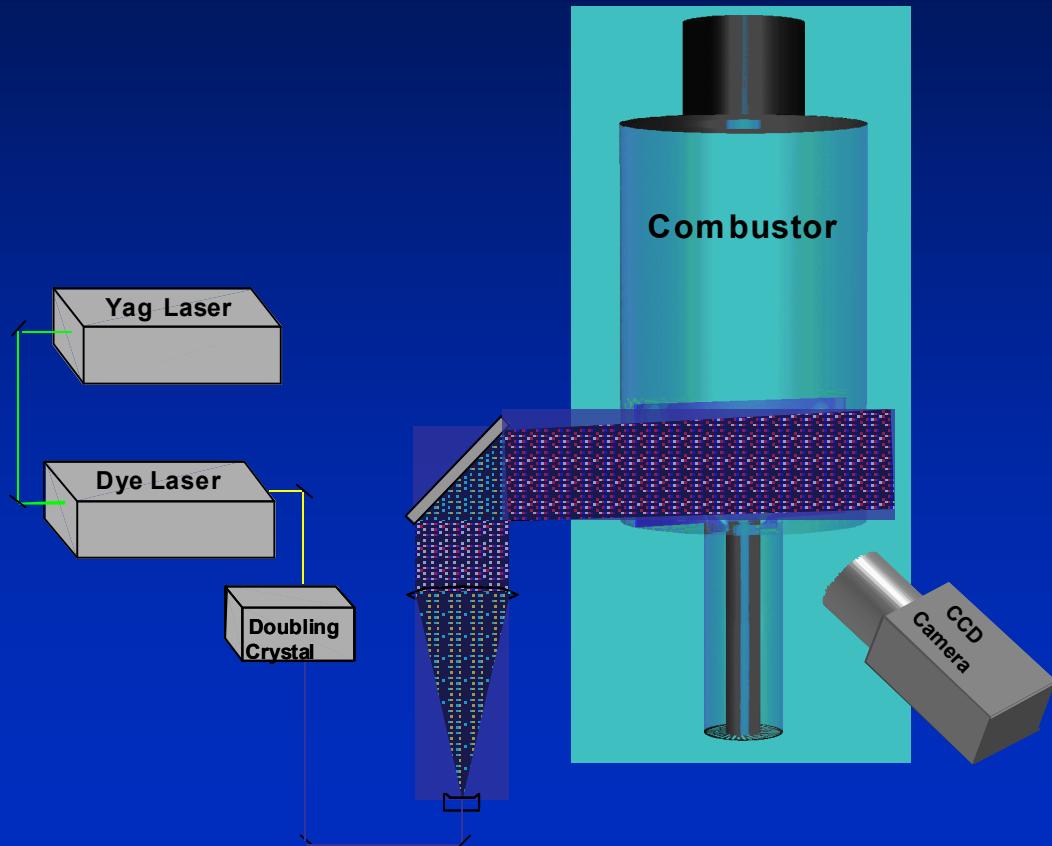

Test Conditions

Pressure 1-8 atm



Preheat 520-600 K

H₂ addition 0-60% in NG

Equivalence ratio 0.5-0.6

Effect of Pressure

60% H₂ / 40% NG $\Phi=0.6$ $T_{in}= 522-580K$ $V=40$ m/s

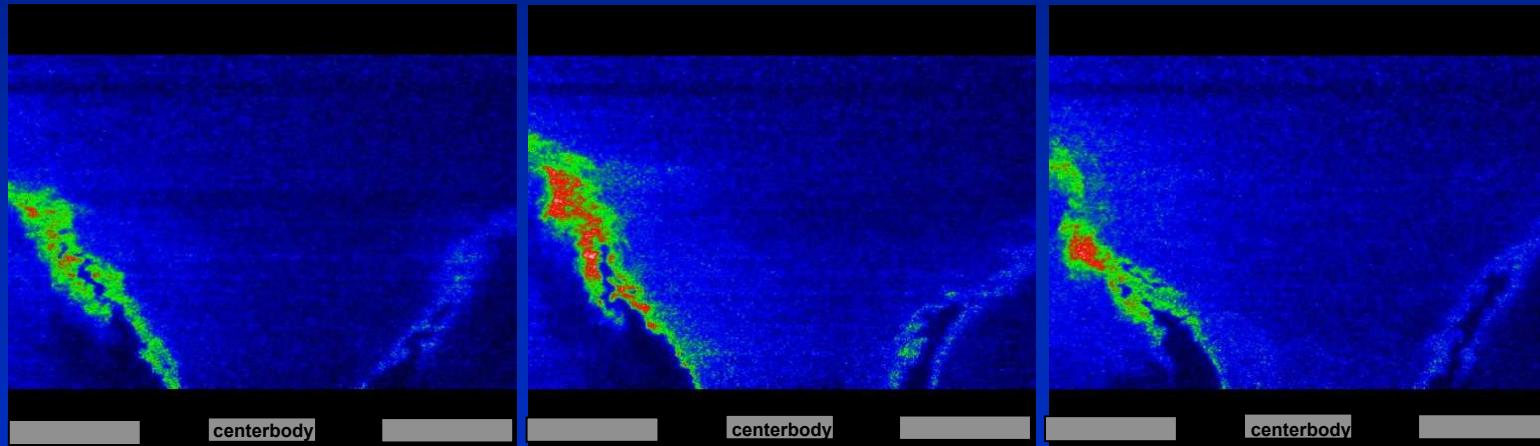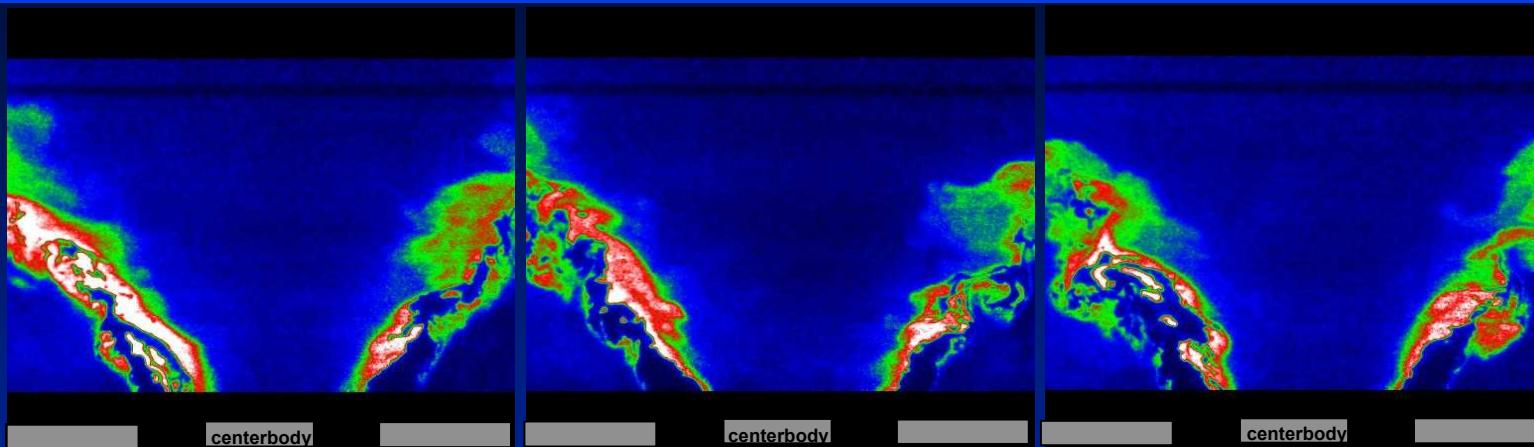


- Increased pressure reduces flame thickness

Effect of H_2 Addition



Average of 200 OH PLIF Images

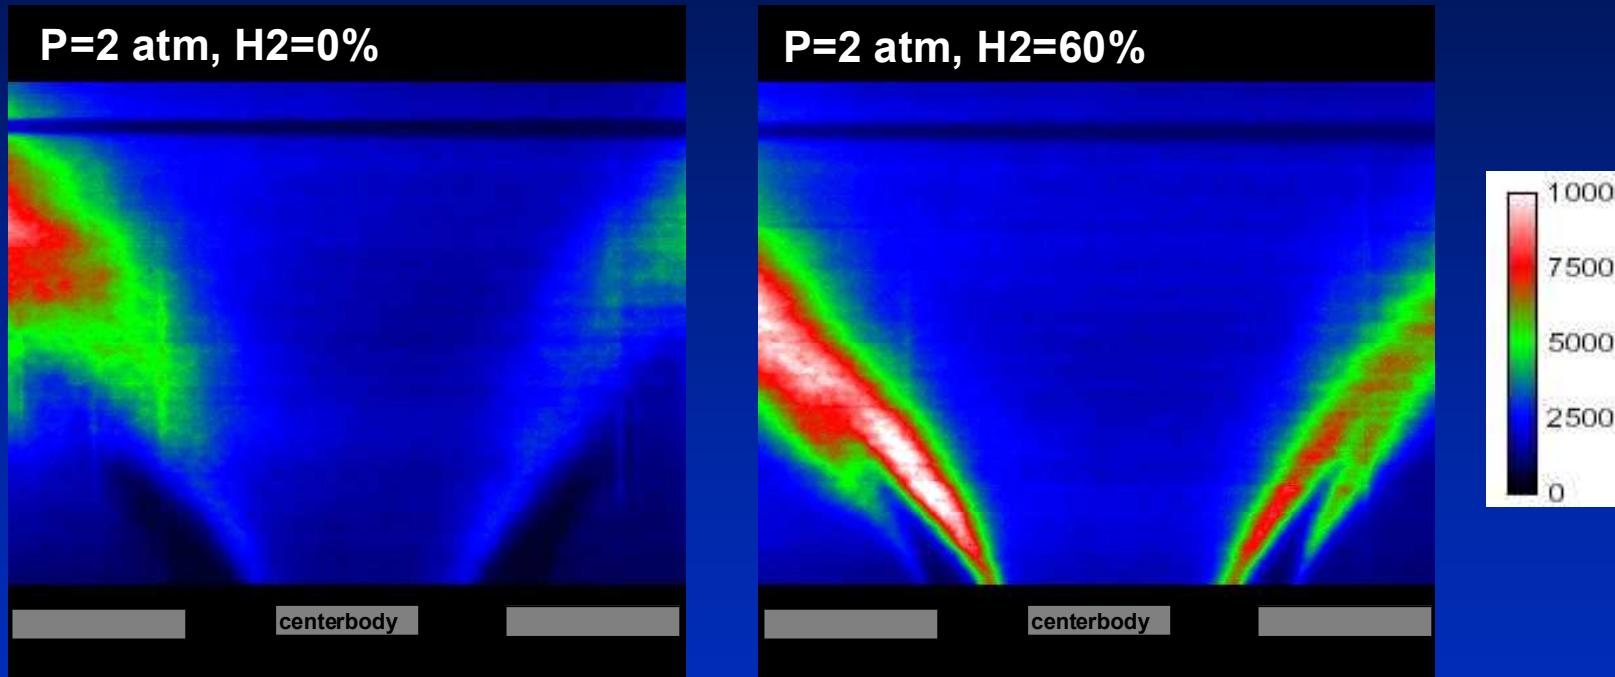

- H_2 addition reduces flame thickness and moves flame stabilization point farther upstream