



Dakota Software Training

Model Calibration

<http://dakota.sandia.gov>



*Exceptional
service
in the
national
interest*



Sandia National Laboratories is a multi-program laboratory managed and operated by Sandia Corporation, a wholly owned subsidiary of Lockheed Martin Corporation, for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-AC04-94AL85000.

Module Learning Goals

In this module you will learn


- Why you might want to tune models to match data via calibration (parameter estimation)
- How to formulate calibration problems and present them to Dakota
- What Dakota methods can help you achieve calibration goals

Exercise: create a Dakota calibration study and try to infer unknown parameters for a synthetic data set.

Calibration: Fitting Models to Data



- Use data to **improve characterization of input parameter values**, by maximizing agreement between simulation output and experiment target
 - Infer unknown conditions, source terms, or properties
 - Tune models to match specific scenarios
 - Make them more robust to predict a range of outcomes

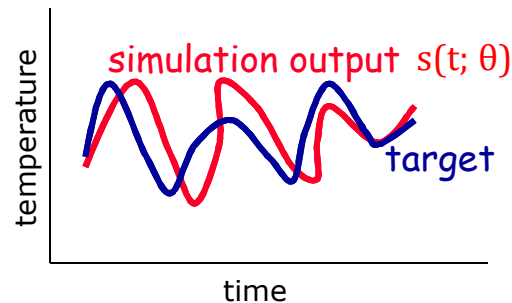

- Also known as parameter estimation/identification, inverse modeling
 - Can also calibrate one model to another (typically higher fidelity) model
- **Calibration is not validation!** Separate hold-out data must be used to assess whether a calibrated model is valid.



Classes of Model Calibration



- **Goal:** maximize agreement between observations y_i and corresponding simulation output $s_i(\theta)$; typically a nonlinear, implicit function of θ (parameterized simulation)
- **Deterministic calibration:** seek one or more sets of parameter values that best match the data y , typically in the two-norm:


$$\min_{\theta} f(\theta) = SSE(\boldsymbol{\theta}) = \sum_{i=1}^n [(s_i(\boldsymbol{\theta}) - y_i)]^2 = \sum_{i=1}^n [r_i(\boldsymbol{\theta})]^2$$

- Least-squares: initial iterate θ_0 , *nonlinear optimization*, updated values θ
- **Statistical calibration:** seek a statistical characterization of parameters most consistent with the data



- Bayesian: prior distribution, *statistical inference (MCMC)*, posterior distribution

Example: Parameter Estimation for a Material Plasticity Model

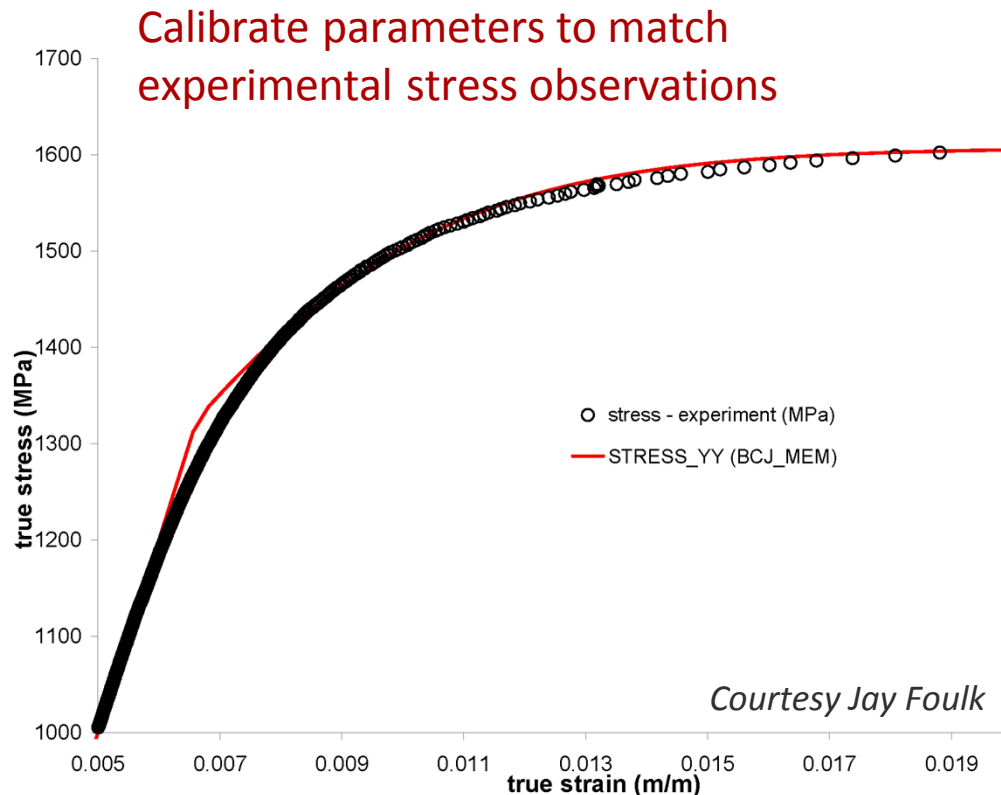

f – yields rate dependence (fit)
 Y – the yield stress (chosen)
 n – exponent in flow rule (fit)
 H – hardening in evolution of κ (fit)
 R_d – recovery in evolution of κ (fit)

f 4.52×10^4
 Y 1325 MPa
 n 0.386
 H $1.10 \times 10^5 \text{ MPa}$
 R_d 389

NOTE: Experimental data taken from a representative test, ph13-8-h950-test-3

Flow rule concentrating the effective stress

$$\dot{\epsilon}_p = f \left\{ \sinh \left[\frac{\bar{\sigma}}{(1-\phi)(\kappa+Y)} - 1 \right] \right\}^n$$

evolution of isotropic hardening

$$\dot{\kappa} = [H - R_d \kappa] \dot{\epsilon}_p$$

*Large values of f make the formulation rate independent. I did not need to fit f .

Specifying Calibration Parameters



- Deterministic calibration problems are presented to Dakota using **design variables** (same as optimization)
- Initial point starts the solve for local methods
- Bounds for the search are typical, not required for all methods
- See advanced slides for Bayesian methods, which use uncertain variables instead of design

Cantilever example:

```
variables
  active design
  continuous_design 3
    upper_bounds 3.1e7 10 10
    initial_point 2.9e7 4 4
    lower_bounds 2.7e7 1 1
    descriptors 'E' 'w' 't'
  continuous_state 3
    initial_state 40000 500 1000
    descriptors 'R' 'X' 'Y'
```

Defining Calibration Responses

$$\min_{\theta} f(\theta) = SSE(\theta) = \sum_{i=1}^n [(s_i(\theta) - y_i)]^2 = \sum_{i=1}^n [r_i(\theta)]^2$$

Three main options:

1. Interface returns differences (residuals)

$r_i(\theta) = s_i(\theta) - y_i$ to Dakota

```
responses
  calibration_terms = 2
  descriptors
    'stress_diff' 'displ_diff'
```

2. Interface returns simulation outputs

$s_i(\theta)$ to Dakota; specify data file containing y_i values

```
responses
  calibration_terms = 2
  descriptors
    'sim_stress' 'sim_displ'
  calibration_data_file 'myobs.dat'
  num_experiments = 3
```

3. Interface returns composite objective

$f(\theta)$; gives advanced users greater control

```
responses
  objective_functions = 1
  descriptors 'f_SSE'
```

Local nonlinear least squares methods require set of residuals (Option 1 or 2)

Dakota Calibration Methods




Deterministic

- For local parameter value improvement; reliable simulation derivatives: specialized local least-squares solvers
- Local search with unreliable derivatives: pattern search
- Global best parameter set: global optimizers such as DiRECT or genetic algorithms (can be costly)
- Other advanced optimization approaches

Statistical

- Calibrate distribution parameters to match data: any of the above solvers with a nested model
- Bayesian inference: Markov Chain Monte Carlo (QUESO)

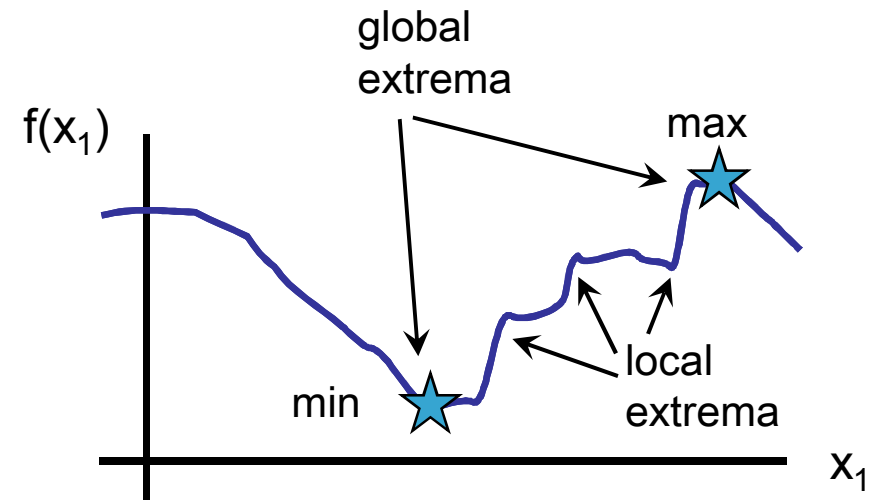

Classes of Methods



Gradient Descent




- Looks for improvement based on derivative
- Requires analytic or numerical derivatives
- Efficient/scalable for smooth problems
- Converges to local extreme

Derivative-Free Local

- Sampling with bias/rules toward improvement
- Requires only function values
- Good for noisy, unreliable or expensive derivatives
- Converges to local extreme

Derivative-Free Global

- Broad exploration with selective exploitation
- Requires only function values
- Typically computationally intensive
- Converges to global extreme

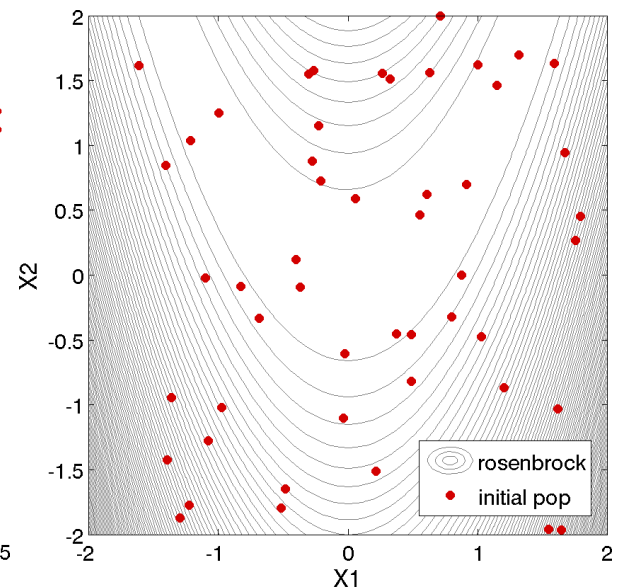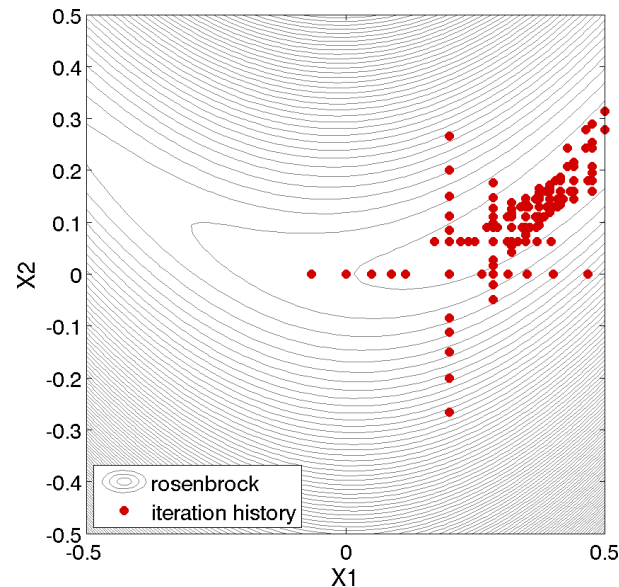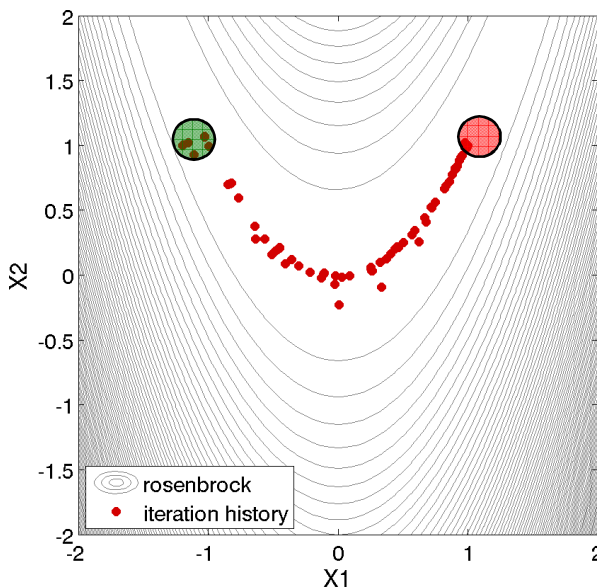

More About Local Calibration



- Local, derivative-based least squares solvers are similar to Newton methods for general nonlinear programming
- Local least squares solvers take advantage of the squared residual formulation

$$\frac{SSE}{2} = f(\theta) = \frac{1}{2} r(\theta)^T r(\theta) = \frac{1}{2} [s(\theta) - y]^T [s(\theta) - y]$$

$$\nabla f(\theta) = J(\theta)^T r(\theta); \quad J_{ij} = \frac{\partial r_i}{\partial \theta_j} \quad \nabla^2 f(\theta) = J^T J + \sum_{i=1}^n r_i(\theta) \nabla^2 r_i(\theta)$$

and either **ignore** the circled Hessian term (as residuals should be small as the algorithm converges), or **successively approximate** it during optimization

- Dakota's NL2SOL local calibration algorithm uses a quasi-Newton update scheme to approximate the Hessian, and is often more robust than other solvers when the residuals are not small.
- These methods can be very efficient, converging in a few function evaluations

Exercise: Find Beam Properties

- The directory `~/exercises/calibration` contains several data files with observations of mass, displacement, and stress from some cantilever beam experiments
- Create a Dakota input file to perform calibration (e.g., with NL2SOL or OPT++ Gauss-Newton) to determine the properties of the beam used in the experiment
- How do your parameter values compare to your neighbors?
- What do you observe if you calibrate with more and more data?

Hints:

- Start from a previous cantilever beam study and/or example input file
- See the reference manual sections on:
 - Continuous design variables
 - Responses: gradients, data (file and num_experiments), weights
 - Scaling (method, variables, responses)

Exercise: Calibrate Cantilever to Experimental Data



- Calibrate design variables E , w , t to data from all 3 responses
- X , Y , R fixed (state) at nominal values
- Use NL2SOL or OPT++ Gauss-Newton
- Key Dakota specs:
 - `calibration_terms = 3`
 - no constraints
 - `least_squares_datafile`

DATA	clean	with error
area	7.5	7.772
stress	2667	2658
displacement	0.309	0.320

`cantilever_clean.dat`
`cantilever_witherror.dat`

- ***For least-squares methods, application normally must return residuals $r_i(x) = s_i(x) - d_i$ to Dakota***
- ***Here we return the usual area, stress, displacement and specify a datafile and Dakota computes the residuals***

Potential Solution:

Cantilever Least-Squares



```
# Calibrate to area, stress, and displacement data generated with  
# E = 2.85e7, w = 2.5, t = 3.0
```

```
method  
  nl2sol  
    convergence_tolerance = 1.0e-6  
  
variables  
  continuous_design = 3  
    upper_bounds  3.1e7 10.0 10.0  
    initial_point  2.9e7 4.0  4.0  
    lower_bounds   2.7e7 1.0  1.0  
    descriptors    'E' 'w' 't'  
  # Fix at nominal  
  continuous_state = 3  
    initial_state  40000 500 1000  
    descriptors    'R' 'X' 'Y'  
  
interface  
  direct  
    analysis_driver = 'mod_cantilever'  
  
responses  
  calibration_terms = 3  
  # calibration_data_file = 'dakota_cantilever_clean.dat'  
    calibration_data_file = 'dakota_cantilever_witherror.dat'  
    descriptors = 'area' 'stress' 'displacement'  
  analytic_gradients  
  no_hessians
```

Confidence Intervals
approximated by
calculating the variance
of the parameter vector
as diagonal elements of:

$$\hat{\sigma}^2(J^T J)^{-1}$$

CIs without error:

```
E: [ 2.850e+07, 2.850e+07 ]  
w: [ 2.500e+00, 2.500e+00 ]  
t: [ 3.000e+00, 3.000e+00 ]
```

CIs with error:

```
E: [ 1.992e+07, 4.190e+07 ]  
w: [ 1.962e+00, 3.918e+00 ]  
t: [ 1.954e+00, 3.309e+00 ]
```

Parameter Identifiability

- Looking at the cantilever beam equations, which parameters would you expect to be able to estimate given data on which responses?
- How would you determine this for an implicit function (black-box simulation)?

$$M = \rho * wt * \frac{L}{12^3}$$

$$S = \frac{600}{wt^2} Y + \frac{600}{w^2 t} X$$

$$D = \frac{4L^3}{Ewt} \sqrt{\left(\frac{Y}{t^2}\right)^2 + \left(\frac{X}{w^2}\right)^2}$$



Guide to Calibration Methods

Category	Dakota method names	Continuous Variables	Categorical/ Discrete Variables	Bound Constraints	General Constraints
Gradient-Based Local (Smooth Response)	<code>nl2sol</code>	x		x	
	<code>nlssol_sqp</code> , <code>optpp_g_newton</code>	x		x	x
Gradient-Based Global (Smooth Response)	<code>hybrid strategy</code> , <code>multi_start strategy</code>	x		x	x
Derivative-Free Global (Nonsmooth Response)	<code>efficient_global</code> , <code>surrogate_based_global</code>	x		x	x

See Usage Guidelines in Dakota User's Manual.
Also, can apply any optimizer when doing derivative-free local or global calibration.

Calibration References



- G. A. F. Seber and C. J. Wilde, “Nonlinear Regression”, John Wiley and Sons, Inc., Hoboken, New Jersey, 2003.
- M. C. Hill and C. R. Tiedeman, “Effective Groundwater Model Calibration: With Analysis of Data, Sensitivities, Predictions, and Uncertainty”, John Wiley and Sons, Inc., Hoboken, New Jersey, 2007.
- R. C. Aster, B. Borchers, and C. H. Thurber, “Parameter Estimation and Inverse Problems”, Elsevier, Inc., Oxford, UK, 2005.
- Dakota User’s Manual
 - Nonlinear Least Squares Capabilities
 - Surrogate-Based Minimization
- Dakota Reference Manual

Guide to Optimization Methods



Category	Dakota method names	Continuous Variables	Categorical/ Discrete Variables	Bound Constraints	General Constraints
Gradient-Based Local (Smooth Response)	optpp_cg	x			
	dot_bfgs, dot_frcg, conmin_frcg	x		x	
	npsol_sqp, nlpql_sqp, dot_mmfd, dot_slp, dot_sqp, conmin_mfd, optpp_newton, optpp_q_newton, optpp_fd_newton, weighted sums (multiobjective), pareto_set strategy (multiobjective)	x		x	x
Gradient-Based Global (Smooth Response)	hybrid strategy, multi_start strategy	x		x	x
Derivative-Free Local (Nonsmooth Response)	optpp_pds	x		x	
	asynch_pattern_search, coliny_cobyla, coliny_pattern_search, coliny_solis_wets, surrogate_based_local	x		x	x
Derivative-Free Global (Nonsmooth Response)	ncsu_direct	x		x	
	coliny_direct, efficient_global, surrogate_based_global	x		x	x
	coliny_ea, sogas, moga (multiobjective)	x	x	x	x

See Usage Guidelines in Dakota User's Manual

Optimization References



- J. Nocedal and S. J. Wright, “Numerical Optimization”, Second Edition, Springer Science and Business Media, LLC, New York, New York, 2006.
- S. S. Rao, “Engineering Optimization: Theory and Practice”, Fourth Edition, John Wiley and Sons, Inc., Hoboken, New Jersey, 2009.
- Dakota User’s Manual
 - Optimization Capabilities
 - Surrogate-Based Minimization
 - Advanced Strategies
 - Advanced Model Recursions: Optimization Under Uncertainty
- Dakota Reference Manual



APPLICATION-SPECIFIC EXAMPLE



BACKUP SLIDES

Local Least-squares Methods

Take Advantage of Special Structure



Alternate objective formulation: $f(x) = \frac{1}{2} r(x)^T r(x) = \frac{1}{2} [s(x) - d]^T [s(x) - d]$

Derivative formulations:

$$\nabla f(x) = J(x)^T r(x); \quad J_{ij} = \frac{\partial r_i}{\partial x_j} \qquad \nabla^2 f(x) = J^T J + \sum_{i=1}^n r_i(x) \nabla^2 r_i(x)$$

Methods vary in second derivative approximation:

Gauss-Newton: $J(x)^T J(x)$

Levenberg-Marquardt: $J(x)^T J(x) + \mu I$, with $\mu \geq 0$

NL2SOL: $J(x)^T J(x) + S$,

with $S = 0$ or $S =$ Quasi-Newton approximation to $\sum_{i=1}^n f_i(x) \nabla^2 f_i(x)$