

Exceptional service in the national interest

Sandia  
National  
Laboratories


## Fundamental Understanding of Methane-Carbon Dioxide-Water ( $\text{CH}_4\text{-CO}_2\text{-H}_2\text{O}$ ) Interactions in Shale Nanopores under Reservoir Conditions

Yifeng Wang, Tuan Anh Ho, Yongliang Xiong, and Louise J. Criscenti, Philippe Weck, Edward Matteo and Jessica Kruichak (Sandia National Laboratories)


### Objectives:

Understand two important processes that control gas-in-place (GIP) & well production:

- Methane partitioning in the nanopores of mudstone matrices.
- Methane transport from low-permeability matrices to fracking-induced fracture networks.

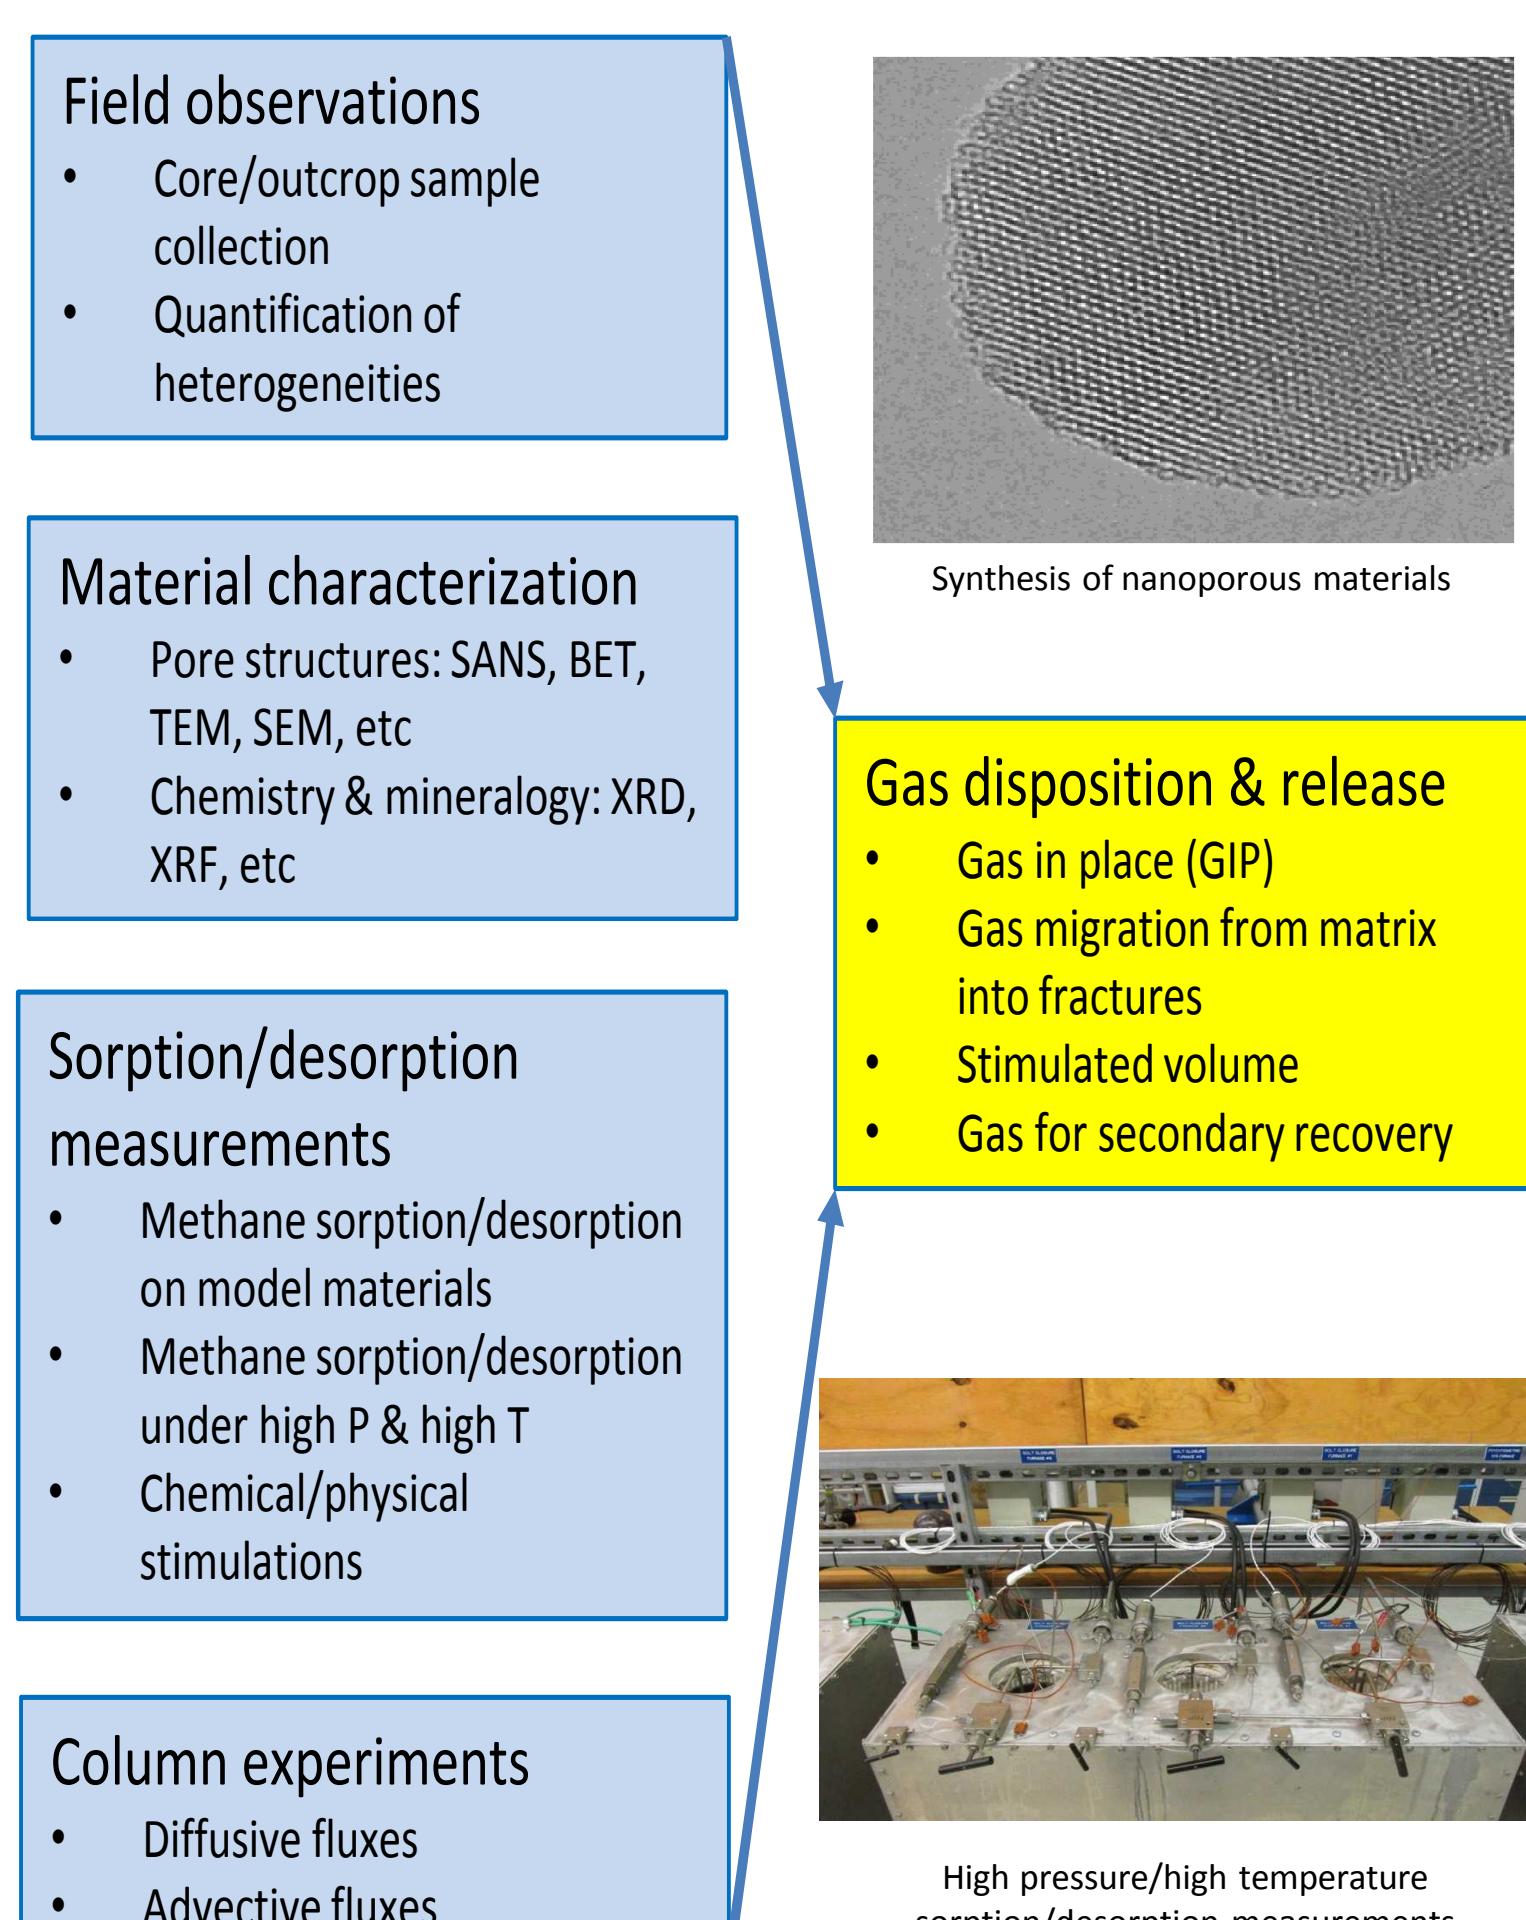

### Extraction of $\text{CH}_4$ from nanopores in kerogen

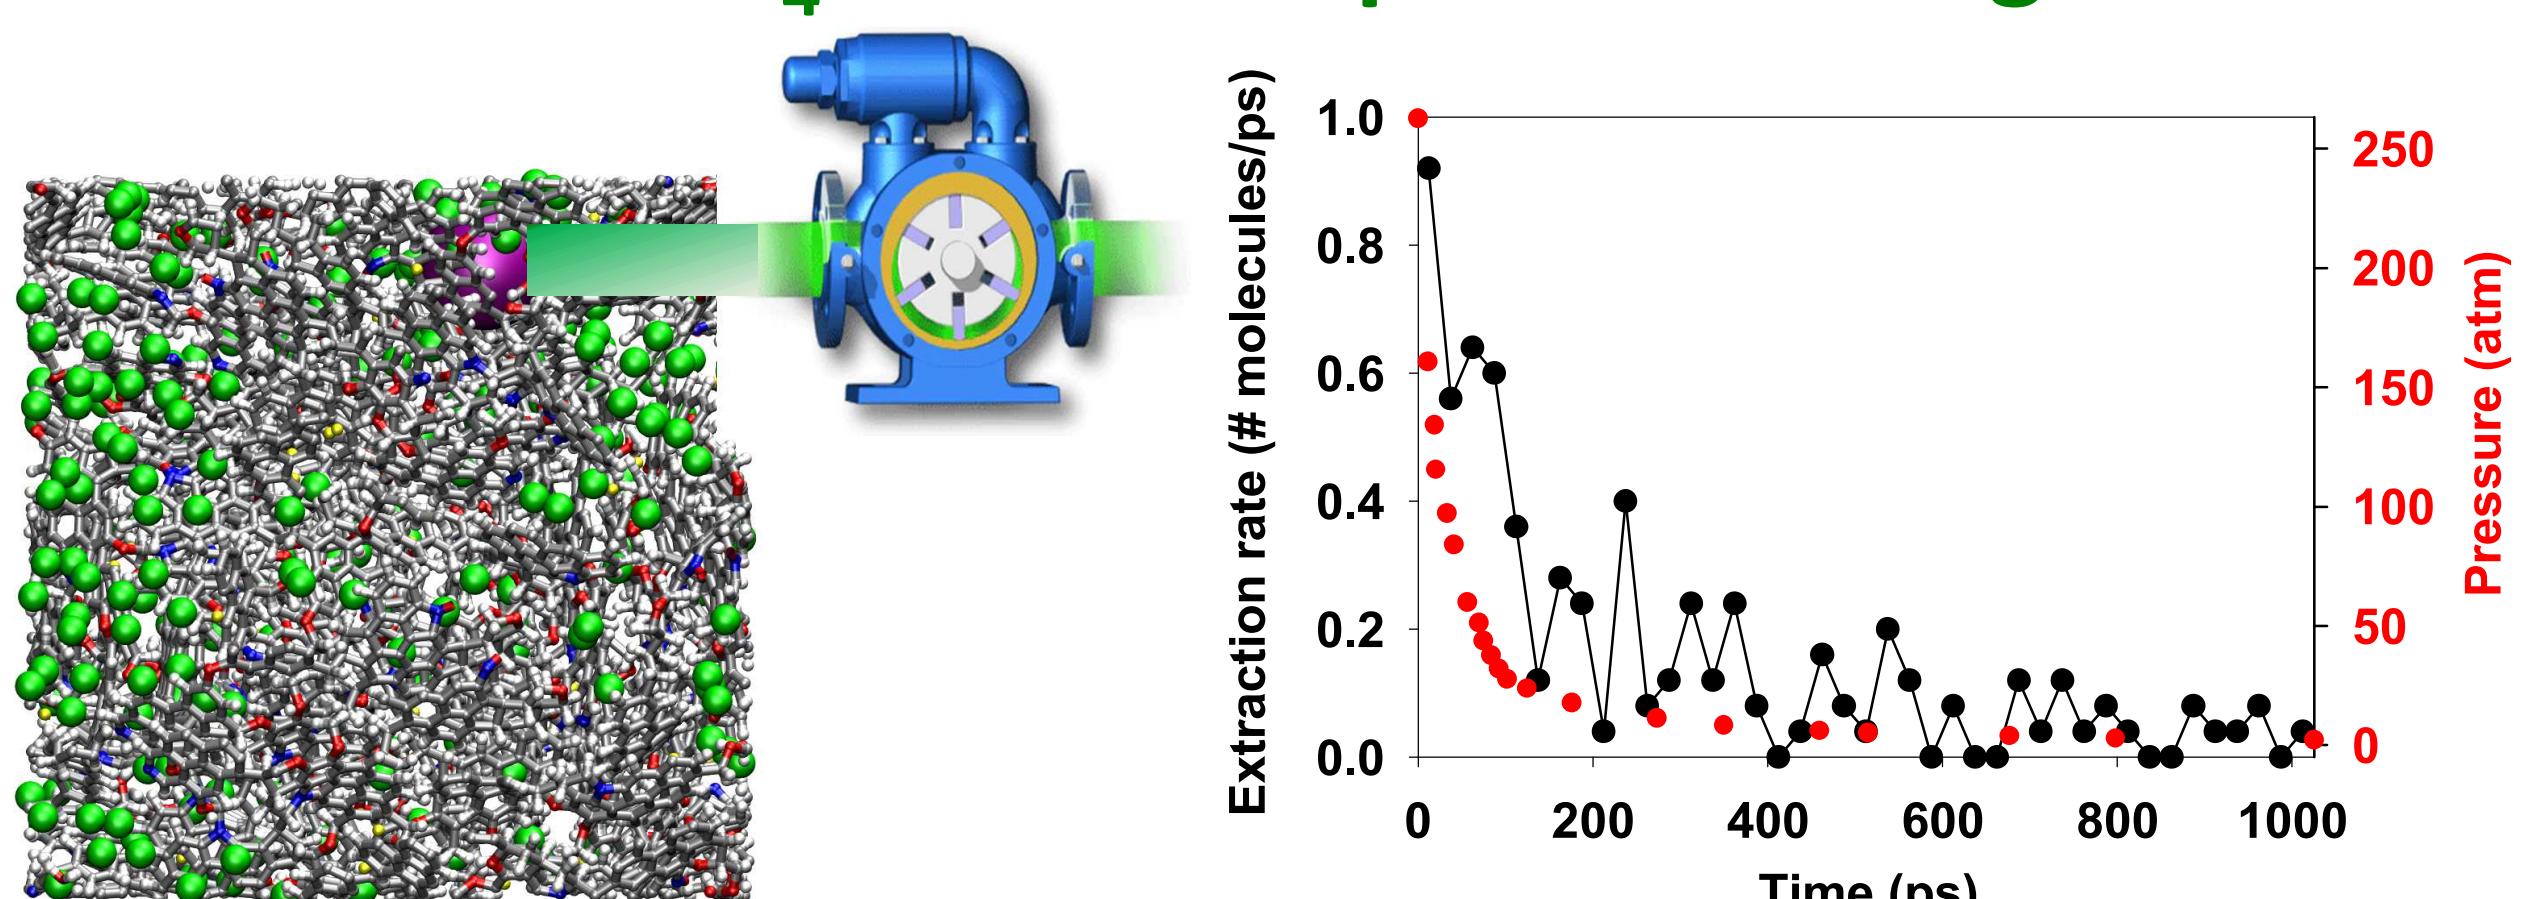


Methane release from kerogen matrix is characterized by a fast release of pressurized free gas followed by a slow release of adsorbed gas.


Table 1. Experimental measurements of sorption capacities and sorption rates for the model substances at 1 bar total pressure

Model Substances	Temp, °C	Gas Mixture, volume percent	Pressure, bar	Sorption Capacity, mg/g	Sorption Rate, mg/g min <sup>-1</sup>
DARCO activated carbon	25	85% $\text{CH}_4$ + 15% $\text{CO}_2$	1	28	0.68
	50	85% $\text{CH}_4$ + 15% $\text{CO}_2$	1	11	0.59
	75	85% $\text{CH}_4$ + 15% $\text{CO}_2$	1	9.0	0.31
	100	85% $\text{CH}_4$ + 15% $\text{CO}_2$	1	2.1	0.14
	125	85% $\text{CH}_4$ + 15% $\text{CO}_2$	1	1.8	0.10
Montmorillonite, <75 $\mu\text{m}$	25	85% $\text{CH}_4$ + 15% $\text{CO}_2$	1	2.8	$4.7 \times 10^{-2}$
	50	85% $\text{CH}_4$ + 15% $\text{CO}_2$	1	0.30	$9.6 \times 10^{-3}$
	75	85% $\text{CH}_4$ + 15% $\text{CO}_2$	1	0.19	$6.7 \times 10^{-3}$
	100	85% $\text{CH}_4$ + 15% $\text{CO}_2$	1	0.18	$5.1 \times 10^{-3}$
	125	85% $\text{CH}_4$ + 15% $\text{CO}_2$	1	0.12	$3.3 \times 10^{-3}$
Crushed Shale	25	85% $\text{CH}_4$ + 15% $\text{CO}_2$	1	0.29	$3.3 \times 10^{-3}$
	50	85% $\text{CH}_4$ + 15% $\text{CO}_2$	1	0.21	$2.7 \times 10^{-3}$
	75	85% $\text{CH}_4$ + 15% $\text{CO}_2$	1	0.16	$1.7 \times 10^{-3}$

### TOP FIVE SHALE PLAYS




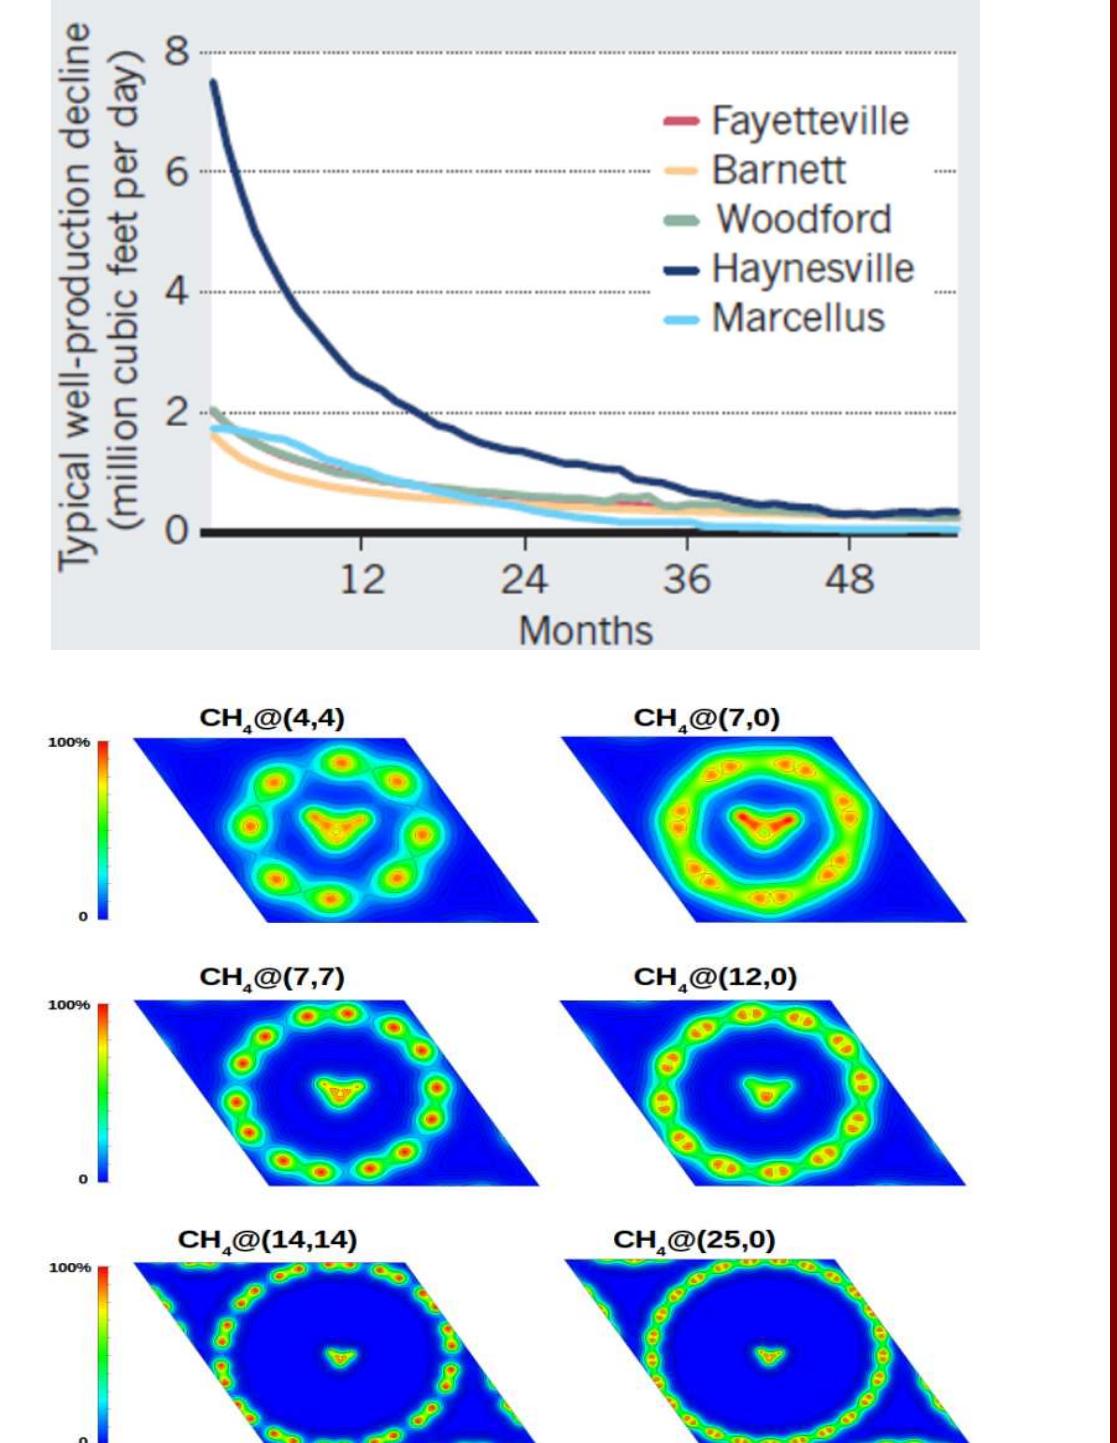


### Adsorption isotherm of $\text{CH}_4$ in kerogen:

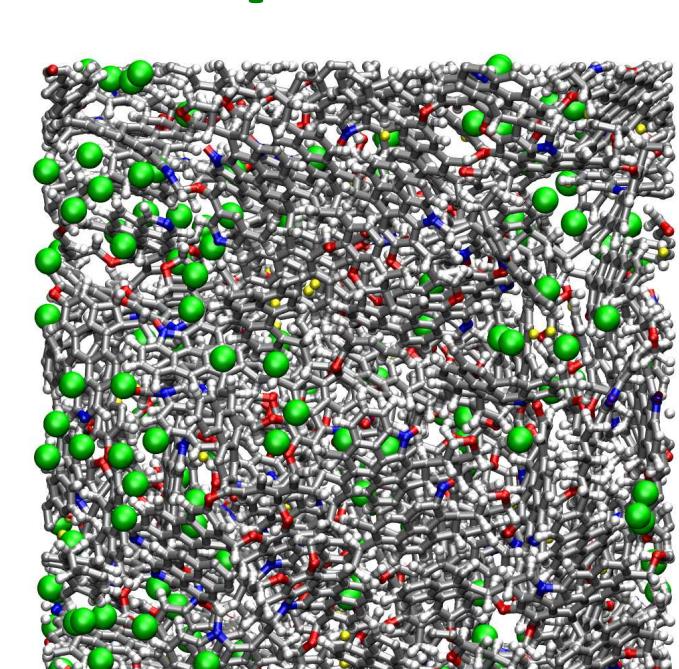

- At low pressure gas present in kerogen is mainly adsorbed gas
- At high pressure more gas fills into the free volume inside kerogen matrix.

Total uptake of  $\text{CH}_4$  in kerogen

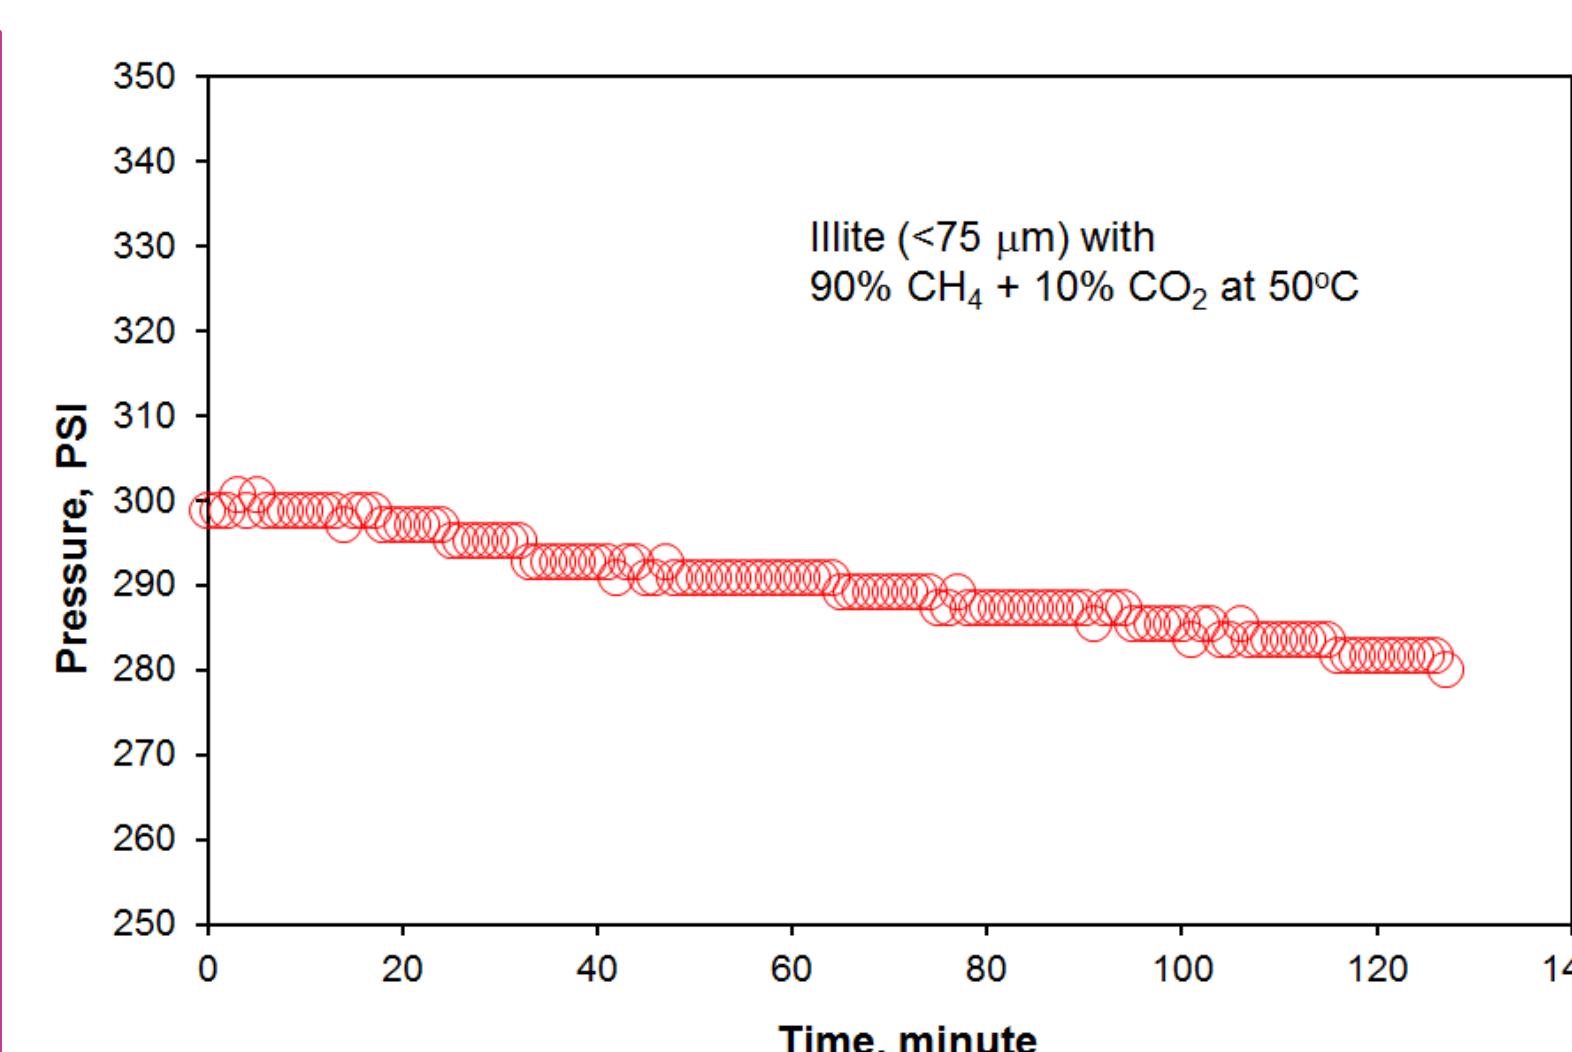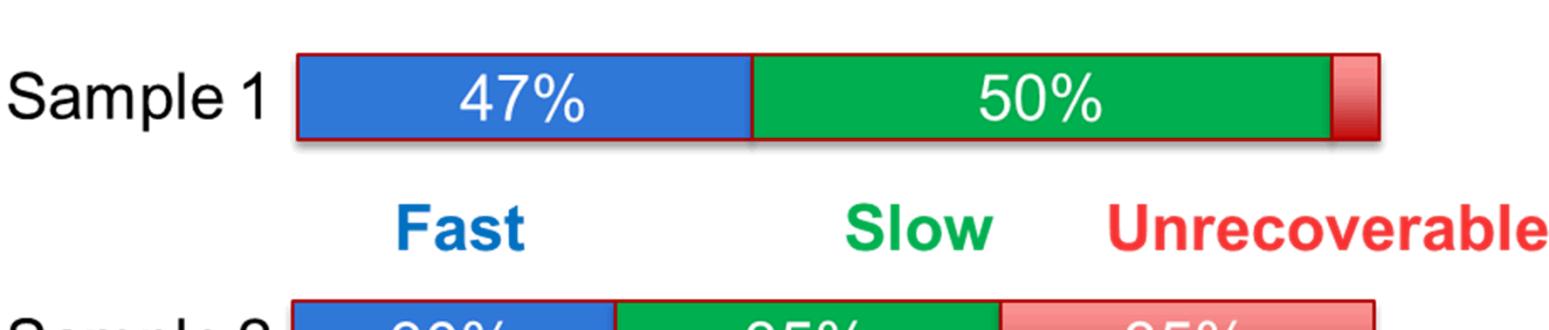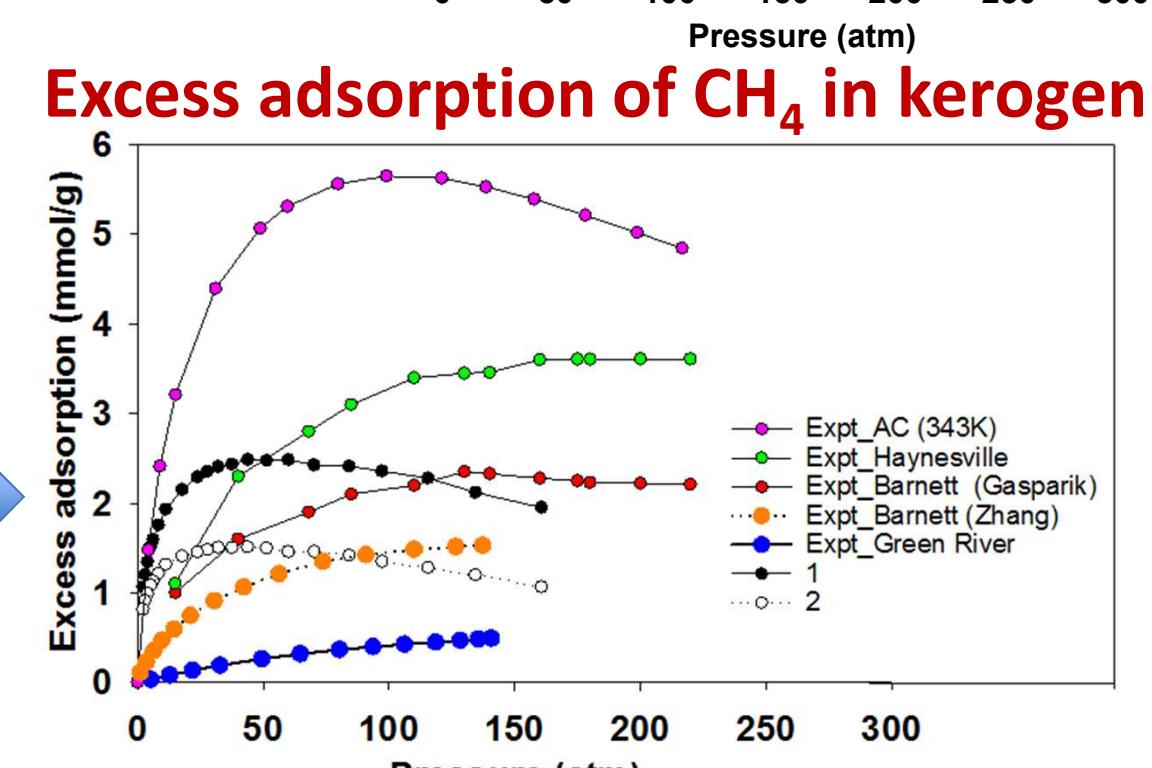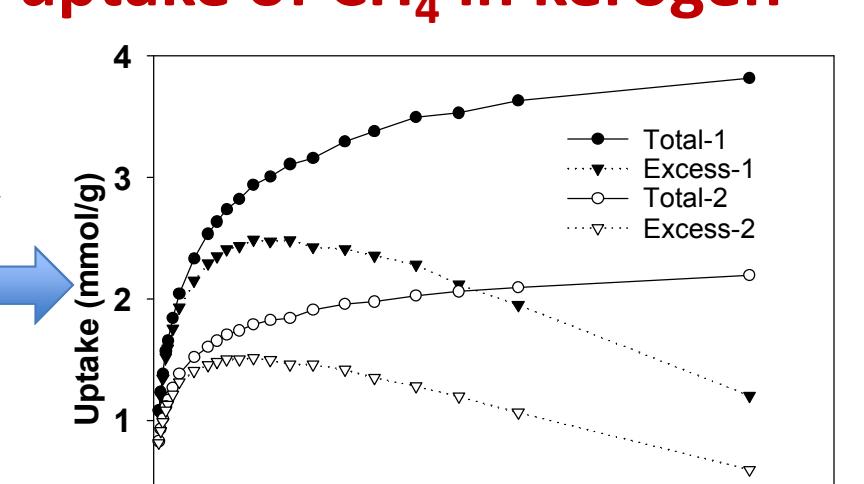

### Conclusions:

- Our kerogen model can reproduce the experimental results such as the kerogen density, pore size distribution, and methane adsorption isotherm in organic shales.
- Methane diffusion in kerogen nanopores behaves significantly different from the bulk phase.
- We found that methane release from kerogen matrix is characterized by a fast release of pressurized free gas followed by a slow release of adsorbed gas.
- Significant amount of gas deposited in kerogen can be trapped in isolated pores and thus not recoverable.
- Significant fraction methane can sorb onto clay minerals.
- A new kerogen model is needed to reproduce FTIR data.