



Project update: bowl geometry impacts on spray driven, late cycle flow and mixing

Steve Busch, Kan Zha

Sandia National Laboratories

Federico Perini, Rolf Reitz

University of Wisconsin-Madison

May 8, 2017

Sandia National Laboratories is a multi-program laboratory managed and operated by Sandia Corporation, a wholly owned subsidiary of Lockheed Martin Corporation, for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-AC04-94AL85000

Project status

Thermodynamic analysis

Finished

First law analysis

In progress

Publication of
thermal efficiency
improvement
mechanism

Optical / CFD Investigations

Complete

Cold flow

In progress

Fuel injection,
jet-bowl-swirl
interactions,
late-cycle mixing

Next steps

Combustion and soot
formation / oxidation

Characterization of swirl-plane flow asymmetries

- Axis tilt and precession
- Squish-swirl interactions
- Near-TDC vertical plane flow topologies



Outline


- Thermodynamic analysis
 - Heat loss vs. late-cycle heat release
- FRESCO: model development / evaluation
 - Spray model calibration (review)
 - Liquid phase behavior
 - Turbulence modeling
 - Jet penetration and deflection by swirl
- Bowl geometry impacts on late-cycle flow and mixing (conventional diesel combustion)
 - CFD setup
 - Post-processing of CFD results
 - Results
- Summary: initial theory about late-cycle mixing mechanisms
- Next steps




Thermodynamic analysis – what is responsible for the increase in thermal efficiency with the stepped-lip piston?

With the stepped-lip piston:

- Late-cycle heat release is enhanced for intermediate main injection timings (3-13 CAD ATDC)
- Whether normalized wall heat loss increases or decreases depends on injection timing

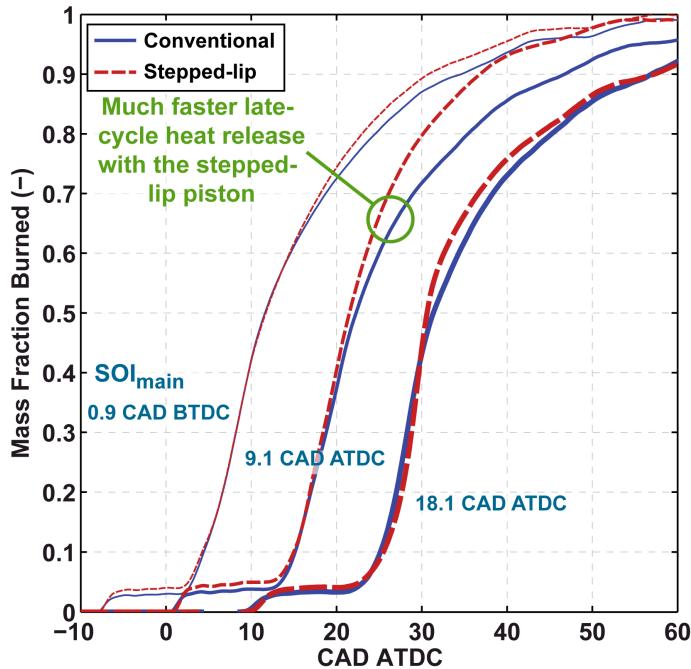

Bowl geometry can have a profound impact on late-cycle heat release

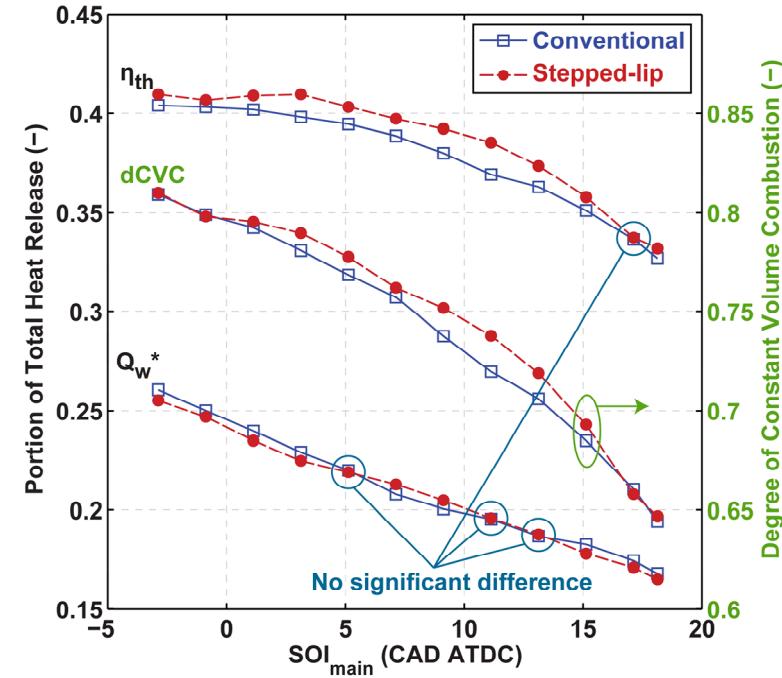

Thermal efficiency gains with the stepped-lip piston are greatest for main injection timings between 3 and 13 CAD ATDC

Thermodynamic analysis – what is responsible for the increase in thermal efficiency with the stepped-lip piston?


- Integrated wall heat loss (IVC-EVO) normalized by total heat released:

$$Q_w^* = \frac{Q_w}{Q_{hr}} = \frac{\int_{IVC}^{EVO} \frac{dQ_w}{d\theta} d\theta}{\max \left(\int_{SOI}^{EVO} \frac{dQ_{hr}}{d\theta} d\theta \right)}$$

- Boundary work (IVC-EVO) normalized by total heat released:

$$\eta_{th} = \frac{W}{Q_{hr}} = \frac{\int_{IVC}^{V_{EVO}} PdV}{\max \left(\int_{SOI}^{EVO} \frac{dQ_{hr}}{d\theta} d\theta \right)}$$

- Changes in thermal efficiency correlate most closely with changes in the degree of constant volume combustion
 - Improved late-cycle mixing has a greater impact on efficiency than reduced wall heat loss

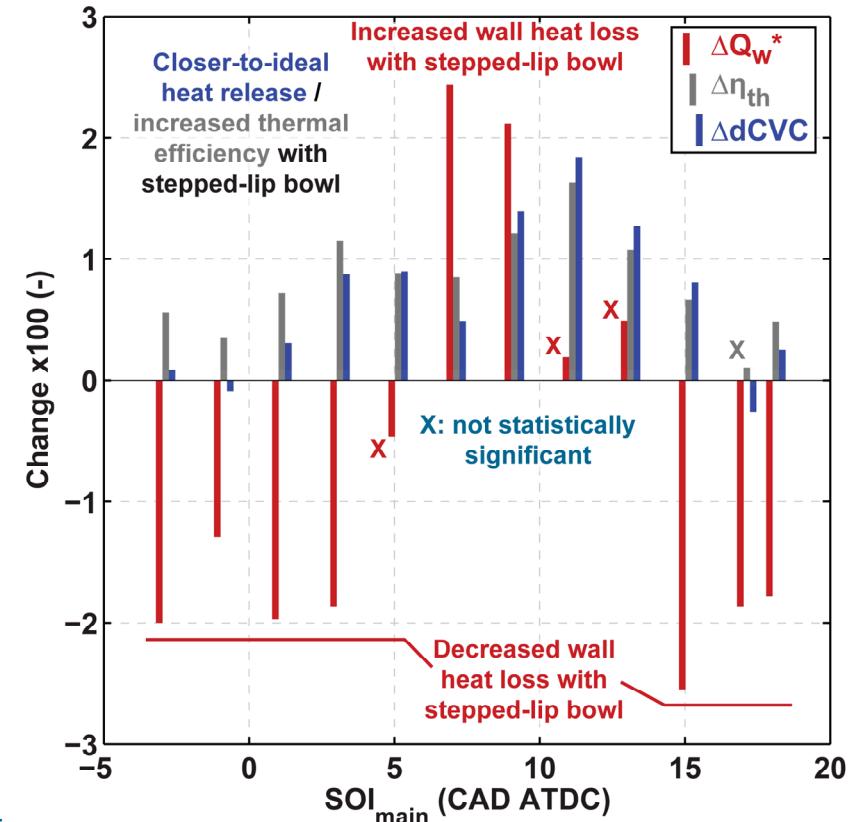


Spray model calibration in FRESCO (review)

- State-of-the-art spray atomization, droplet collision, and sub-grid scale momentum coupling models have been implemented in FRESCO
- A genetic algorithm-based parameter optimization has been performed based on quantitative ECN data (Spray A)
 - Numerous model constants with complex interactions are optimized
- Objectives for optimization
 - Vapor penetration time-history
 - Initial jet penetration
 - Absolute value and stability of liquid penetration in near-steady state
 - Mixture fraction profiles (transverse and axial)
- Once optimized, the spray model parameters are not adjusted
 - This provides a true test of the models' predictive capabilities

¹Federico Perini, Rolf D. Reitz, Improved atomization, collision and sub-grid scale momentum coupling models for transient vaporizing engine sprays, International Journal of Multiphase Flow, Volume 79, March 2016, Pages 107-123, ISSN 0301-9322, <http://doi.org/10.1016/j.ijmultiphaseflow.2015.10.009>.


Time-resolved liquid scattering imaging data has been used to evaluate CFD simulation capabilities to predict liquid fuel behavior

SNL high speed imaging data
-distortion corrected

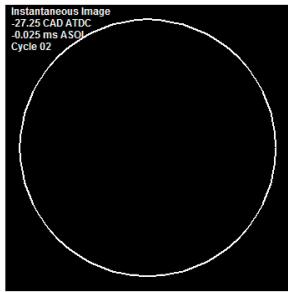


FRESCO simulation results (UW)

-spray models calibrated with ECN data


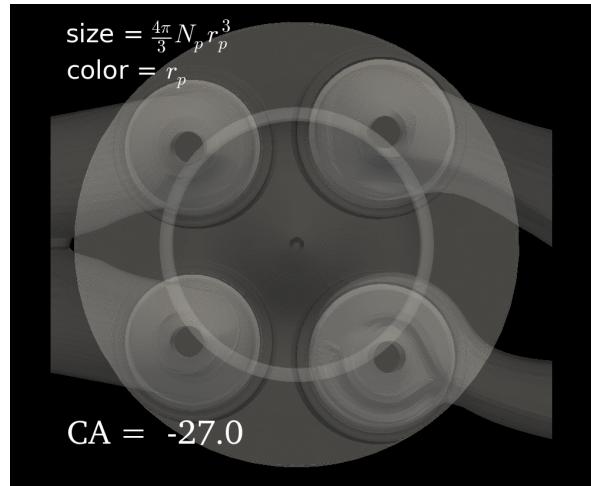


CONVERGE simulation results

-spray models calibrated with ECN data

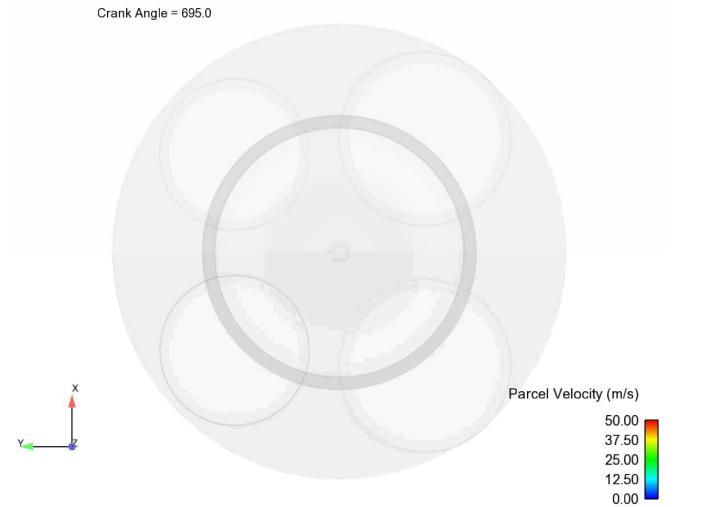


- High speed Mie scattering data has been collected and processed at SNL to characterize liquid fuel behavior for a main-only injection strategy (LTC operation, DPRF fuel)
- FRESCO accurately predicts initial liquid penetration, but underpredicts steady-state liquid lengths (criteria for comparison are still being developed)
- Overall phenomenology of liquid fuel injection is well captured by the FRESCO simulation

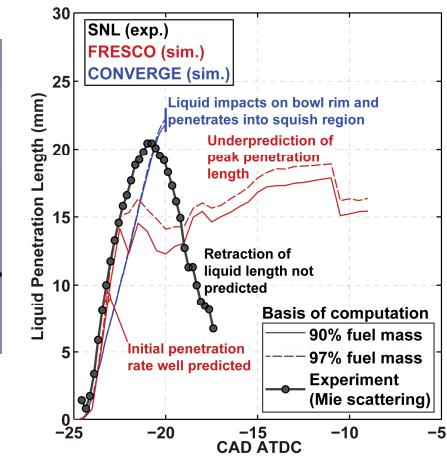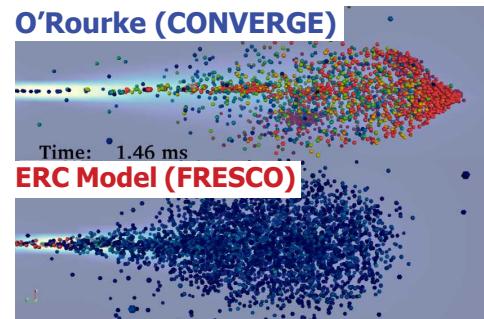


Various 2-equation turbulence models have been evaluated using PIV data from the SNL light-duty optical diesel engine

No turbulence model predicts the experimental cold-flow data perfectly, but the standard $k-\epsilon$ model is slightly more accurate than the RNG and GRNG models at predicting compression-stroke flow topology.






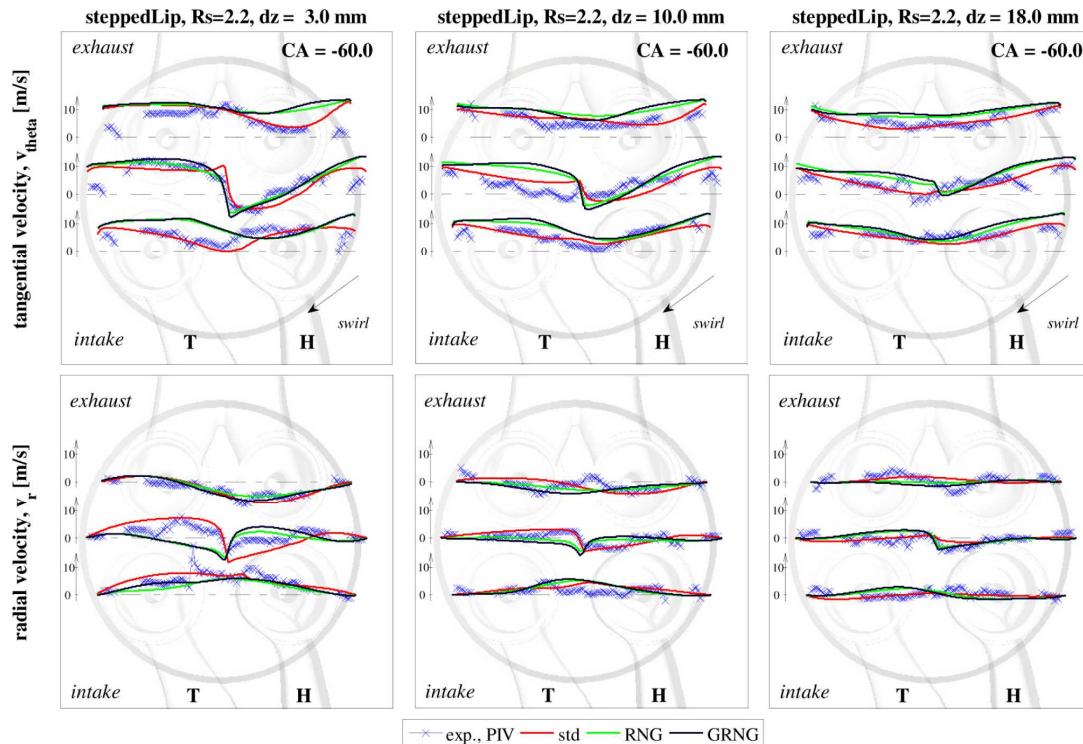


For details, see Perini, F., Zha, K., Busch, S., and Reitz, R., "Comparison of Linear, Non-Linear and Generalized RNG-Based $k-\epsilon$ Models for Turbulent Diesel Engine Flows," SAE Technical Paper 2017-01-0561, 2017, doi:10.4271/2017-01-0561.

Various 2-equation turbulence models have been evaluated using canonical flows such as a gas jet impinging on a plate

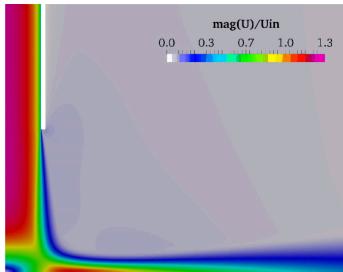

The GRNG turbulence model provides the most accurate velocity-profile predictions and reasonable predictions of velocity fluctuations near the jet.

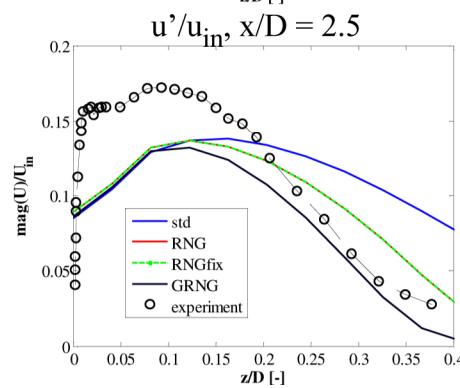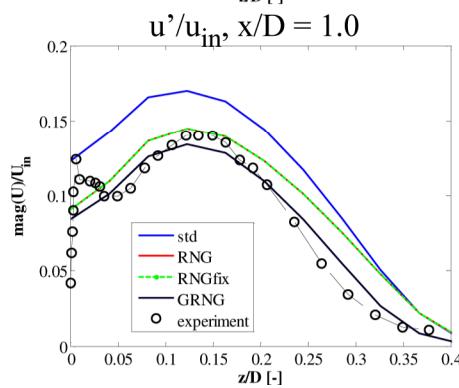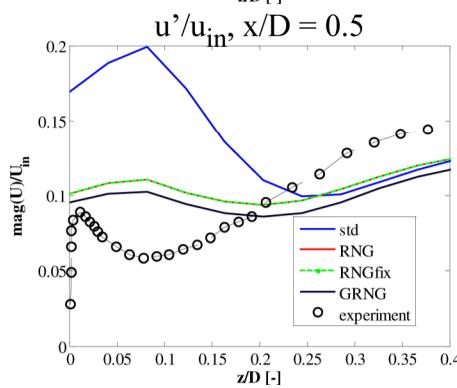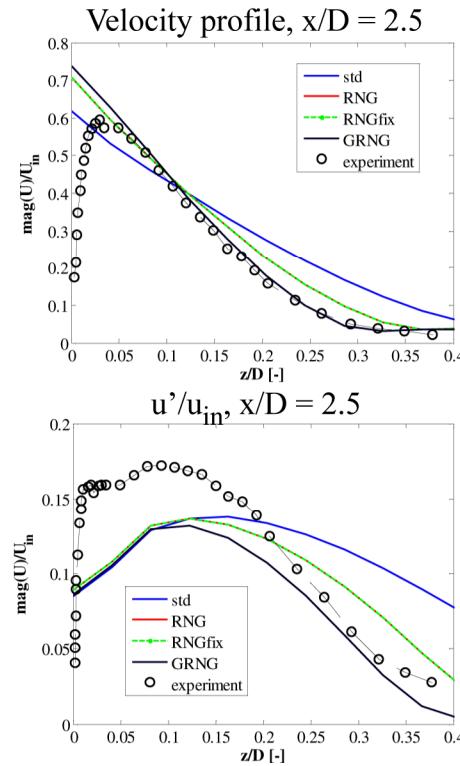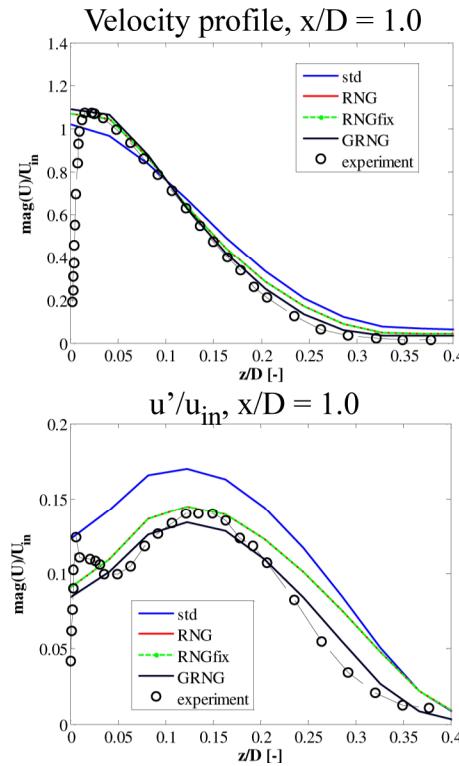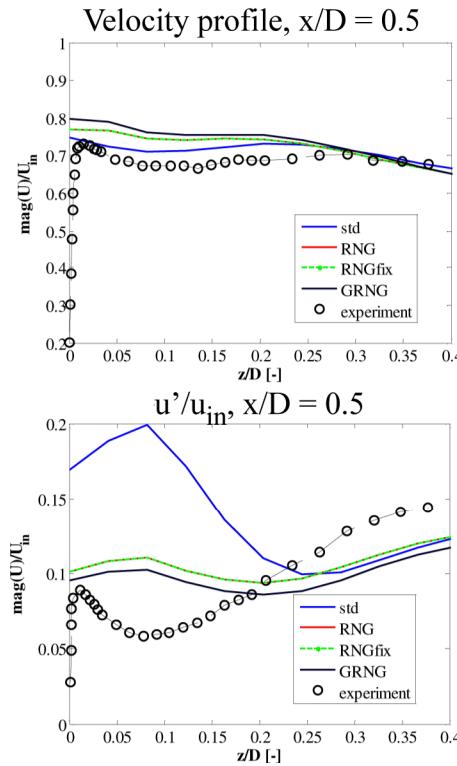


The RNG and GRNG models both perform reasonably well for all simulated diesel engine-like flow conditions




Various 2-equation turbulence models are evaluated with ECN Spray A data

The Generalized RNG (GRNG) turbulence model (a product of SNL-UW collaboration) has been determined to produce the best accuracy trade-off between cold engine flow and jet flow / spray combustion based on comparisons with state-of-the-art ECN data.

Mixture formation is better predicted with the GRNG turbulence model


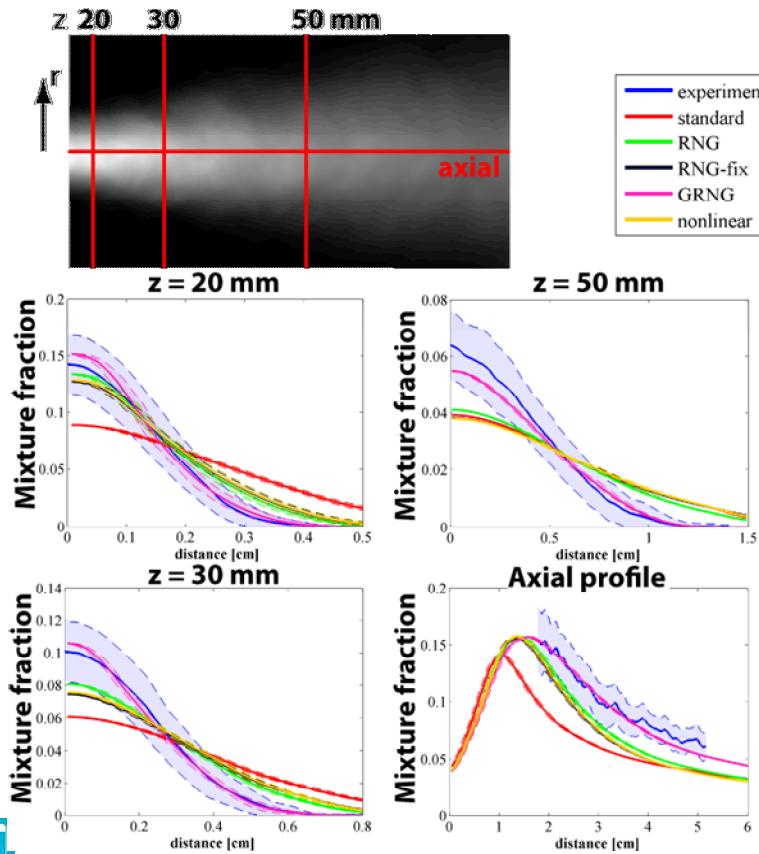


The GRNG model yields the most accurate flame structure predictions

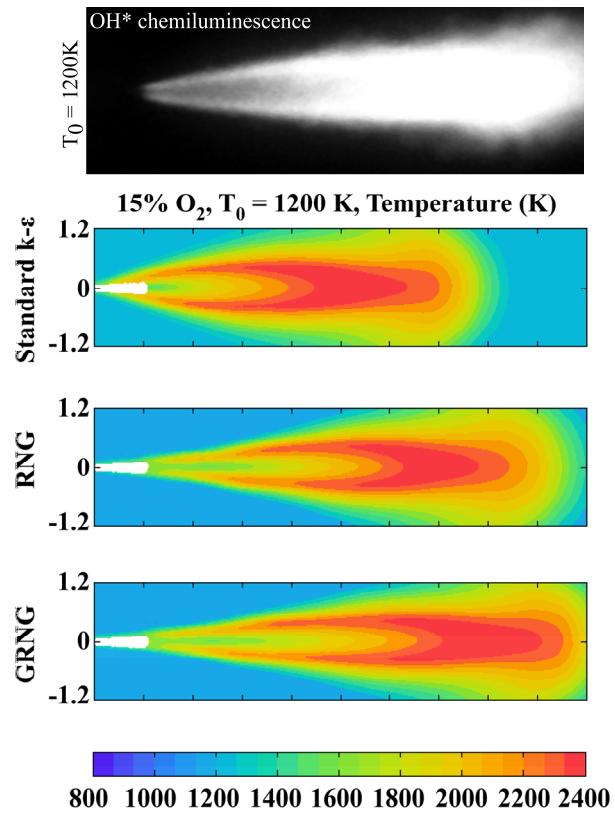

FRESCO simulation setup for PLIF comparisons


Engine configuration	
Compression ratio	16.1 : 1
Squish height at TDC [mm]	1.36
Piston bowl geometry	Stepped-lip
Operating conditions	
Engine speed [rev/min]	1500
Intake pressure [bar]	1.5
Intake temperature [K]	372
Injection pressure [bar]	860
Start of solenoid energizing	27 CAD BTDC
Swirl Ratio (Ricardo) [-]	2.2
Intake charge [mol fr.]	0% O ₂
FRESCO solver setup	
mesh accuracy	Body-fitted, unstructured hexa
time accuracy:	hybrid 1st-order implicit (diffusion, momentum) / explicit (advection)
spatial accuracy:	2nd-order (diffusion) upwind (advection)

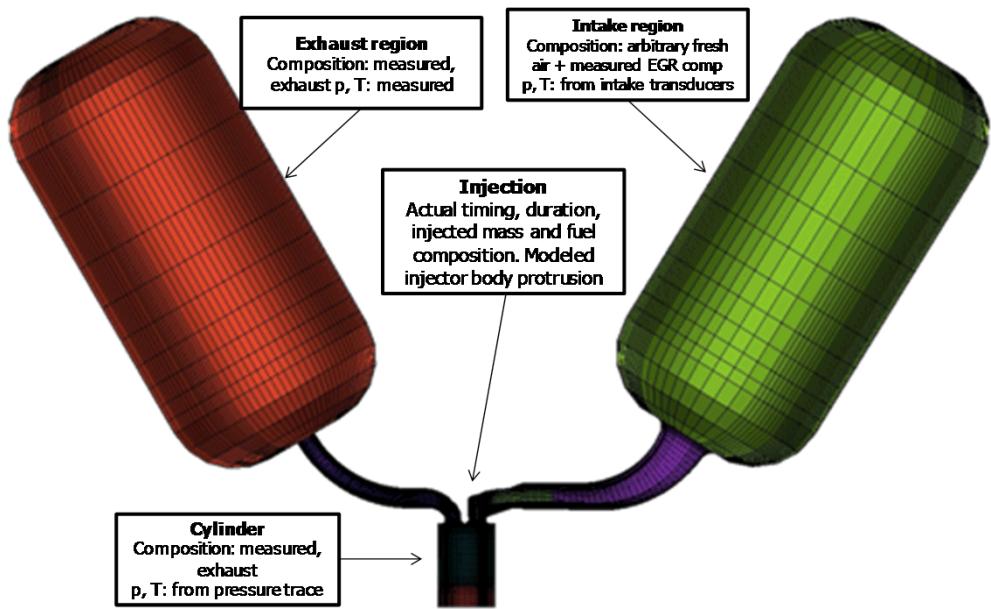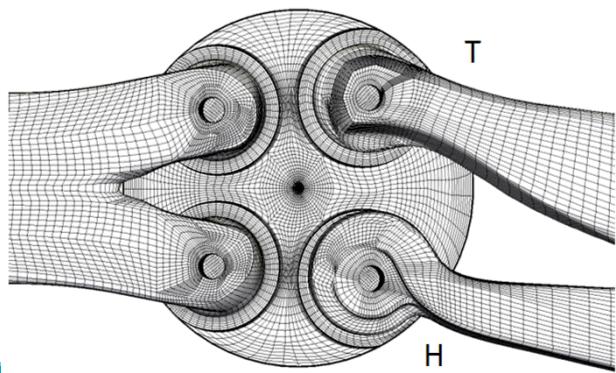


Configuration mimics optical engine conditions for early injection, low temperature combustion operation (“LTC3”)

Comparisons of PLIF data with both bowls


Conventional bowl: jet penetration into bowl reasonably well captured; phenomenology well predicted

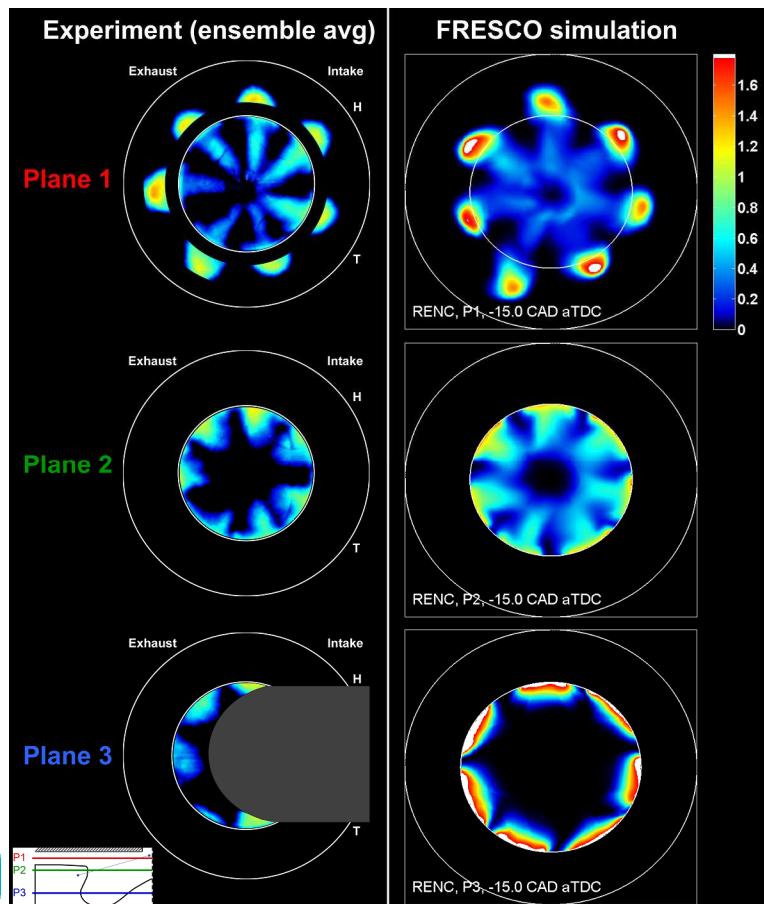


Stepped-lip bowl: good qualitative agreement; questions remain about vortex dynamics resulting from jet-step interactions

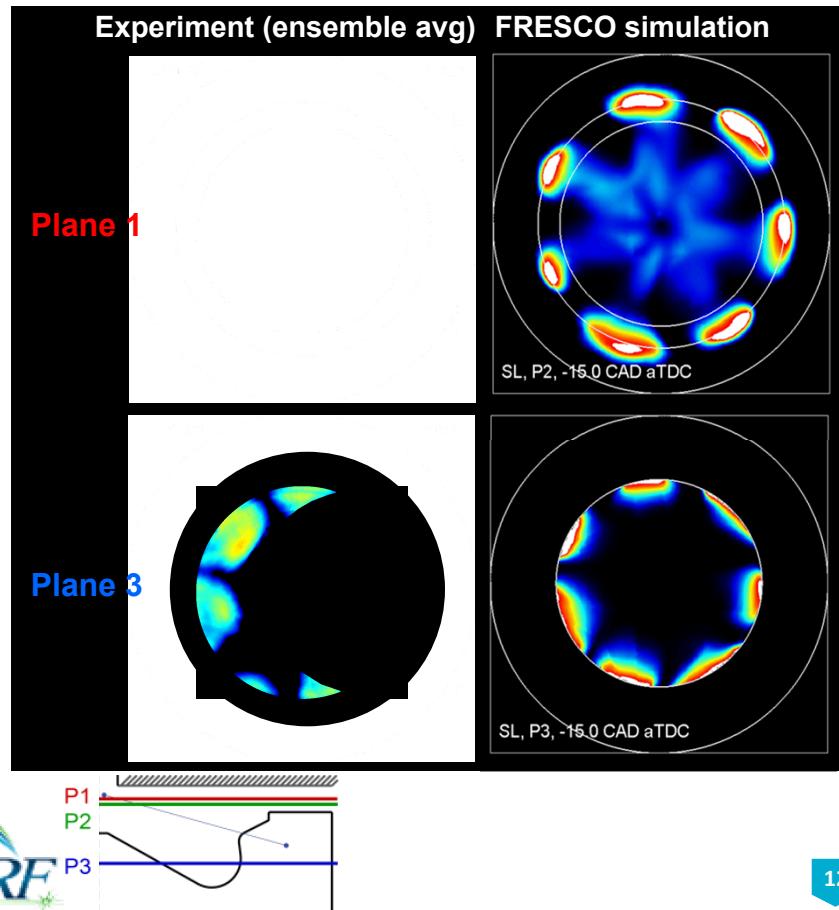

Jet-swirl interactions / jet-bowl interactions (from AEC presentation)

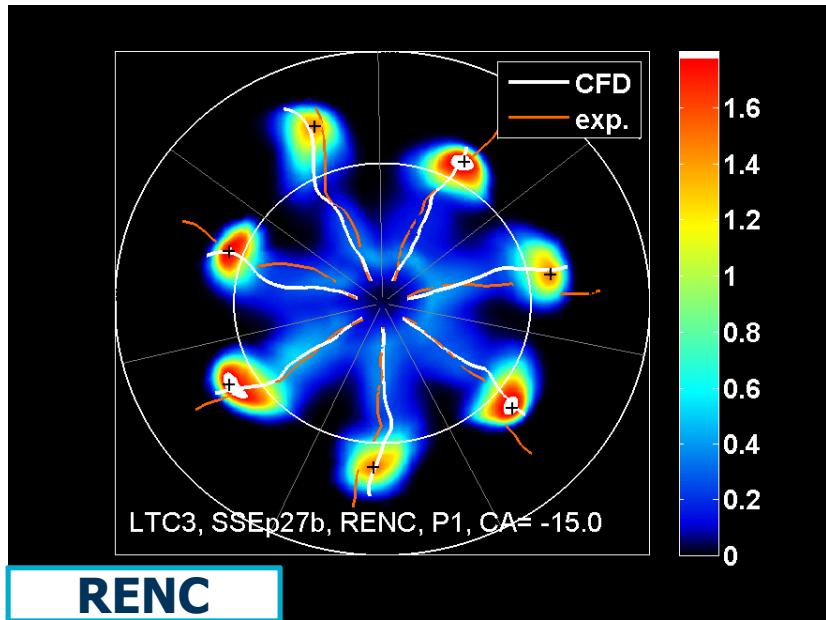

RENC

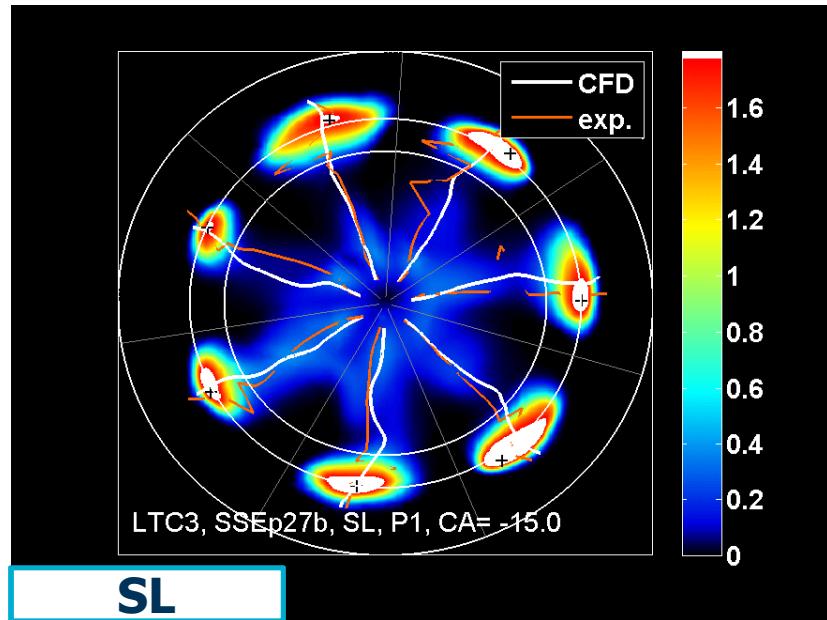

SL

- Jet deflection and rotation due to swirl are well captured in bowl & squish regions
- Mixture forming above the step is broadened by presence of the step → peak phi's unaffected
- Jet deviation phenomenon at the rim ← turbulence modeling

Recap: FRESCO model evaluation

Turbulence modeling

The GRNG turbulence model performs acceptably well for cold flow predictions, but is much more reliable than the standard $k-\varepsilon$ or standard RNG models for gas jet configurations. The GRNG model is therefore used for all engine simulations shown here.

Comparison with fuel tracer PLIF images



The latest simulation results compare more favorably with experimental data than previous attempts with sector mesh simulations for the conventional bowl. It is not yet certain that the prediction of vortex dynamics above the step matches the experimental observations.

Moving forward

Application of FRESCO simulations to bowl geometry study – what can we learn about late-cycle mixing? Do the predictions agree with experimental data?

Post-processing of CFD results (1/4)


- Vertical half planes intersecting two jet axes are used to make a cross section
 - See cartoon at bottom right
- Top view: vertical plane flow and fuel concentration
 - Velocity projection onto vertical half-planes
 - Fuel-air mixture colored by ϕ
- Bottom view: tangential velocity
 - Depiction of swirling flow structures
- Still images and videos are shown

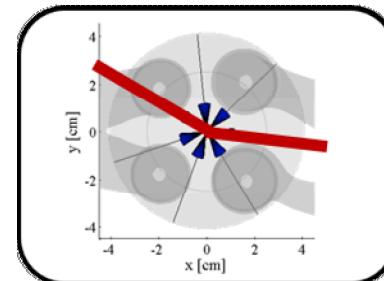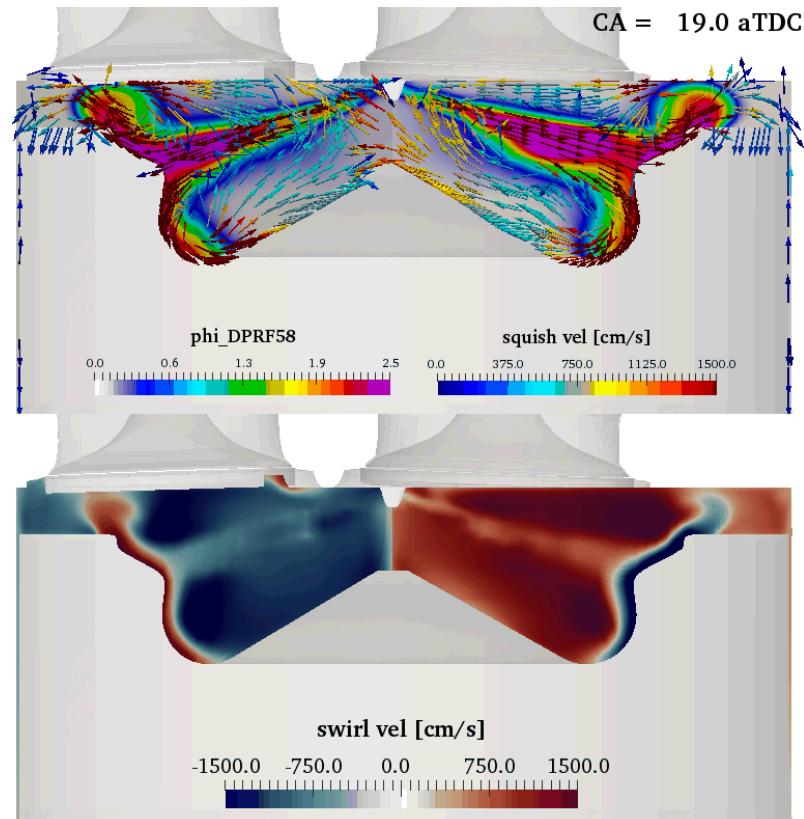

Post-processing of CFD results (2/4)


- Fuel splitting is quantified as follows:

1. A cone containing the jet axes is defined (see image at right)
2. A level-set field is defined such that the cone surface is identified by $d=0$
3. $d < 0$: underneath the cone (bowl)
 $d > 0$: above the cone (squish)

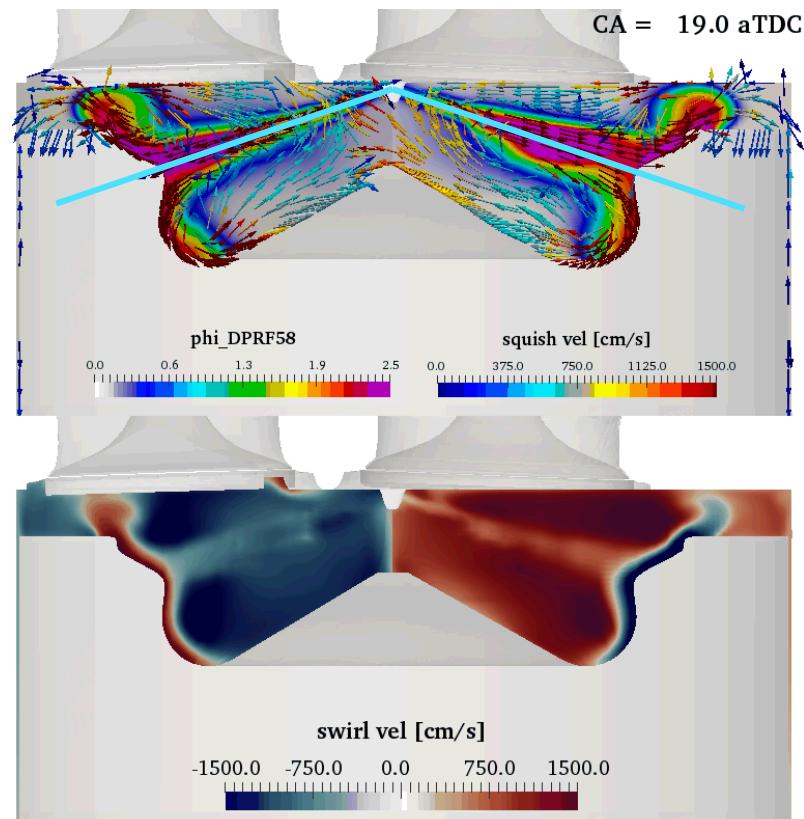


Post-processing of CFD results (3/4)

- To visualize and characterize mixing, the three-dimensional stoichiometric isosurface is computed
 - The mixtures inside this isosurface are richer than stoichiometric
- The isosurface shown at the right is colored by the local fuel mass flux
 - Fuel mass passing into the surface: blue
 - Fuel passing out of the surface into leaner mixtures: red
- The surface area/volume ratio of the stoichiometric isosurface is tracked
- Higher surface area/volume ratio:
 - Rich mixture cloud is less compact and spread over a larger portion of the cylinder
 - Potential for steeper concentration gradients
 - Higher potential for mixing

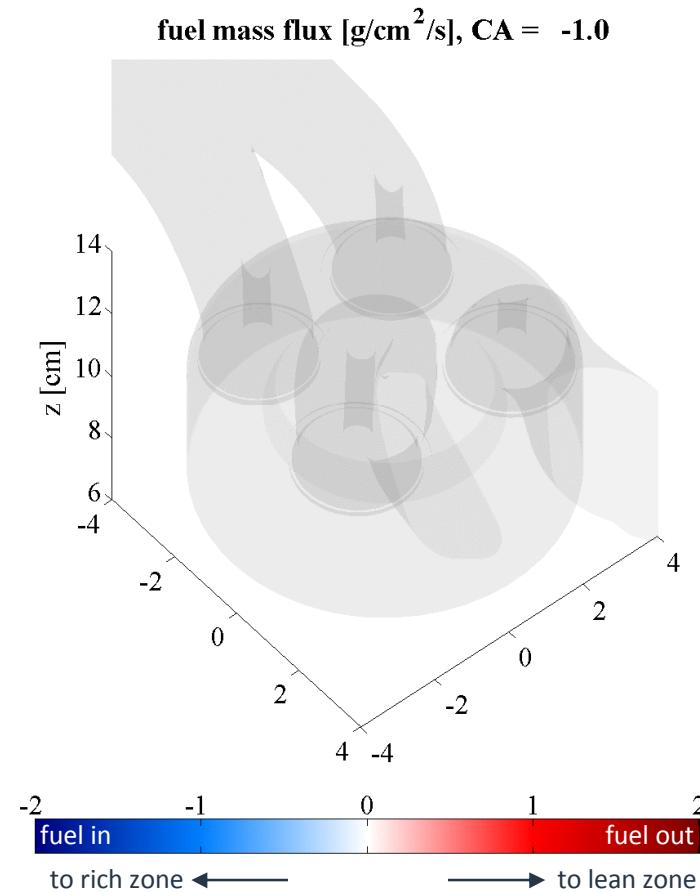

Post-processing of CFD results (4/4)



- Swirl-plane images
 - Cutting plane 1 mm below the head
 - Velocity field shown with black vectors
 - Fuel-air equivalence ratio (ϕ) shown with false-color
 - Turbulent fluctuation (u') contours

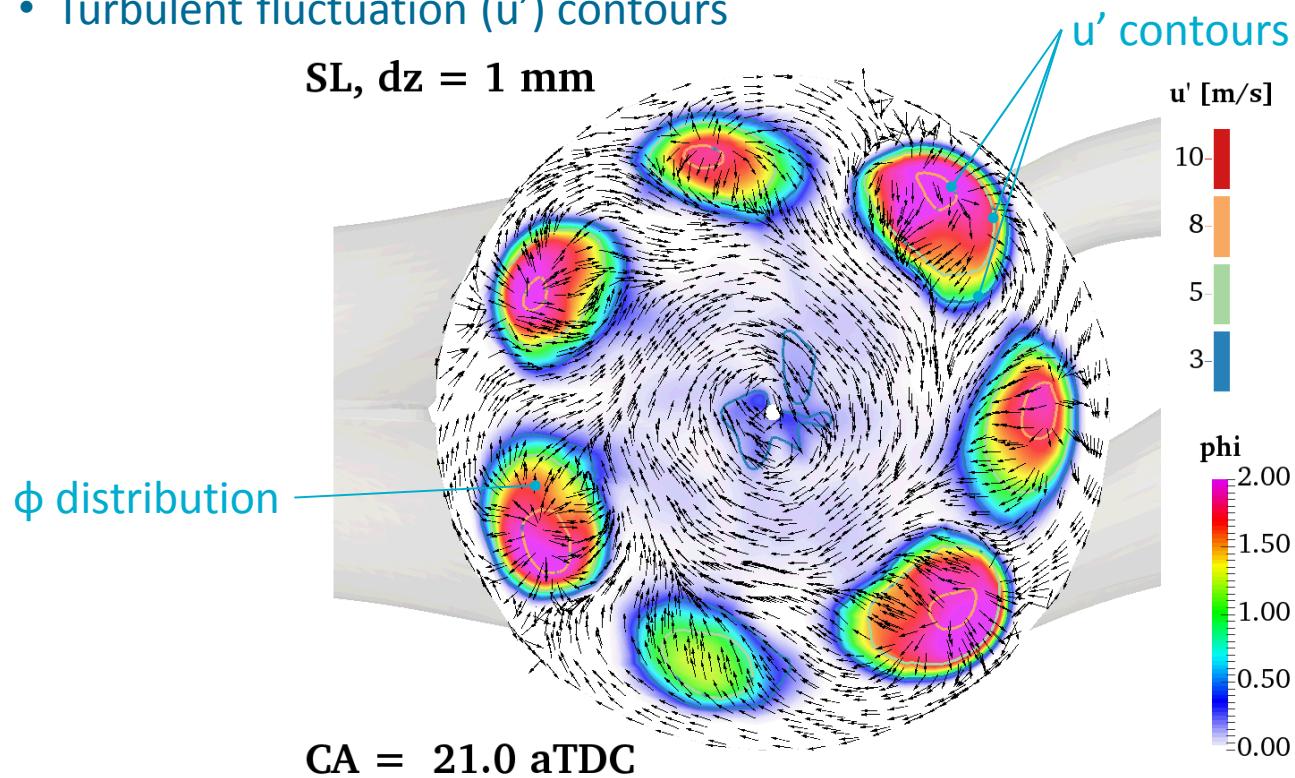


Intermediate injection timing: observations about jet-piston interactions and flow structure

- Pilot injection
 - Does not interact directly with either bowl rim
- Main injection fuel splitting
 - Conv: some fuel redirected down into bowl, some sweeps across top of piston toward wall
 - SL: Upper portion of jet redirected upward at step; lower portion of jet redirected down into bowl
 - SL: upper portion impinges on cylinder head, spreads inward and outward
- Vortex dynamics
 - Conv: strong toroidal bowl vortex
 - SL: toroidal vortex forms in bowl; second toroidal vortex forms above step



This is the injection timing at which late-cycle heat release is most effectively enhanced with the stepped-lip bowl

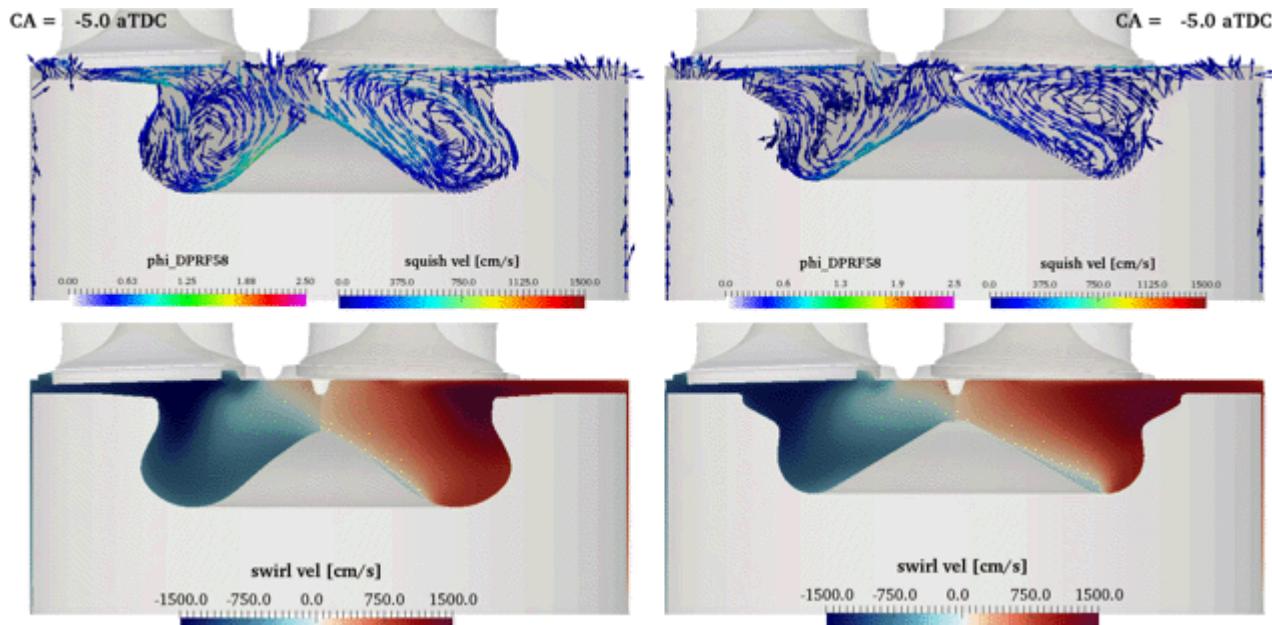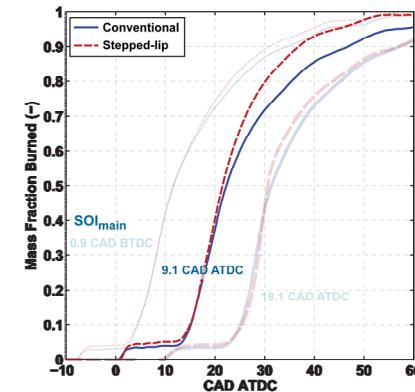

Intermediate injection timing: quantifying fuel splitting

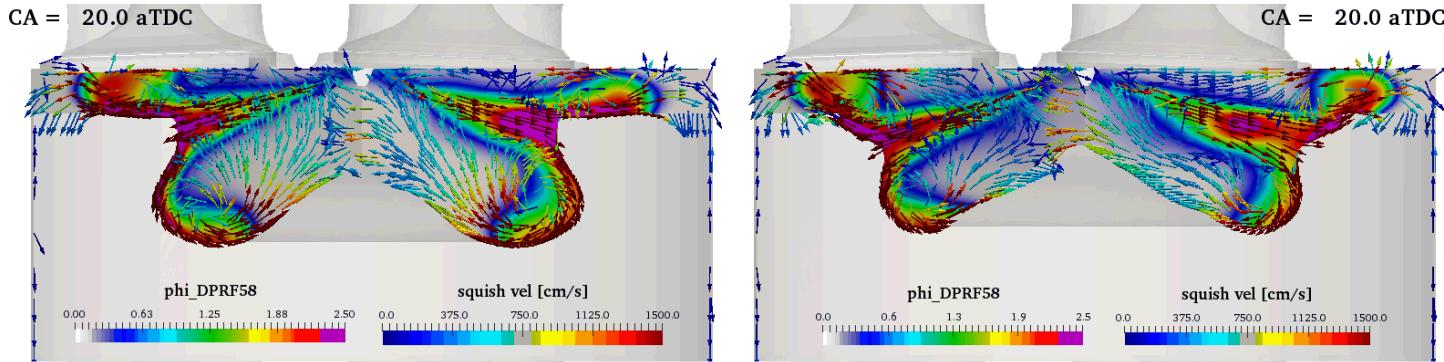



- Conventional bowl
 - Nearly equal split above and below jet axes
- Stepped-lip bowl
 - Uneven split: ~60% of fuel vapor is directed upward after impinging on the conical surface of the step
- Surface area to volume ratio of stoichiometric isosurface
 - Higher for stepped-lip bowl after ~20 CAD ATDC despite uneven fuel splitting

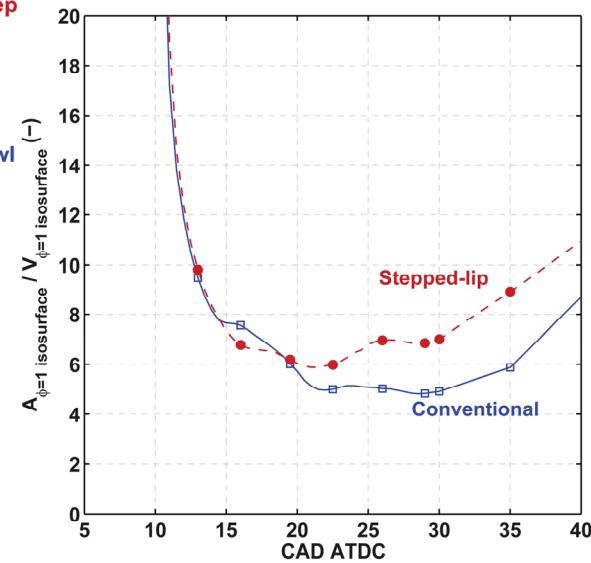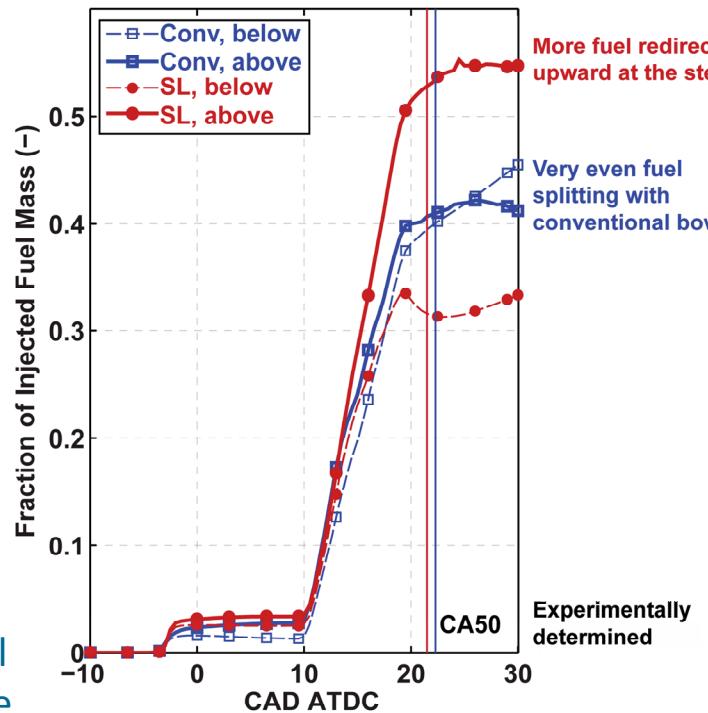


Near-TDC injection timing: observations about jet-piston interactions and flow structure

- Pilot injection
 - Does not interact directly with either bowl rim
- Main injection fuel splitting
 - Conv: most fuel redirected down into bowl
 - SL: Upper portion of jet redirected upward at step; lower portion of jet redirected down into bowl
 - SL: upper portion impinges on cylinder head, spreads inward and outward
- Vortex dynamics
 - Conv: strong toroidal bowl vortex, similar to intermediate injection timing
 - SL: toroidal vortex forms in bowl, but a well organized, long-lived vortex does not form above the step



Near-TDC injection timing:
little difference between
heat release profiles

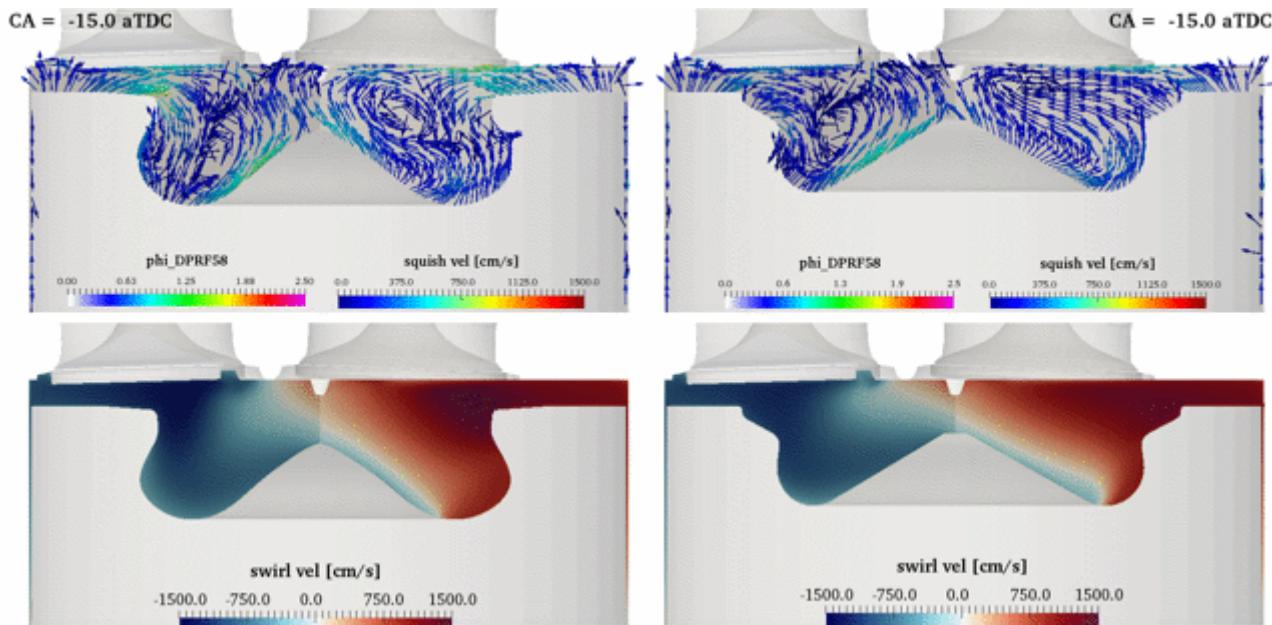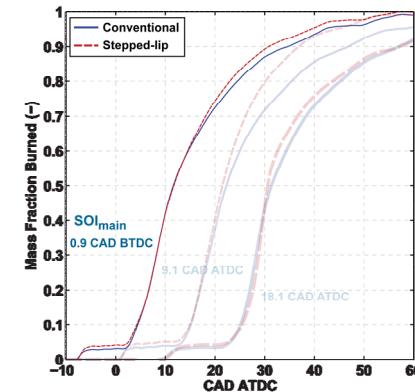

Near-TDC injection timing: quantifying fuel splitting

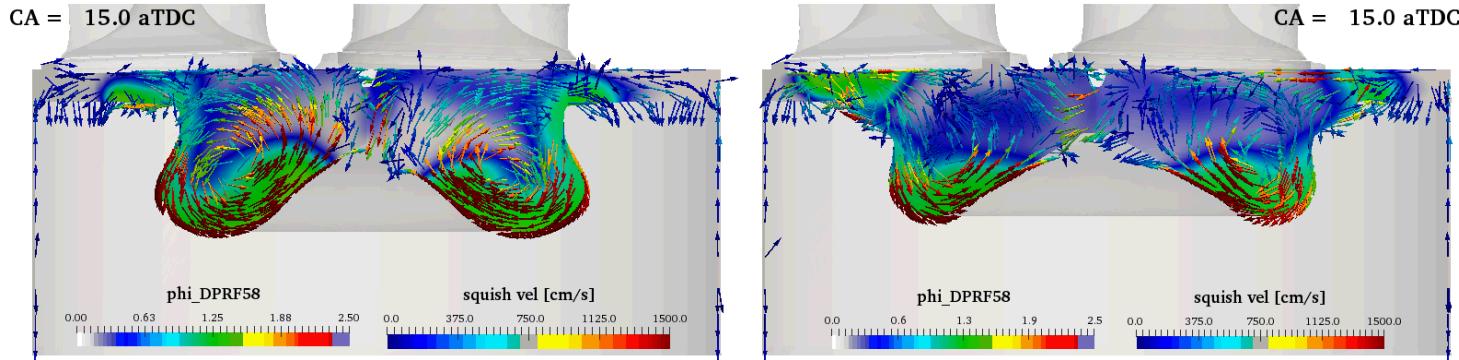



- Conventional bowl
 - Most fuel injected into bowl
- Stepped-lip bowl
 - Fuel splitting more even than for the conventional bowl, more even than at the intermediate injection timing
 - $\sim 54\%$ of fuel vapor is above jet axes
 - Surface area to volume ratio of stoichiometric isosurface
 - Higher for stepped-lip bowl after ~ 10 CAD ATDC

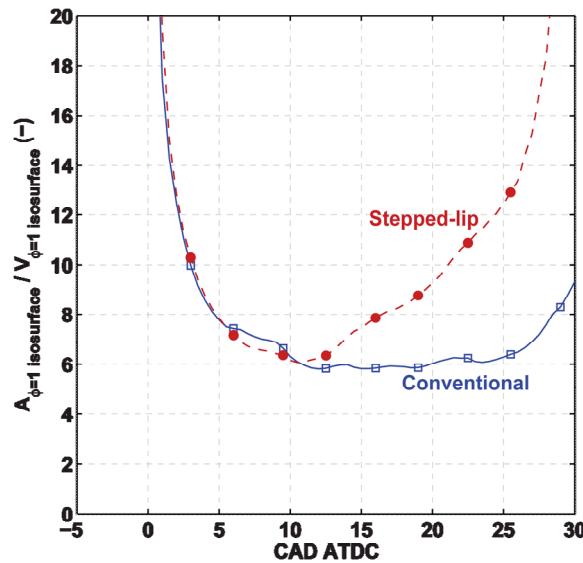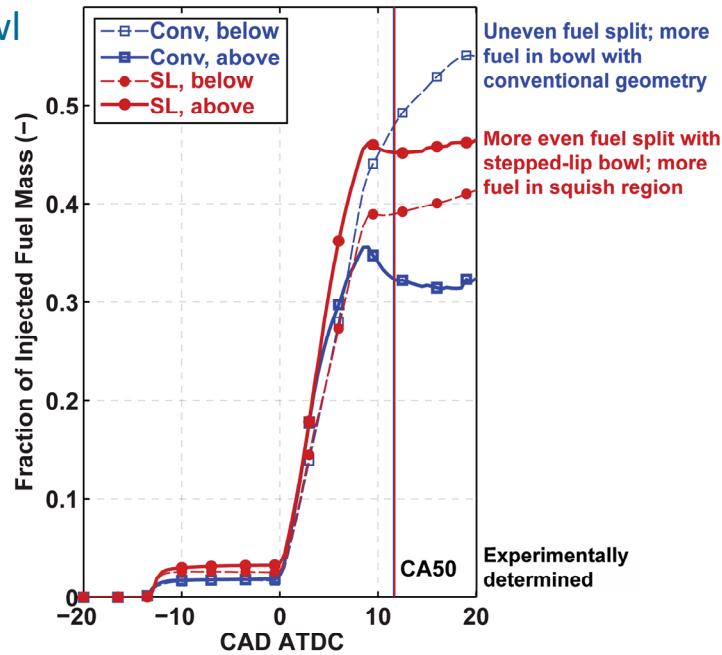


Late injection timing: observations about jet-piston interactions and flow structure

- Pilot injection
 - Does not interact directly with either bowl rim
- Main injection fuel splitting
 - Conv: most fuel is rapidly deflected by the top piston surface toward the liner
 - SL: Jets impinge on upper portion of step; most fuel is deflected upward and outward
 - SL: upper portion impinges on cylinder head, spreads inward and outward
- Vortex dynamics
 - Conv: weak toroidal bowl vortex, bore-sized toroidal vortex in the squish region
 - SL: weak bore-sized toroidal vortex in the squish region


Late injection timing: small differences between heat release profiles

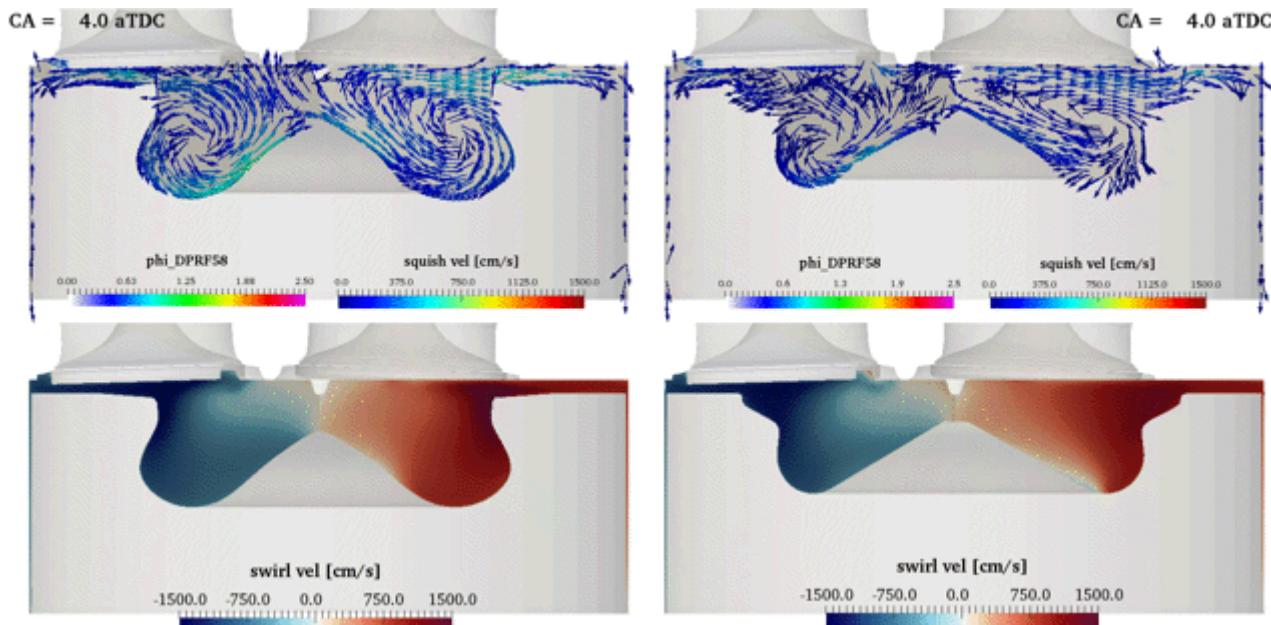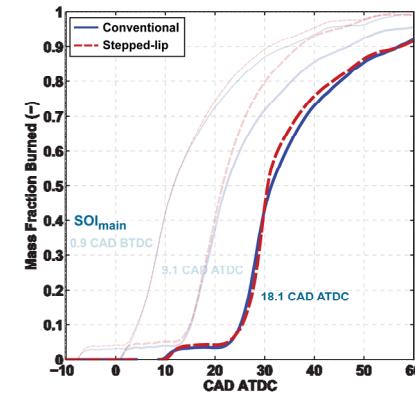

Late injection timing: quantifying fuel splitting

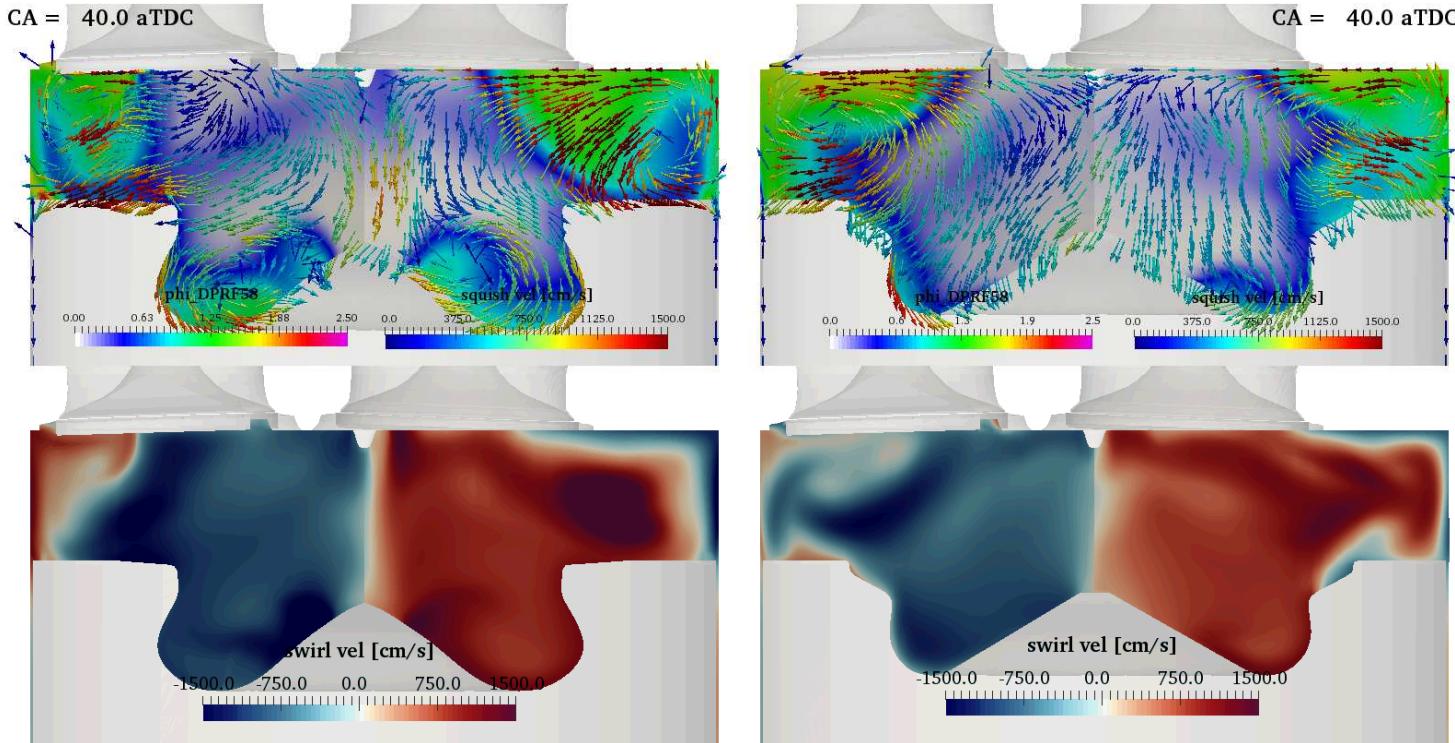

- Toroidal vortex structure appears more organized in the conventional bowl
- Fuel splitting: little difference between bowls
 - Majority of fuel remains in the squish region

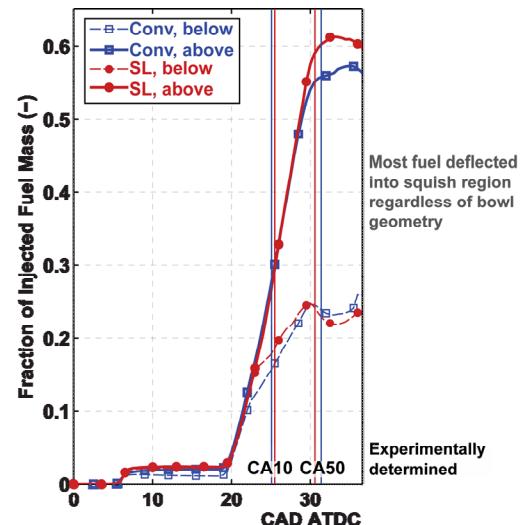

Recap: overview of simulation results for injection timing sweep (conventional diesel combustion)

- CFD simulations with both bowl geometries predict significant impacts of varying injection timing on:
 - Fuel splitting / jet deflection
 - Late-cycle vortex dynamics
- For intermediate injection timings where late-cycle heat release rates are enhanced with the stepped-lip piston, CFD simulations predict the following:
 - Uneven fuel splitting: ~60% of fuel vapor is deflected upward at the step
 - Formation of dual toroidal vortices – well organized, long-lived and energetic; these are not observed for any other injection timing
- Focus on near-TDC and intermediate main injection timings
 - Do optical measurements support CFD predictions of late-cycle combustion structure?
 - Do simulations predict enhanced mixing with the stepped-lip bowl for the intermediate injection timing, but not the near-TDC injection timing? If so, what is the mechanism for enhanced mixing?

Do optical data support CFD predictions of late-cycle fluid dynamics (1/2)?

Fuel tracer PLIF data (LTC); image taken \sim 12 CAD after the start of injection. Note the apparent encroachment of fuel from the outer regions of the squish region.


SOI: 24 CAD BTDC; piston moves up



This phenomenon had yet to be predicted with simulations...

CFD results (CDC9); image taken \sim 10 CAD after SOI_{main}. A void in the mixture is sometimes visible above the step (see red arrow).






SOI: 9.5 CAD ATDC; piston moves down

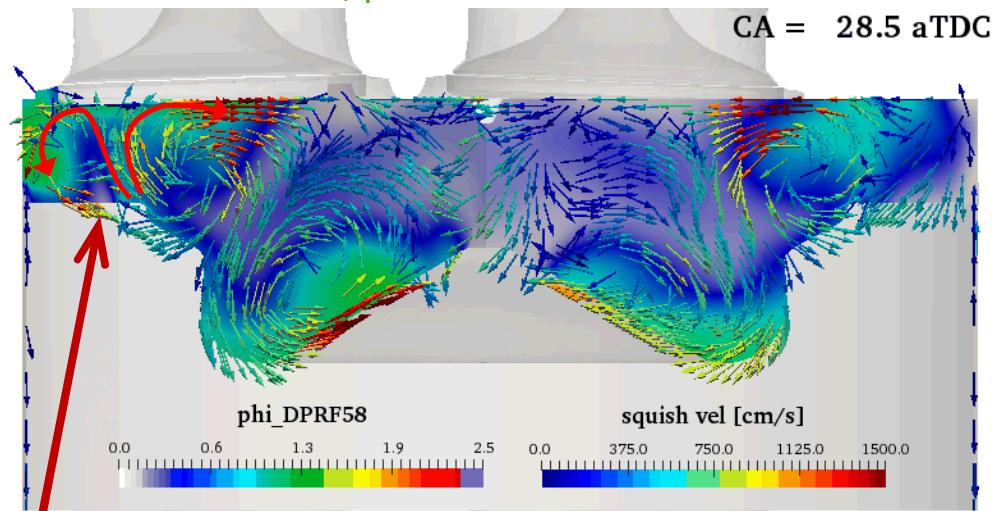

The upper portion of the jet impinges on the head and splits. The outward bound portion is redirected downward at the liner. The upper toroidal vortex transports the remaining mixture inward, away from the mixture in the outer squish region.

Do optical data support CFD predictions of late-cycle fluid dynamics (2/2)?


- Advanced post-processing techniques have been developed to provide insight into mixing processes predicted by FRESCO CFD simulations

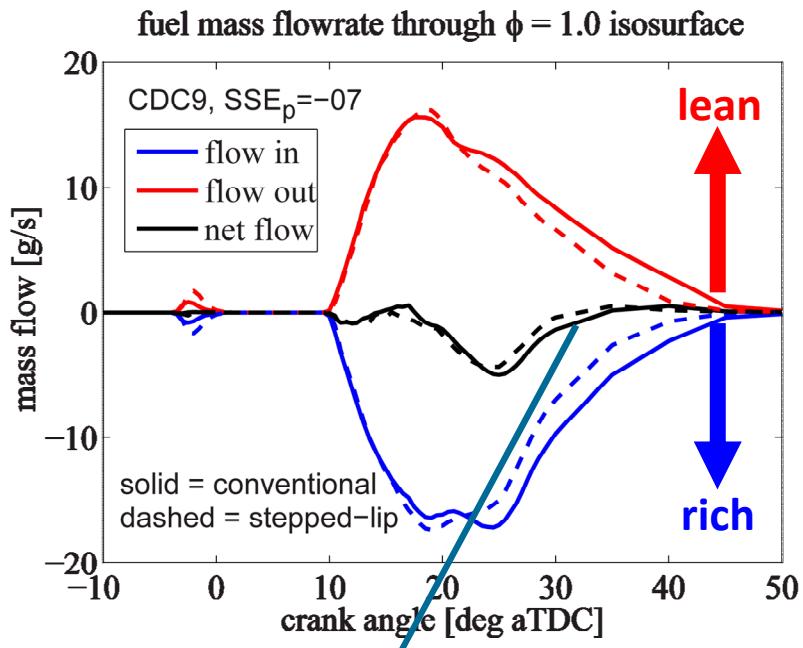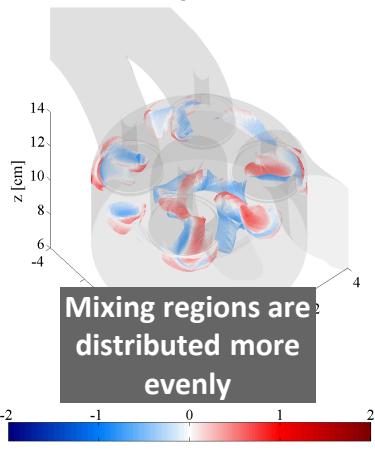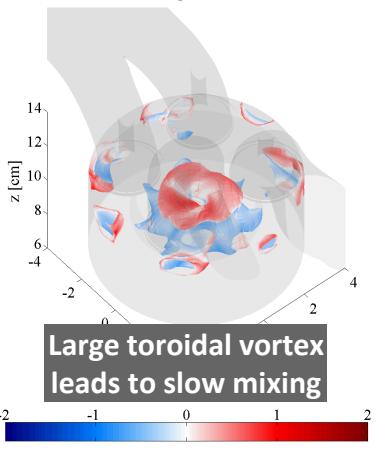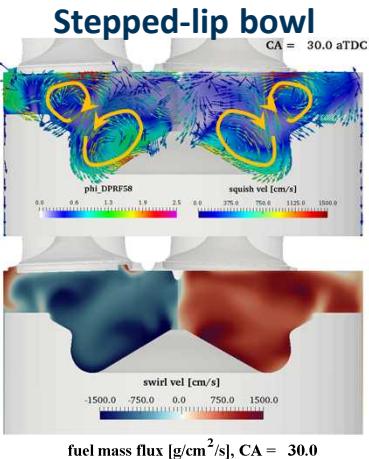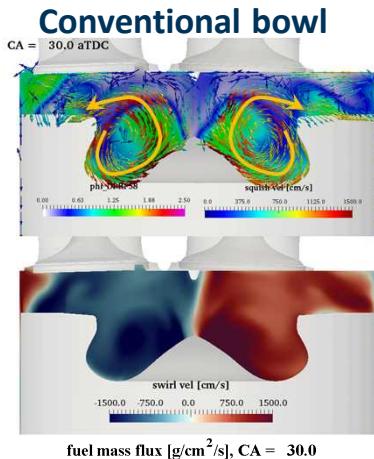

Richer conditions persist longer in the conventional bowl; natural luminosity images show a large amount of soot above the conventional bowl late in the cycle


Conventional

Stepped-lip

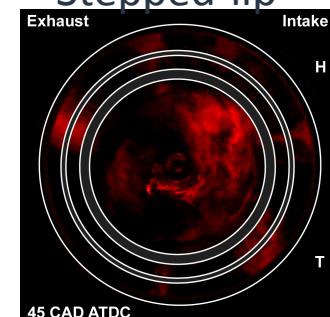

Understanding the mechanism of enhanced late-cycle mixing with the stepped-lip bowl







Do CFD simulations predict differences in late-cycle mixing associated with thermal efficiency improvements?

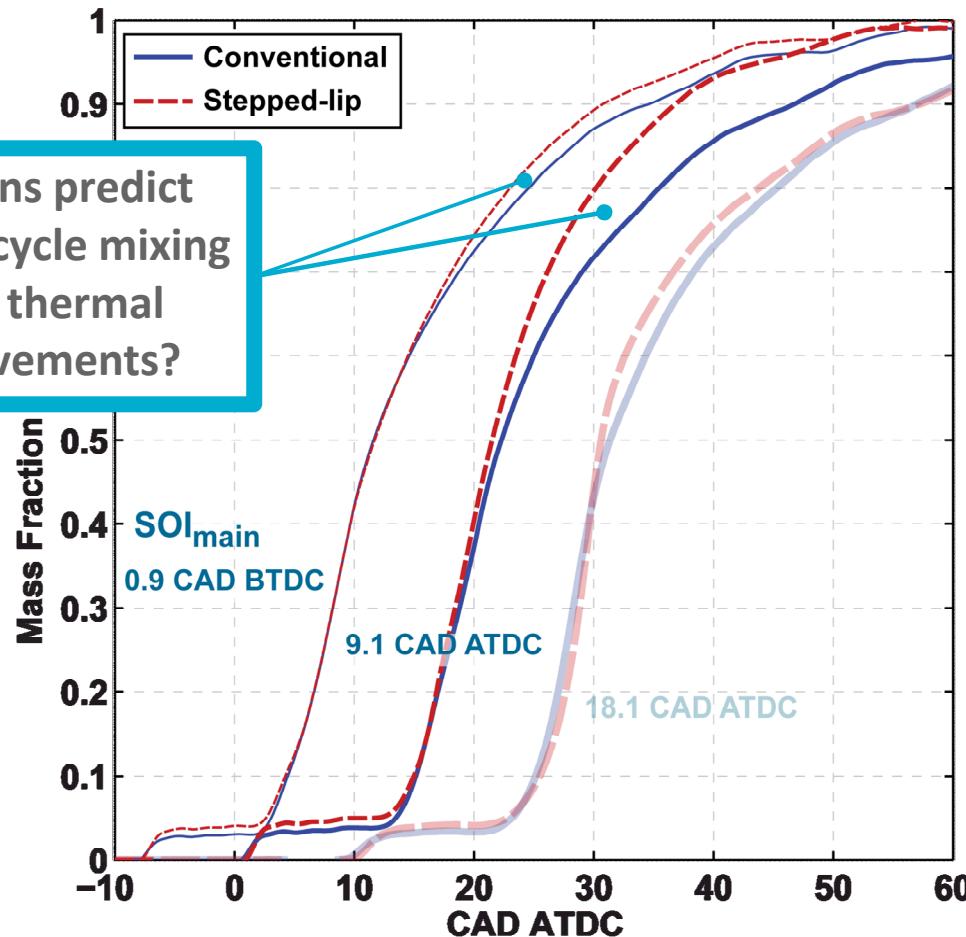

For the intermediate main injection timing, jet-step interactions create significant turbulence in the squish region that persists late in the cycle

- 20 CAD ATDC: shortly before CA50
 - Similar turbulent kinetic energy distributions; impingement on cylinder head begins with stepped-lip piston
- 23 CAD ATDC: shortly after CA50
 - Stepped-lip: deflection at step, impingement on cylinder head create significant turbulence
 - TKE distributions in the bowls are comparable
- 26 CAD ATDC: after CA50
 - Enhanced turbulence persists above the step and spreads due to impingement on the head, formation of upper toroidal vortex

Intermediate injection timing

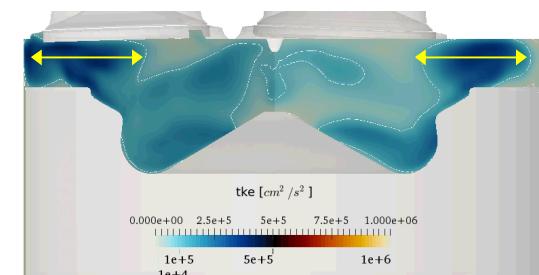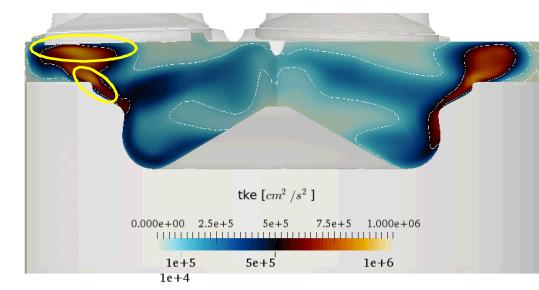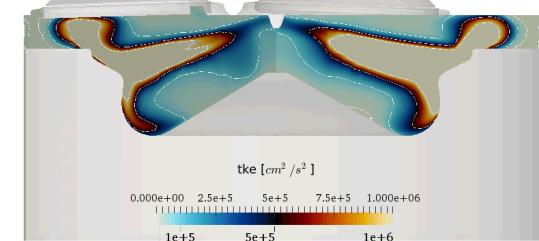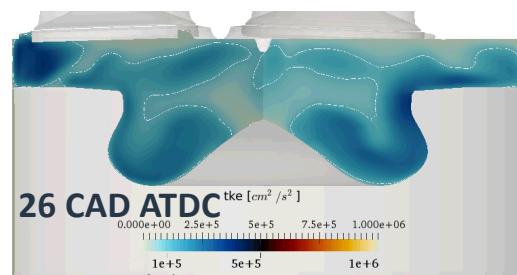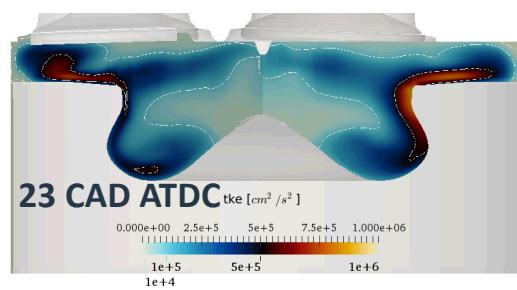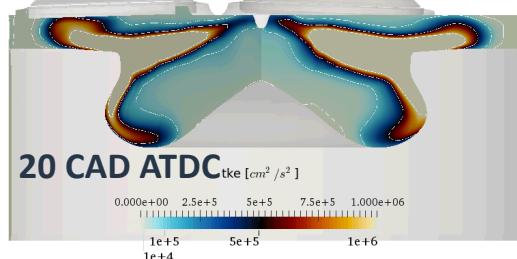


During engine testing with the stepped-lip piston, a ring of deposited soot was observed on the cylinder head above the step region for this injection timing

For the near-TDC main injection timing, robust, long-lived flow structures beneficial for mixing do not form above the step region


- 07 CAD ATDC: ~CA20
 - Similar turbulent kinetic energy distributions; impingement on bowl rims has just begun
- 10 CAD ATDC: ~CA40
 - TKE distributions are comparable
- 13 CAD ATDC: shortly after CA50
 - Stepped-lip: impingement on the cylinder head leads to less spreading than with the intermediate injection timing; TKE is concentrated in a small annular region above the lip
 - The limited step-head spacing appears to inhibit flow structures that promote spreading

Near-TDC injection timing

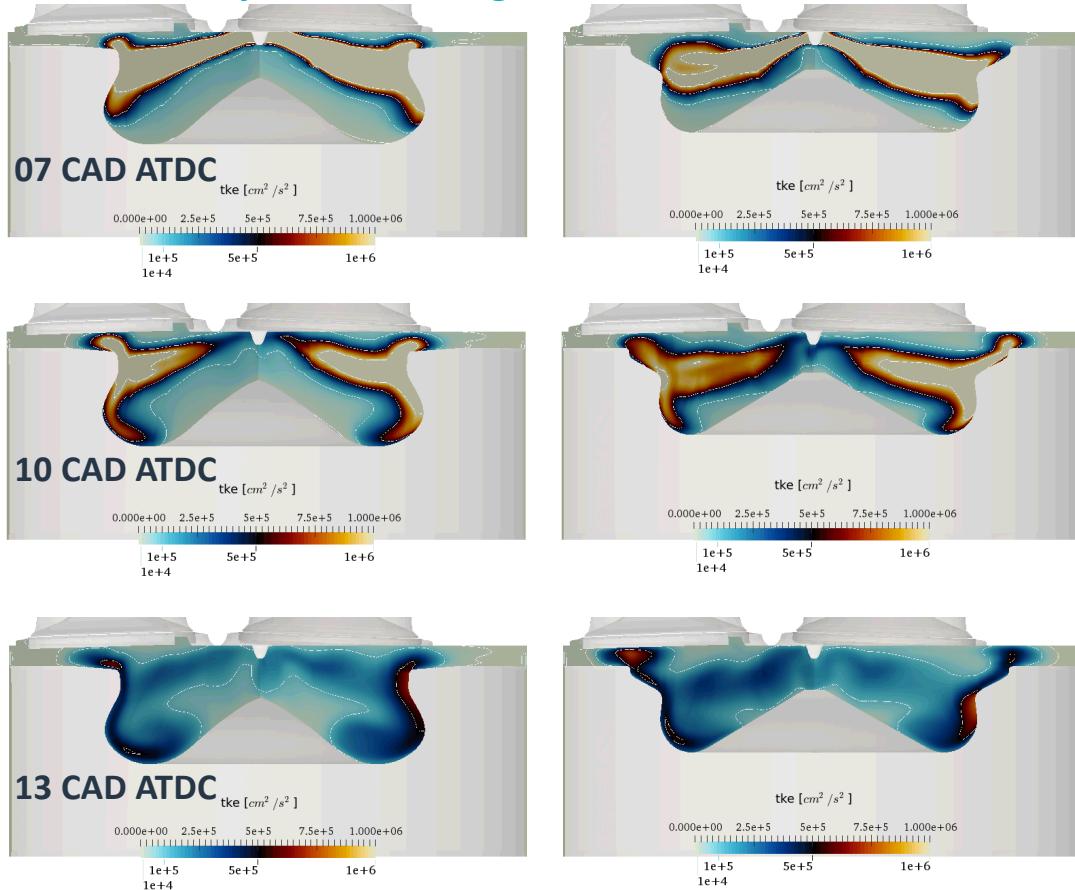


For the intermediate injection timing, the stepped-lip piston changes jet-head interactions: azimuthal and radial spreading are enhanced

- Early spray development
 - Jets propagate outward toward the bowl rim
 - Greater upward deflection with conventional bowl (Coanda effect, stronger bowl vortex)
- Jet behavior in the squish region
 - Conventional: modest spreading of jet heads, transition into swirling flow; jets remain separated
 - SL: impingement on cylinder head leads to more rapid spreading of jet heads, both radially and tangentially
- Late-cycle behavior
 - Conventional: mixture remains in squish region and swirl motion is slow
 - Stepped-lip: upper toroidal vortex transports mixture inward; mixture is more evenly distributed over a larger portion of the cutting plane

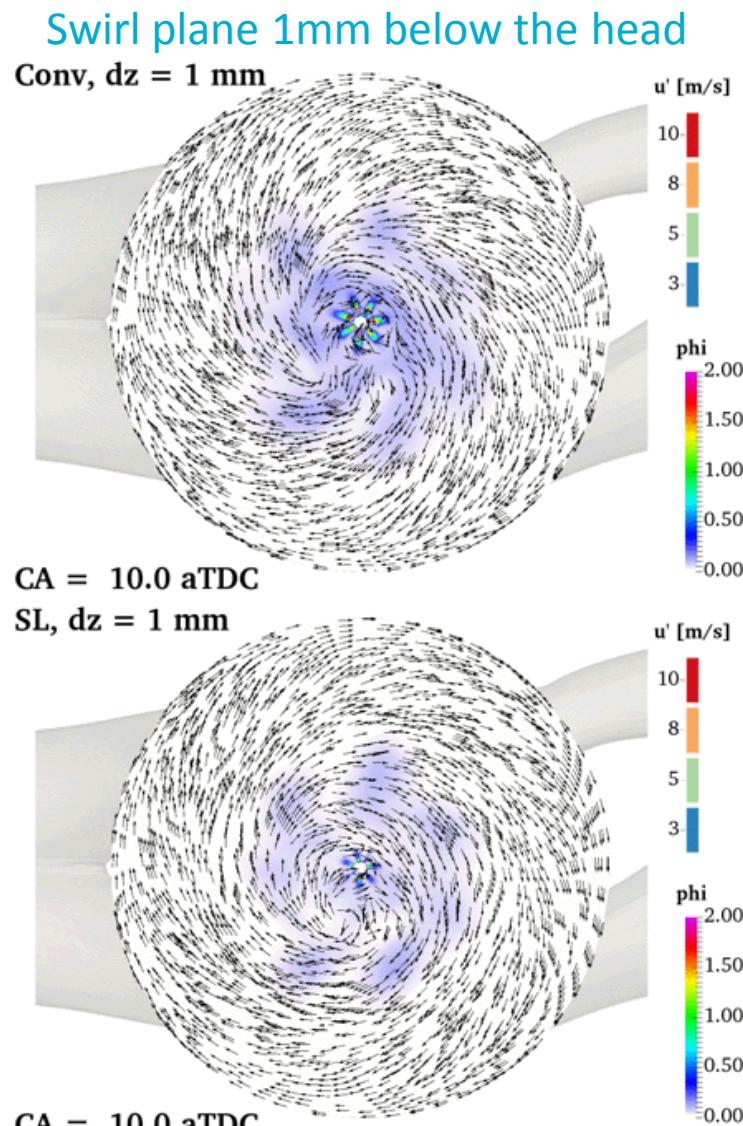


For the intermediate injection timing, the stepped-lip piston changes jet-head interactions: azimuthal and radial spreading are enhanced

- Early spray development
 - Jets propagate outward toward the bowl rim
 - Greater upward deflection with conventional bowl (Coanda effect, stronger bowl vortex)
- Jet behavior in the squish region
 - Conventional: modest spreading of jet heads, transition into swirling flow; jets remain separated
 - SL: impingement on cylinder head leads to more rapid spreading of jet heads, both radially and tangentially
- Late-cycle behavior
 - Conventional: mixture remains in squish region and swirl motion is slow
 - Stepped-lip: upper toroidal vortex transports mixture inward; mixture is more evenly distributed over a larger portion of the cutting plane

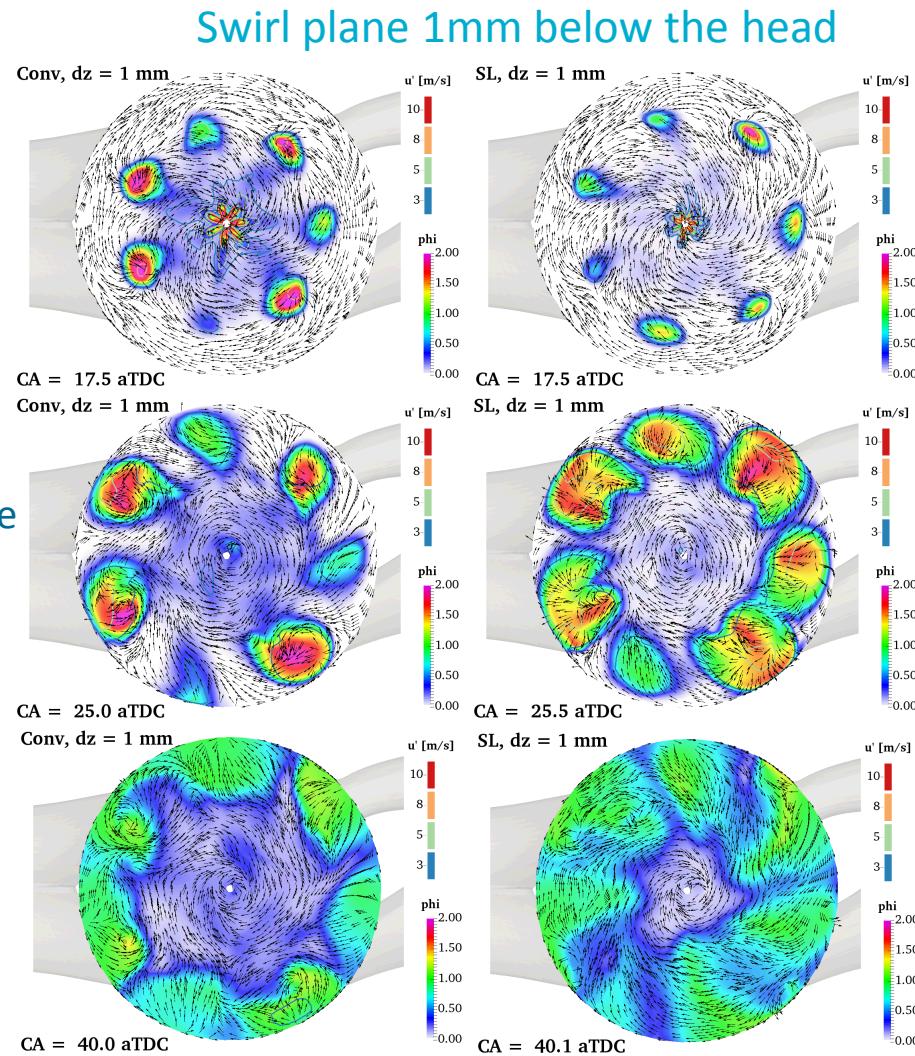

For the intermediate injection timing, mixture and turbulence are spread over a larger region above the stepped-lip bowl


- 27 CAD ATDC: ~CA70; enhanced late-cycle mixing is expected to occur with the stepped-lip bowl based on experiments

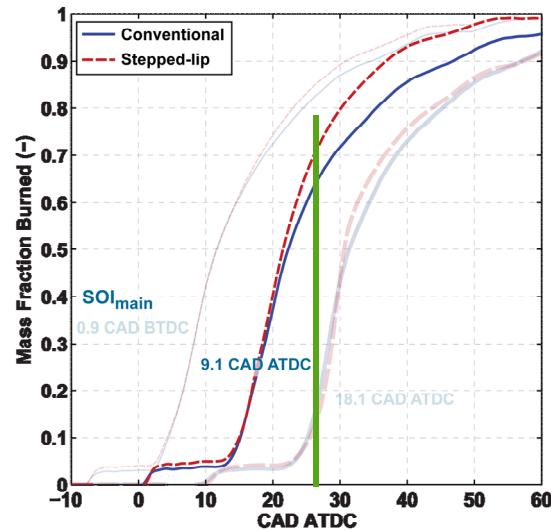


- Recall that with the stepped-lip piston for this injection timing, the majority of the fuel is redirected upward at the step
- With the stepped-lip bowl, jet impingement on head leads to significant spreading of mixture, but also of turbulence



Swirl plane 1mm below the head
Conv, $dz = 1$ mm

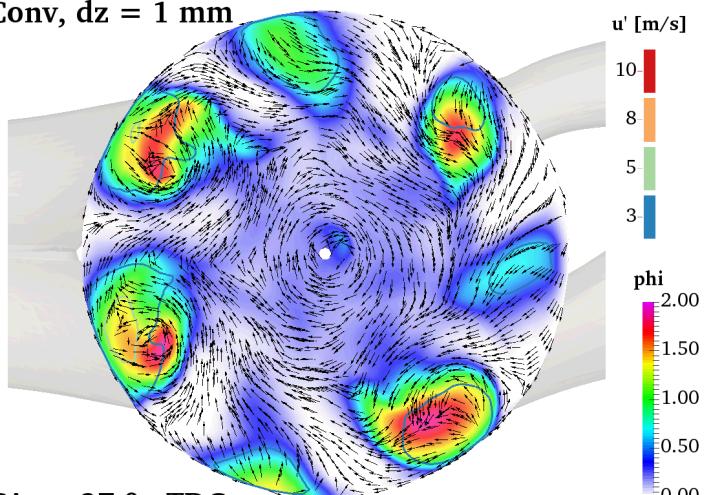


CA = 27.0 aTDC
SL, $dz = 1$ mm

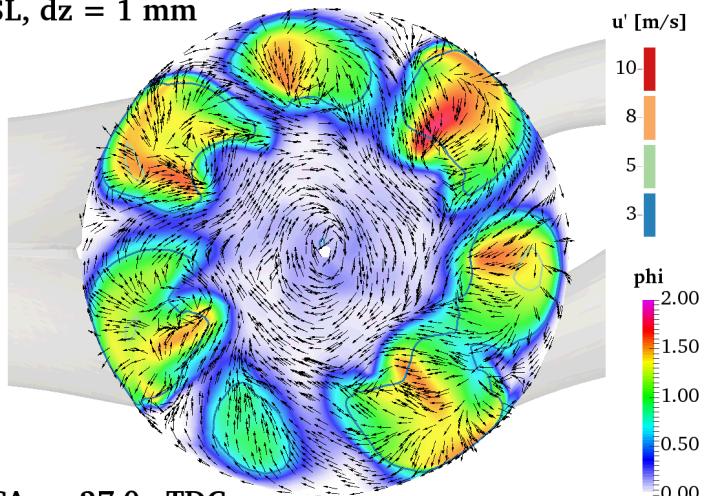

CA = 27.0 aTDC


For the near-TDC injection timing,

- Early spray development
 - Stronger interaction with bowl rim for conventional bowl; greater tangential spreading and slow penetration into squish
 - Greater upward deflection with conventional bowl (Coanda effect, stronger bowl vortex)
- Jet behavior in the squish region
 - Conventional: slow penetration; jet heads merge and continue to be transported by swirl
 - SL: larger proportion of fuel in the squish; impingement on cylinder head causes jet heads to spread
- Late-cycle behavior
 - Conventional: squish mixture becomes leaner, toroidal vortex in bowl carries mixture upward in the center of the chamber
 - Stepped-lip: squish mixture is primarily transported by swirl – no upper toroidal vortex to promote inward motion

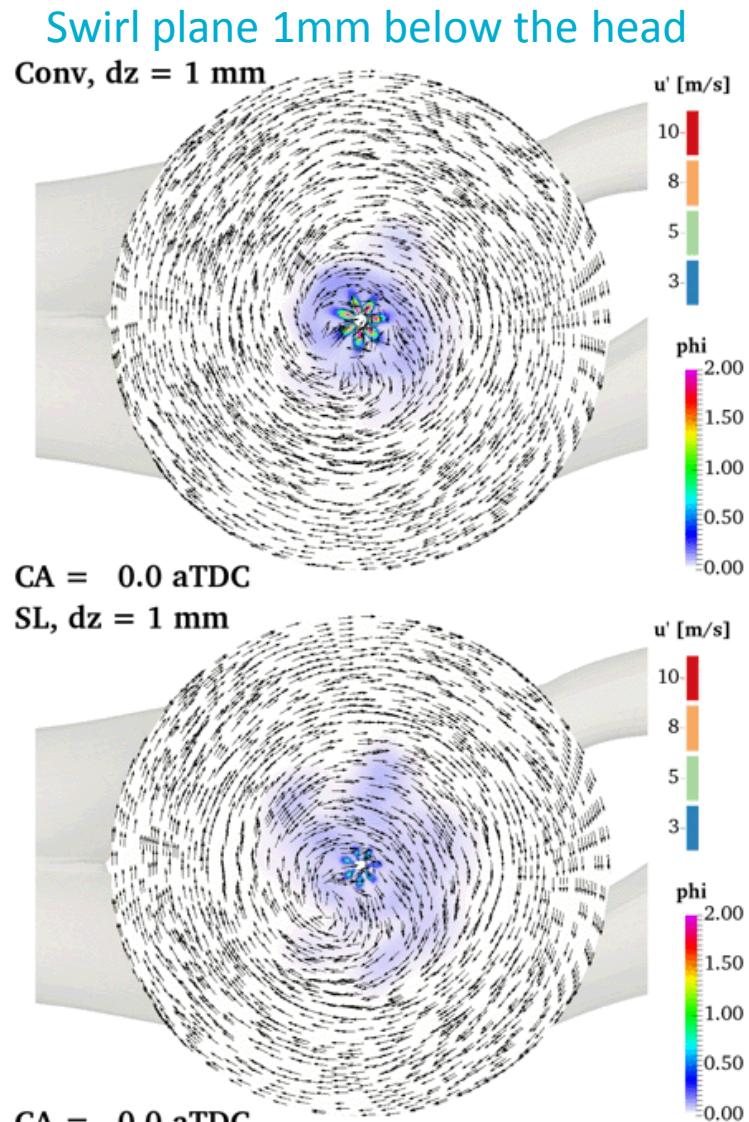

For the near-TDC injection timing,


- Early spray development
 - Stronger interaction with bowl rim for conventional bowl; greater tangential spreading and slow penetration into squish
 - Greater upward deflection with conventional bowl (Coanda effect, stronger bowl vortex)
- Jet behavior in the squish region
 - Conventional: slow penetration; jet heads merge and continue to be transported by swirl
 - SL: larger proportion of fuel in the squish; impingement on cylinder head causes jet heads to spread
- Late-cycle behavior
 - Conventional: squish mixture becomes leaner, toroidal vortex in bowl carries mixture upward in the center of the chamber
 - Stepped-lip: squish mixture is primarily transported by swirl – no upper toroidal vortex to promote inward motion

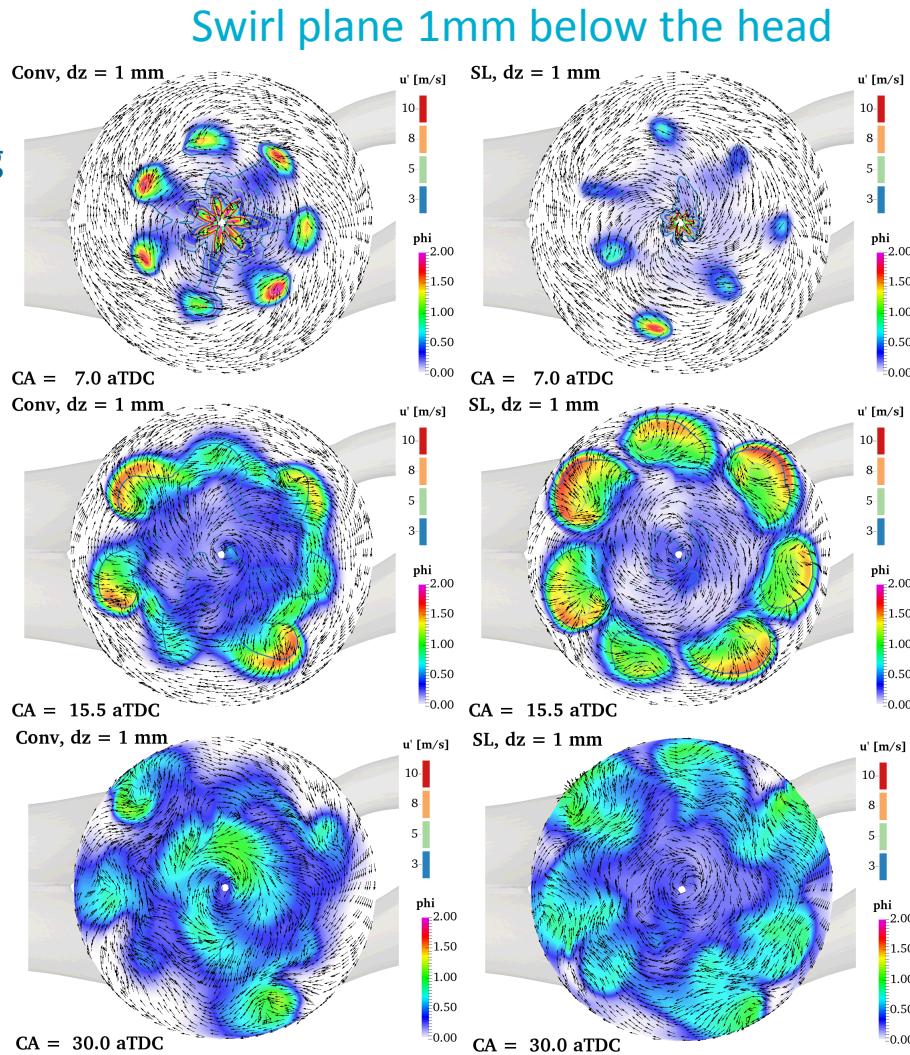


Summary: theory of late-cycle mixing behavior

- Conceptual models in development to explain the observed late-cycle mixing behavior
- Jet impingement, fuel splitting, and vortex dynamics appear to play key roles to enhance:
 - Air utilization
 - Late-cycle mixing

Conventional re-entrant bowl: dominated by toroidal bowl vortex

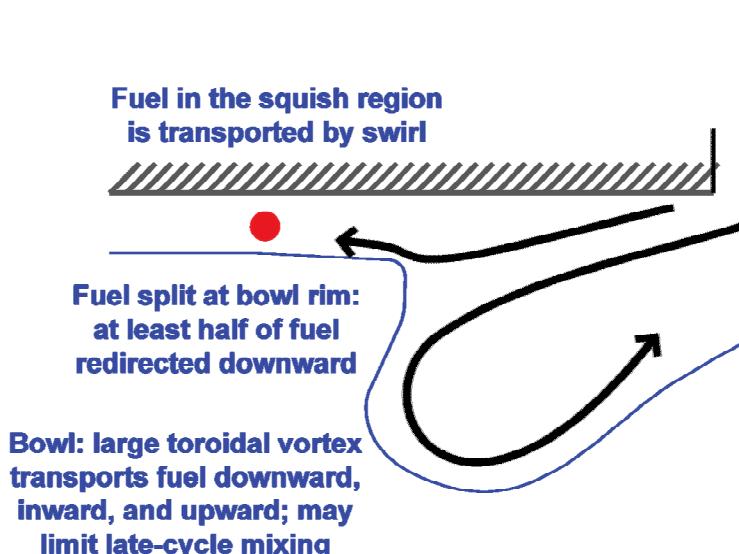

Stepped-lip bowl: enhanced air utilization and late-cycle turbulent mixing

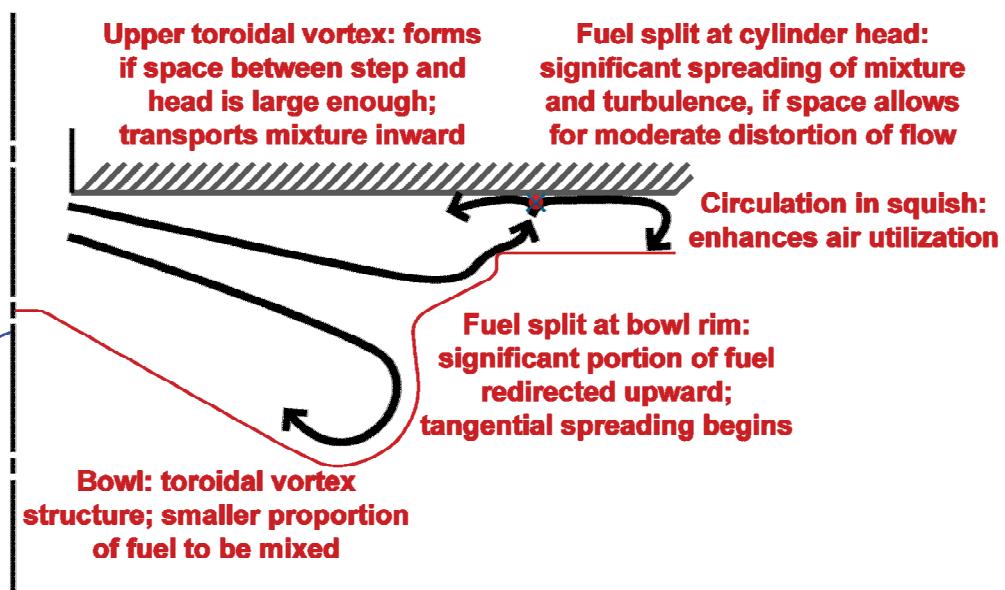

Next steps

- Publications
 - CIV measurements (Kan; nearly finished)
 - Thermodynamic analysis (Steve; nearly finished)
 - PLIF / CFD mixing comparison (Kan/Federico)
 - Description of mixing behavior and introduction of conceptual mixing models (Steve/Federico)
- Continued CFD simulations
 - Combustion, soot formation
 - Evaluation of heat release and soot emissions predictions
 - Comparison of in-cylinder flow: CIV vs. CFD
 - Further development of conceptual models
- Questions for further research
(May be addressed after demonstration of predictive capabilities of the combusting simulations)
 - Do heat transfer predictions match the experimentally-derived trends?
 - How does changing the swirl ratio impact late-cycle mixing for both of these bowl geometries?



**Thank you for your attention
Questions?**