Exceptional service in the national interest

Sandia National Laboratories

SCO2 Brayton Cycle Heat Exchangers

Brayton Cycle Industrial Engagement Workshop

August 26-27, 2014

Sandia National Laboratories, Albuquerque, NM

U.S. DEPARTMENT OF ENERGY

NNSA National Nuclear Security Administration

Sandia National Laboratories is a multi-program laboratory managed and operated by Sandia Corporation, a wholly owned subsidiary of Lockheed Martin Corporation, for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-AC04-94AL85000. SAND NO. 2011-XXXXP

Overview – SCO2 Cycle Exchangers

- **Several supercritical carbon dioxide (SCO2) cycles proposed**
  - Proposed as an alternative to steam and organic Rankine systems
  - Offer high efficiency, compact turbomachinery, fluid compatibility
  - Recompression Brayton cycles are well-matched to nuclear applications

- **Proposed SCO2 cycles are highly recuperated to enhance efficiency**
  - Recuperation between 1 and 5 times the net electrical power
  - Require a combination of high temperature and pressure capability
  - Will be a significant portion of demonstration and production cycles

- **Key requirements are pressure containment and cost scalability**
  - Several types can contain high pressures (PFHE, PCHE, S+T)
  - Current SCO2 test systems use PCHEs almost exclusively
  - Cost and size scaling suggest S+T units are impractical, despite wide use

- **Exploration of heat exchangers at SNL**
  - Partnering with Vacuum Process Engineering to understand PCHEs
  - Developing cast metal heat exchangers (CMHEs) to reduce cost

HEAT EXCHANGER BACKGROUND

Supercritical CO_2 Brayton Cycle

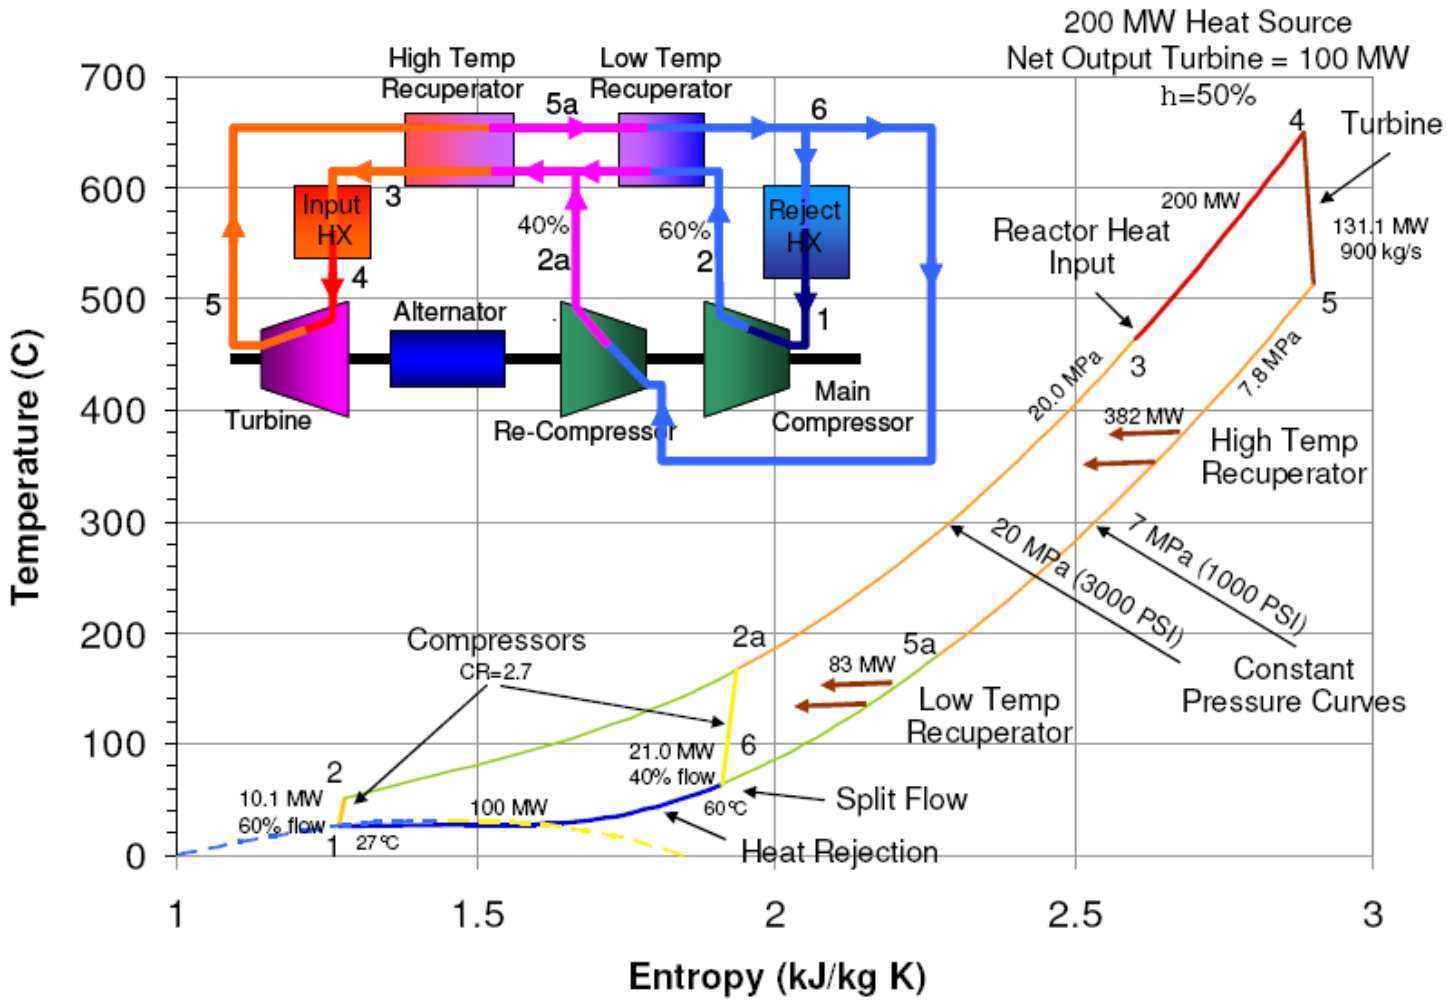

E. J. Parma, S. A. Wright, M. E. Vernon, D. D. Fleming, G. E. Rochau, A. J. Suo-Anttila, A. Al Rashdan, and P. V. Tsvetkov, "Supercritical CO2 Direct Cycle Gas Fast Reactor (SC-GFR) Concept," Sandia National Laboratories, Albuquerque, NM, USA, SAND 2011-2525, May 2011.

Recuperation in Brayton Cycles

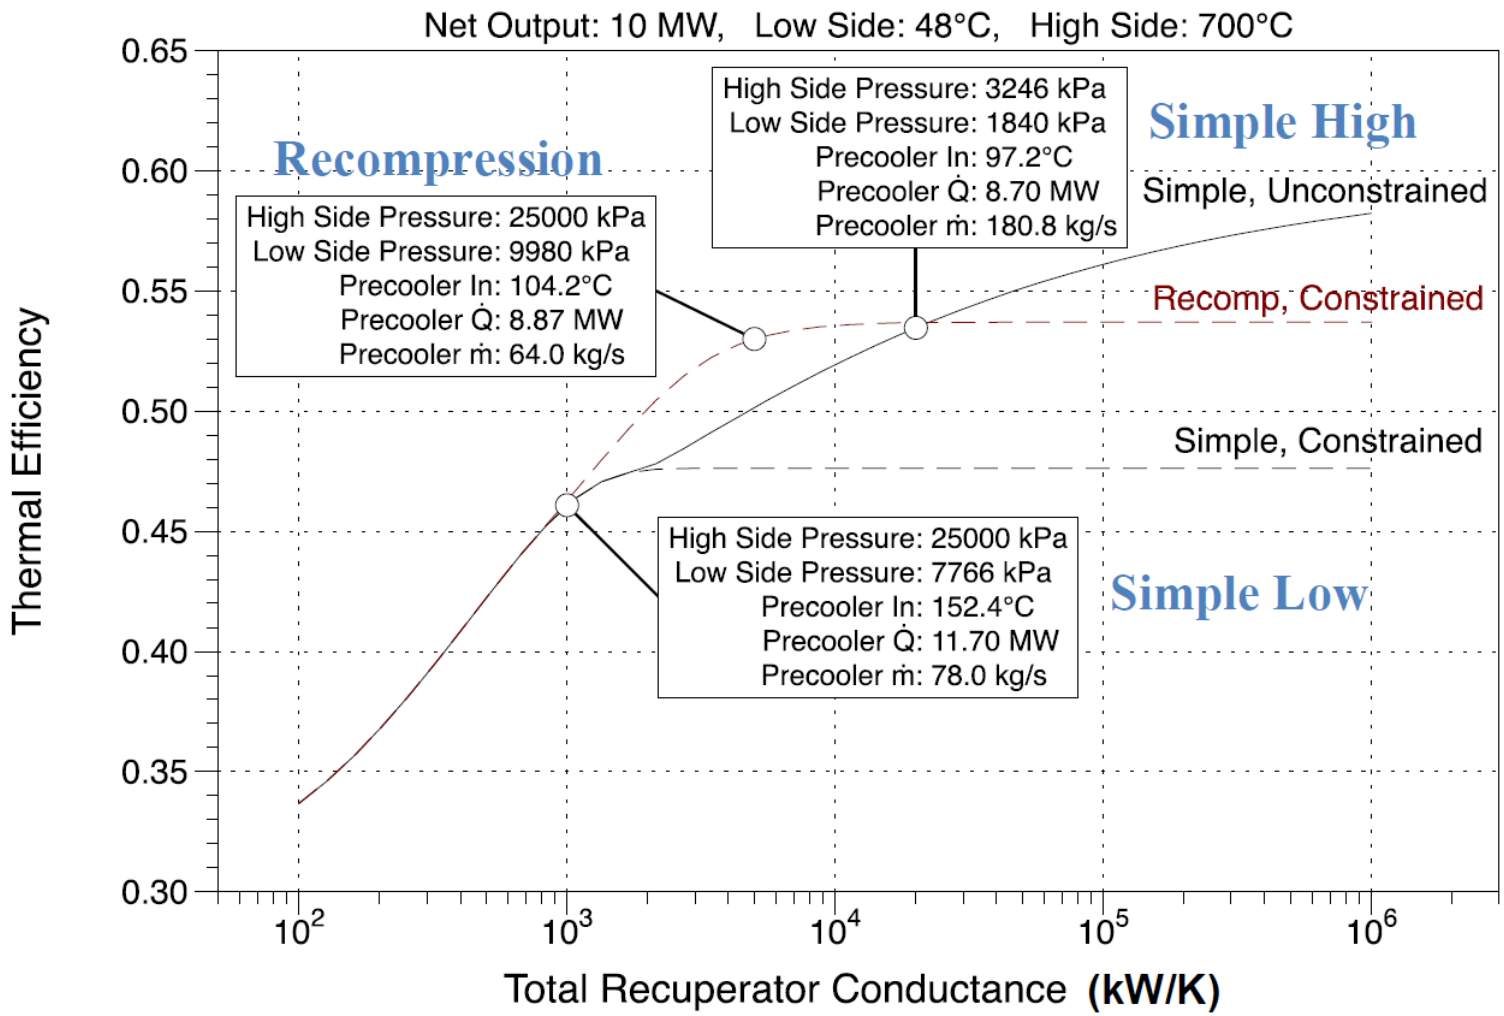

Dyreby, J., S. Klein, G. Nellis, and D. Reindl. (2012). Development of Advanced Models for Supercritical Carbon Dioxide Power Cycles for use in Concentrating Solar Power Systems. National Renewable Energy Laboratory.

Early Air CBC Recuperators

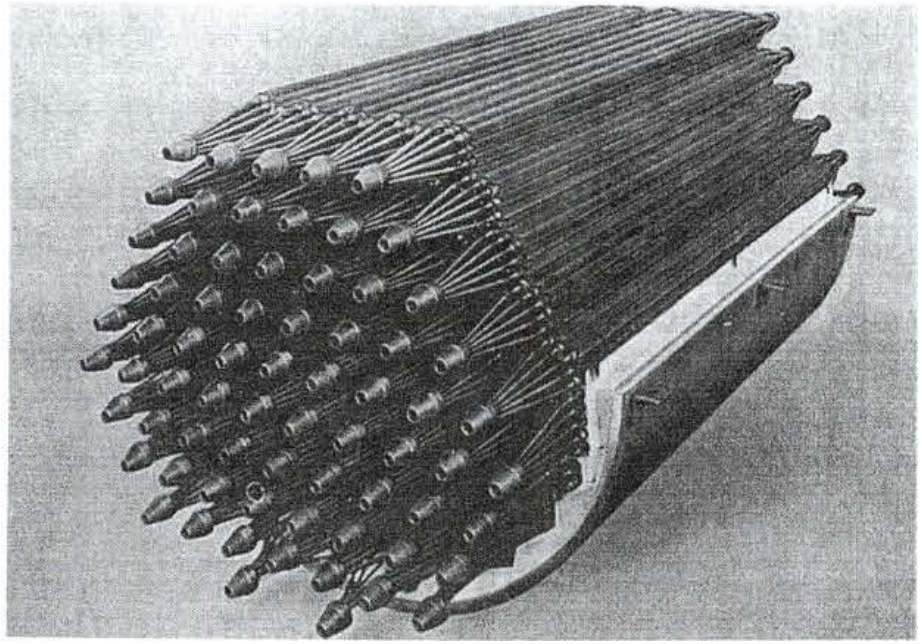

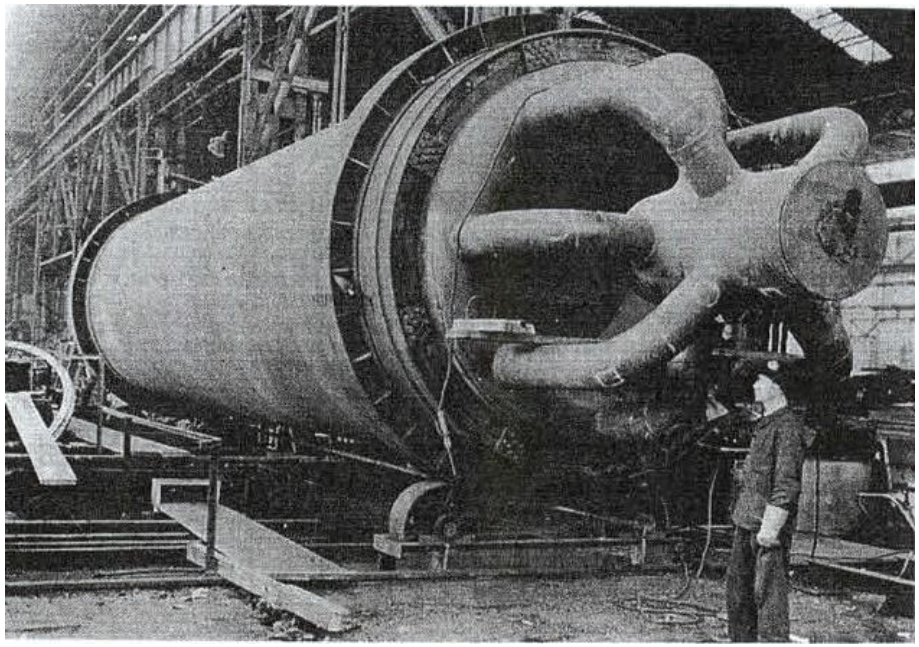

2 to 6 MWe Plant Style

12 to 30 MWe Plant Style

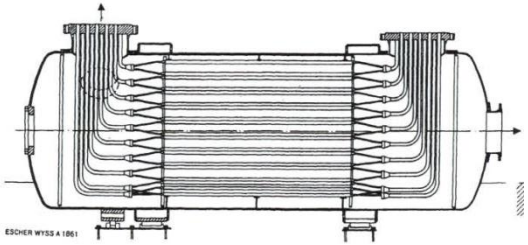

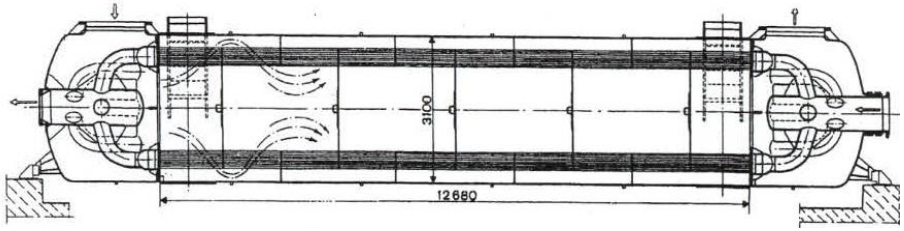

H. U. Frutschi, Closed-cycle gas turbines : operating experience and future potential. New York: ASME Press, 2005.

Scalable SCO2 CBC Systems

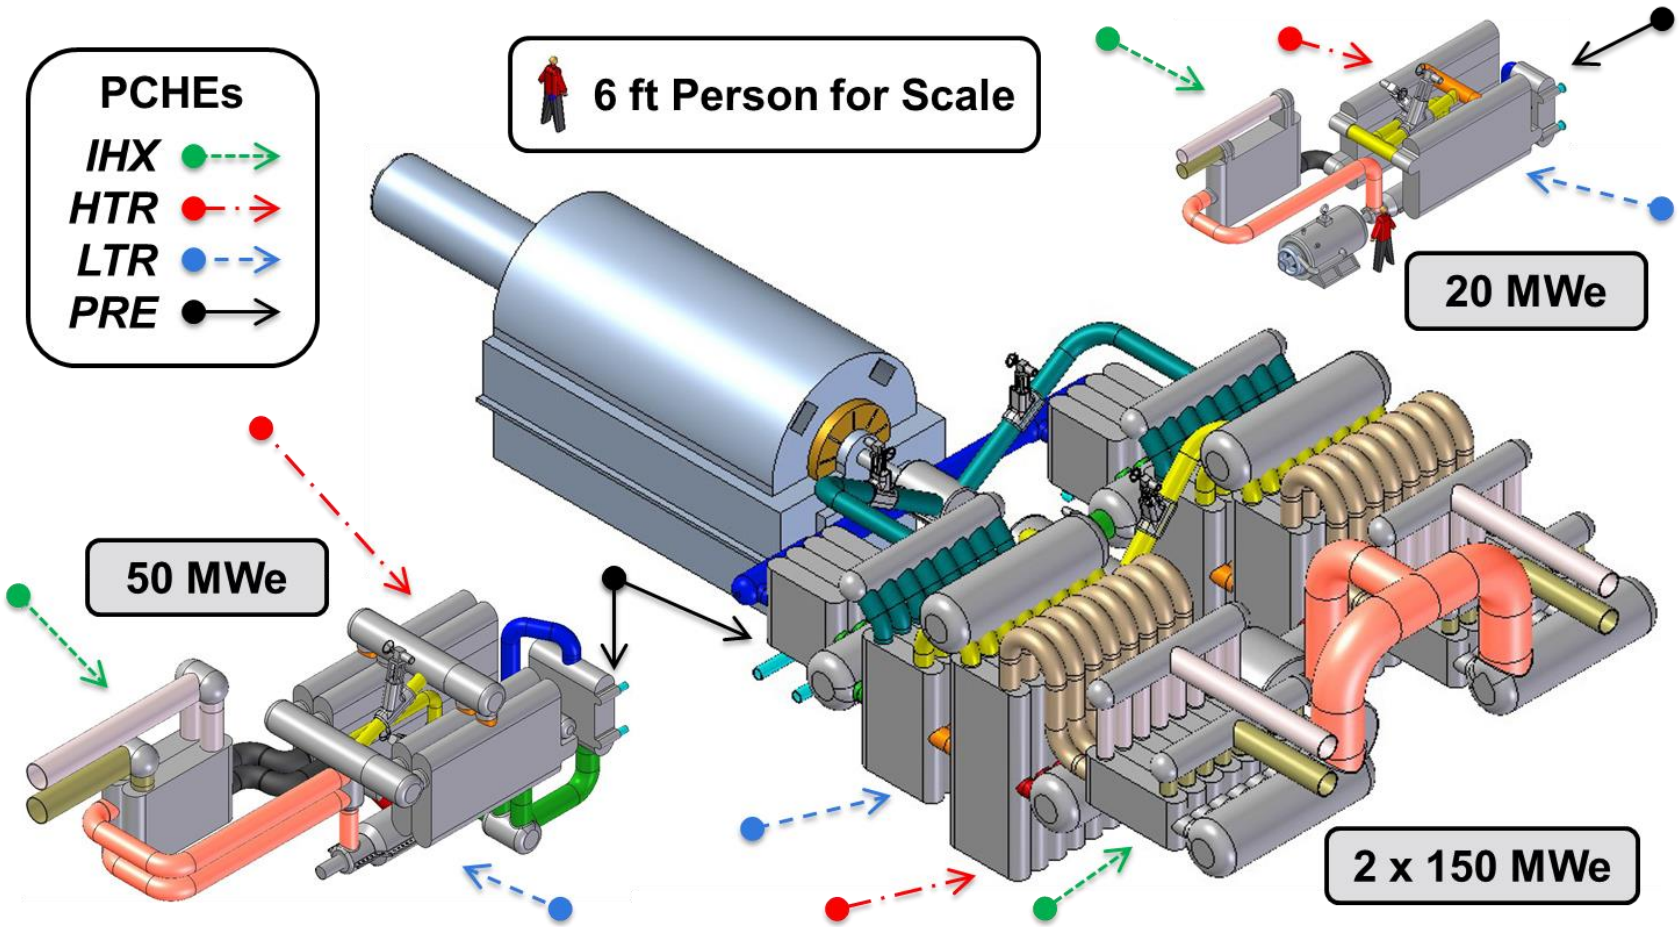

J.P. Gibbs, P. Hejzlar, & M.J. Driscoll. (2006). *Applicability of Supercritical CO2 Power Conversion Systems to GEN IV Reactors* (Topical Report No. MIT-GFR-037) (p. 97). Cambridge, MA: Center for Advanced Nuclear Energy Systems MIT Department of Nuclear Science and Engineering.

Heat Exchanger Requirements

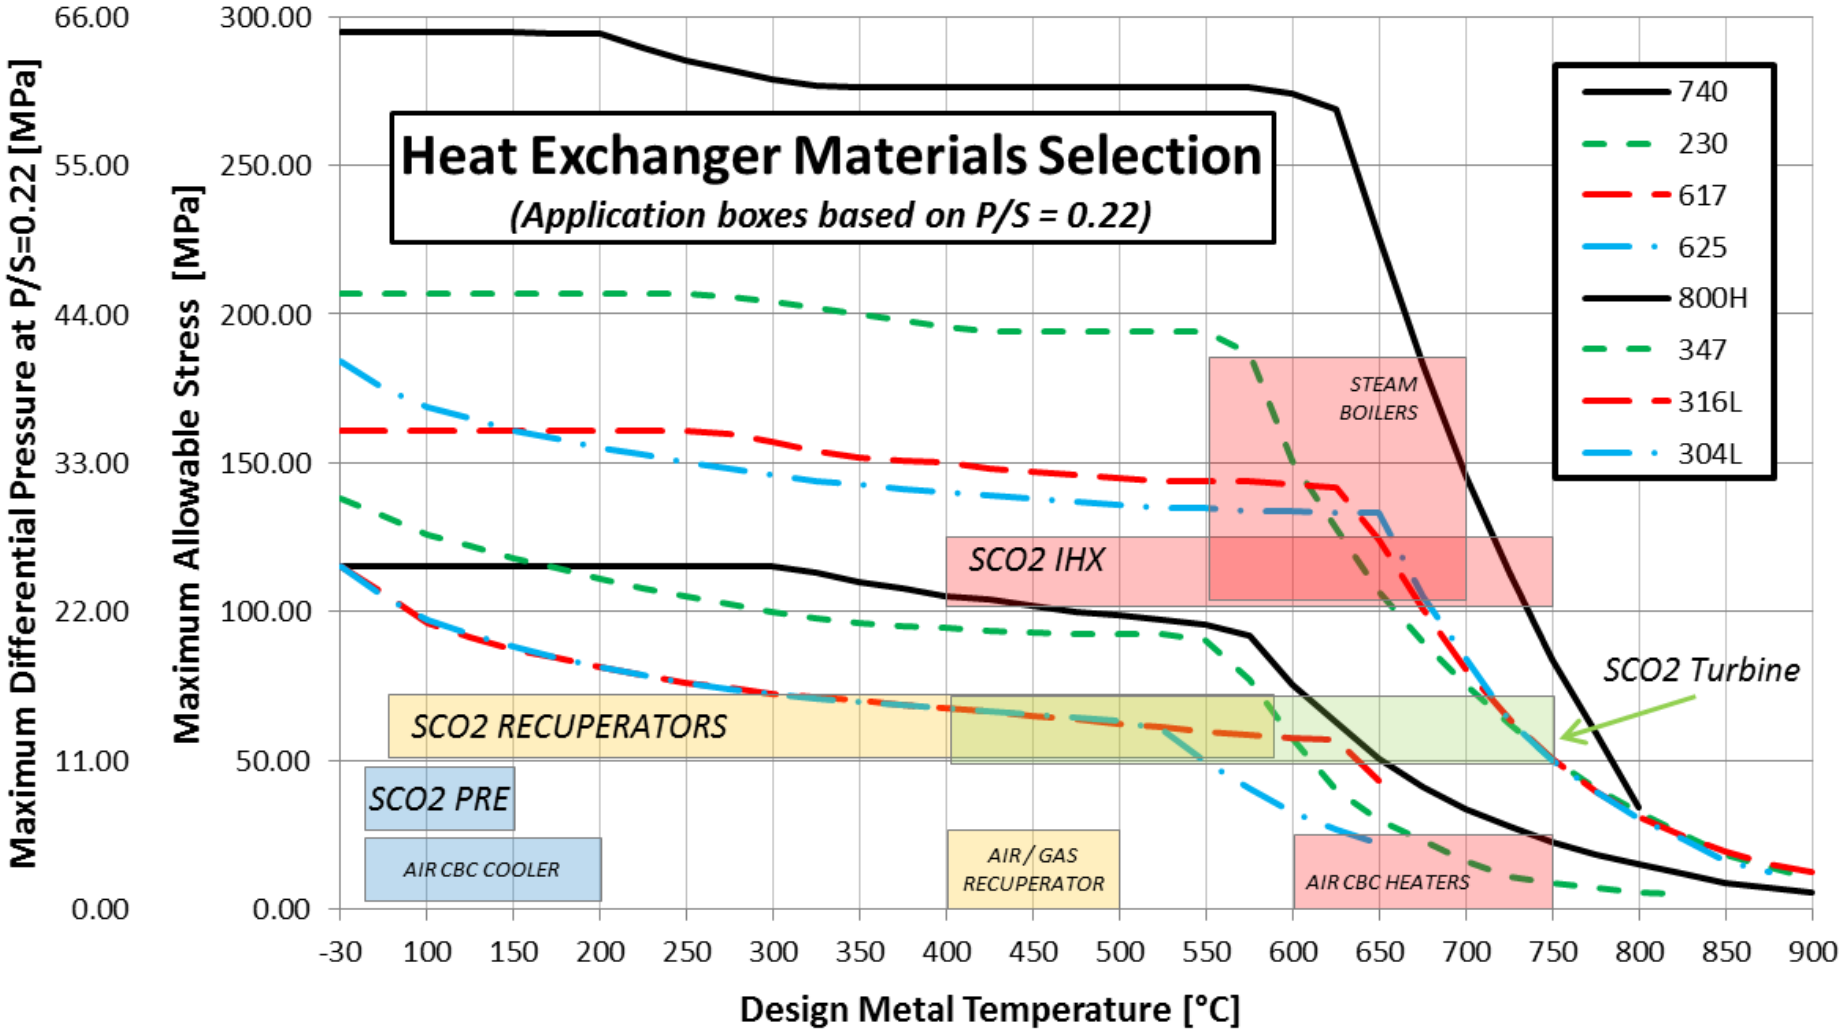

Approximate Cost Scaling

$$Cost = C_{ESDU} F_{mat} F_p F_i UA_{sp} P_{elec}$$

C_{ESDU} is the UA-specific cost value [$/(kW/K)]

F_{mat} is a material cost factor

F_P is a pressure cost factor

F_i is an adjustment for inflation

UA_{sp} is the cycle power-specific UA [kW/(K-MWe)]

P_{elec} is the cycle power level [MWe]

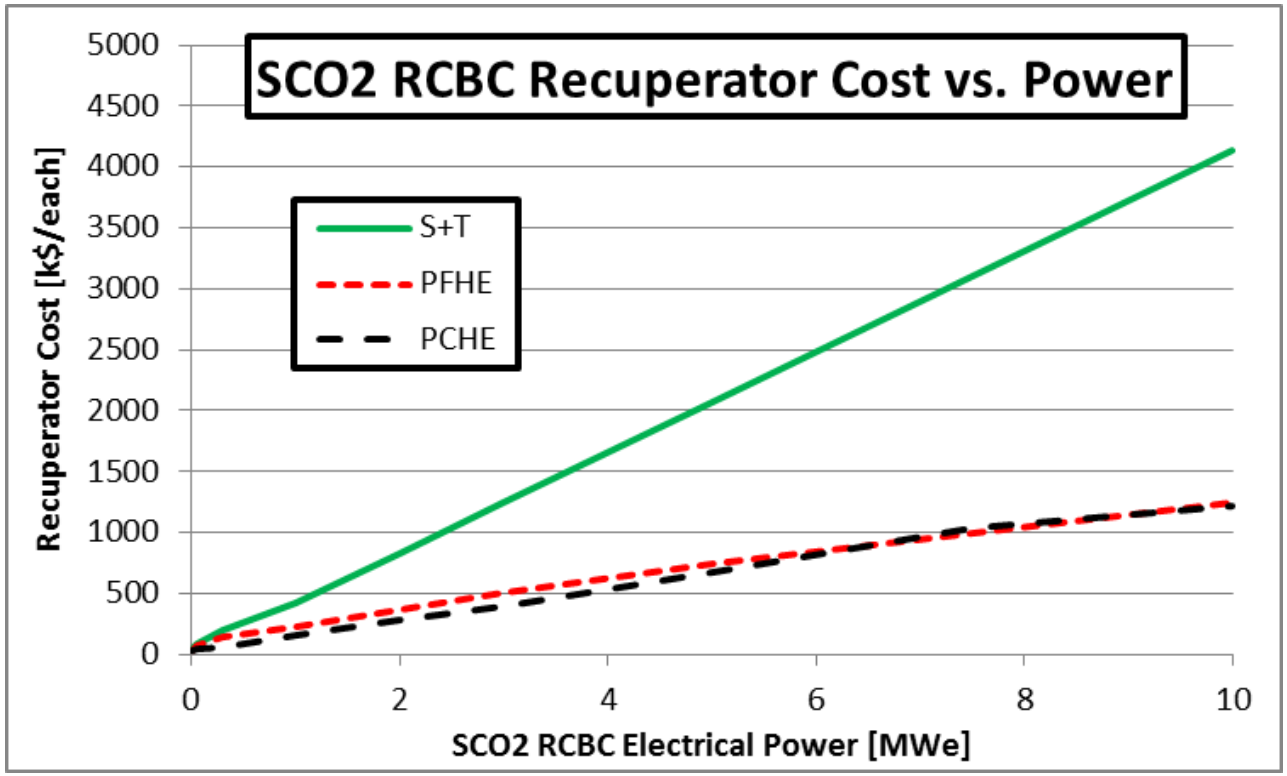

ESDU, "Selection and Costing of Heat Exchangers," Engineering Sciences Data Unit, ESDU 92013, Dec. 1994.

ACTIVITIES AT SANDIA

SNL Heat Exchanger Team

Summary:

- All closed loops require heating and cooling
- Recuperation is critical for Brayton cycles
- Air units saw high temperature at low pressure
- SCO2 units must operate at both high temperature and pressure

Our Goals:

1. Optimize commercial units for SCO2 Brayton cycles on small modular sodium fast reactors
2. Develop near-term, easily scalable, and low-cost advanced heat exchanger(s)
3. Explore options for higher temperatures

VPE Partnership - PCHEs

Understand Near-Term Option

- Material and Bond Evaluation
  - Possible materials
  - Bonding defects
  - Develop U-stampable PCHEs
- PCHE Performance Testing
  - Pressure containment
  - Thermal-hydraulic testing
  - Thermal Fatigue testing
- Techno-Economic Optimization
  - Design -> Fabrication -> Testing

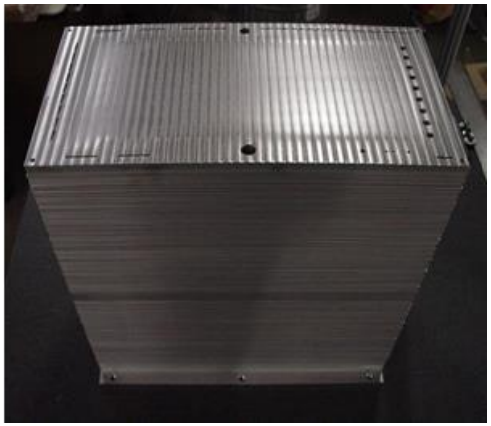

Current Diffusion Bond Testing

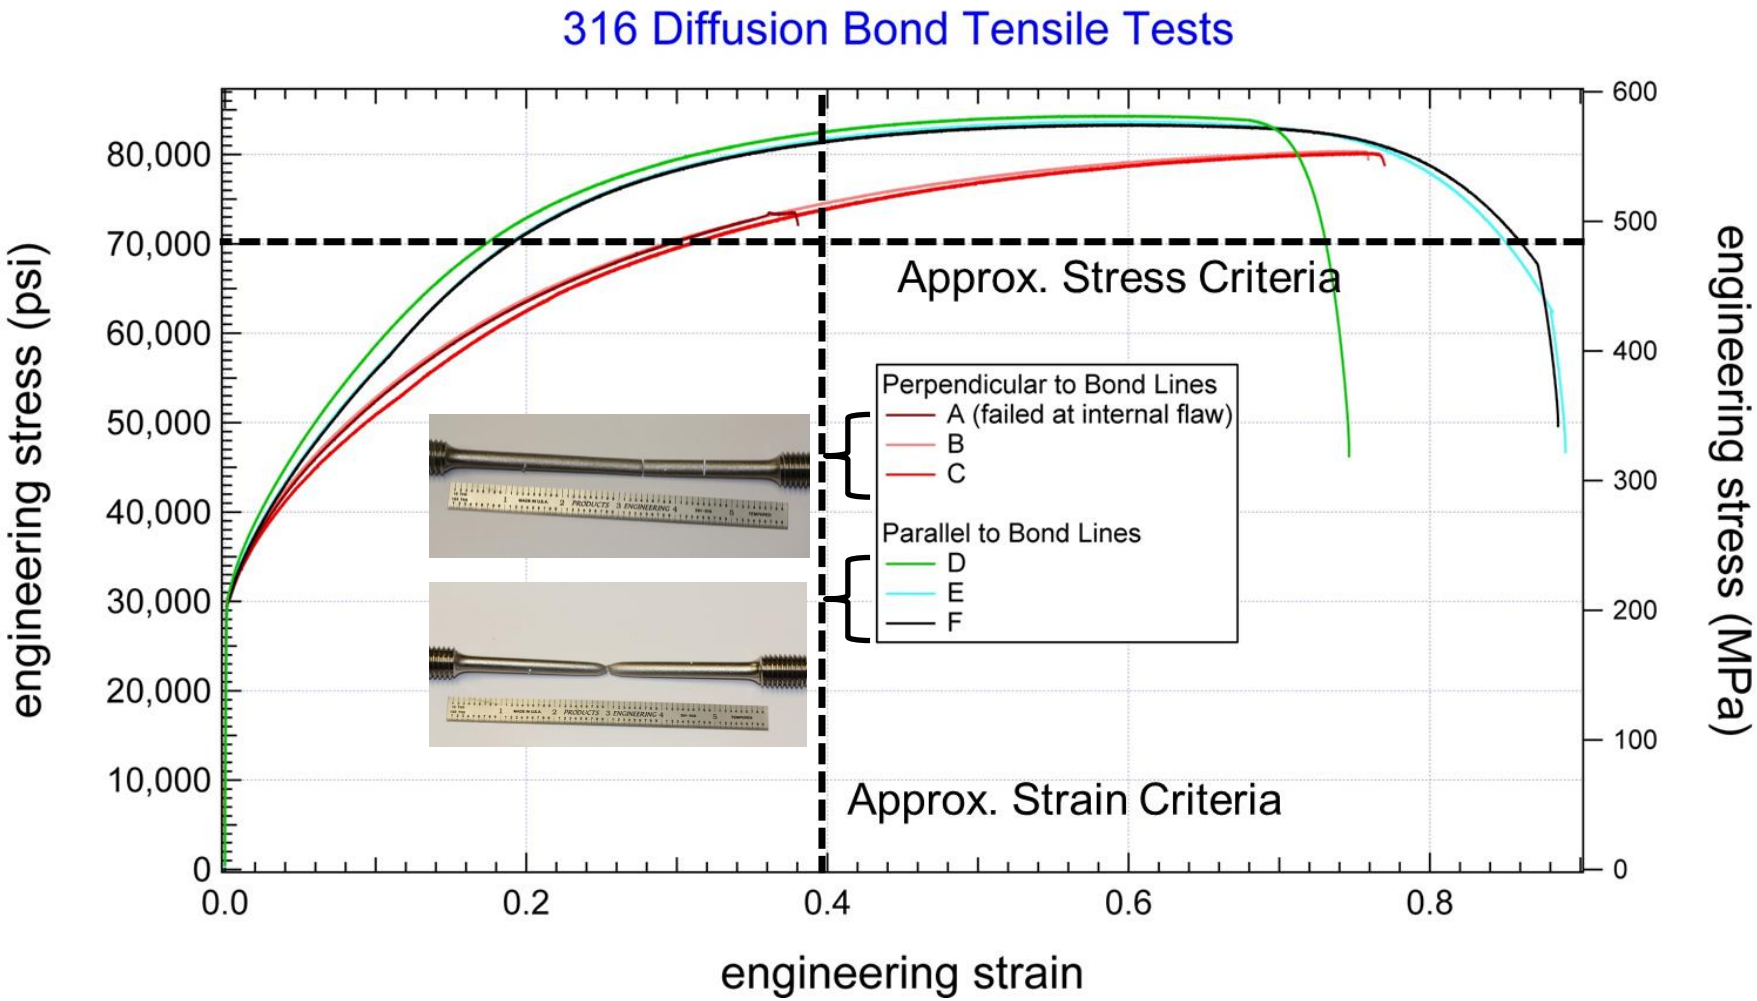

SNL Cast Metal Heat Exchangers

Proposal: Directly cast heat exchanger core geometries.

Key Concept: Using inter-connected flow passages provides essential mechanical integrity to casting cores.

Benefits:

- Reduce cost by as much as a factor of 5
- Reduce lead-time caused high-temperature joining techniques (welding, brazing, bonding)
- Allow for innovative channel geometry
- Greatly expand material possibilities
- Easily incorporate surface features

CMHE Recuperator Geometries

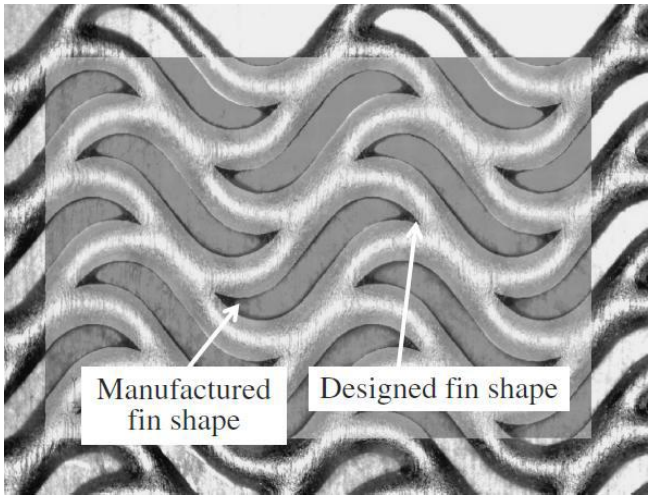

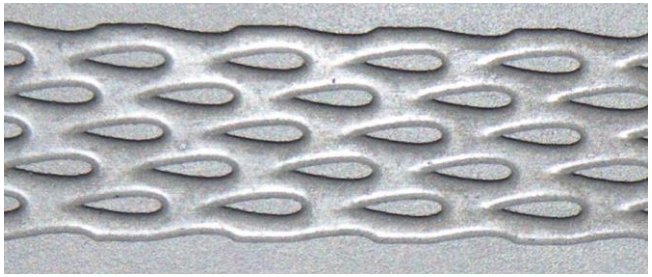

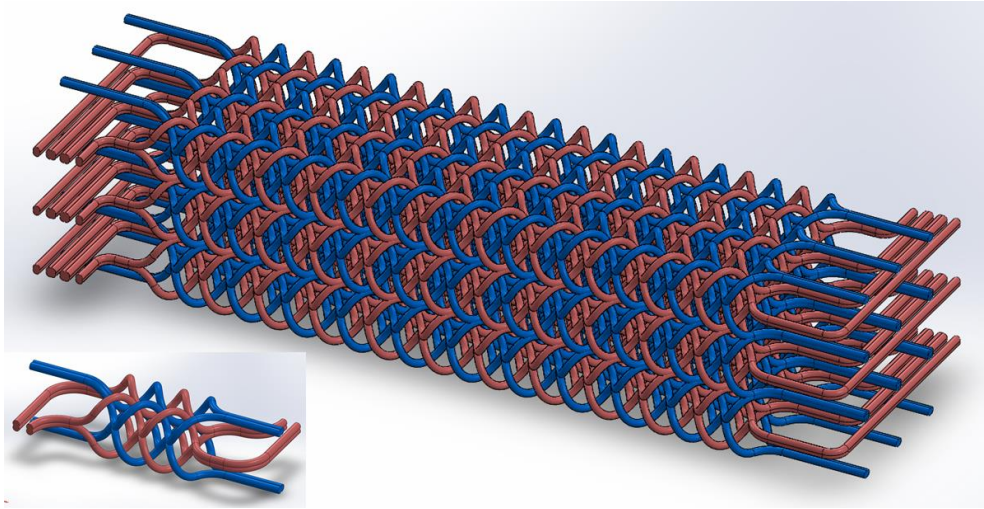

Brazed Plates

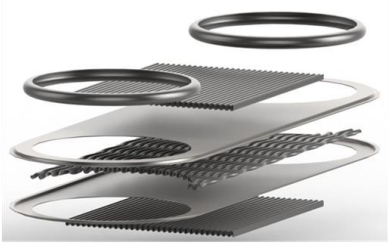

- Requires plate stamping

Cast Plates

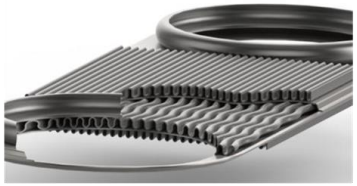

- Dry-fit multiple casting cores

Unit-Cell Heat Exchanger

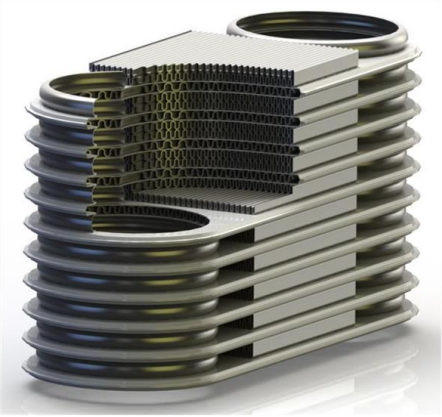

BACKUP SLIDES

2013 NEUP Award Corrosion Activities

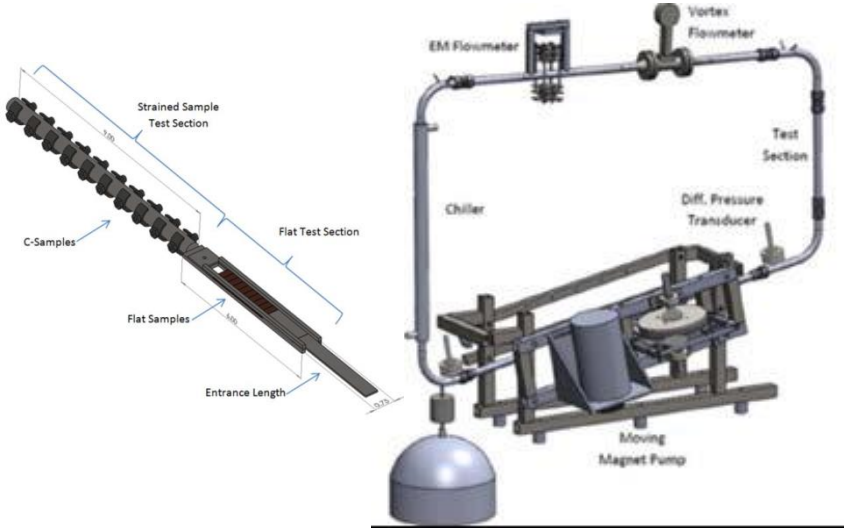

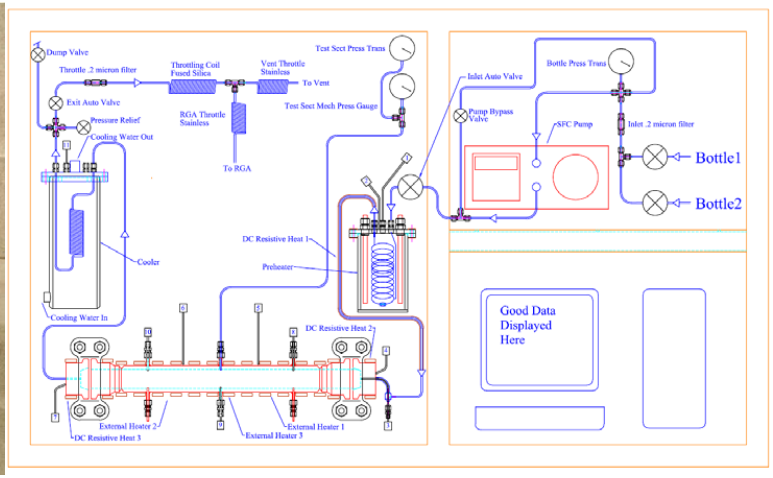

Sodium Corrosion Facility

SCO2 Corrosion Facility

2013 NEUP Award PCHE Activities

Helium Flow Loop at TOSU

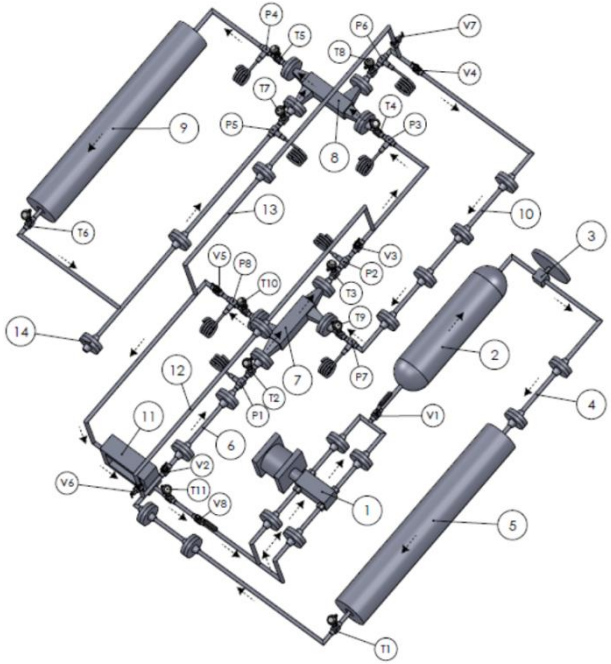

Balloon No.	Name
1	Gas booster
2	Surge volume tank
3	Pressure reducing valve
4	Venturi flowmeter 1
5	Pre-heater
6	Venturi flowmeter 2
7	PCHE 1
8	PCHE 2
9	Main heater
10	Venturi flowmeter 3
11	Cooler
12	Bypass 1
13	Bypass 2
14	Blind flange for future use
V1, V8	Ball valves
V2-V7	Needle valves
T1-T11	Thermowells
P1-P8	Pressure taps

(a)

SCO2 Flow Loop at UW-Madison

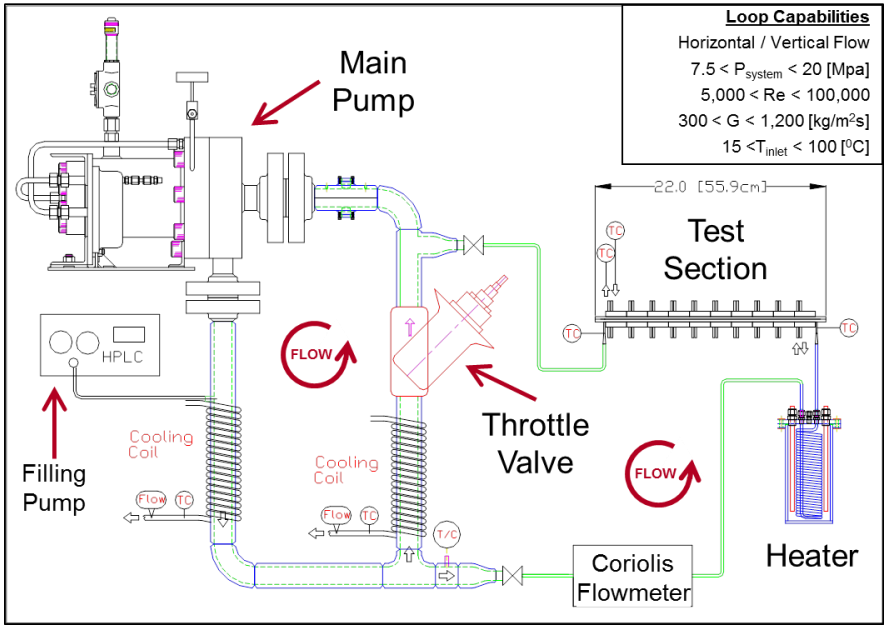

Non-Destructive Examination

X-Ray Radiography

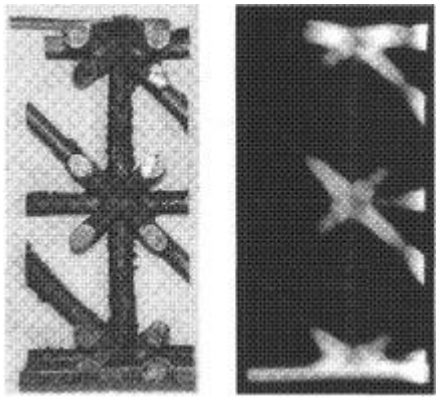

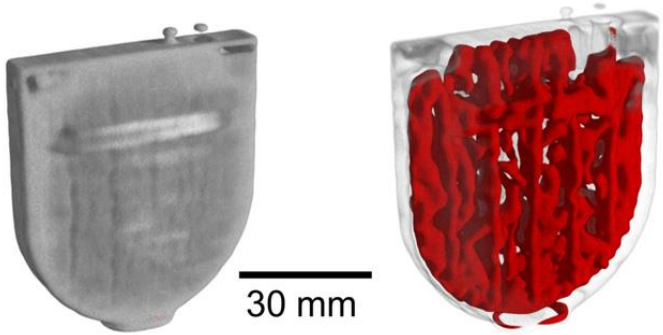

Neutron Radiography

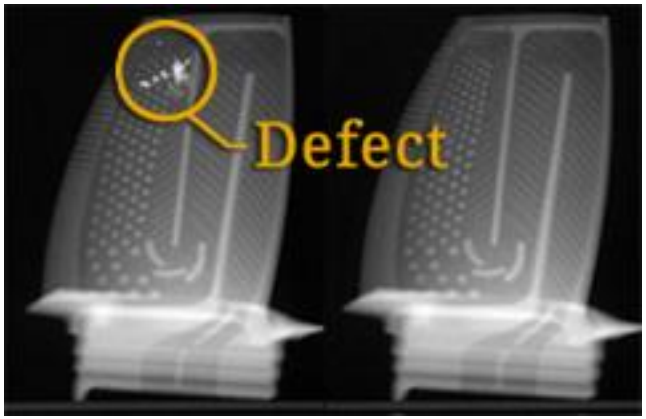

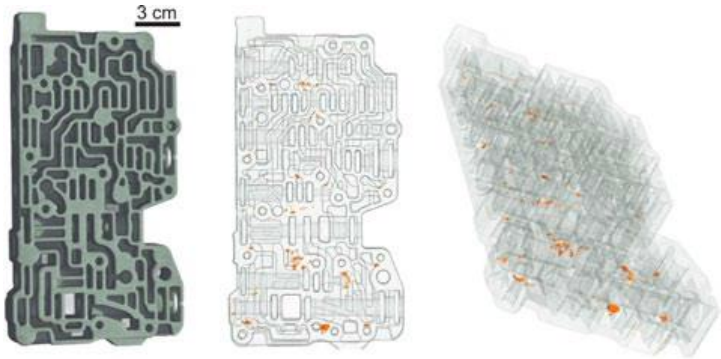

1. K. G. Lipetzky, “Nondestructive Characterization of Lattice Block Material™,” 2002, vol. 615, pp. 1447–1454.
2. http://phoenixnuclearlabs.com/application/non-destructive-testing/
3. http://issuu.com/paul-scherrer-institute/docs/psi_neutron_imaging_e

Transitioning to Casting

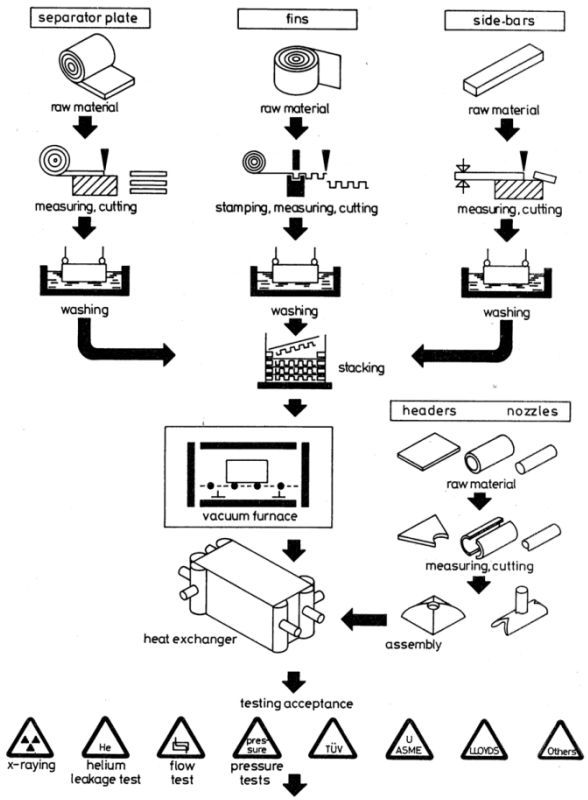

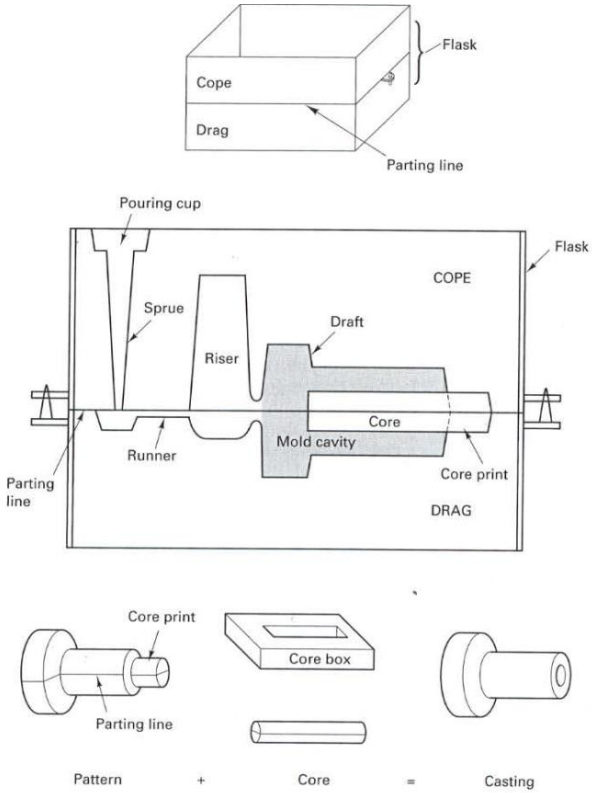

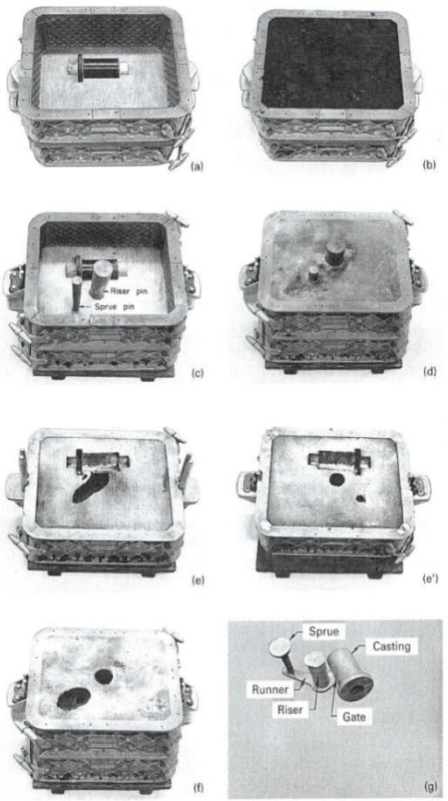

J. T. Black, R. A. Kohser, and E. P. DeGarmo, DeGarmo's materials and processes in manufacturing. Hoboken, NJ: Wiley, 2008.

Industrial Precedent

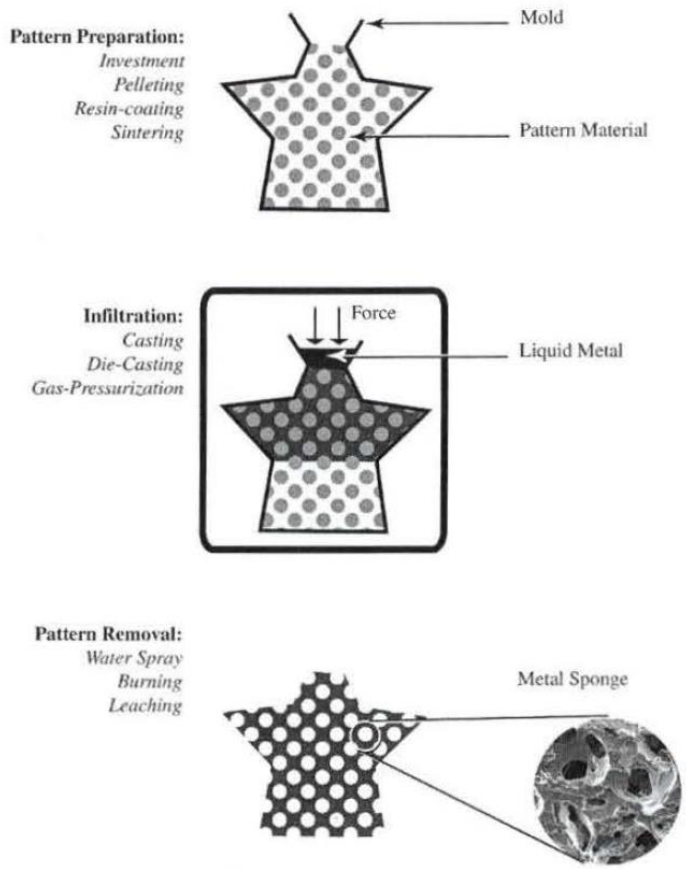

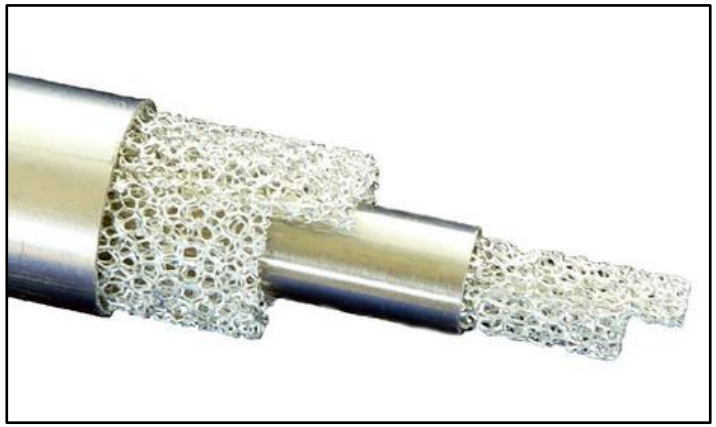

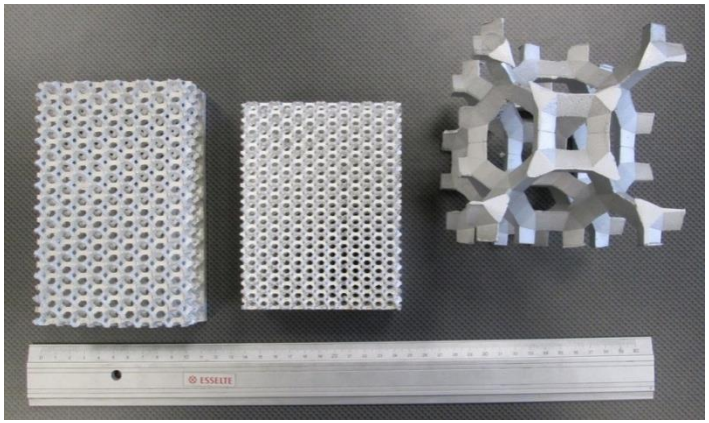

Handbook of Cellular Metals: Production, Processing, Applications. Weinheim: Wiley-VCH, 2002.

CMHE Industrial Precedent

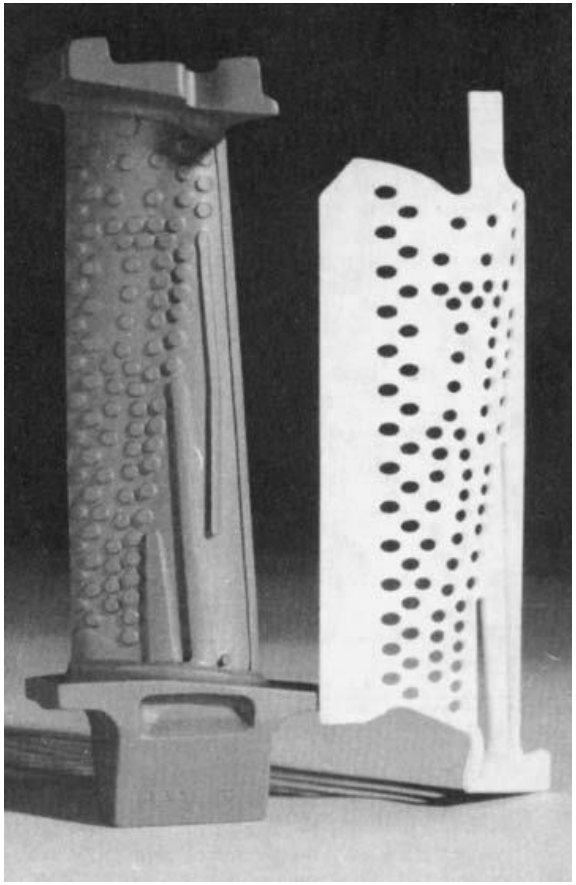

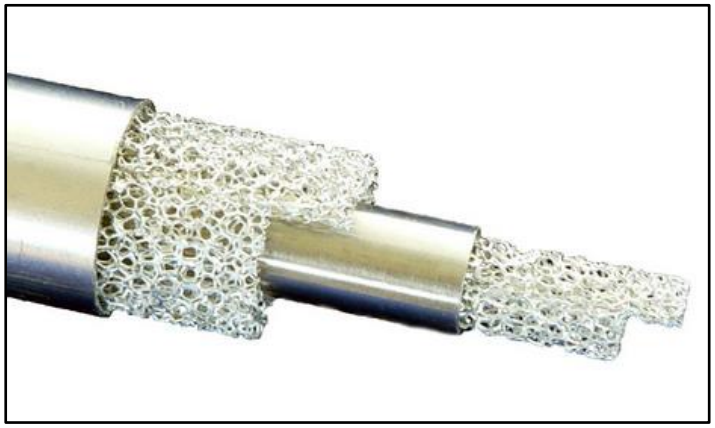

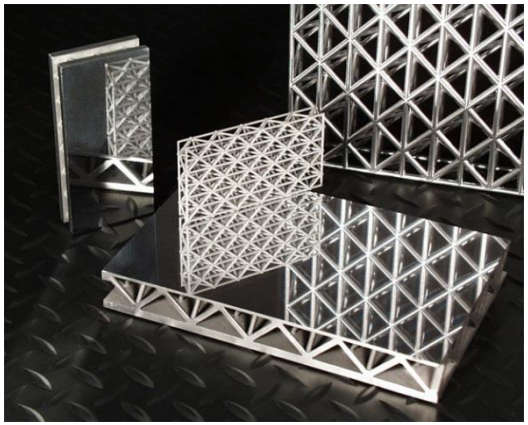

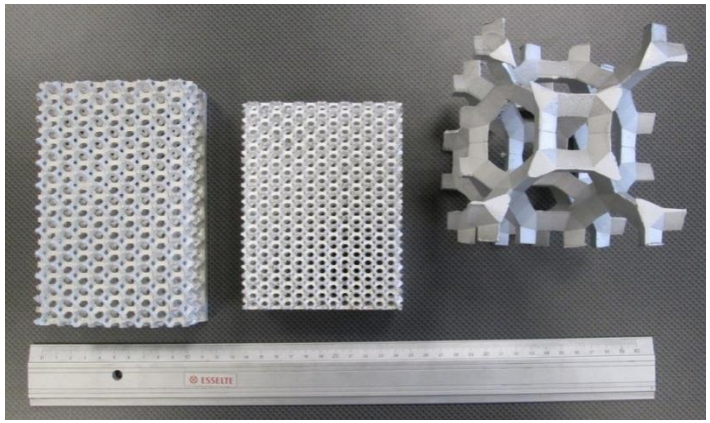

M. J. Donachie, Superalloys a technical guide. Materials Park, OH: ASM International, 2002.
http://www.fedtechgroup.com/advanced_materials/lbs/lbs_cast.html
http://www.ergaerospace.com/project-gallery.htm
http://www.alveotec.fr/nos-actualites/exemples-d-applications-mousses-metalliques_55.html

Current Recuperated Systems

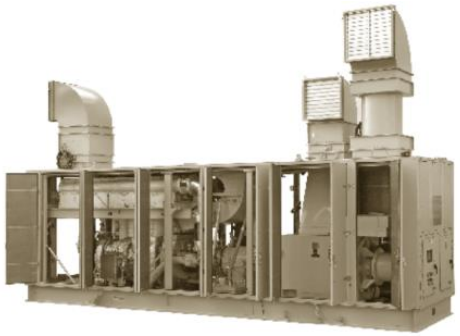

STATIONARY
Solar Turbines
Mercury 50

MARINE
Rolls-Royce WR-21
Type 45 Destroyer

VEHICULAR
Honeywell AGT1500
M1 Abrams Tank

Current SCO2 CBC HXers

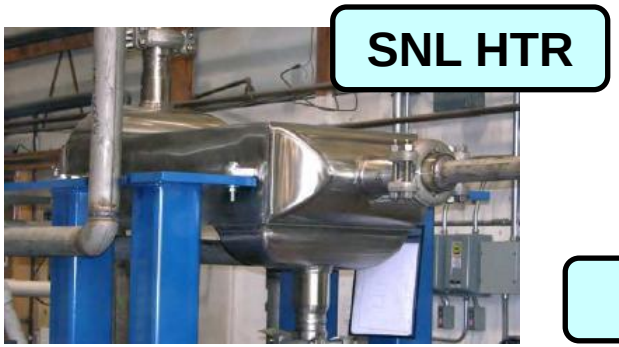

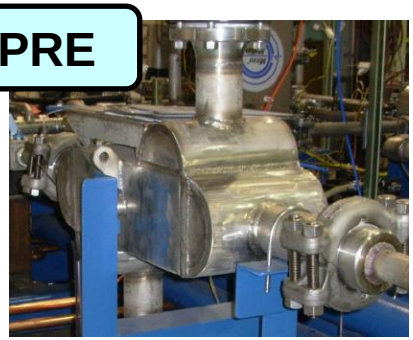

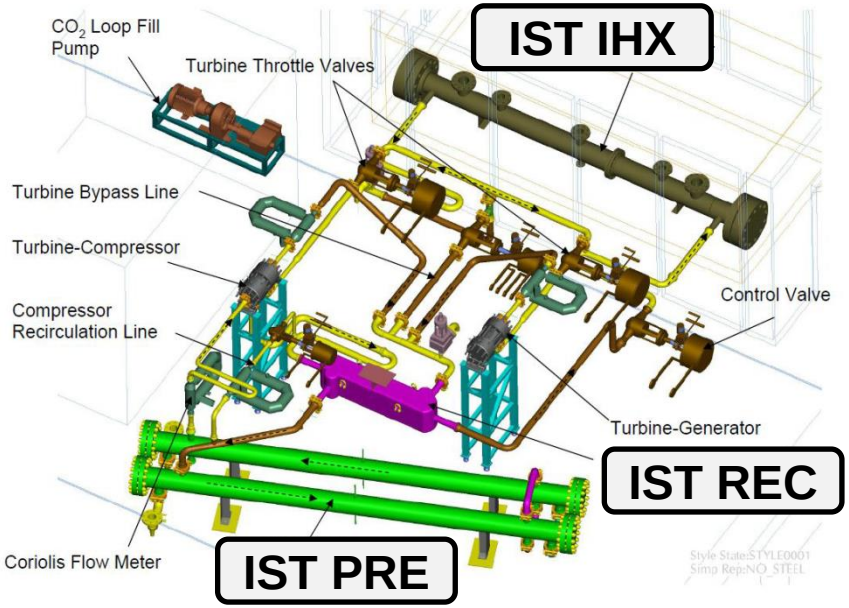

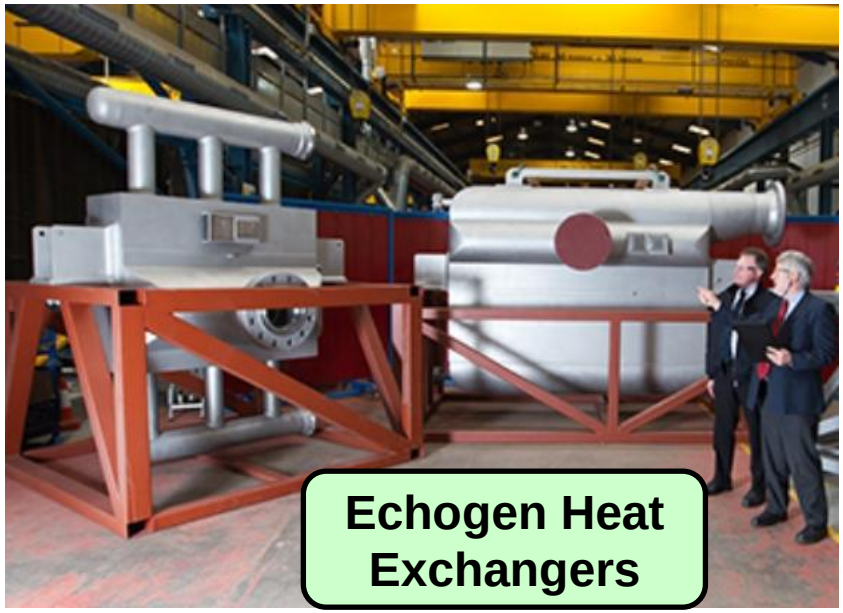

G. O. Musgrove, C. Pittaway, D. Shiferaw, and S. Sullivan, “Tutorial: Heat Exchangers for Supercritical CO2 Power Cycle Applications,” San Antonio, Texas, USA, 03-Jun-2013.

Commercial Unit Potential

Key Requirements:

- ✓ High Pressure
- ✓ High Temperature
- ✓ Corrosion Resistant
- ✓ High Reliability
- ✓ Compact Geometry
- ✓ Scalable to 150 MWe

$$\beta = \frac{A_s}{V} = \frac{4\phi}{d_h}$$

Coil-Wound
10 to 300 [m²/m³]

Shell and Tube
10 to 200 [m²/m³]

Plate-Fin
200 to 800 [m²/m³]

Printed Circuit
200 to 5000 [m²/m³]

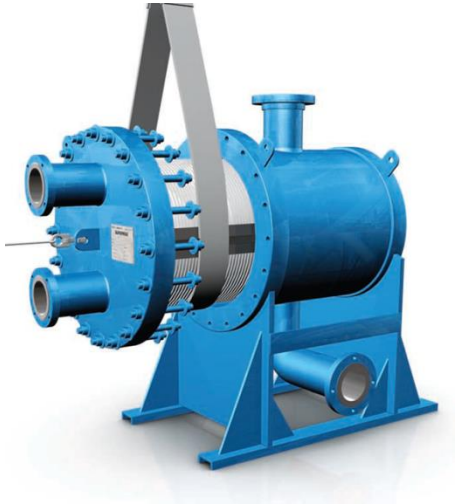

Shell and Plate
100 to 600 [m²/m³]

PCHE Thermal-Hydraulic Performance

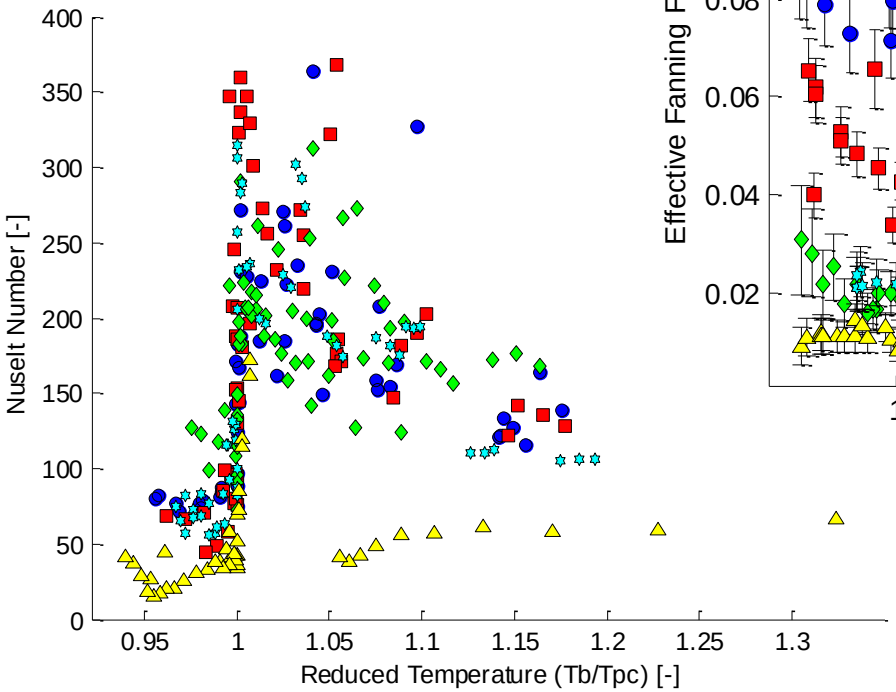

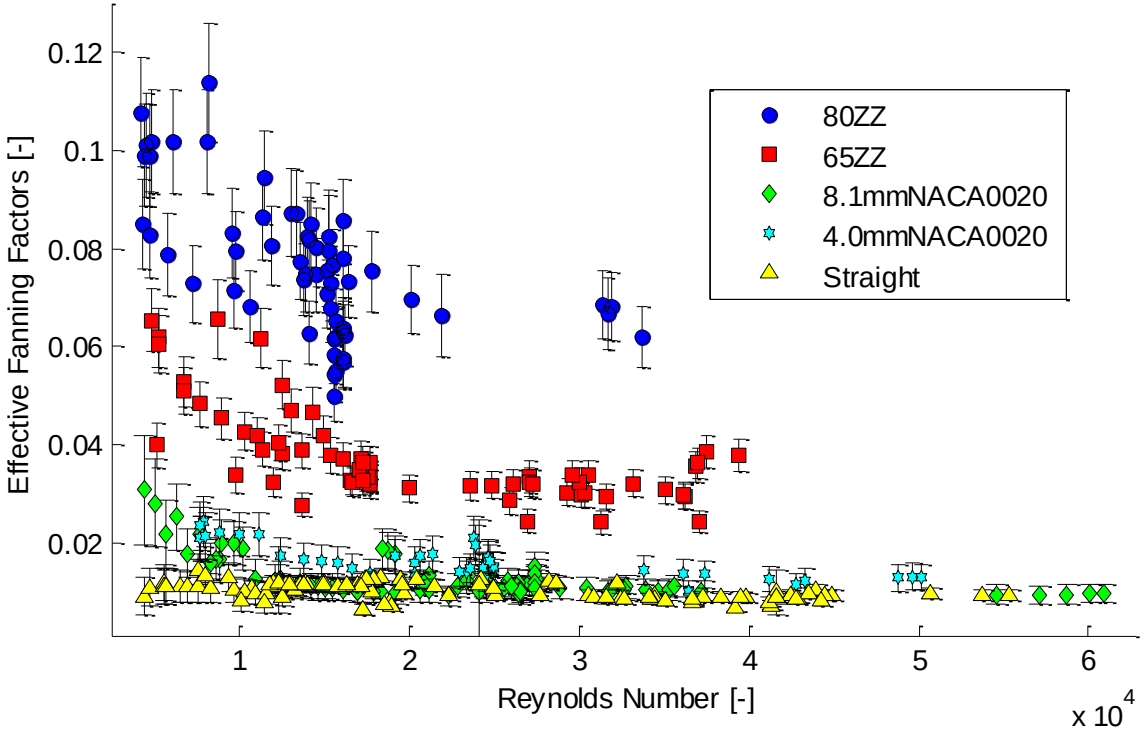

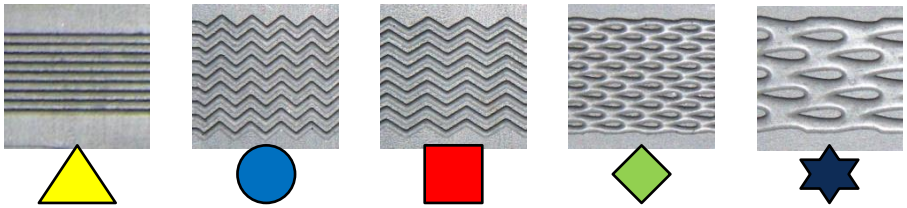

Carlson, M. (2012). *Measurement and Analysis of the Thermal and Hydraulic Performance of Several Printed Circuit Heat Exchanger Channel Geometries* (Master of Science). University of Wisconsin - Madison, Madison, WI.

PHE
120 to 660

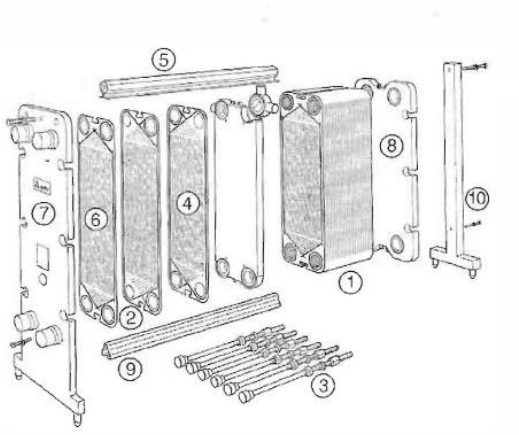

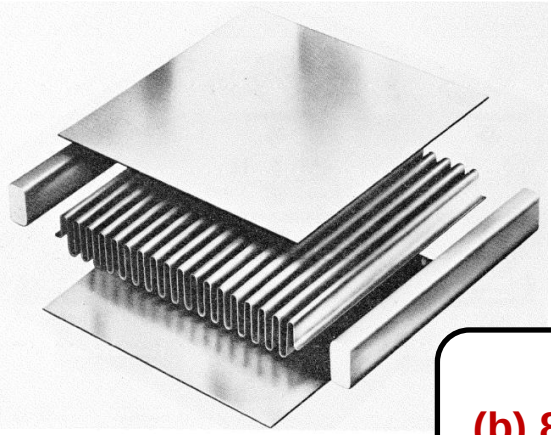

PFHE
(b) 800 to 1500
(d) 700 to 800

PCHE
(d) 200 to 5000

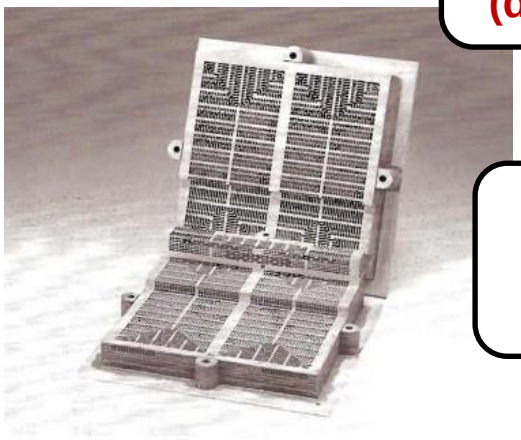

CBHE
(Marbond)
Up to 10000

HEAT EXCHANGER COMPACTNESS

Surface Area Density: $\beta = \frac{A_s}{V} = \frac{4\phi}{d_h}$

Potential Applications

Coal / Nuclear
Steam Rankine

MARINE
Rolls-Royce WR-21
Type 45 Destroyer

VEHICULAR
Honeywell AGT1500
M1 Abrams Tank

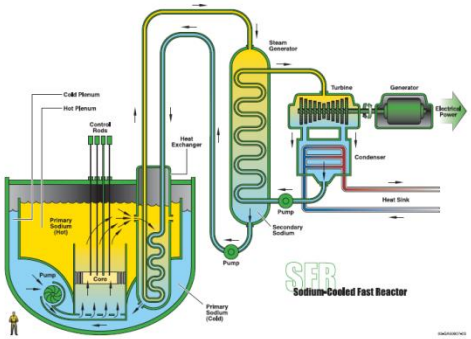

GenIV Nuclear
Sodium Fast Reactor

Refrigeration
Commercial, Cryogenic

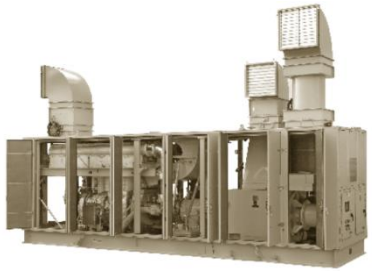

STATIONARY
Solar Turbines
Mercury 50