

Nanofillers for Improved Flywheel Materials

September 18, 2014

**Timothy J. Boyle, Timothy N. Lambert
Nelson S. Bell, William Miller**



**Sandia
National
Laboratories**

*Exceptional
service
in the
national
interest*

OE:Dr. Imre Gyuk




Sandia National Laboratories is a multi-program laboratory managed and operated by Sandia Corporation, a wholly owned subsidiary of Lockheed Martin Corporation, for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-AC04-94AL85000.

Project: Improved Flywheel Materials

Problem: Flywheels used to level the AC grid need to spin faster, which requires stronger rims. Focused on the material (C-fiber, glass fiber, resin) properties of composite flywheels.

No major changes to basic design, processing parameters, and/or cost can be incurred.

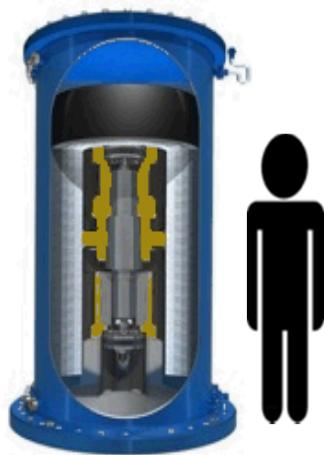

Goal: improve the overall strength of composite flywheel materials, so they can spin faster.

Approach: explore utility of nanomaterials in strengthening composite flywheel rims to improve performance. Low load levels (>5%) of nanoparticle fillers have led to dramatic property changes.



Energy is stored in the rotor as kinetic energy, or more specifically, rotational energy:

$$E_k = \frac{1}{2} \cdot I \cdot \omega^2$$

ω = angular velocity, I = moment of inertia of the mass about the center of rotation


The amount of energy that can be stored is dependent on:

$$S_t = \rho \cdot r^2 \cdot \omega^2$$


S_t = tensile stress on the rim, ρ = density, r is the radius, ω is the angular velocity of the cylinder.

Energy Storage Impact: The economics of flywheel-based energy storage can potentially be improved by a factor of 3 or more. The increased storage/supply is necessary to meet expected future complications expected as alternative energies (i.e., solar, wind, etc.) are introduced.

Nanofillers used to improve the composite flywheel materials' properties.


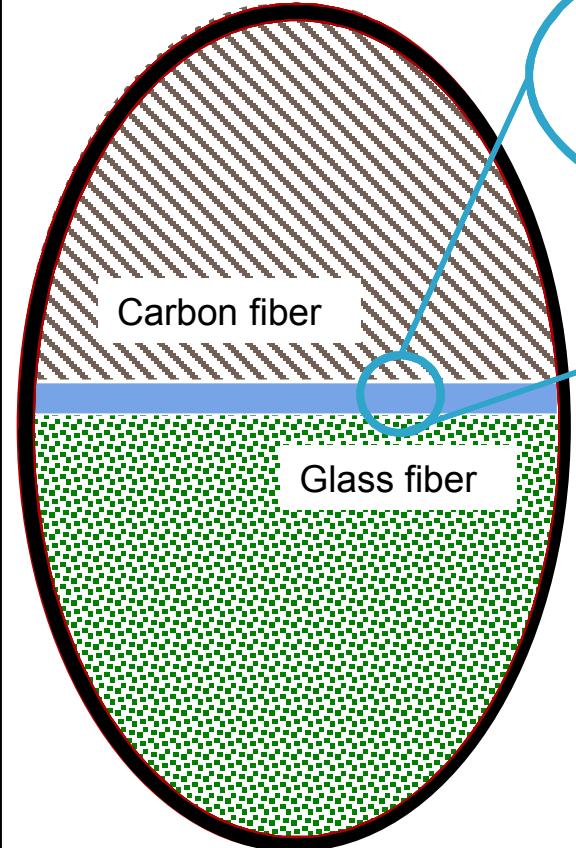


An example of an EPON resin

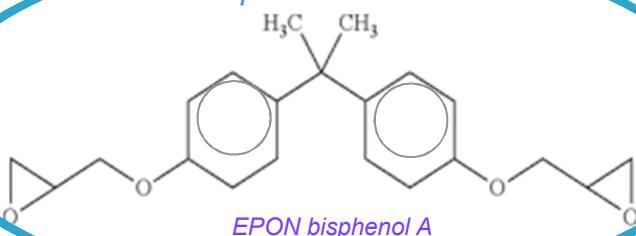

LS81k

Poly(oxyporopylene) triamine

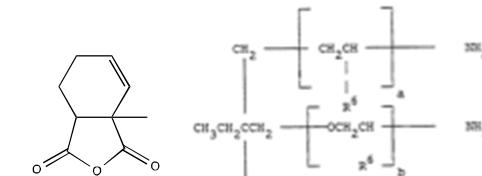

An activator or crosslinker required to polymerize

Ceramic and Graphene Nanofillers

- + Fillers are a simple cost-effective method to alter resin properties.
- + Meso-sized fillers require high loads (> 60%) due to small surface area.
- + Nanomaterials are 2 D fillers with all surface area; added at low levels.
- + Surface functionality of the nanofiller can interact with the reactive epoxide group of resin.
- + Reactivity can be tailored by surfactant on the nanomaterial
- + Previous results indicate that wires and planes have biggest impact at lowest load level.

Loading (wt %):	4	$\text{Al}_2\text{Si}_2\text{O}_5(\text{OH})_4$:	23% storage, 113% flexural strength,
	3	Al_2O_3 :	75% tensile strength,
	2	SiO_2 :	3% hardness, 57% impact, 65 % flex, 88 % tensile strength,
	2	ZrP :	52% Youngs Modulus, 14% tensile strength 6 %, fracture toughness,
	0.4% CNT-2% ZrP:		41% Youngs Modulus, 55% tensile strength.

Nanofiller sample preparation: Carleton vs KCP

Carleton/Cobham: TiO₂

Part Manufacture:

- Single Tow, near hoop wound

Part Dimensions:

- 4.0 I.D. X .25" thick (4.5 O.D.) X 10" long
- Target 60% Fiber Mass Fraction
- Tubes produced with (5%) TiO₂, and (5%) CNT.
-



CF/Resin(GNF) Part Manufacture:

- Parts were fabricated at the Cobham/Carleton plant in Westminster, MD.
- Filament winding took place on a Entecwinder.
- Parts were wound onto a 4" diameter, 0.25" thick wall that was 12" long.
- Parts were cured at 100 °C for 24h, with 5 rpm rotation to prevent flow of resin during cure
- Mandrel was wound at 22 rpm with 6-6.5 Lbs of line tension at the part, single tow, hoop winding.
- Mandrel was cryogenically shrunk after being removed from oven, allowing part to easily slide off.



KCP: Graphene

Part Manufacture:

- 4 Simultaneous Tow, no change in angle (resulting in overlap of 3 tow)

Part Dimensions:




- 4' long, 4" ID, ~ 1/4" (6.35 mm), 78% Fiber Mass Fraction

Prepared 0%, 1% and 3% GNF Parts

CF/Resin(GNF) Part Manufacture:

- Parts were fabricated in the Mechanical Fabrication and Support Area in the National Secure Manufacturing Center at the Kansas City Plant.
- Filament winding took place on a 6-Axis McClean-Anderson winder.
- Parts were oven cured on a rotating cart for 24 hours at 158 ° F.
- Mandrel designed/fabricated to spec
- Mandrel was cryogenically shrunk after being removed from oven, allowing part to easily slide off.


Flywheel: 3-point bend test results show marked improvement in strength

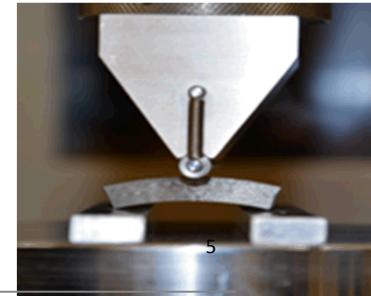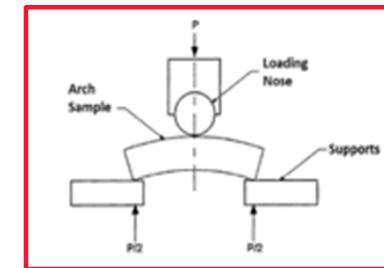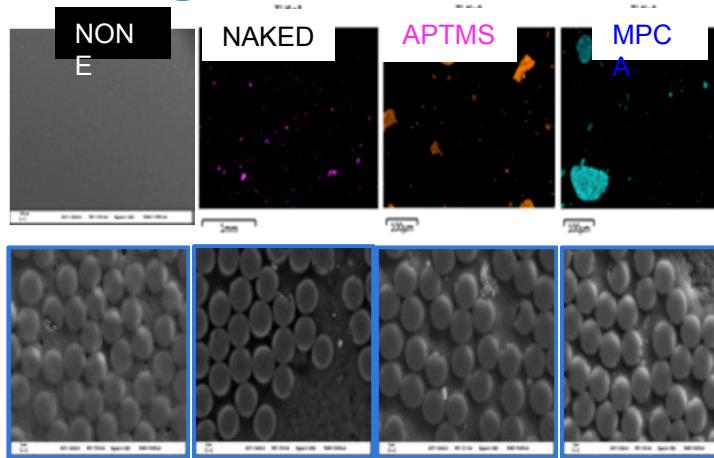

Filament wound carbon fiber composites



Overall Objectives: defining functionalized nanoparticle fillers effects on the ‘state-of-the-art’ working Flywheel system.

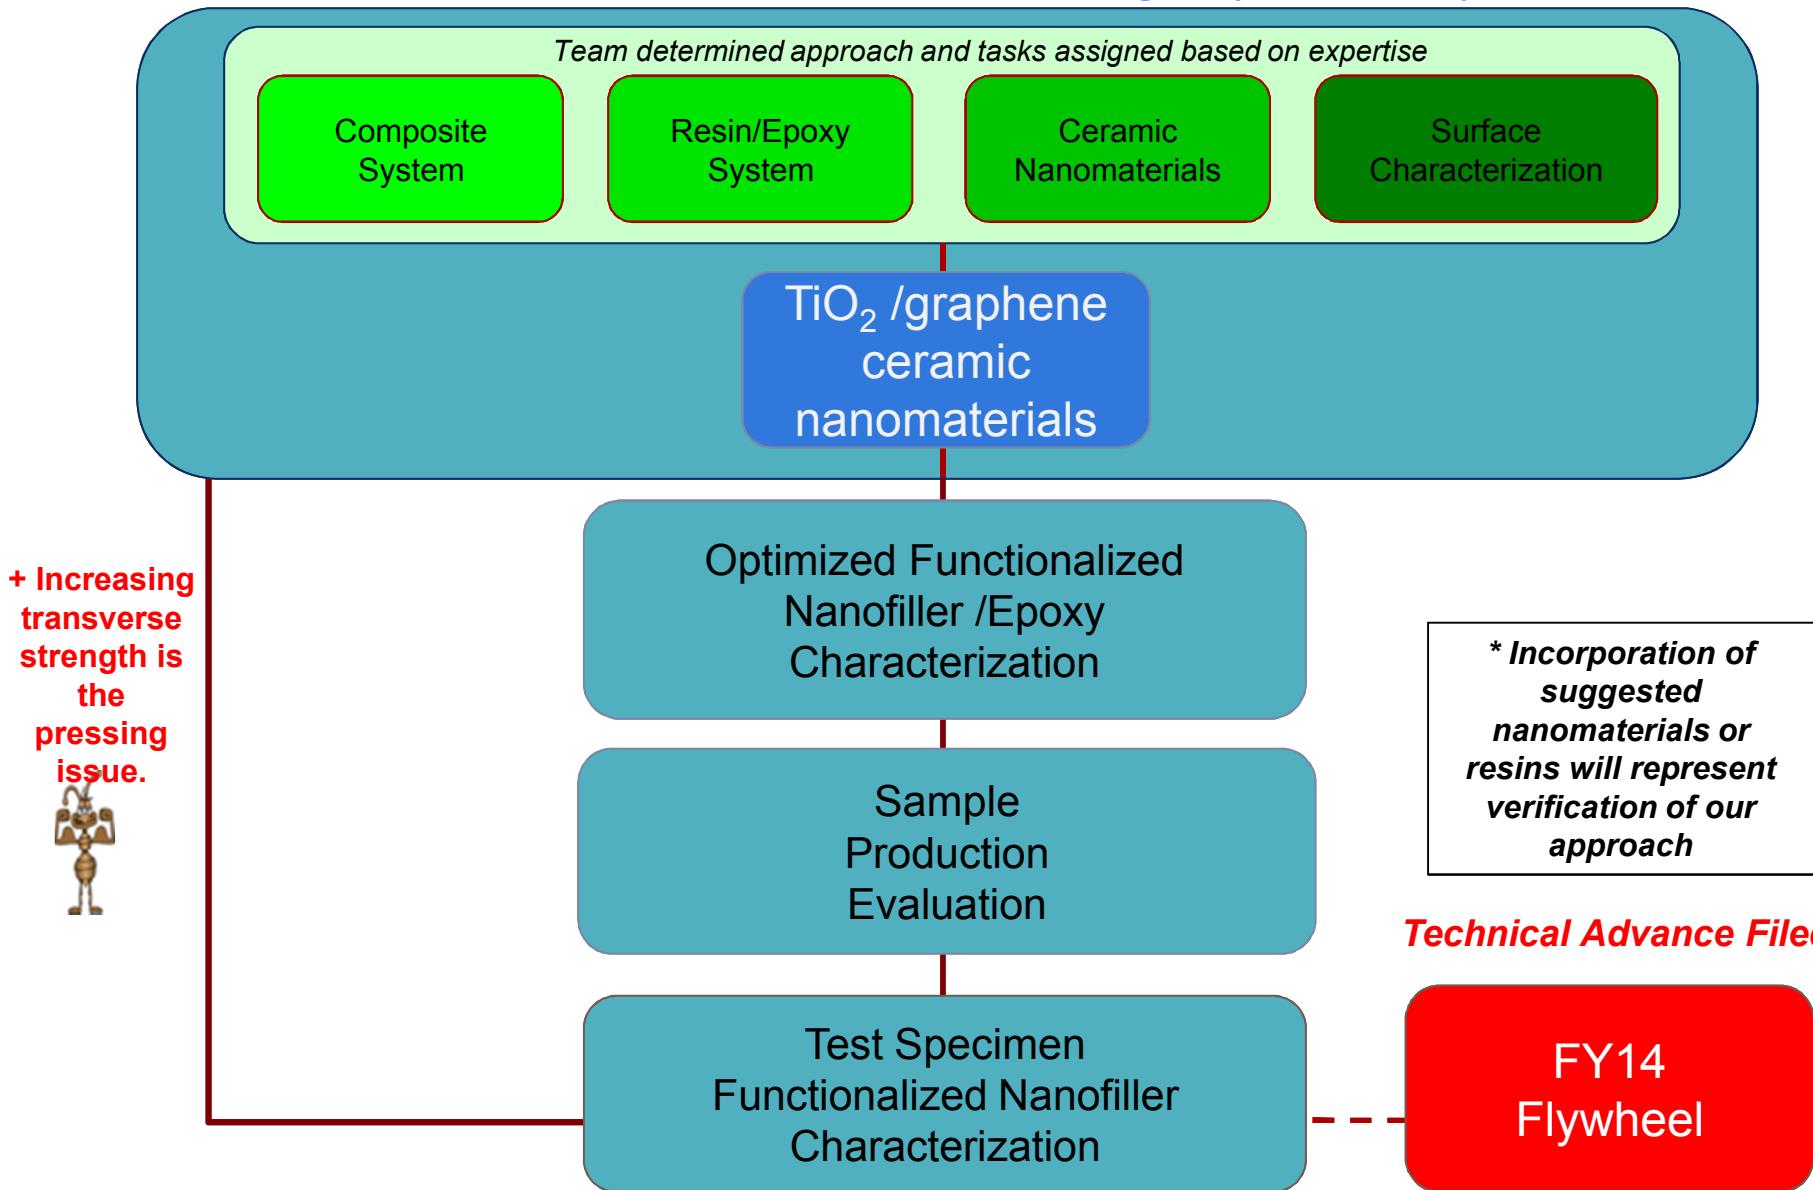


PowerThru formed in 2010 from Pentadyne Power Corporation Beaver Aerospace and Defense.



POWERTHRU designs and manufactures advanced flywheel energy storage systems that provide ride-through power and voltage stabilization for power quality and power recycling applications. Designed to provide high-power output and energy storage in a compact, self-contained package.


POWERTHRU flywheel products are a long-lasting, low-maintenance, lightweight, and environmentally-sound alternative to flooded and valve regulated lead-acid (VRLA) batteries in uninterruptible power supply (UPS) systems. POWERTHRU products are developed for commercial application and not home use.

POWERTHRU shipped its first commercial production flywheel in 2004, and continues to provide award-winning flywheel products to critical applications around the world. Flywheels are built in Michigan (seismic Zone 4 rated).

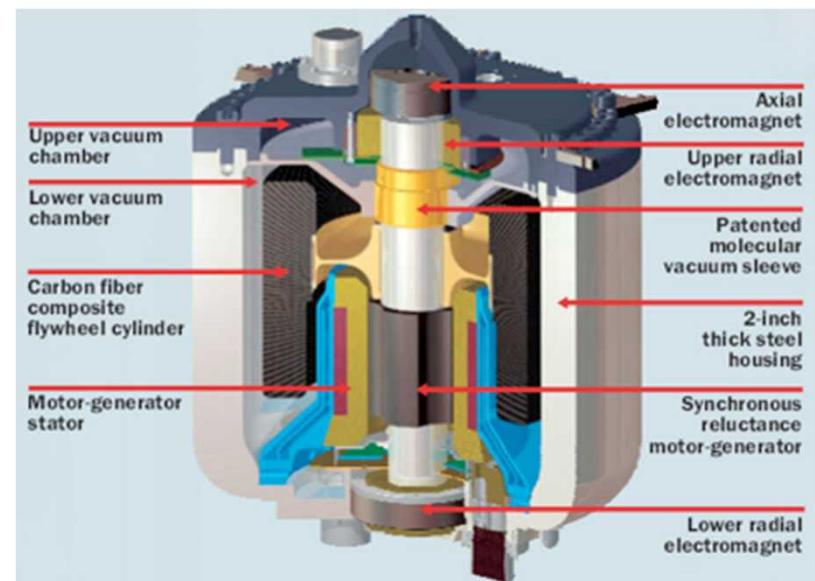

12" diameter; 7.6" tall.

Benefits to all involved are anticipated for the Carleton/Cobham, PowerThru, Sandia, and OE Collaboration.

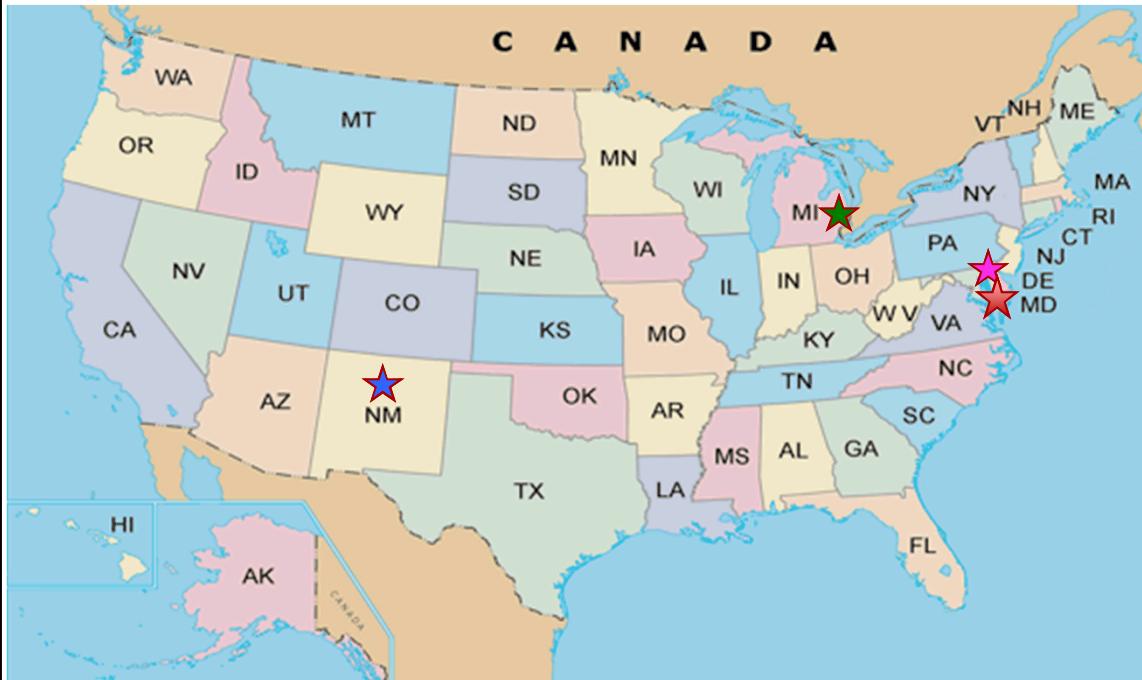

* 3-way NDA in place*

Carleton/Cobham

- New tech developed - nanofillers
- New customer base

PowerThru

- Comparative analysis of flywheel produced using diff. resin system
- Improved flywheels/ same processing
- US based provider

Sandia

- Lab scale idea implemented
- Another happy customer

OE

- Increased elect. storage for grid
- Tech Transfer: TRL 1 to ~7
- US jobs – TiO_2 production

If nano-loaded flywheels provide improved performance:


- C/C will have developed a new capability outside of their current manufacturing scope
- New job potential as C/C may assume overseas manufacturing of flywheels; incorporation of nano-wires into an existing composite product can provide an overarching effect for other technologies/
- Product viability provides stepping stone for incorporation into larger grid-based flywheel systems.
- PowerThru will have the ability to improve their commercial and defense related UPS product

SNL will supply the various nanofillers

- Blank (2) to PowerThru specifications
- **TiO₂ Nanofiller**
- **Graphene sheet filler**
- Al₂O₃ Nanosheet filler

- **Sandia** will synthesize the **TiO₂** nanowires:
requires substantial large scale redesign **5 g**
(2011) → 500 g (2013) → 5000 g (2014)


Sandia will prepare or procure
graphene materials from
commercial sources

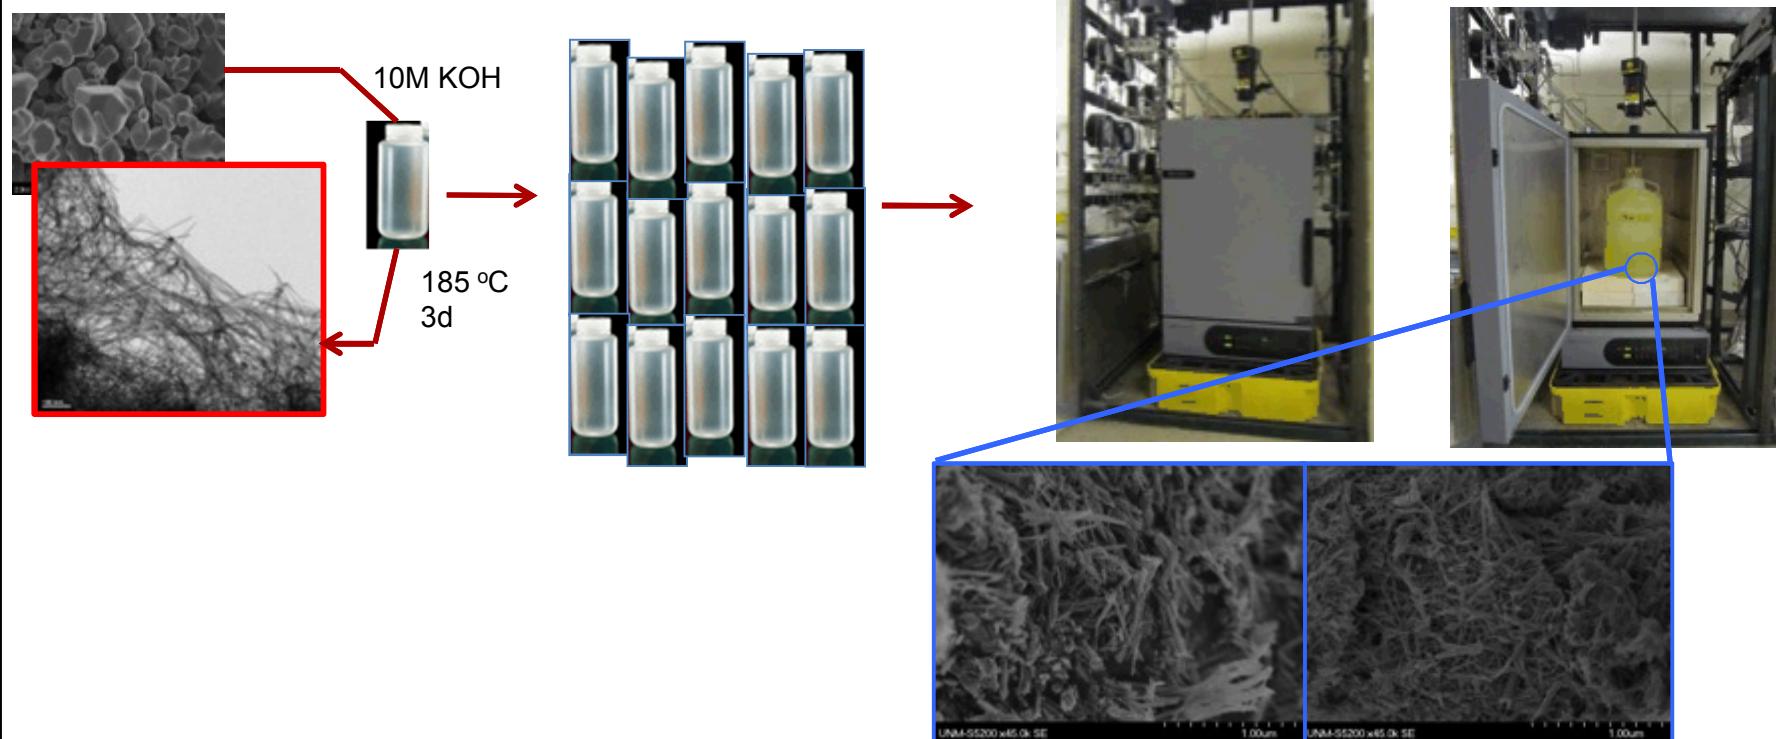

Additional nanofiller that compares planes versus wires being developed.

Glycothermal routes for chemical synthesis lead to organically modified layer materials - organoclays

Boehmite

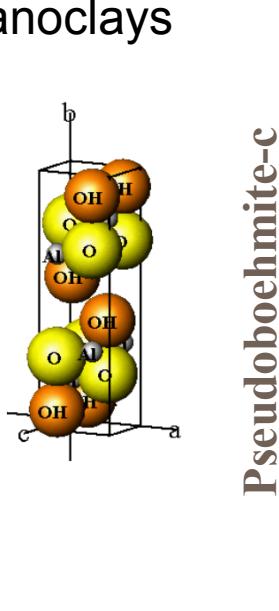



Pseudoboehmite-c

The organoclay has weaker forces bonding layers together, and can be exfoliated into nanosheets of aluminum oxide.

Aggregated Product
Post-Synthesis in 1,4-butanediol


Ethanol, sonication

Exfoliated Material

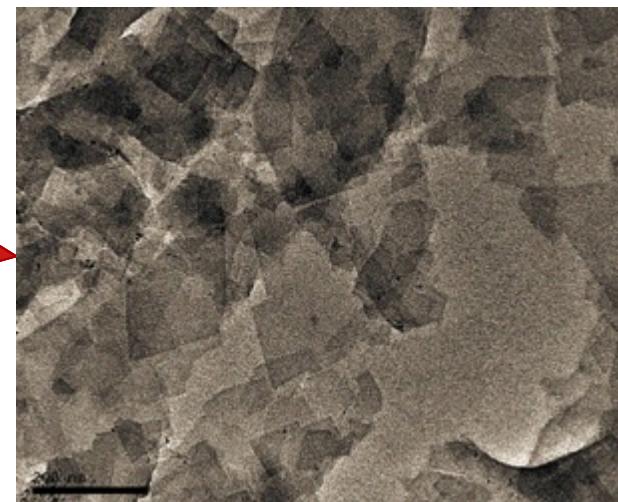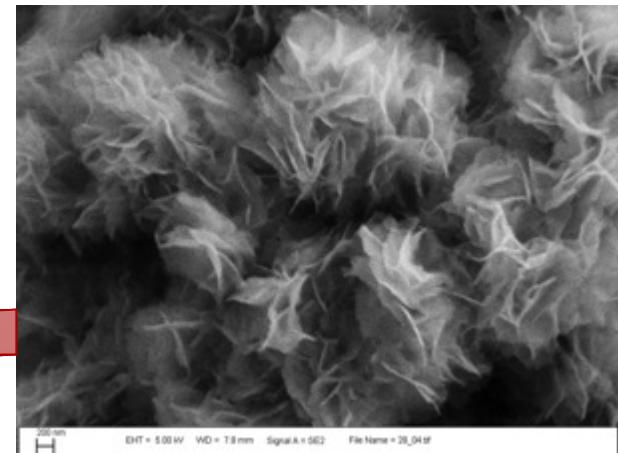

Technical Advance filed (08/14)

Timeline for flywheel production determined and production initiated.

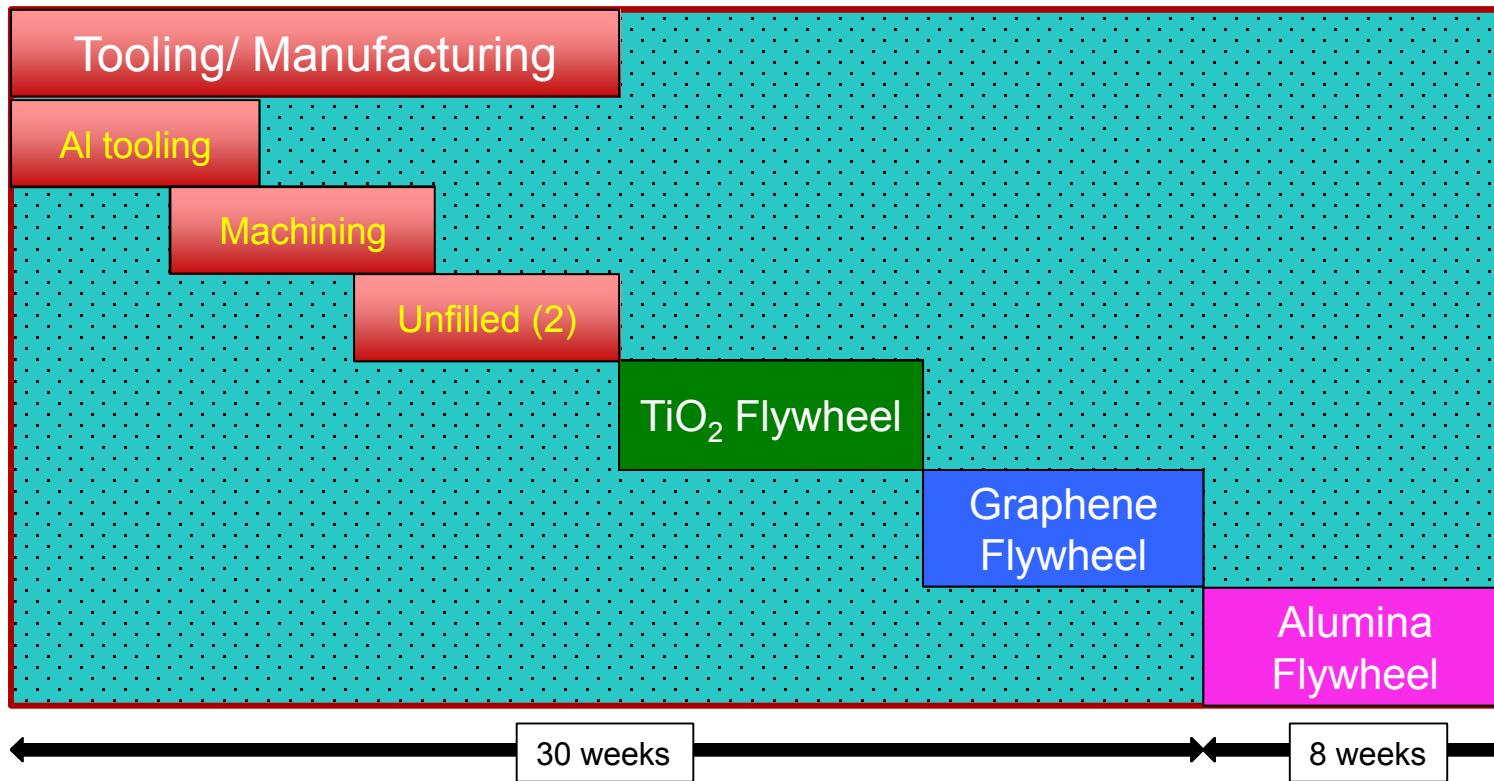

16 weeks to produce the first unfilled flywheel (includes)

- Manufacturing aluminum tooling to wind rim parts
- Time for machining filament wound rim parts
- Manufacturing time for aluminum tooling to press hub into rim


8 weeks to produce the TiO₂ filled flywheel (all processes)

7 weeks to produce each Graphene flywheel (all processes)


8 weeks to produce the AlO_x filled flywheel (all processes)

C-fiber resin interaction needs to be improved. Functionalization of the C-fiber is underway:


(i) Microdroplet testing of epoxy-fiber strength

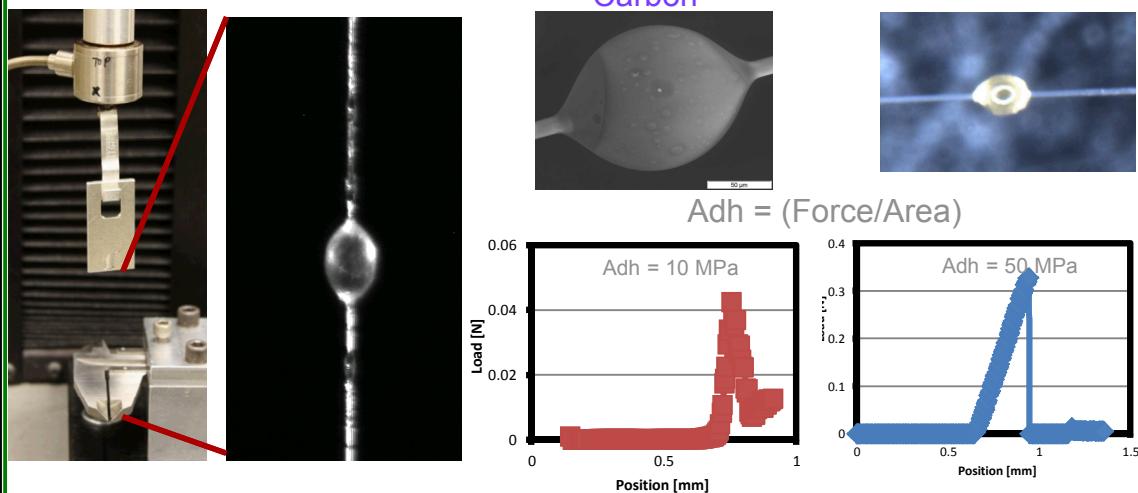

(ii) SEM of fractured pieces

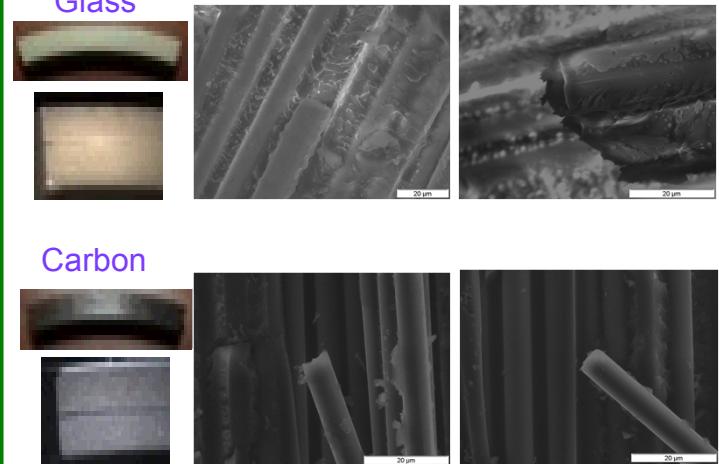


Solution Growth
the C-fiber is being treated in different concentrations of metalorganic salts. The changes will be monitored by SEM and attempts to grow ZnO on the carbon will be investigated.

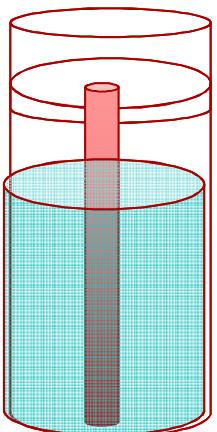


Electrophoretic Deposition: Under applied DC voltage, oppositely charged particles are attracted to the C fiber and deposited.

- Scalable, conformal process.
- dependent on surface charge

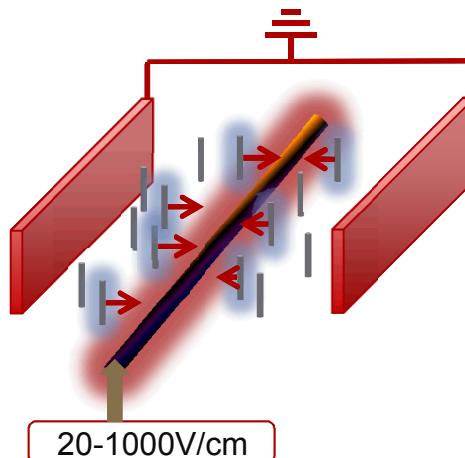


Thermal oxidation
reactive chemistry to induce $C=O$, $O-C=O$, $C-O$ functionalities on the surface, that could be used for further grafting or better adhesion with the polar matrix.

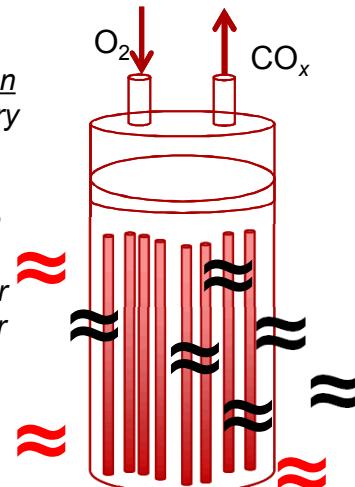


Surfaces can be modified using commercially viable routes. Dog-bone testing initiated.




120°C, 3 days

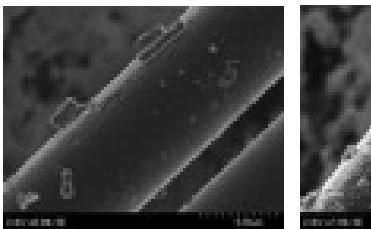




$\text{Zn}(\text{NO}_3)_2$

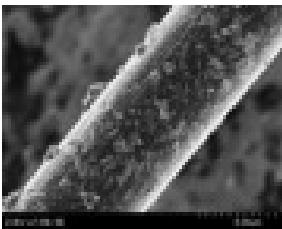


$\text{Zn}(\text{OAc})_2$

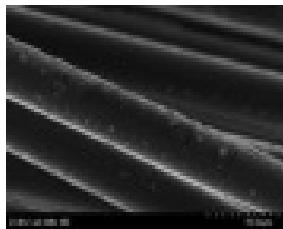


$\text{Zn}(\text{OAc})_2$

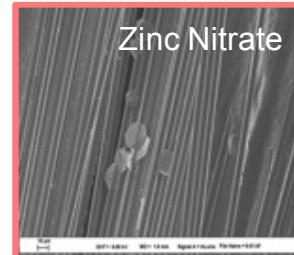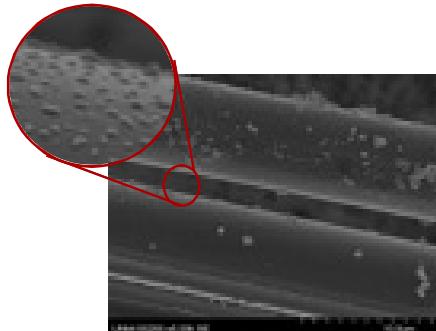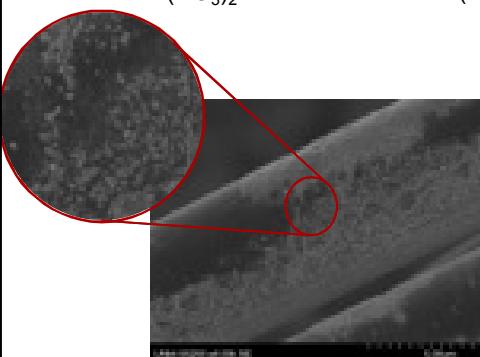


Zinc Nitrate

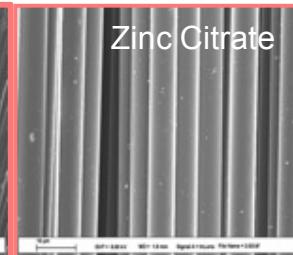


Zinc Citrate

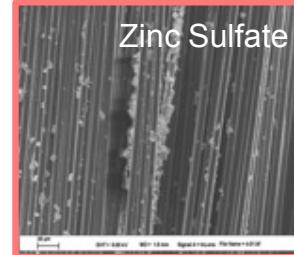

Zinc Sulfate

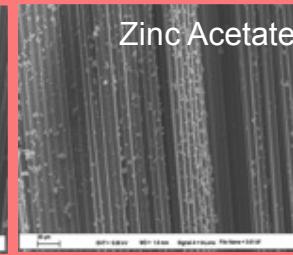


Zinc Acetate

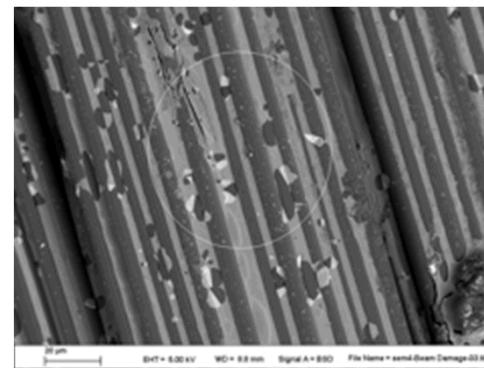

Cut away of dog-bone mold with Carbon Fiber Tow under tension.

CF-Resin Interaction testing with acoustic emission (Miller - MSU)

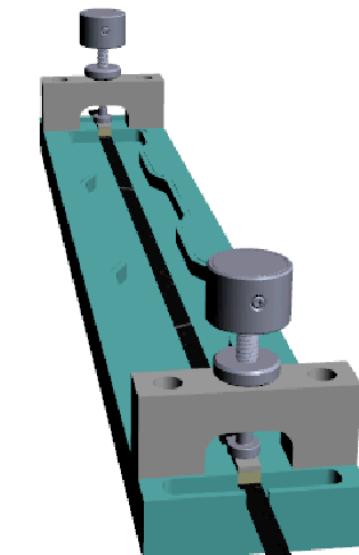

Summary/Conclusions

FY14 Overall

- V. Large scale samples successfully prepared – new method, new setup, new ES&H concerns.
- Ceramic nanosheet developed for filler – pseudoboehmite
- 3-way contract in place for analyzing nano filler functionalized flywheels.
 - (a) 3-way NDA successfully executed
 - (b) contract for Flywheel components
 - i. Unfilled (blanks (2)) to PowerThru specifications
 - ii. TiO_2 nanofiller
 - iii. Graphene nanofiller
 - iv. Al_2O_3 nanosheets
- Functionalized C-fiber synthesized, placed in a dog-bone resin setup, and submitted for testing.
 - i. Contract with U. of Wyoming (Miller)
 - ii. Dog-bone cast developed
 - iii. C-fiber centered in cast.

Future Tasks: Milestones for FY15

- Test breakdown properties of operating flywheels
 - + contract with PowerThru
 - + transfer of flywheels.
 - + testing of breakdown properties.
- Analysis of results and determine if additional work on nanofillers is going to improve overall spin speed.
- Formulation of TiO_2 dispersion and optimized Graphene
- Financial impact evaluation.
- Analyze results of C-fiber resin interaction using dog-bone test and optimize:
 - (i) baseline (blank),
 - (ii) solution ceramic, and
 - (iii) organic
 - (iv) mixture (ii/iii)
- Method for large scale C-fiber modification developed



Special Thanks to:

United States Department of Energy,
Office of Electricity Delivery and Energy Reliability
Energy Storage Program Manager – Dr. Imre Gyuk



Contact Information

Timothy J. Boyle

Sandia National Laboratories
Advanced Materials Laboratory
1001 University Boulevard, SE
Albuquerque, New Mexico 87106

tjboyle@Sandia.gov

Ph:(505)272-7625



COBHAM

POWERTHRUTM
Clean Flywheel Energy Storage