

Sunshine to Petrol: Reimagining Transportation Fuels

Sandia National Laboratories

8 July 2017
Anthony Martino

Sandia National Laboratories is a multimission laboratory managed and operated by National Technology & Engineering Solutions of Sandia, LLC, a wholly owned subsidiary of Honeywell International, Inc., for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-NA0003525.

Drivers of Transportation Fuel Research



The Problem

- **U.S. Petroleum Demand is 20.7 mb/d (2007).**
- **An additional 64 mb/d of petroleum – six times the current capacity of Saudi Arabia – will be needed in the U.S. by 2030.**
- **1 in 8 casualties in Iraq were protecting fuel convoys**

The Solution

- **Policy:**
 - The Renewable Fuel Standard (RFS) and RFS2 of 2005 and 2007
- **Targets:**
 - 36 bg/yr renewable fuels by 2022
 - 15 bg/yr of corn ethanol by 2015
 - 21 bg/yr from second and third generation cellulosic- or algae-based fuels
- **Investments:**
 - FY2008-FY2011: DOE/EERE/BETO, DOE/SC/OBER) \$1B in Bioenergy Research Centers, Algae Biofuels Consortia, and Industry-Led Biorefineries
 - FY2012: EERE/BETO \$195M (\$270M FY13 request); SC/OBER \$113M
 - USDA loan guarantee program.

A Diversified Policy and R&D Portfolio is Needed



Potential Solutions


- **Natural Gas Reforming (GTL)**
- **Hybrid, Plug-in Hybrid, Electric Vehicles**
- **Biofuels**
- **Solar Fuels (H_2 , H_2 & CO)**



Technology Options

- **Solar Thermochemical**
- **Artificial Photosynthesis**
- **Photoelectrochemical (PEC)**
- **Photocatalysis**
- **Solar Electrolysis**

Solar ThermoChemical Fuels: Sunshine to Petrol (S2P)

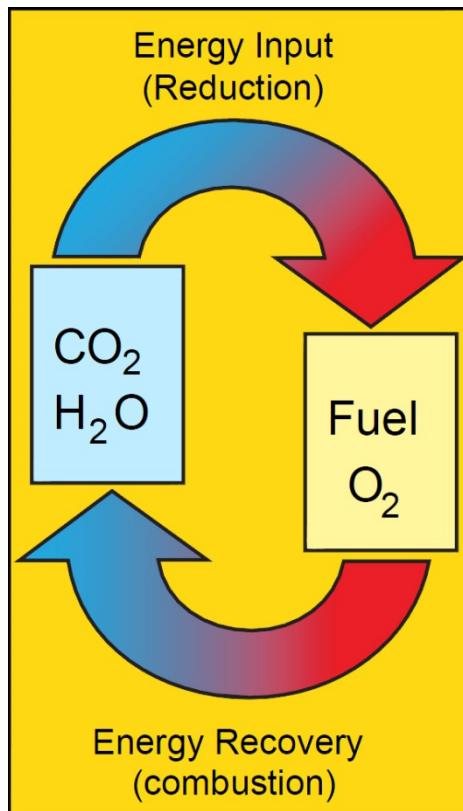

Liquid hydrocarbons are the “Gold Standard” for transportation fuels.


S2P: Use the heat of the sun to “energize” CO_2 and H_2O into syngas, a precursor to hydrocarbon fuels.





H_2O , CO_2 Splitting



Fischer-Tropsch



Our Solar Thermochemical Process is Conceptually Simple

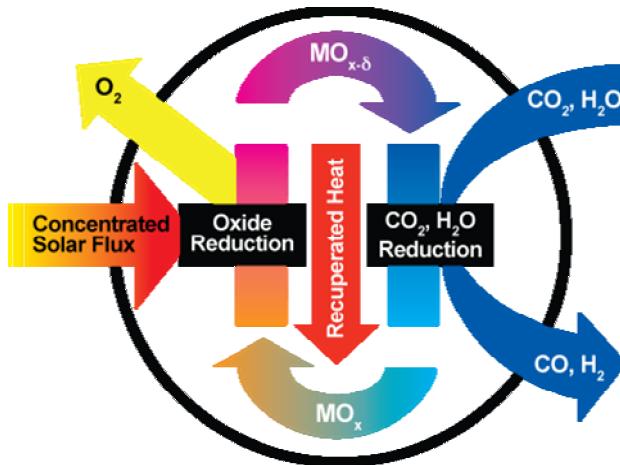

R&D focus on:

- **Reactor/Engine**
 - Maximizing Energy usage (continuous operation, sensible energy recovery i.e. recuperation)
 - Interfacing Solar with chemistry
 - Minimal parasitic work input
 - Decoupling steps (products, conditions, rates)
- **Catalysts**
 - Thermodynamics
 - Kinetics
 - Durability
- **Systems**
 - Setting targets, process optimization , economics, life cycle impacts etc.

We envision new domestic industries in engines, catalysts, and fuels.

Sandia has invested nearly \$20M and built an interdisciplinary team.



Principal Investigator – James E. Miller
Project Manager – Tony Martino

Engines

- **Solar Reactor** - Rich Diver, Tim Moss, Scott Korey, Nathan Siegel
- **Reactive Structures** - Nathan Siegel, Terry Garino, Nelson Bell, Rich Diver, Brian Ehrhart
- **Detailed Reactor Models** - Roy Hogan, Ken Chen, Spencer Grange, Siri Khalsa, Darryl James (TTU), Luke Mayer (student)

Catalysts

- **Reactive Materials Characterization & Development** - Andrea Ambrosini, Eric Coker, Mark Rodriguez, Lindsey Evans, Stephanie Carroll, Tony Ohlhausen, William Chueh
- **Bulk Transport & Surface Reactions** - Gary Kellogg, Ivan Ermanoski, Taisuke Ohta, Randy Creighton
- **Thermodynamics & Reaction Kinetics** - Mark Allendorf, Tony McDaniel, Chris Wolverton (Northwestern University), Bryce Meredig (student), Heine Hansen (PD), Asegun Henry, Al Weimer (CU), Jon Scheffe (student)

Systems Analysis

- **Terry Johnson, Chad Staiger, Christos Maravelias (U-WI), Carlos Henao (student), Jiyong Kim (PD), Daniel Dedrick**

Over 20 conference proceedings, 80 conference presentations, 20 peer-reviewed journal articles, 4 book chapters, and 8 patents

The CR5 is our First Engine Prototype

Counter-Rotating-Ring Receiver/Reactor/Recuperator (CR5)

CO₂ SPLITTER

Heat from the sun provides energy to break down CO₂, releasing CO which can then be used to produce synthetic fuels

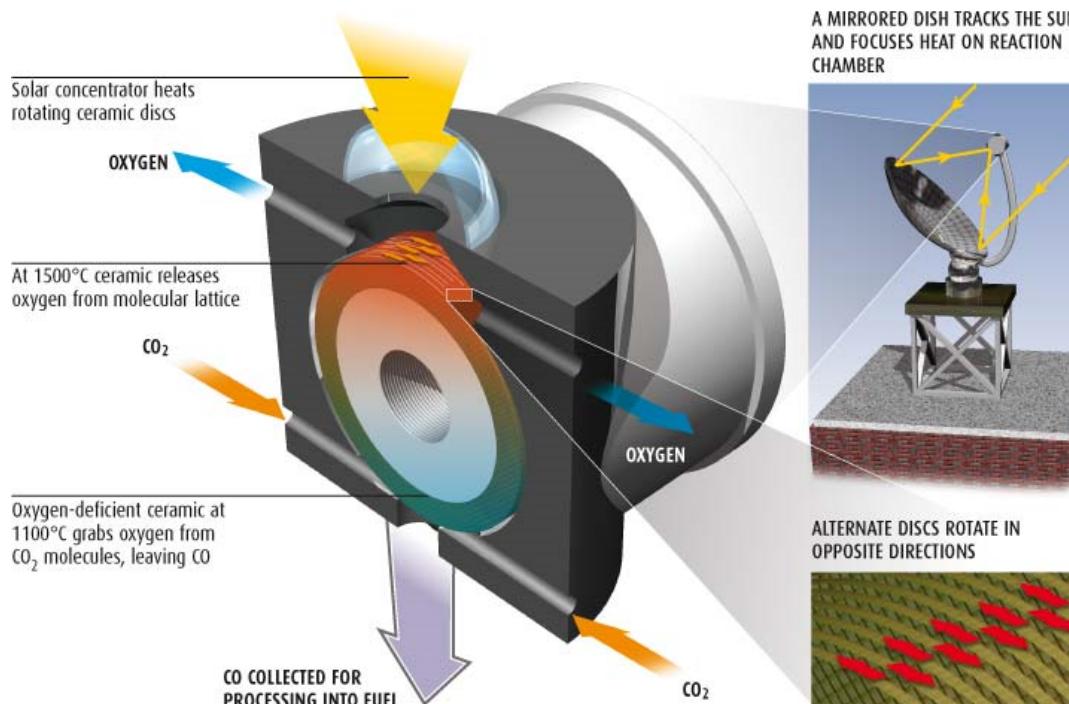


Figure Credit: Popular Science

“Reactorizing a Countercurrent Recuperator”


Continuous flow, Spatial separation of products, Thermal recuperation

S2P uses concentrated solar power focused on a solar furnace.



This 12-ring test set the standard for heat-to-**S2P** chemical conversion efficiency.


August 1, 2011 Test Overview

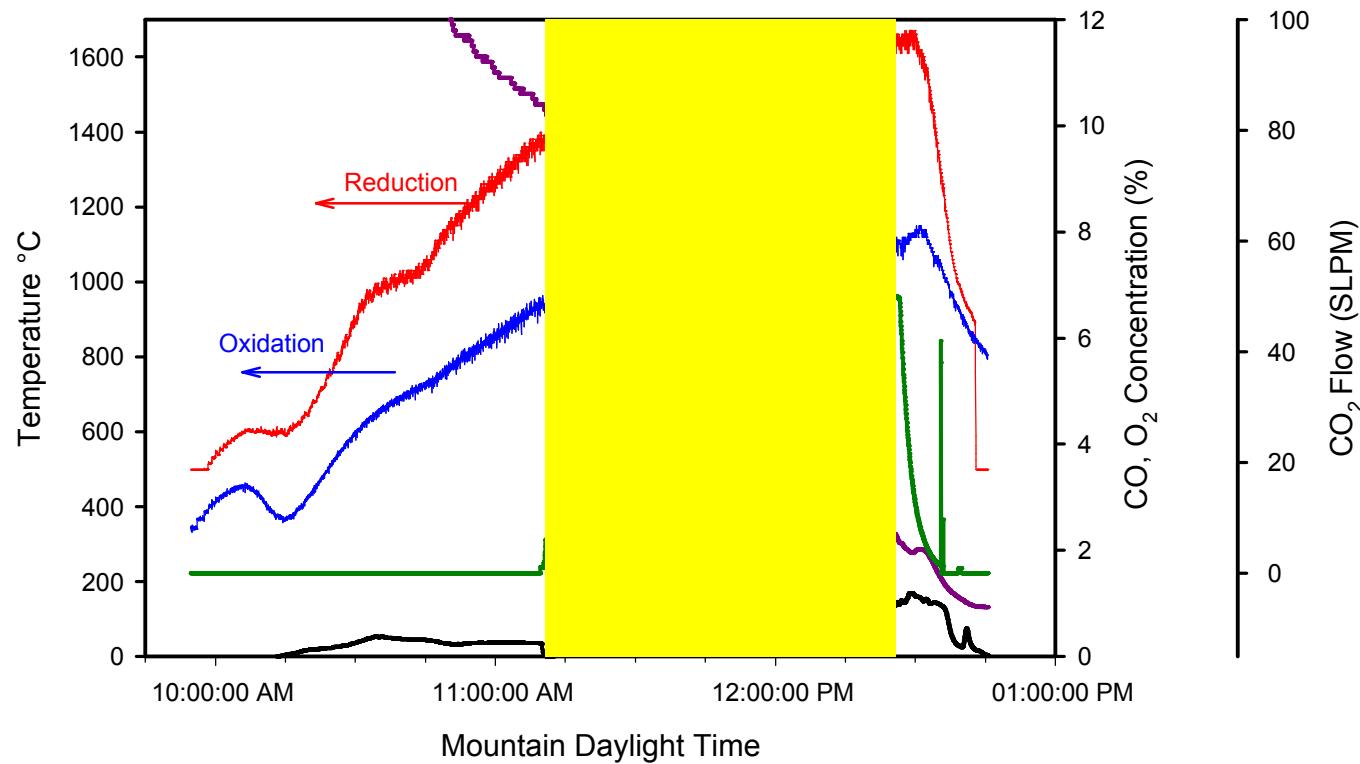


Generation 2: Packed Bed Particle Reactor



- Direct solar absorption by the working material
- Sensible energy recovery between T_H and T_L
- Continuous on-sun operation
- Pressure, temperature and product separation
- Pros:
 - Small reactive particles ($\sim 100\text{mm}$)
 - Only particles are thermally cycled
 - Independent component optimization
 - Easy material replacement
- Cons:
 - Particle conveyance
 - Beam-down optics

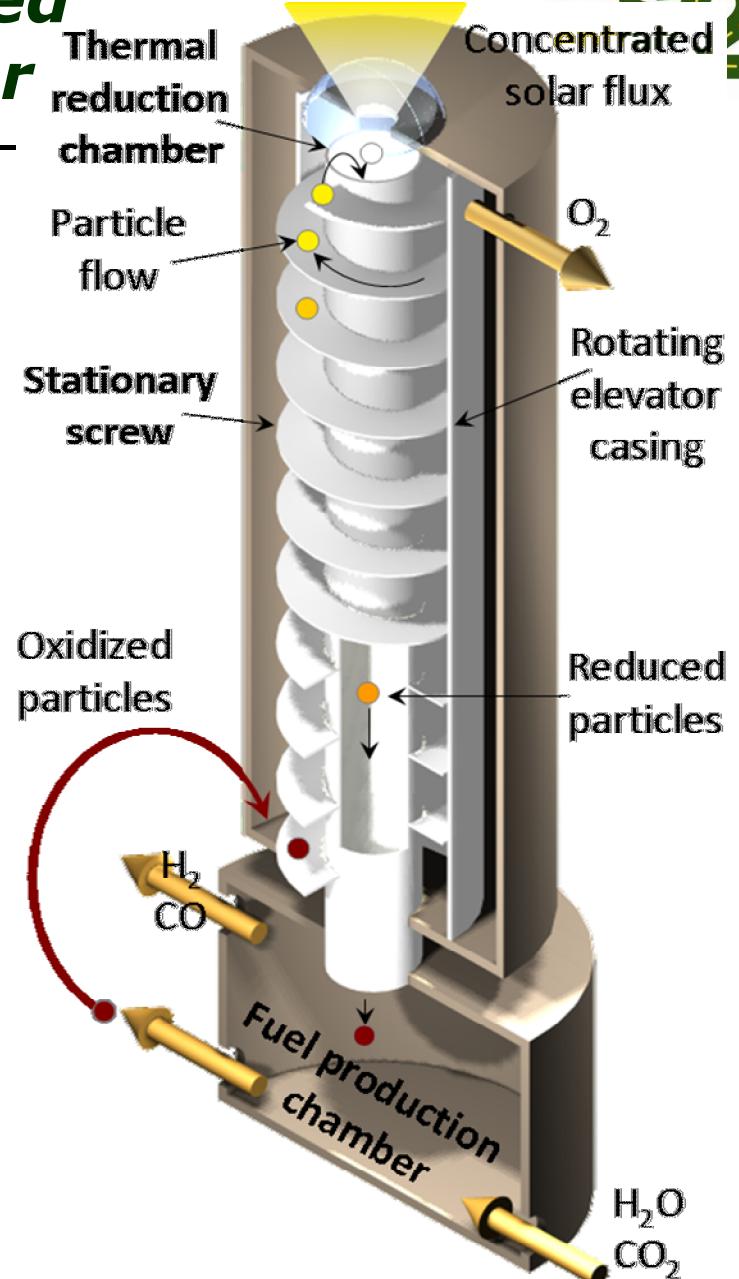




The Cascading Pressure Reactor Embodies the Packed Bed Reactor Design with Increased Efficiencies

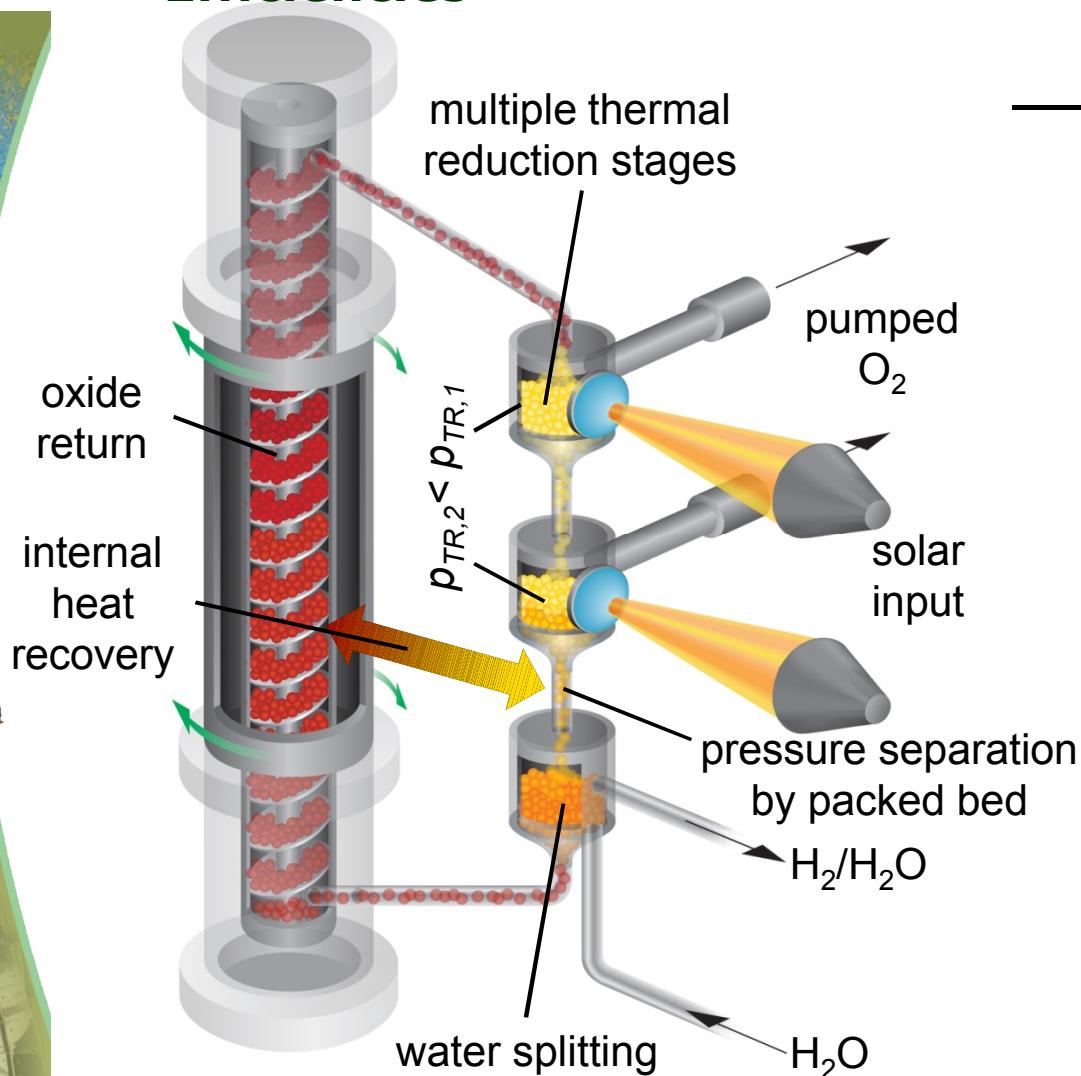


Incrementally pumping O₂ reduces the overall flow volume and velocity



We recently produced 2L of H₂ over 1 hour.

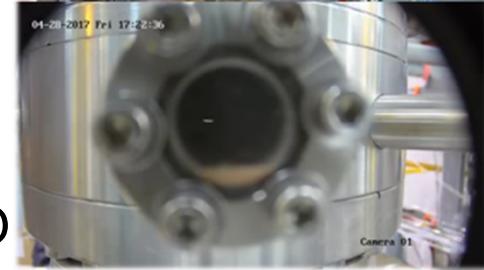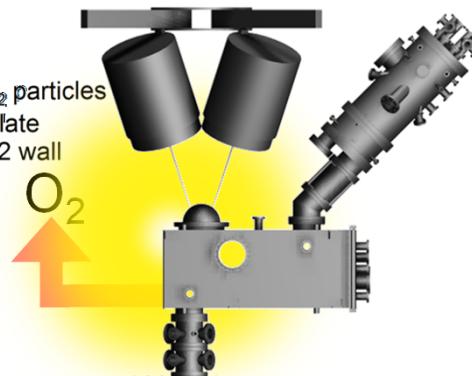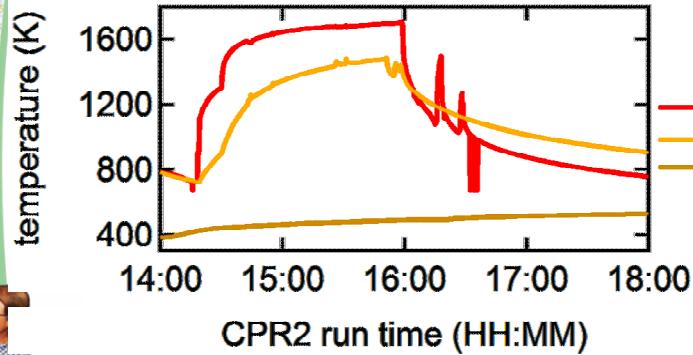


$T_R \sim 1700$ K
0.25 SLPM peak H₂ rate

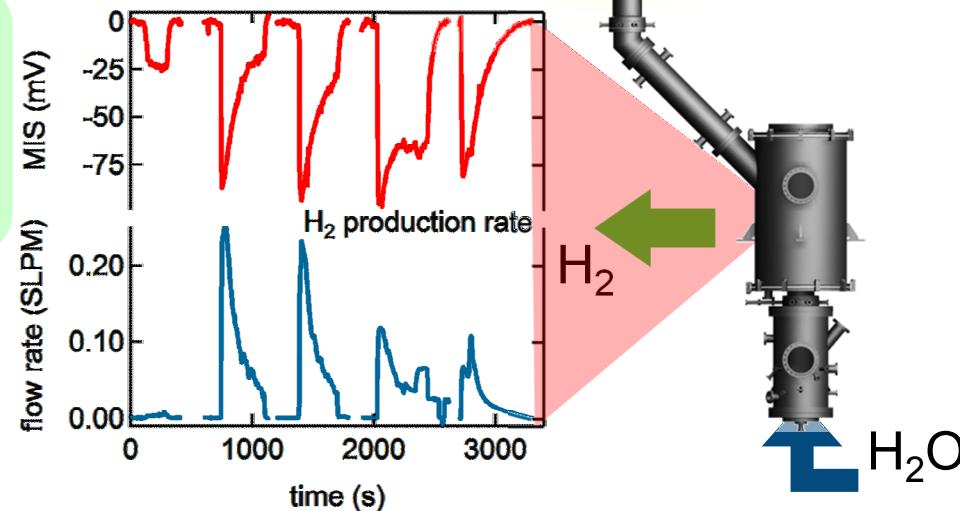


Sandia uses Predictive Simulations and Characterization to Design New Materials Formulations

Thermodynamics


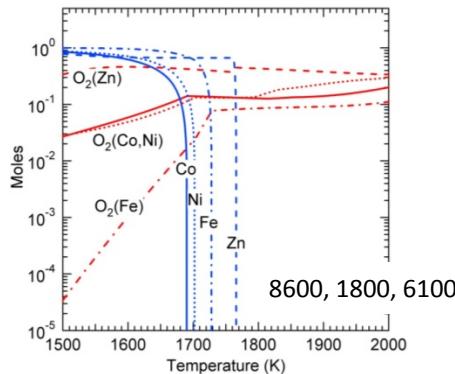


Energy & Fuels, 22 (2008), 4155

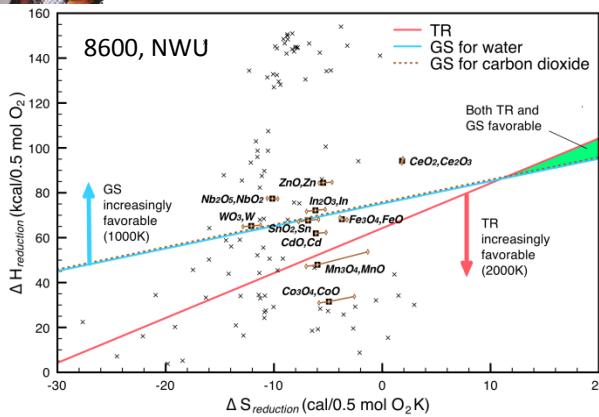




Physical Review B 80, 245119 (2009).

Computational Materials Science

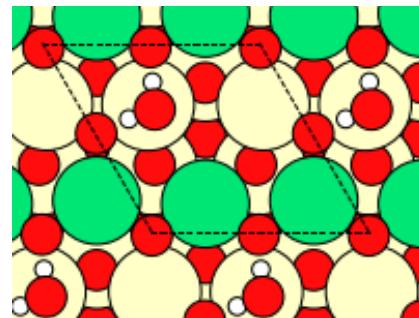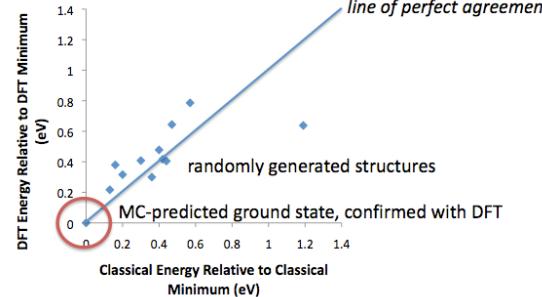




8600 in collaboration with
Northwestern U.

Kinetics of Real & Model Systems

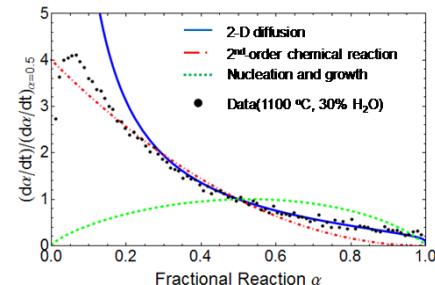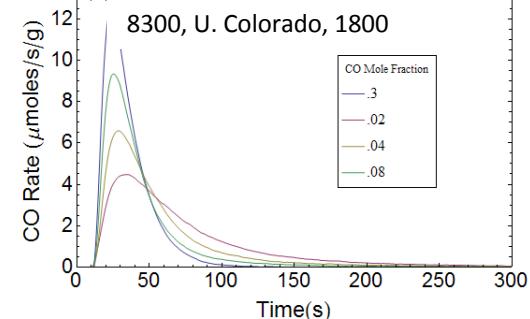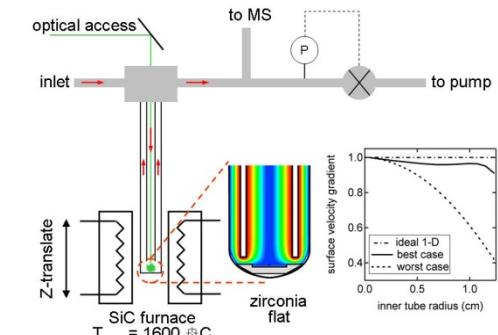


Redox Materials Most Determine Process Efficiency

Surface Science

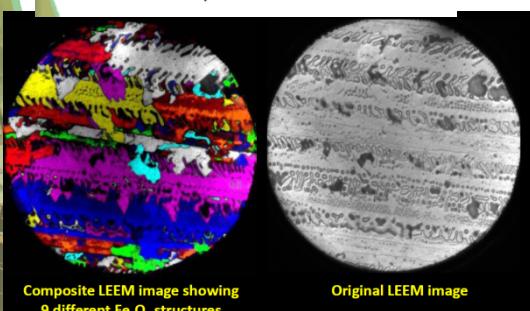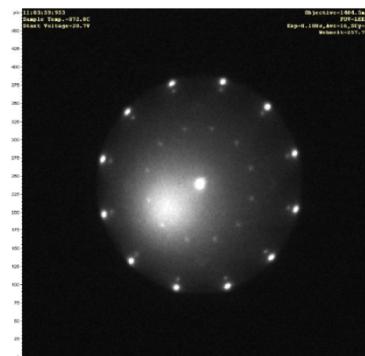


in situ, ex situ Characterization

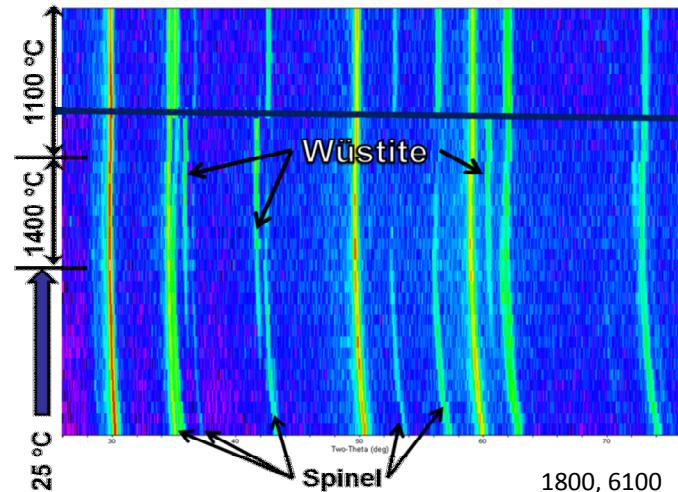


SEM of 10 wt.-% Fe_2O_3 /8YSZ before and after 3 thermochemical cycles (Ar/CO₂)





Before




After



Fabrication and Testing

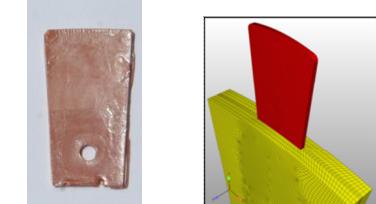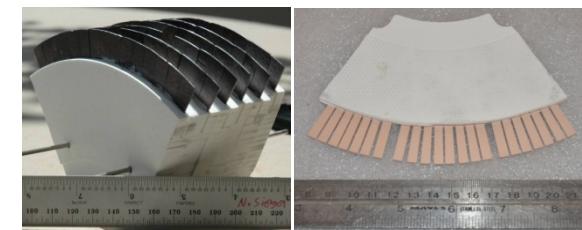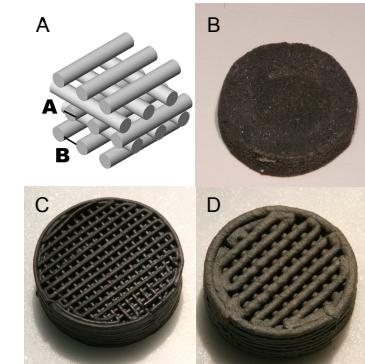

Solar Resources Analysis Shows the Promise of Scale and Requirement for High Efficiency Target

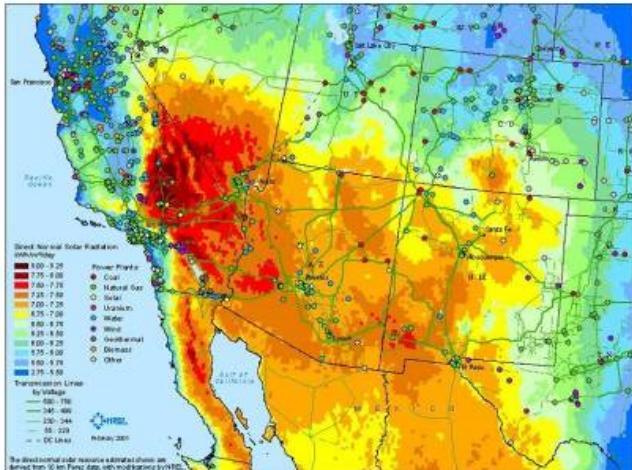

- U.S. Petroleum Demand is 20.7 mb/d (2007)
- **12.5% lifecycle efficiency** could produce 16.6 mb/d (**80%** of total U.S. demand)
- NM alone could produce **23%** of U.S. demand
- **12.5% of available land** ($17.4 \times 10^9 \text{ m}^2$) could provide **10%** of U.S. demand


Filters applied (Resource analysis by NREL): Over-filtered

- Sites > 6.75 kWh/m²/day
- Exclude environmentally sensitive lands, major urban areas, etc.
- Remove land with slope > 1%.
- Assume 25% packing density
- Only contiguous areas > 10 km² (675 MW_{primary}) $10 \text{ km}^2 = 10^7 \text{ m}^2 = 3.86 \text{ mi}^2$

State	Land Area (10^9 m^2)	Solar Capacity (TW)	Fuel Capacity (GW)	(mb/d)
AZ	49.9	3.37	421	5.9
CA	17.7	1.20	150	2.1
CO	5.5	0.37	46	0.7
NV	14.5	0.98	122	1.7
NM	39.3	2.65	331	4.7
TX	3.0	0.20	25	0.4
UT	9.2	0.62	78	1.1
Total	139.2	9.39	1,174	16.6

139 billion m² is 1.5% of total U.S. land

Numerous Large CO₂ Sources Exist

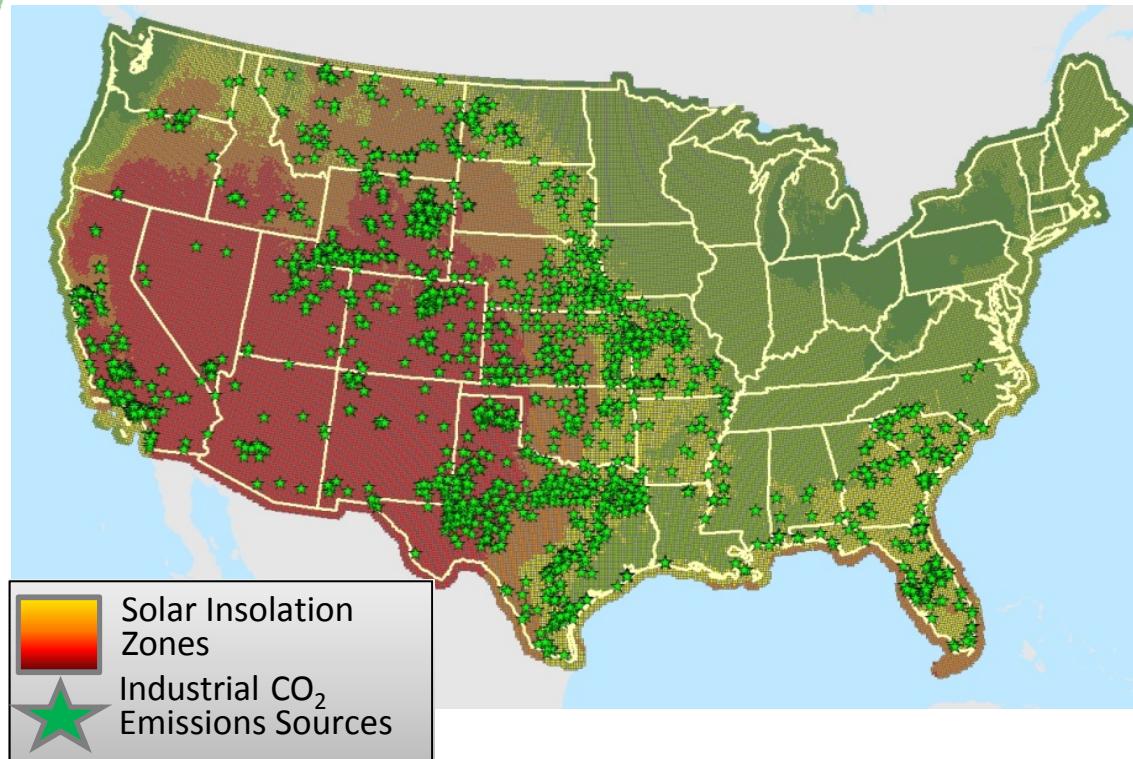


- Hundreds of large industrial CO₂ emissions sources exist in the United States in areas of high solar insolation.
- 4-Corners Power Plant: 15.6 Mt/y and San Juan 13.4 Mt/y
- At 81% utilization these two plants can supply fuel plants up to 9.8 GW (139 kb/d)
- ~25 plants of comparable size to 4-Corners could supply US CO₂ for 10% of U.S. demand.

Substantial resources can be tapped.
Infrastructure exists for CO₂ transport.


We Investigated a Number of Pathways and Products including MeOH and FT.

Mixed pathway to Fischer-Tropsch (FT) products

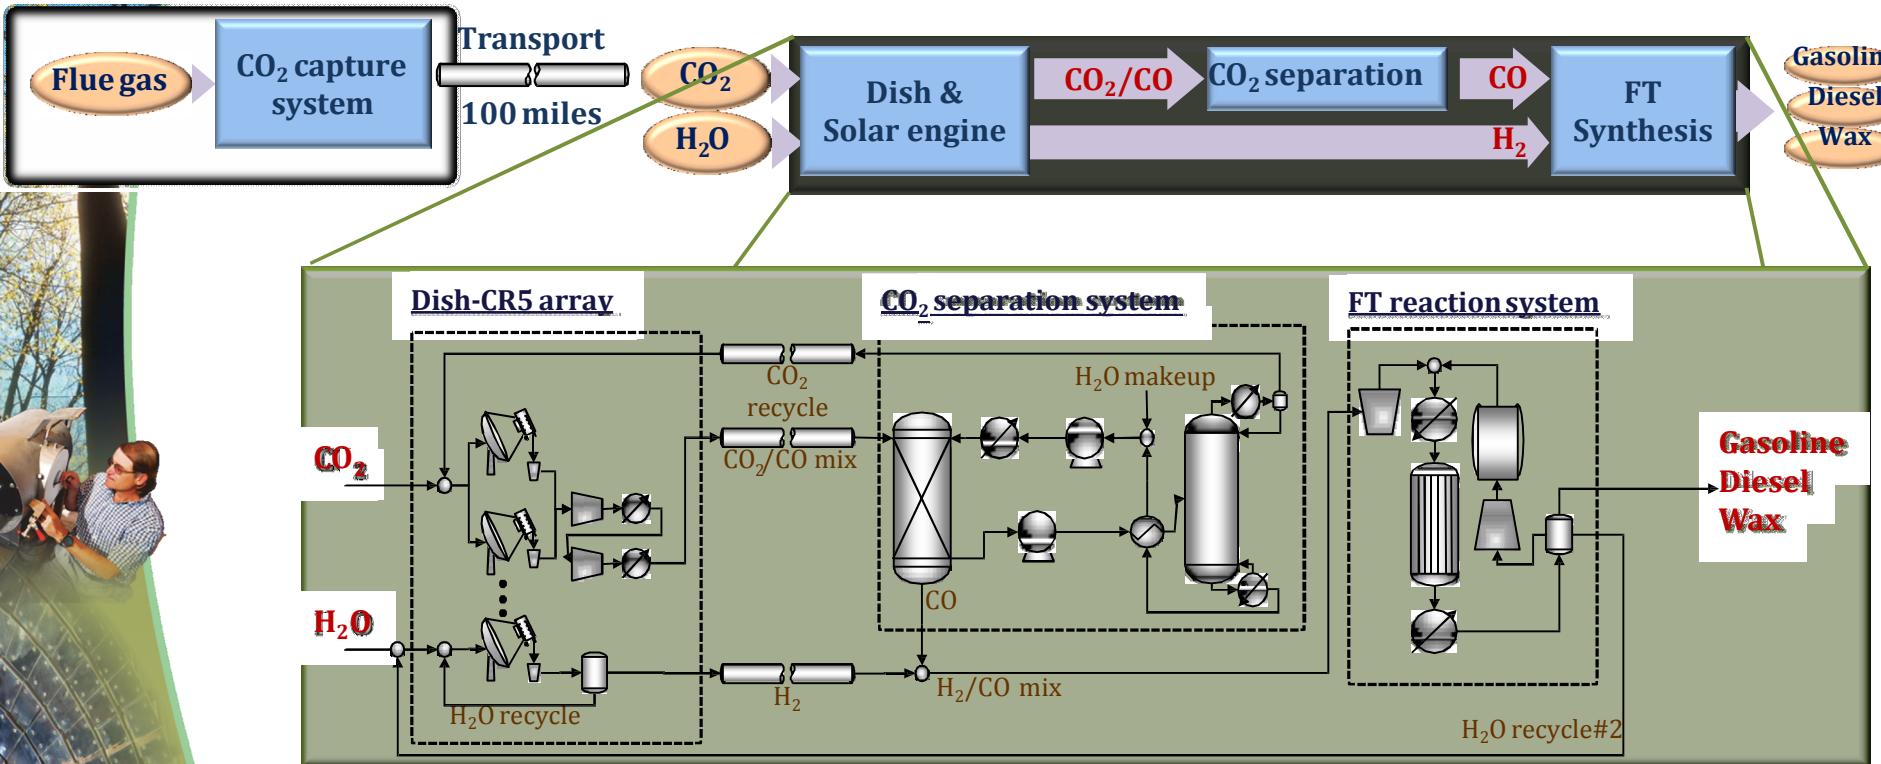


- Feed
 - CO₂: 352 kmol/hr
 - H₂O: 395 kmol/hr
- Product
 - Gasoline (C7)/Diesel (C14)/Wax (C25): 24/10/1 kmol/hr (333 kmol C/hr)

Economic Evaluation: Minimum Selling Price

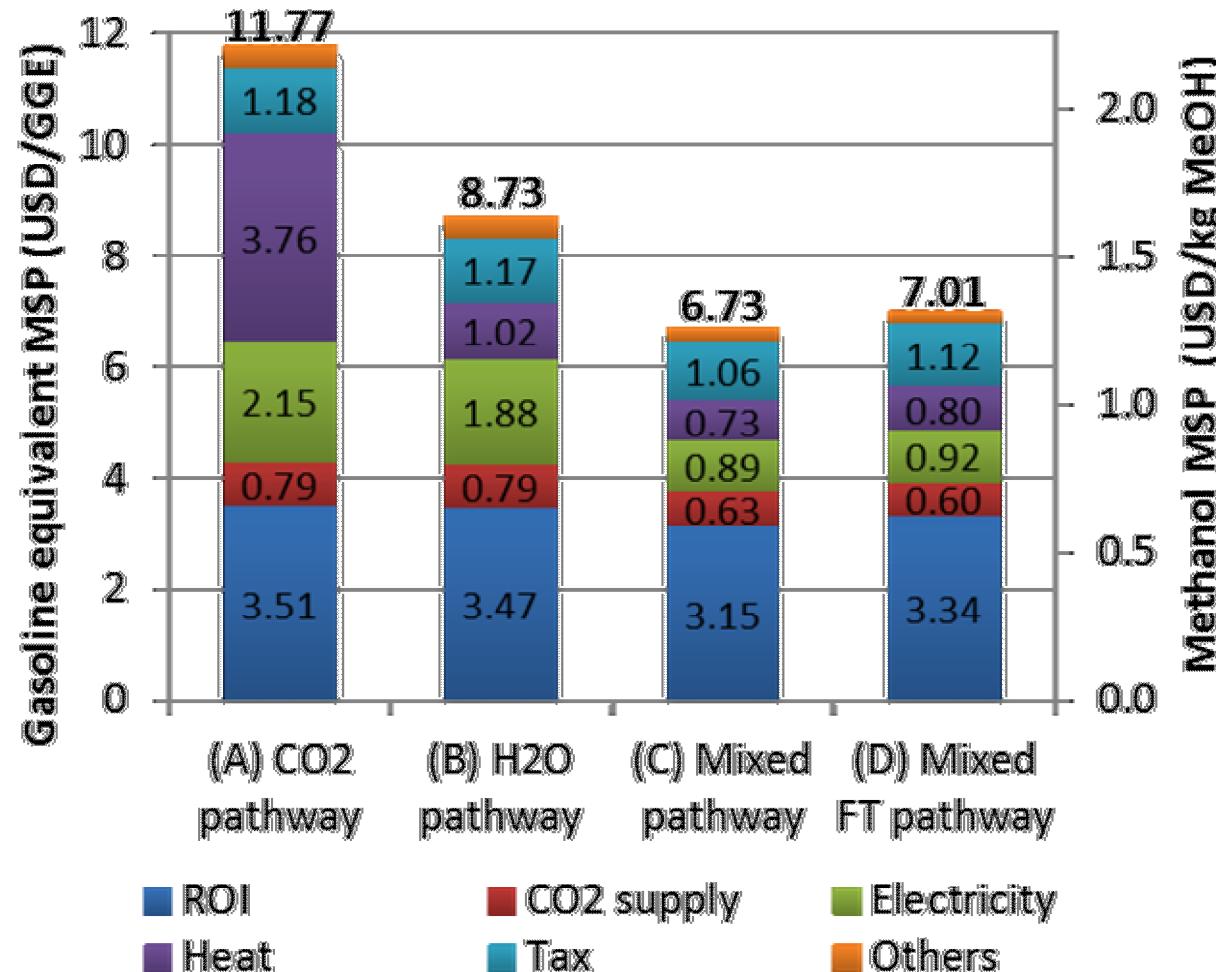

Economic Evaluation: Sensitivity Analysis

Mixed pathway to MeOH

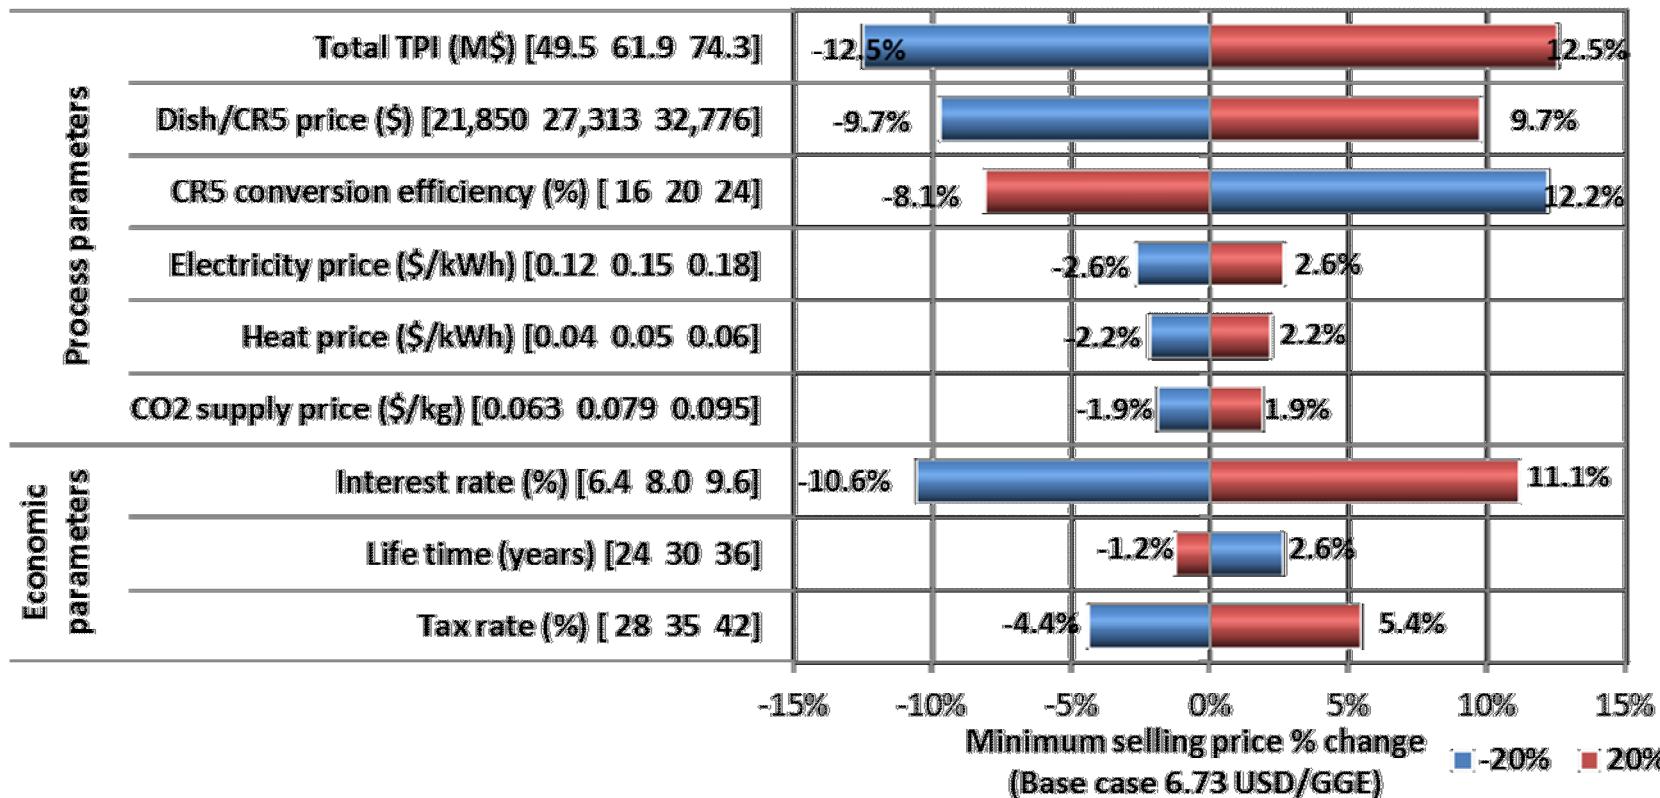


Summary

- **Thermochemical approaches have great promise**
 - Potential for high efficiency
 - Field is rapidly advancing, Global interest and investment
- **Efficiency is key for cost and scalability**
 - Sunlight is the high cost feedstock (capital to capture)
 - Adjacency to other technologies (e.g. solar electric, solar reforming) offers benefits
- **High utilization is essential to achieving high efficiency**
 - Recuperation, reduction extent, kinetics
 - Need for new materials with optimized thermodynamics, transport properties, structures, physical properties, and thermally efficient reactors
- **Three aspects to advancing materials**
 - Improved compositions (modification and discovery)
 - Structuring materials
 - Integrating materials and reactor design
- **Production and testing of Gen1 CR5 completed; Gen 2 packed bed reactor tested**
 - Efficiency > 0.8%, Scales to > 1.5 %
 - Full-days of continuous on-sun testing at powers up to 9 kW.
 - Applying lessons to Gen2 designs and Materials

Thank You For Your Attention




Efficiency → Costs: Collector Area

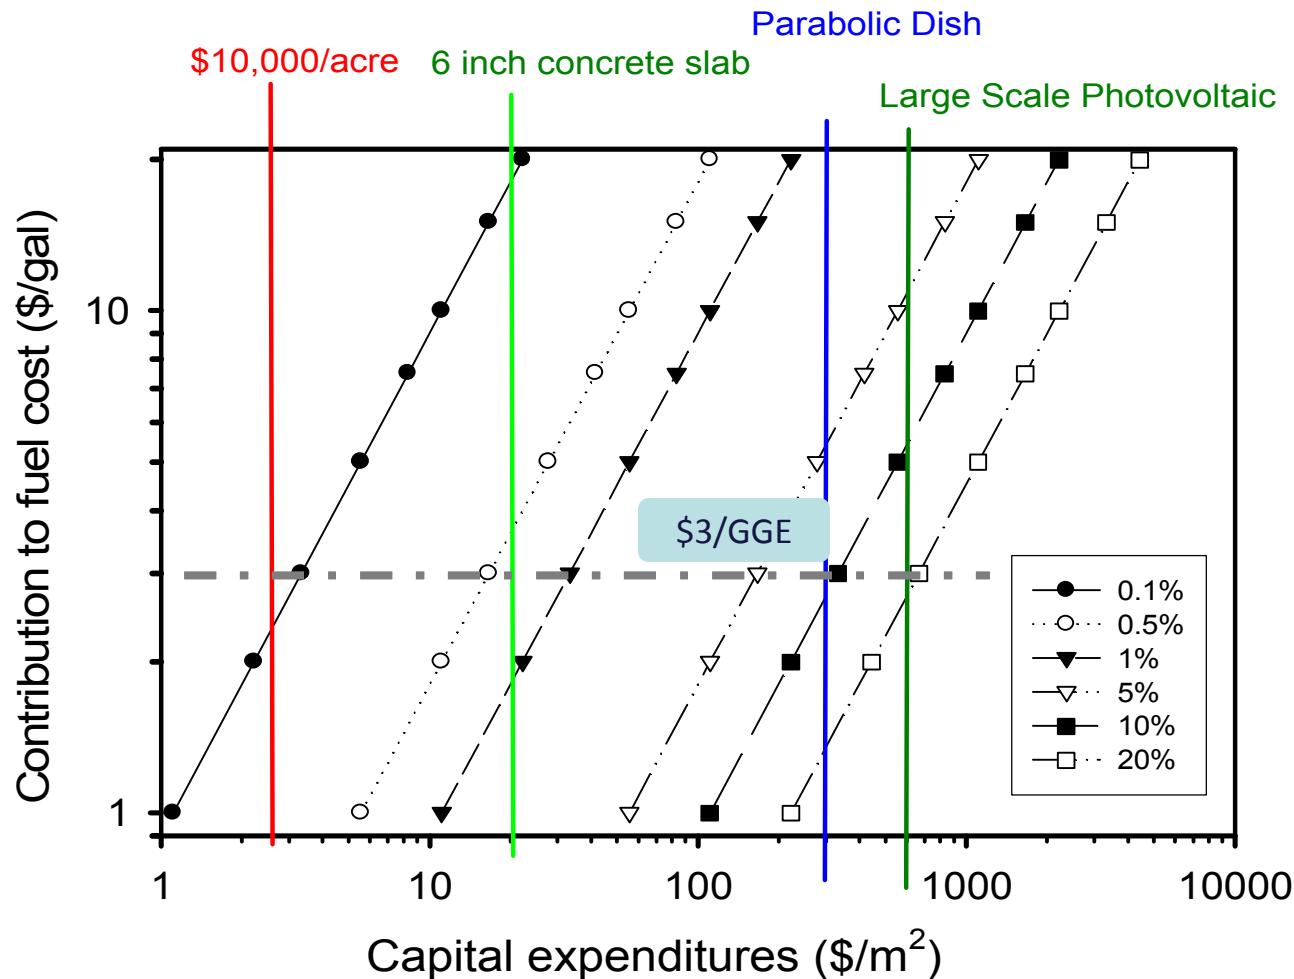

Assumptions: GGE = 36 kWh, Solar Resource = 2600 kWh/m²/yr,
Favorable Financing (5% interest, 30 years)

Cost Breakdown For \$5/GGE; S2P 12.5% LCE

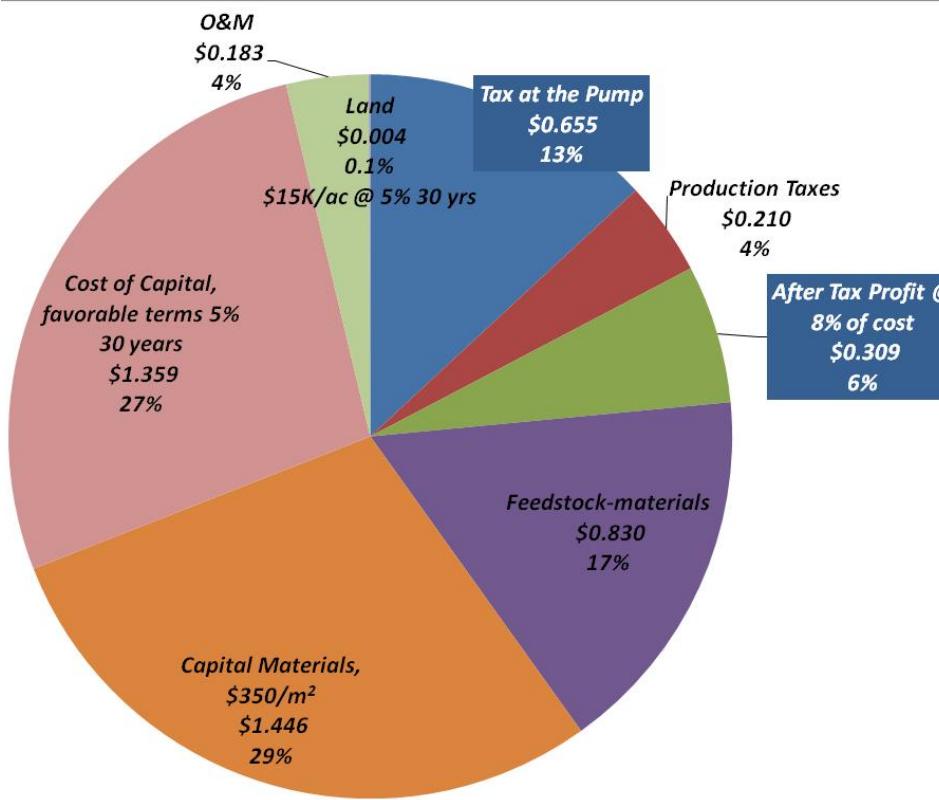

- Costs for S2P are in the **ballpark of viability**
- Learning curve will reduce the most expensive contributions
- Very sensitive to the cost of capital recovery