

Exceptional service in the national interest



Recent Developments in Disposal of High-Level Radioactive Waste and Spent Nuclear Fuel

Peter Swift
Senior Scientist
Sandia National Laboratories

Interagency Steering Committee on Performance and Risk Assessment Community of Practice
Annual Technical Exchange Meeting
Albuquerque NM
October 17, 2017

Outline

- Status of the US program
- Options for geologic disposal in the US and other nations





Spent Nuclear Fuel and High-Level Radioactive Waste Disposal: The Goal

Deep geologic disposal has been planned since the 1950s

“There has been, for decades, a worldwide consensus in the nuclear technical community for disposal through geological isolation of high-level waste (HLW), including spent nuclear fuel (SNF).”

“Geological disposal remains the only long-term solution available.”




National Research Council, 2001

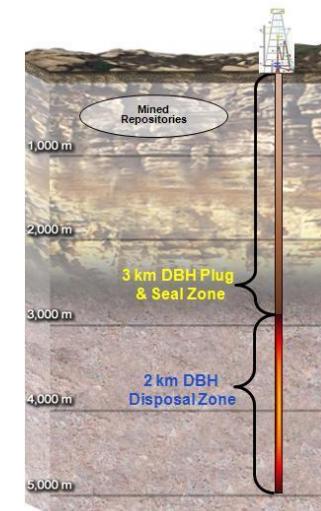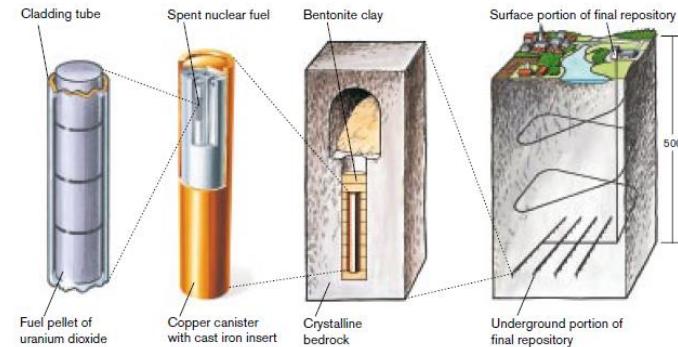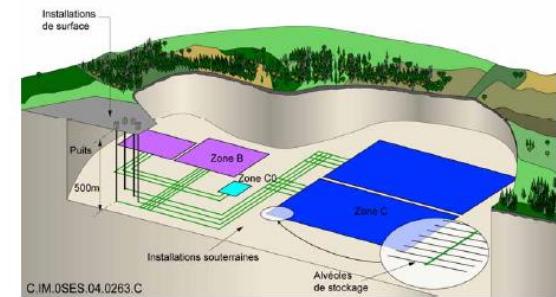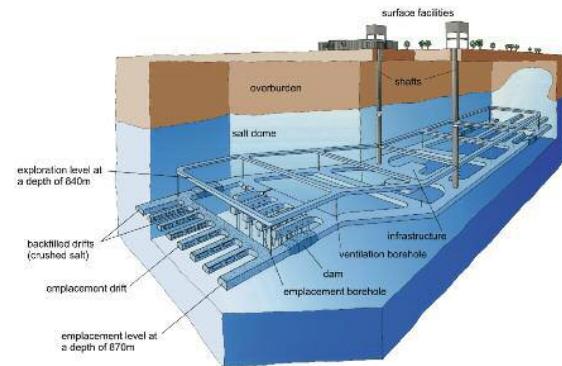

Geologic Disposal in the US: The Reality


Commercial Spent Nuclear Fuel (SNF) is in Temporary Storage at 75 Reactor Sites in 33 States

- Pool storage provides cooling and shielding of radiation
 - Primary risks for spent fuel pools are associated with loss of the cooling and shielding water
- US pools have reached capacity limits and utilities have implemented dry storage
- Some facilities have shutdown and all that remains is “stranded” fuel at an independent spent fuel storage installation (ISFSI)

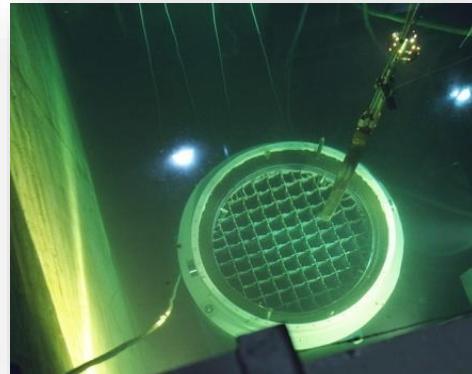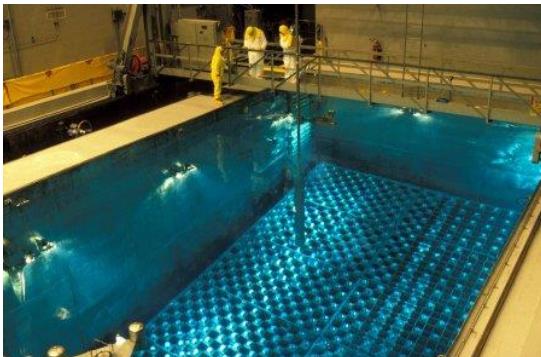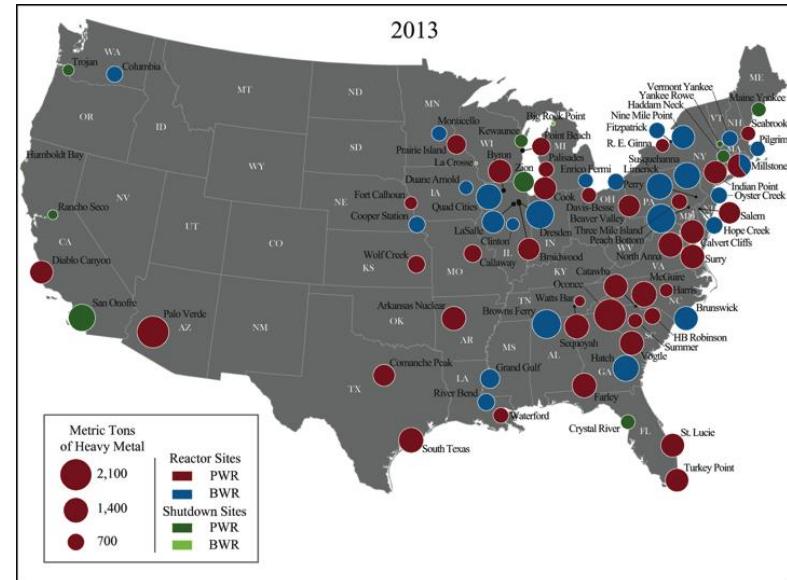


Geologic Disposal in the US: The Reality

*DOE-managed SNF and High-Level Radioactive Waste (HLW) is in
Temporary Storage at 5 Sites in 5 States*

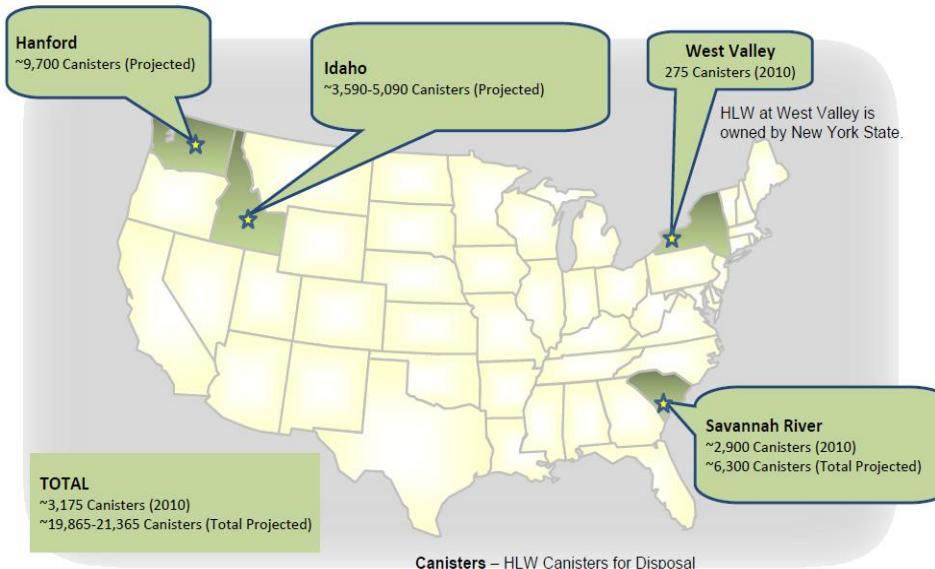


DOE-Managed HLW
~20,000 total canisters
(projected)



DOE-Managed SNF
~2,458 Metric Tons




Source: Marcinowski, F., "Overview of DOE's Spent Nuclear Fuel and High-Level Waste," presentation to the Blue Ribbon Commission on America's Nuclear Future, March 25, 2010, Washington DC.

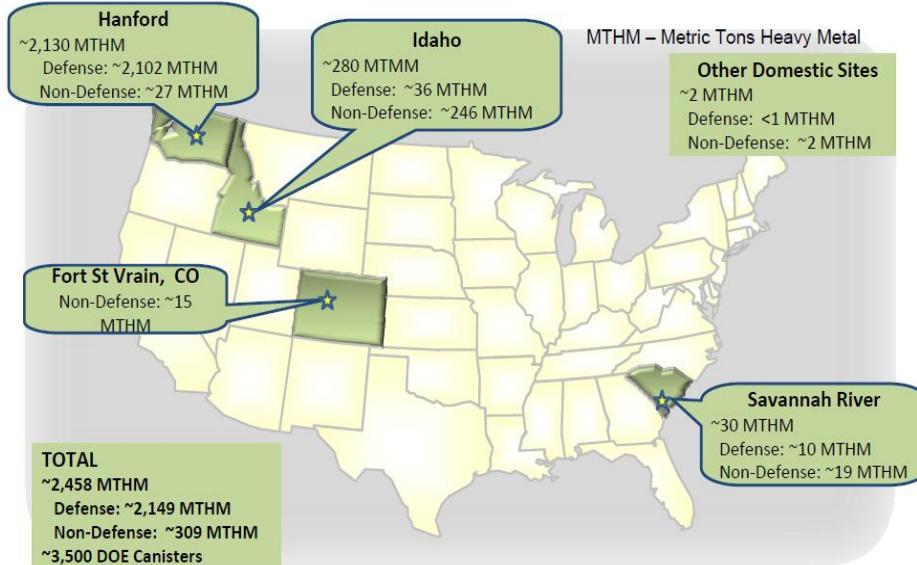


Dry Storage Systems for Spent Nuclear Fuel

- Dual purpose canister (DPC)
 - A canister that is certified for both storage and transportation of spent nuclear fuel
- Dry cask/canister storage systems
 - The most common type of dry storage cask system is the vertical cask/canister system shown above, in which the inner stainless steel canister is removed from the storage overpack before being placed in a shielded transportation cask for transport
 - Can be constructed both above and below grade
 - Horizontal bunker-type systems and vaults are also in use
 - Some older fuel is also stored as “bare fuel” in casks with bolted lids; few sites continue to load these systems
 - Multiple vendors provide NRC-certified dry storage systems to utilities

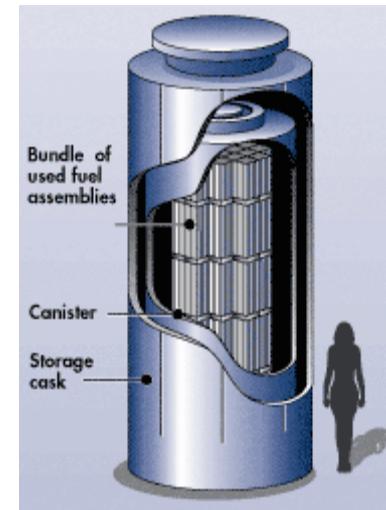


US Projections of Spent Nuclear Fuel (SNF) and High-Level Radioactive Waste (HLW)

Projection assumes full license renewals and no new reactor construction or disposal

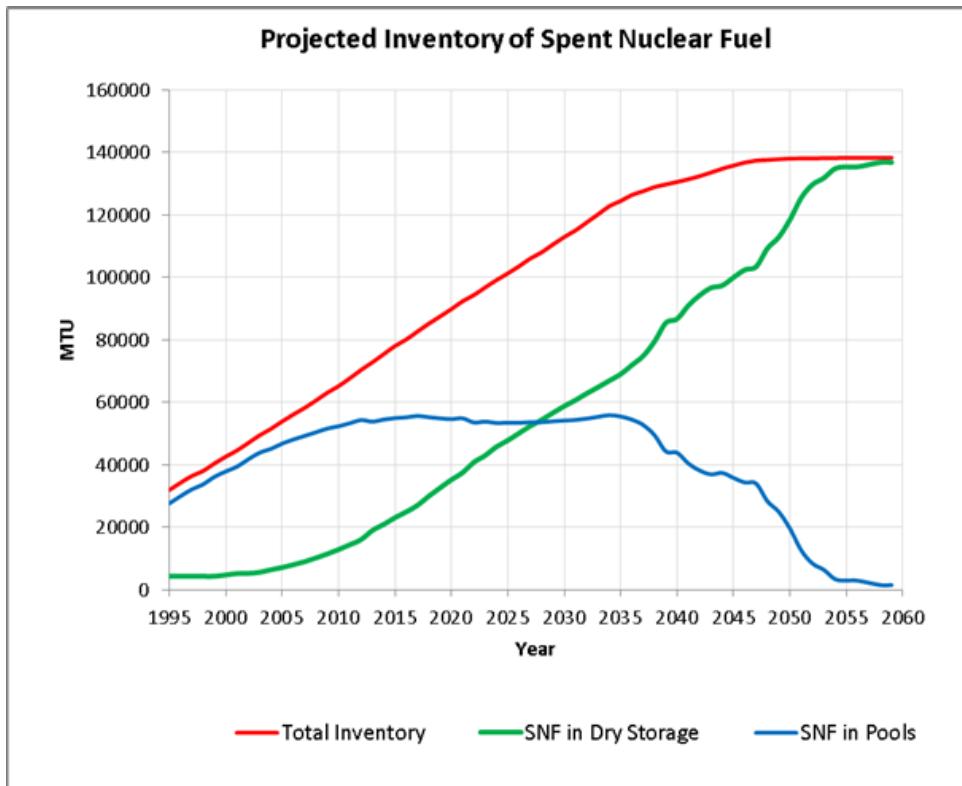

Projected Volumes of SNF and HLW in 2048

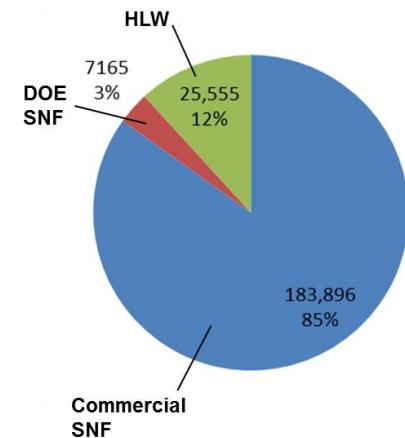

Volumes shown in m³, assuming constant rate of nuclear power generation and packaging of future commercial SNF in existing designs of dual-purpose canisters

Approx. 80,150 MTHM (metric tons heavy metal) of SNF in storage in the US today

- 25,400 MTHM in dry storage at reactor sites, in approximately 2,080 cask/canister systems
- Balance in pools, mainly at reactors

Approx. 2200 MTHM of SNF generated nationwide each year

- Approximately 160 new dry storage canisters are loaded each year in the US

Current Storage and Transportation R&D

Spent fuel integrity

- Current tests and analyses indicate that spent fuel is more robust than was previously thought
- The *DOE/EPRI High Burnup Confirmatory Data Project* will obtain data after 10 years of dry storage to confirm current test and analysis results from parallel hot cell testing of “sister rods”

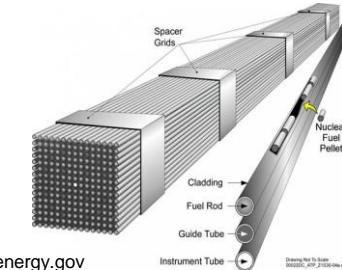


Photo: energy.gov

Storage system integrity

- *Stress corrosion cracking of canisters may be a concern in some parts of the country, and more work is needed in analysis and detection*
- *Monitoring and Aging Management practices at storage sites will be important to confirm storage system performance during extended service*


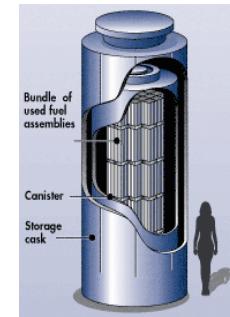


Photo: nrc.gov

Spent fuel transportability following extended storage

- *The realistic stresses fuel experiences due to vibration and shock during normal transportation are far below yield and fatigue limits for cladding*

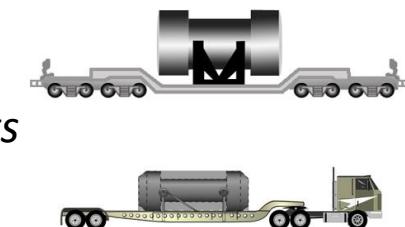

Energy.gov/pictures

Observations on Current Practice

- Current practice is safe and secure
 - Extending current practice raises data needs; e.g., canister integrity, fuel integrity, aging management practices
- Current practice is optimized for reactor site operations
 - Occupational dose
 - Operational efficiency of the reactor
 - Cost effective on-site safety
- Current practice is not optimized for transportation or disposal
 - Thermal load, package size, and package design

Placing spent fuel in dry storage in dual purpose canisters (DPCs) commits the US to some combination of three options

- 1) Repackaging spent fuel in the future
- 2) Constructing one or more repositories that can accommodate DPCs
- 3) Storing spent fuel at surface facilities indefinitely, repackaging as needed

Each option is technically feasible, but none is what was originally planned





Spent Nuclear Fuel and High-Level Radioactive Waste Disposal: The Goal

Deep geologic disposal has been planned since the 1950s

“There has been, for decades, a worldwide consensus in the nuclear technical community for disposal through geological isolation of high-level waste (HLW), including spent nuclear fuel (SNF).”

“Geological disposal remains the only long-term solution available.”

National Research Council, 2001

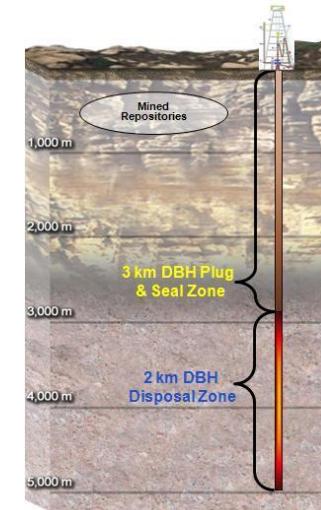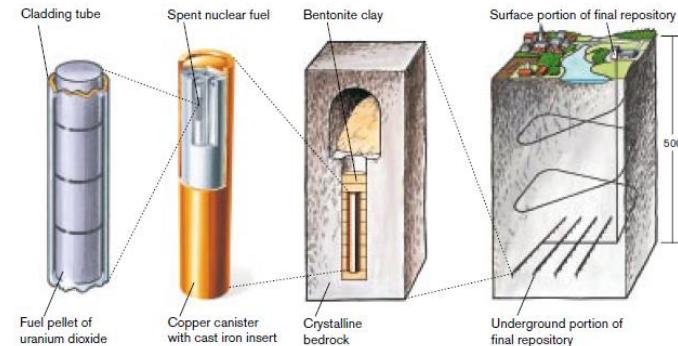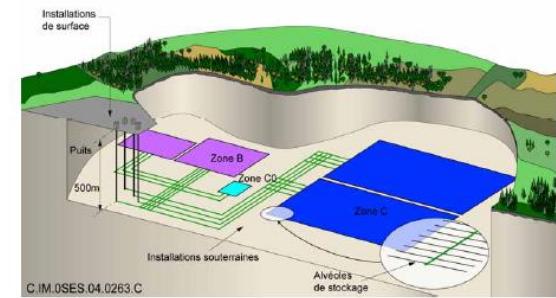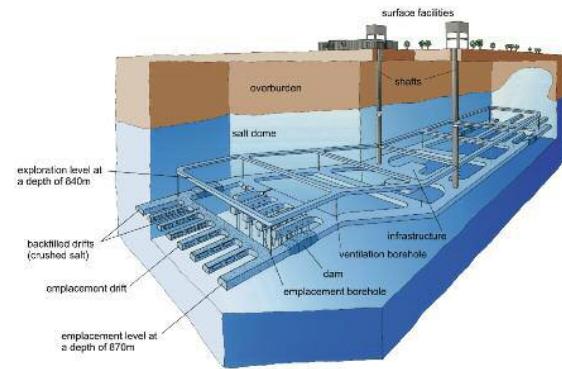

After Decades of Repository Science and Engineering, What do We Have?

- Repository programs in multiple nations
 - Belgium, Canada, China, Czech Republic, Finland, France, Germany, Japan, Korea, Russia, Spain, Sweden, Switzerland, United Kingdom, United States ...
- Detailed safety assessments have been published for multiple disposal concepts, e.g.,
 - Switzerland: Opalinus Clay, 2002
 - France: Dossier 2005 Argile, 2005
 - USA: Yucca Mountain License Application, 2008
 - Sweden: Forsmark site in granite, 2011
 - Finland: Safety Case for Olkiluoto, 2012
- One deep mined repository has been in operation for transuranic waste (the Waste Isolation Pilot Plant) since 1999

First order conclusions

There are multiple approaches to achieving safe geologic isolation

Estimated long-term doses are very low for each of the disposal concepts that have been analyzed in detail


Safe isolation can be achieved for both spent nuclear fuel and HLW

Status of Deep Geologic Disposal Programs World-Wide




Nation	Host Rock	Status
Finland	Granitic Gneiss	Construction license granted 2015
Sweden	Granite	License application submitted 2011
France	Argillite	Disposal operations planned for 2025
Canada	Granite, sedimentary rock	Candidate sites being identified
China	Granite	Repository proposed in 2050
Russia	Granite, gneiss	Licensing planned for 2029
Germany	Salt, other	Uncertain
USA	Salt (transuranic waste at the Waste Isolation Pilot Plant) Volcanic Tuff (Yucca Mountain)	WIPP: operating Yucca Mountain: suspended
Others: Belgium (clay), Korea (granite), Japan (sedimentary rock, granite), UK (uncertain), Spain (uncertain), Switzerland (clay), Czech Republic (granitic rock), others including all nations with nuclear power.		
Source: Information from Faybishenko et al., 2016		

How does Deep Geologic Disposal Achieve Safe Isolation?

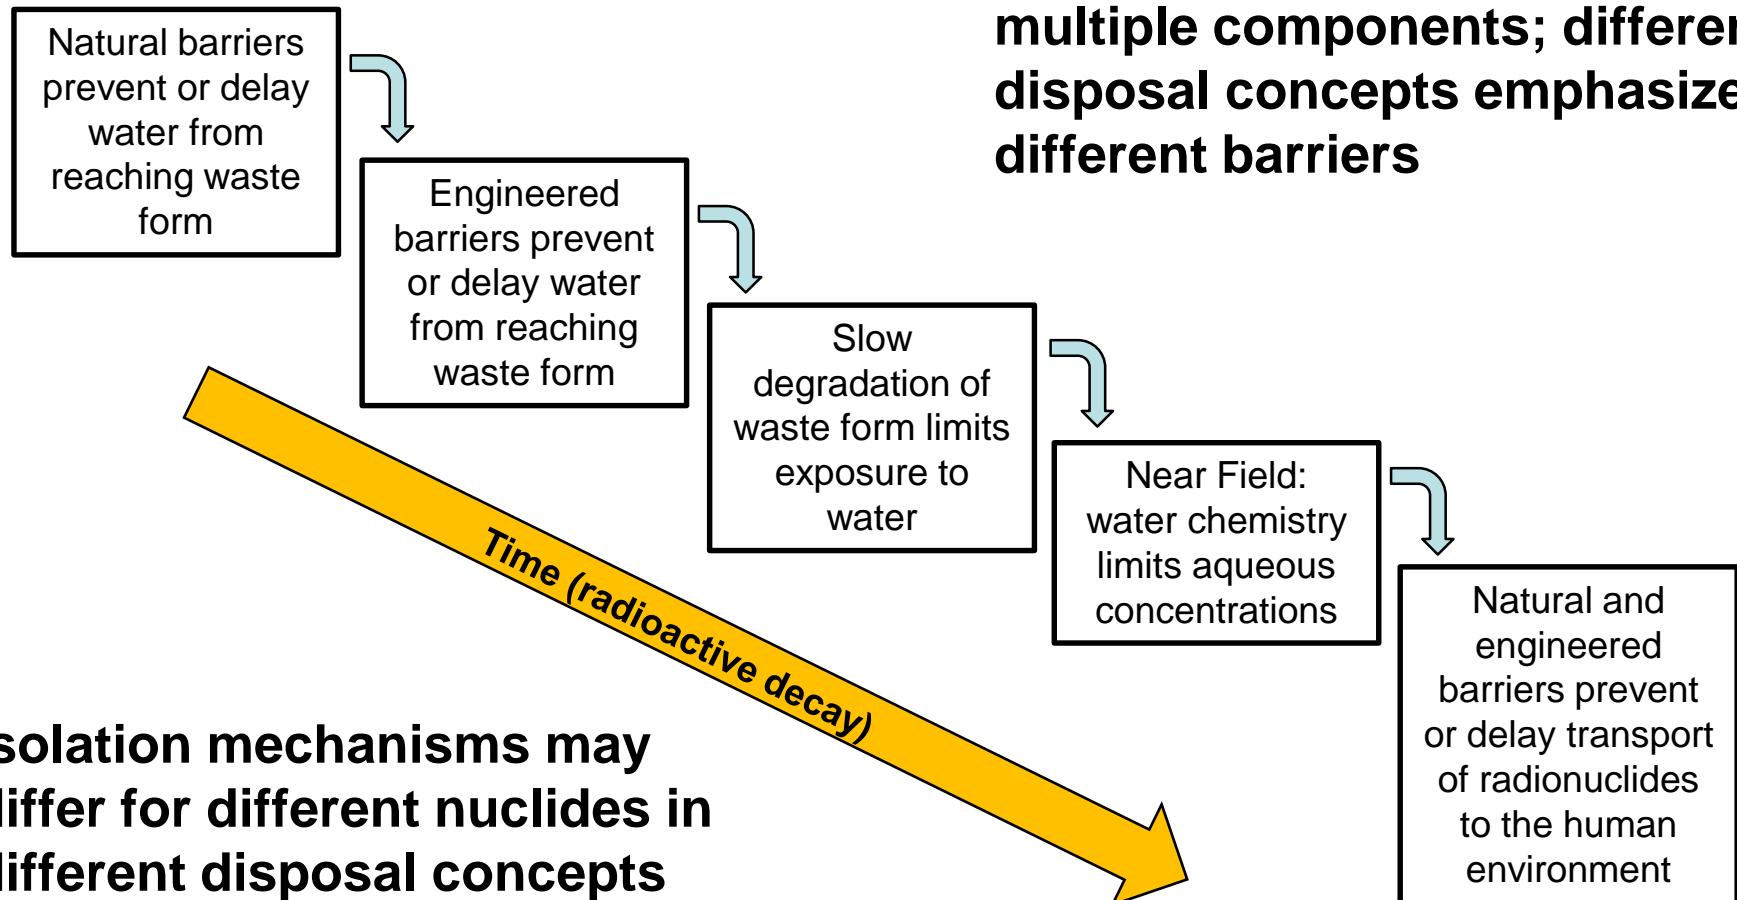


Commercial Spent Nuclear Fuel Decay

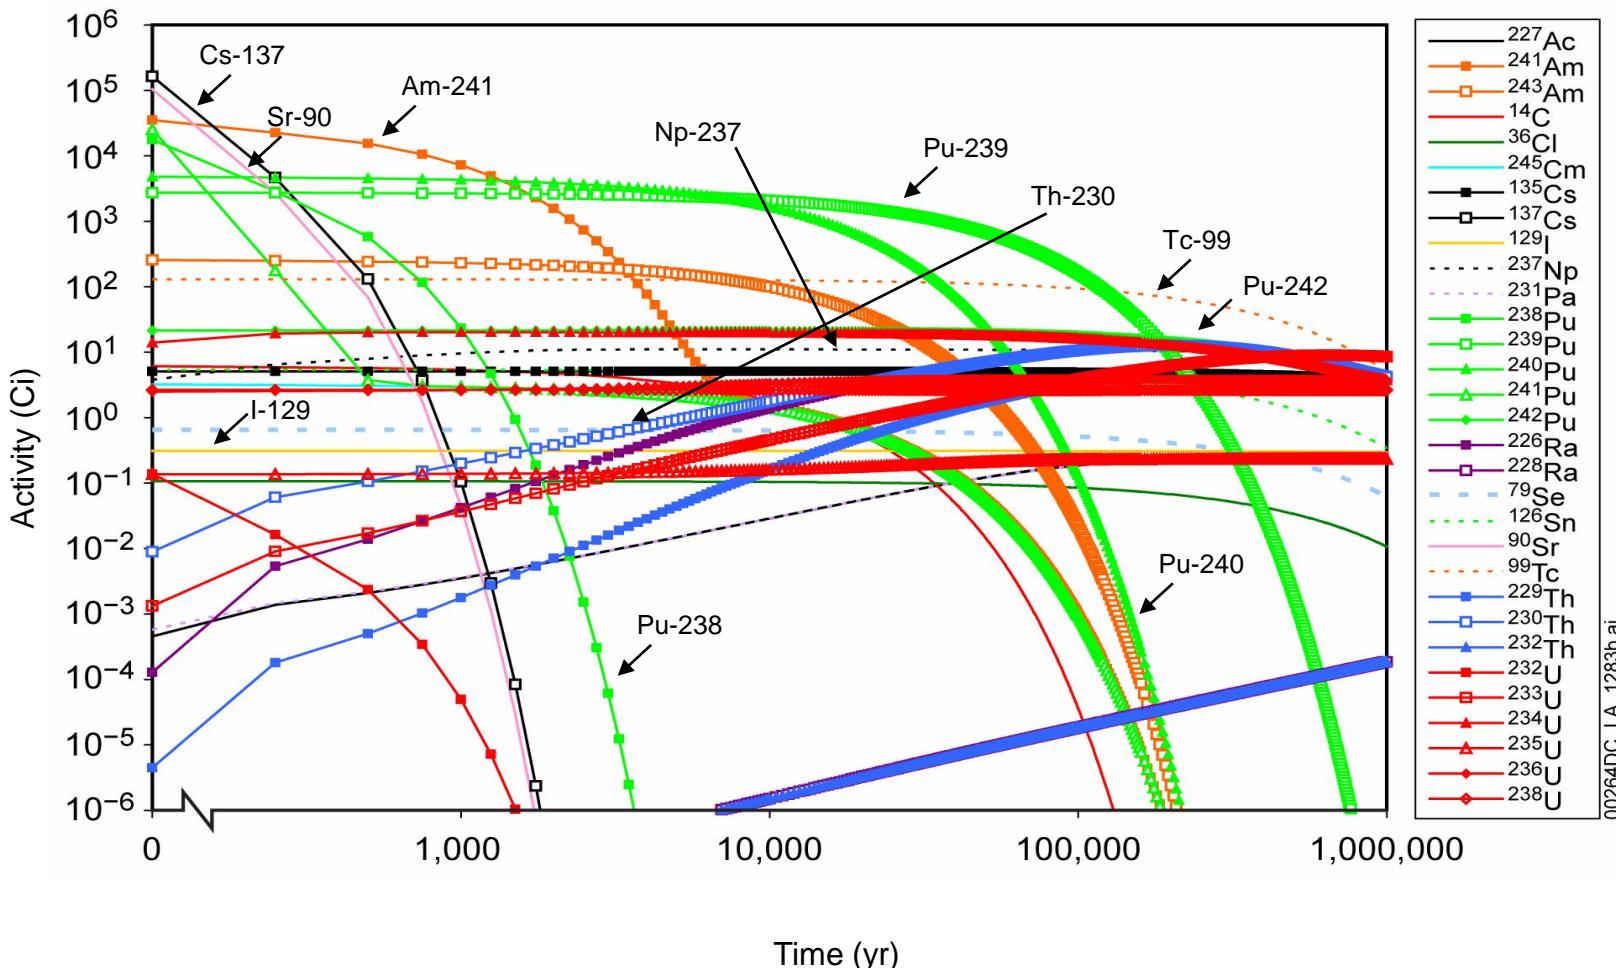

DOE/RW-0573 Rev 0, Figure 2.3.7-11, inventory decay shown for a single representative Yucca Mountain spent fuel waste package, as used in the Yucca Mountain License Application, time shown in years after 2017.


Contributors to Total Dose: Meuse / Haute Marne Site (France)

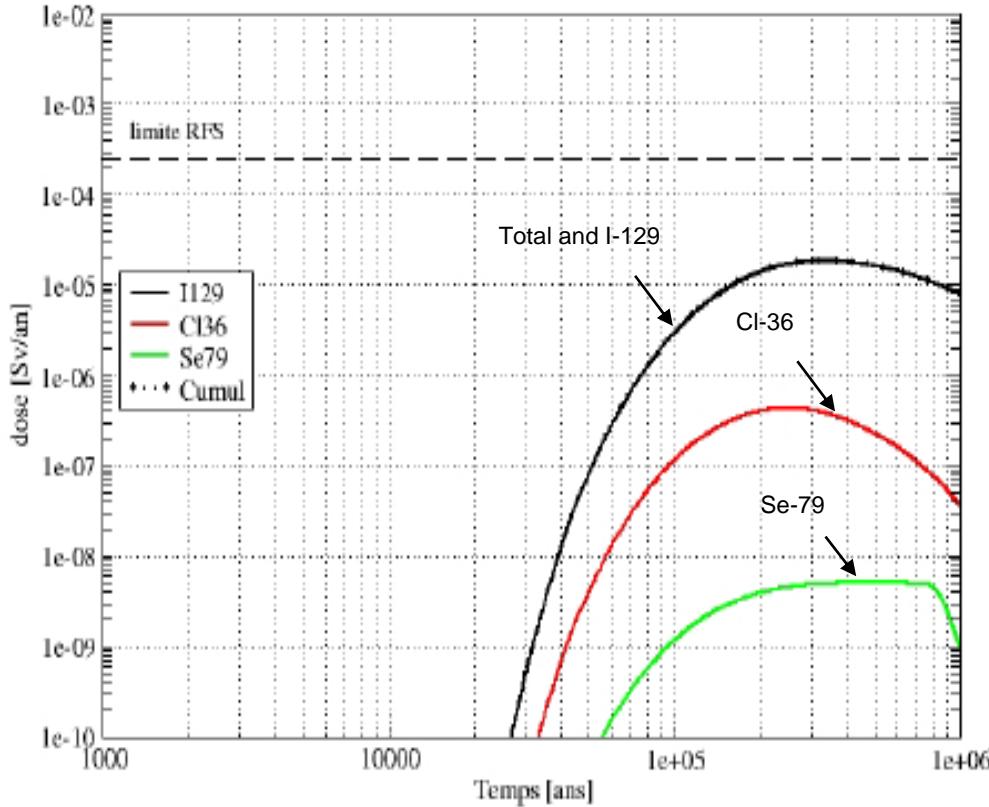

Diffusion-dominated
disposal concept: Argillite


I-129 is the dominant contributor at peak dose

Examples shown for direct disposal of spent fuel (left) and vitrified waste (below)

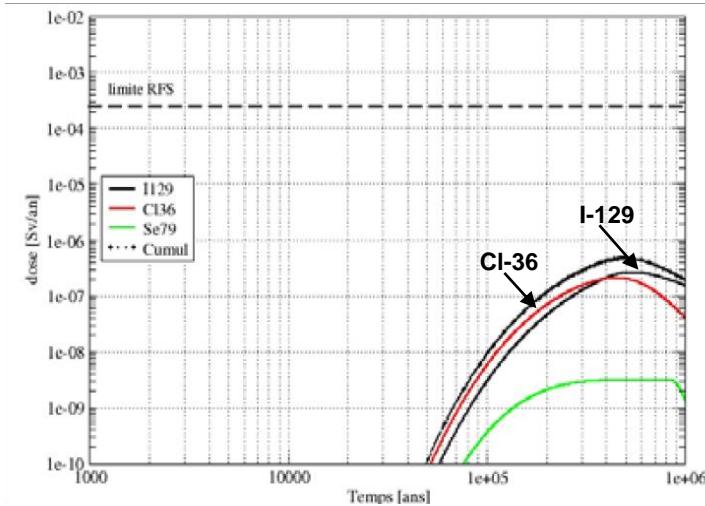

ANDRA 2005, Dossier 2005: Argile. Tome: Evaluation of the Feasibility of a Geological Repository in an Argillaceous Formation, Figure 5.5-18, SEN million year model, CU1 spent nuclear fuel and Figure 5.5-22, SEN million year model, C1+C2 vitrified waste

Contributors to Total Dose: Forsmark site (Sweden)

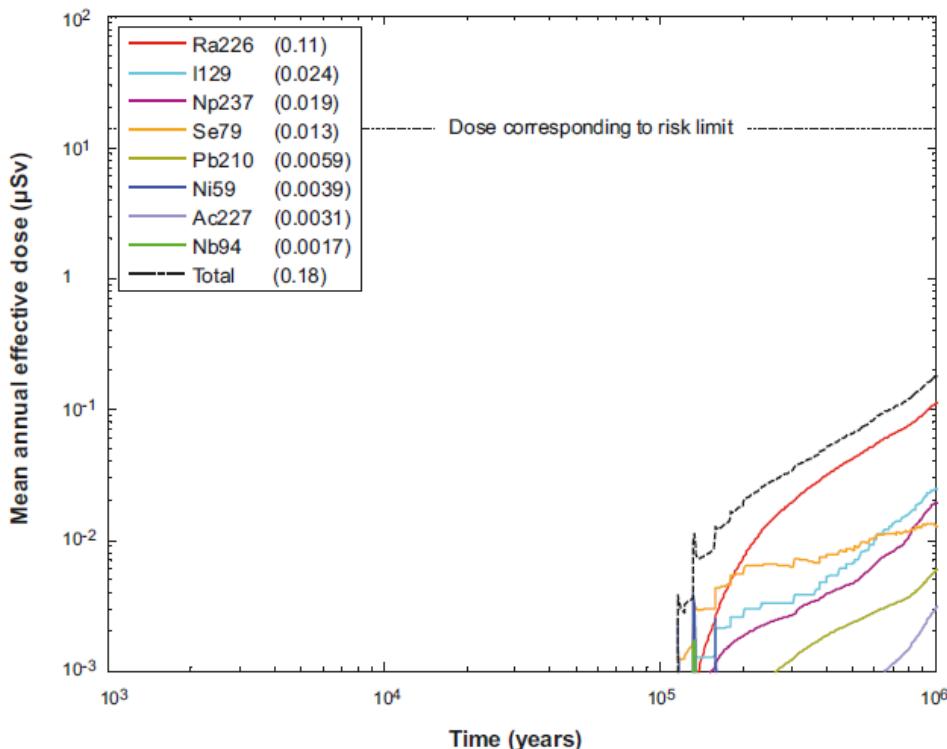

Disposal concept with
advection transport in the far-
field: Fractured Granite



*Long-term peak dose
dominated by Ra-226*

*Once corrosion failure
occurs, dose is primarily
controlled by fuel
dissolution and diffusion
through buffer rather than
far-field retardation*

Figure 13-18. Far-field mean annual effective dose for the same case as in Figure 13-17. The legends are sorted according to descending peak mean annual effective dose over one million years (given in brackets in μSv).

SKB 2011, Long-term safety for the final repository for
spent nuclear fuel at Forsmark, Technical Report TR-11-01


Contributors to Total Dose: Yucca Mountain

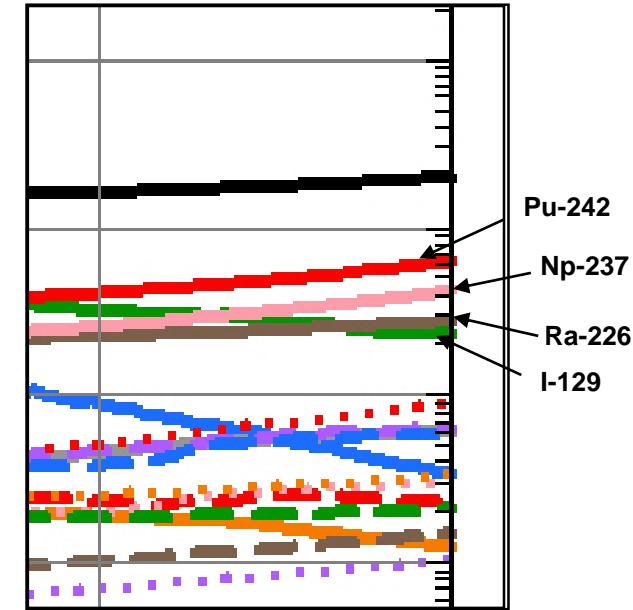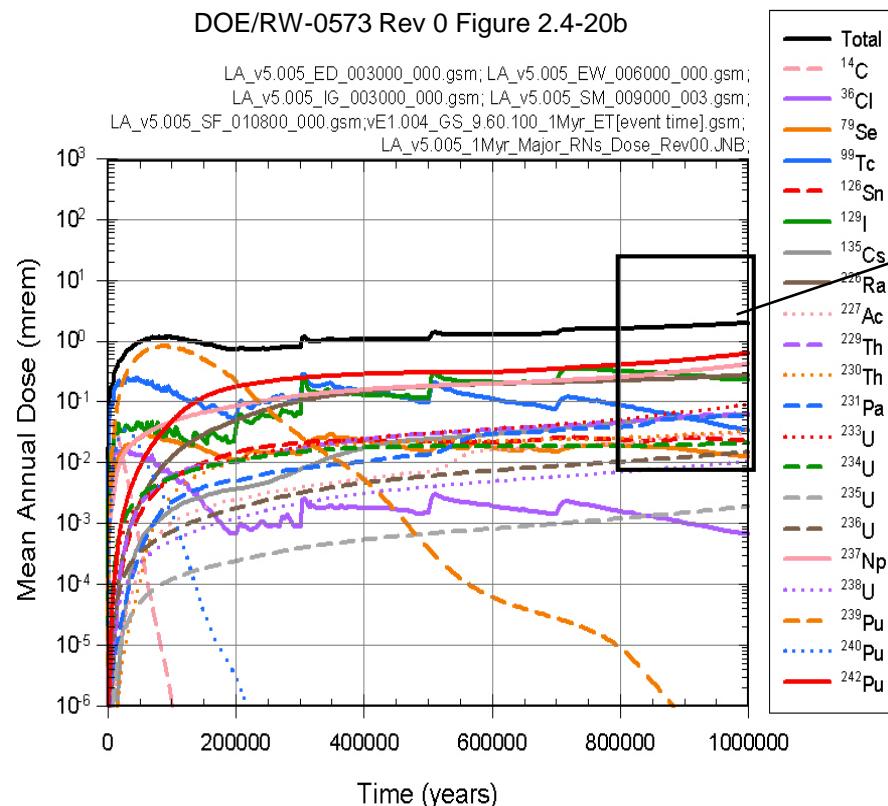

Disposal concept with an oxidizing environment and advective transport in the far-field: Fractured Tuff

Actinides are significant contributors to dose; I-129 is approx. 1/10th of total

Long-term Dose Estimates: Canada

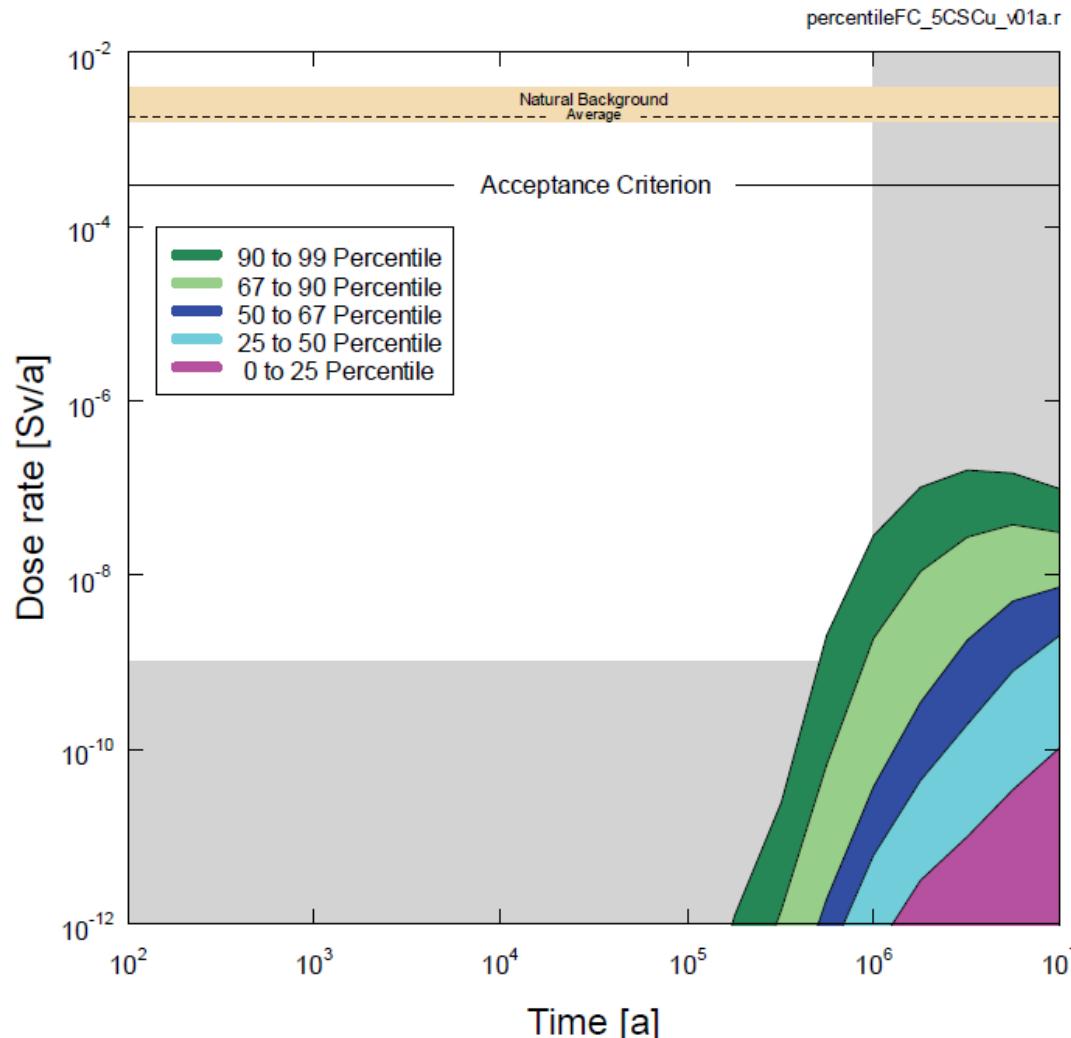

Diffusion-dominated disposal concept:
spent fuel disposal in carbonate host rock

Long-lived copper waste packages and long diffusive transport path

Major contributor to peak dose is I-129

NWMO 2013, Adaptive Phased Management: Postclosure Safety Assessment of a Used Fuel Repository in Sedimentary Rock, NWMO TR-2013-07, Figure 7-87.

Conclusions

- Deep geologic disposal remains the preferred approach for permanent isolation of SNF and HLW
- Interim storage of commercial SNF occurs at all operating reactor sites
 - The existing inventory of SNF exceeds the legal capacity of the proposed Yucca Mountain repository
 - Interim storage will continue for decades longer than originally envisioned
- Interim storage of DOE-managed SNF and HLW continues at multiple sites
- Multiple geologic disposal options are technically feasible, including the proposed site at Yucca Mountain, Nevada

References and selected bibliography

- ANDRA (Agence nationale pour la gestion des déchets radioactifs), 2005. Dossier 2005: Argile. Tome: Safety Evaluation of a Geological Repository (English translation: original documentation written in French remains ultimately the reference documentation).
- Blue Ribbon Commission on America's Nuclear Future, 2012. Report to the Secretary of Energy, 158 p.
- Carter LJ, 1987. Nuclear imperatives and public trust: dealing with radioactive waste, Resources for the Future, Inc. Baltimore, MD: John Hopkins University Press.
- Faybishenko, B., Birkholzer, J., Sassani, D., and Swift, P., 2016. International Approaches for Deep Geological Disposal of Nuclear Waste: Geological Challenges in Radioactive Waste Isolation, Fifth Worldwide Review, LBNL-1006984, Lawrence Berkeley National Laboratory.
- Freeze, G.A., and J.H. Lee, 2011, A Simplified Performance Assessment (PA) Model for Radioactive Waste Disposal Alternatives, proceedings of the 2011 International High-Level Radioactive Waste Management Conference, April 10-14, 2011, Albuquerque, NM.
- Hardin, E., J. Blink, H. Greenberg M. Sutton, M. Fratoni, J. Carter, M. Dupont, R. Howard. 2011. Generic Repository Design Concepts and Thermal Analysis (FY11). FCRD-USED-2011-0002143 Rev. 2. U.S. Department of Energy, Office of Used Nuclear Fuel Disposition, December, 2011.
- Hardin, E., L. Price, E. Kalinina, T. Hadgu, A. Ilgen, C Bryan, J. Scaglione, K. Banerjee, J. Clarity, R. Jubin, V. Sobes, R. Howard, J. Carter, T. Severynse, and F. Perry, 2015. Summary of Investigations on Technical Feasibility of Direct Disposal of Dual-Purpose Canisters, FCRD-UFD-2015-000129 Rev 0, U.S. Department of Energy, Office of Used Nuclear Fuel Disposition.
- Helton, JC and Marietta, MG (eds.), 2000. "The 1996 Performance Assessment for the Waste Isolation Pilot Plant," special issue of Reliability Engineering and System Safety v. 69, p. 1-454.
- Helton, JC, Hansen, CW, and Swift, PN (eds.), 2014, "Performance Assessment for the Proposed High-Level Radioactive Waste Repository at Yucca Mountain, NV," special issue of Reliability Engineering and System Safety, v. 122,p. 1-456.
- National Research Council/ National Academies, 1957. The disposal of radioactive waste on land. Publication 519. Washington, DC: National Academy Press.

References and selected bibliography (cont.)

- National Research Council / National Academies, 2001. Disposition of High-Level Waste and Spent Nuclear Fuel: The Continuing Societal and Technical Challenges, Washington, DC, National Academy Press.
- NWMO (Nuclear Waste Management Organization), 2013. Adaptive Phased Management: Postclosure Safety Assessment of a Used Fuel Repository in Sedimentary Rock, NWMO TR-2013-07.
- Posiva Oy, 2012, Safety Case for the Disposal of Spent Nuclear Fuel at Olkiluoto—Synthesis 2012, POSVIA 2012-12.
- SKB (Svensk Kärnbränslehantering AB [Swedish Nuclear Fuel and Waste Management Co.]), 2011. Long-Term Safety for the Final Repository for Spent Nuclear Fuel at Forsmark: Main Report of the SR-Site Project, Technical Report TR-11-01.
- Swift, P.N., and W.M. Nutt, 2010. “Applying Insights from Repository Safety Assessments to Evaluating Impacts of Partitioning and Transmutation,” Proceedings of the 11th OECD-NEA Information Exchange Meeting on Actinide and Fission Product Partitioning and Transmutation, San Francisco, CA, November 1-4, 2010.
- US DOE (United States Department of Energy) 2008. Yucca Mountain Repository License Application, DOE/RW-0573, Rev. 1.
- U.S. Nuclear Regulatory Commission (NRC), 2014. Safety Evaluation Report Related to Disposal of High-Level Radioactive Wastes in a Geologic Repository at Yucca Mountain, Nevada; Volume 3, Repository Safety after Permanent Closure. NUREG-1949, Vol. 3.
- U.S. Nuclear Regulatory Commission (NRC), 2015. Safety Evaluation Report Related to Disposal of High-Level Radioactive Wastes in a Geologic Repository at Yucca Mountain, Nevada; Volume 2, Repository Safety Before Permanent Closure, and Volume 5, Proposed Conditions on the Construction Authorization and Probable Subjects of License Specifications. NUREG-1949, Vol. 2 and Vol. 5.
- Wagner, J.C., J.L. Peterson, D.E. Mueller, J.C. Gehin, A. Worrall, T. Taiwo, M. Nutt, M.A. Williamson, M. Todosow, R. Wigeland, W. Halsey, R. Omberg, P.N. Swift, and J.T. Carter, 2012, Categorization of Used Nuclear Fuel Inventory in Support of a Comprehensive National Nuclear Fuel Cycle Strategy, ORNL/TM-2012/308, FCRD-FCT-2012-000232, Oak Ridge National Laboratory, Oak Ridge, TN.
- Walker JS, 2009. The Road to Yucca Mountain, Berkeley, CA: University of California Press.
- Yardley, B.W.D., Ewing, R.C., and Whittleston, R.A. (eds.), 2016. “Deep-mined Geological Disposal of Radioactive Waste,” Elements v 12, n. 4.