

**UNREVIEWED DISPOSAL QUESTION EVALUATION: Disposal
of the Idaho National Laboratory Test Reactor Area Foils at
the Area 5 Radioactive Waste Management Site, Nevada
National Security Site, Nye County, Nevada**

March 2019

Prepared by

**Mission Support and Test Services, LLC
Las Vegas, Nevada**

Prepared for

**U.S. Department of Energy
National Nuclear Security Administration
Nevada Field Office
Under Contract Number DE-NA0003624**

DISCLAIMER

Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors.

Available for sale to the public, in paper, from:

U.S. Department of Commerce
National Technical Information Service
5301 Shawnee Road
Alexandria, VA 22312
Phone: (800) 553-6847
Fax: (703) 605-6900
E-mail: info@ntis.gov; customerservice@ntis.gov
Online Ordering: <https://classic.ntis.gov/search>

Available electronically at <http://www.osti.gov>

Available, in paper, for a processing fee to the U.S. Department of Energy and its contractors from:

U.S. Department of Energy
Office of Scientific and Technical Information
P.O. Box 62
Oak Ridge, TN 37831-0062
Phone: (865) 576-8401
Fax: (865) 576-5728
E-mail: reports@osti.gov

UNREVIEWED DISPOSAL QUESTION EVALUATION: Disposal of the Idaho National Laboratory Test Reactor Area Foils at the Area 5 Radioactive Waste Management Site, Nevada National Security Site, Nye County, Nevada

Prepared by: _____ Date: 3/6/2019
Dawn Reed
Senior Scientist

Reviewed by: _____ Date: 3/6/2019
Gregory Shott
Principal Scientist

Approved by: _____ Date: 3/6/2019
Gregory Shott
Principal Scientist

This Page Intentionally Left Blank

Table of Contents

Acronyms and Abbreviations	v
1.0 Executive Summary	1
2.0 Introduction.....	1
3.0 Analysis of Performance.....	1
3.1 Waste Description	1
3.2 Performance Assessment Modeling.....	3
4.0 Results and Interpretation	3
4.1 Performance Assessment Results.....	3
4.1.1 Air Pathway Results.....	3
4.1.2 All-Pathways Results.....	5
4.1.3 Intruder Results	7
4.1.4 ^{222}Rn Flux Density Results	8
5.0 Conclusions.....	9
6.0 References.....	11

This Page Intentionally Left Blank

Acronyms and Abbreviations

BN	Bechtel Nevada
Bq	becquerel
Bq m ⁻³	becquerel per cubic meter
Bq m ⁻² s ⁻¹	becquerel per square meter per second
DOE	U.S. Department of Energy
FY	(Federal) fiscal year
GM	geometric mean
GSD	geometric standard deviation
INL	Idaho National Laboratory
LHS	Latin hypercube sample
m	meter(s)
m ³	cubic meter(s)
mSv	millisievert(s)
NNSA/NFO	U.S. Department of Energy, National Nuclear Security Administration Nevada Field Office
NNSS	Nevada National Security Site
PA	performance assessment
Rn	radon
RWMS	Radioactive Waste Management Site
SLB	shallow land burial
SOFs	sum of fractions
TED	total effective dose
Th	thorium
TRA	Test Reactor Area
UDQE	unreviewed disposal question evaluation
U	uranium
WAC	Waste Acceptance Criteria

This Page Intentionally Left Blank

1.0 Executive Summary

This Unreviewed Disposal Question Evaluation (UDQE) assesses whether the Idaho National Laboratory (INL), Test Reactor Area (TRA) Foils waste stream (INEL198406QR0, Revision 0 [INL 2019]) is suitable for shallow land burial (SLB) at the Area 5 Radioactive Waste Management Site (RWMS) on the Nevada National Security Site (NNSS). Disposal of the INL TRA Foils waste stream meets all the performance objectives contained in U.S. Department of Energy (DOE) Manual DOE M 435.1-1, *Radioactive Waste Management Manual*, Chapter IV, Section P (DOE 2011). The INL TRA Foils waste stream is recommended for acceptance without conditions.

2.0 Introduction

This UDQE addresses disposal of the INL TRA Foils waste stream at the Area 5 RWMS on the NNSS. The waste stream requires a UDQE because the thorium-229 (^{229}Th), ^{230}Th , uranium-232 (^{232}U), ^{233}U , and ^{234}U representative concentrations exceed the NNSS Waste Acceptance Criteria (WAC) Action Level, and the waste stream sum of fractions (SOFs) is greater than 1.0 (U.S. Department of Energy, National Nuclear Security Administration Nevada Field Office [NNSA/NFO] 2016).

3.0 Analysis of Performance

The UDQE addresses the long-term performance of the Area 5 RWMS with the INL TRA Foils waste stream disposed in a SLB disposal cell.

3.1 Waste Description

This waste is unirradiated ^{233}U scrap foils from the Bettis Atomic Power Laboratory (INL 2019). The waste consists of a copper foil, an aluminum foil, empty glass bottle, a small aluminum block, and two small stainless steel coupons.

The waste stream radionuclide activities are assumed to be lognormally distributed. The geometric mean (GM) of the distribution is assumed to be the product of the representative activity concentration and the total remaining volume, 1.4 cubic meters (m^3), as reported on the waste profile (INL 2019, Section D.5) (Table 1).

Table 1. INL TRA Foils Activity Concentration and Total Activity at the Time of Disposal Assumed for Performance Assessment Modeling

Nuclide	GM* Concentration (Bq m^{-3})	95 th Percentile Concentration (Bq m^{-3})	GM Activity (Bq)	95 th Percentile Activity (Bq)	GSD**
^{241}Am	1.0E+08	3.0E+08	1.4E+08	4.2E+08	1.95
^{244}Cm	2.0E+06	6.0E+06	2.8E+06	8.4E+06	1.95
^{137}Cs	5.0E+08	2.0E+09	7.0E+08	2.8E+09	2.32
^{238}Pu	2.0E+07	5.0E+07	2.8E+07	7.0E+07	1.74
^{239}Pu	2.0E+09	6.0E+09	2.8E+09	8.4E+09	1.95
^{240}Pu	2.0E+07	4.0E+07	2.8E+07	5.6E+07	1.52
^{241}Pu	9.0E+05	3.0E+06	1.3E+06	4.2E+06	2.07
^{242}Pu	5.0E+00	2.0E+01	7.0E+00	2.8E+01	2.32

Nuclide	GM* Concentration (Bq m ⁻³)	95 th Percentile Concentration (Bq m ⁻³)	GM Activity (Bq)	95 th Percentile Activity (Bq)	GSD**
²²⁶ Ra	9.0E+05	3.0E+06	1.3E+06	4.2E+06	2.07
⁹⁰ Sr	5.0E+08	2.0E+09	7.0E+08	2.8E+09	2.32
²²⁹ Th	1.0E+11	3.0E+11	1.4E+11	4.2E+11	1.95
²³⁰ Th	8.0E+07	3.0E+08	1.1E+08	4.2E+08	2.23
²³² U	5.0E+12	2.0E+13	7.0E+12	2.8E+13	2.32
²³³ U	2.0E+13	6.0E+13	2.8E+13	8.4E+13	1.95
²³⁴ U	2.0E+11	5.0E+11	2.8E+11	7.0E+11	1.74
²³⁵ U	4.0E+06	2.0E+07	5.6E+06	2.8E+07	2.65
²³⁶ U	3.0E+07	8.0E+07	4.2E+07	1.1E+08	1.81
²³⁸ U	3.0E+06	8.0E+06	4.2E+06	1.1E+07	1.81

*GM = geometric mean

**GSD = geometric standard deviation

The high activity concentration is assumed to be the 95th percentile of the lognormal distribution. The geometric standard deviation (GSD) of the lognormal distribution is calculated as:

$$GSD = e^{\frac{\ln(UL) - \ln(GM)}{1.65}}$$

where

GSD = geometric standard deviation (dimensionless)
 UL = 95th percentile activity, Bq
 GM = geometric mean, Bq

The INL TRA Foils waste stream required a UDQE because the waste stream SOFs is greater than 1.0. Addition of the waste stream has a negligible impact on the fiscal year (FY) 2018 SLB SOFs (Table 2). The INL TRA Foils increase the inventory of the key radionuclides ²³³U and ²²⁹Th. Historical records indicate that this waste stream contains 2.2E11 Bq of ²³³U (INL 2019, Section D.2a). The UDQE inventory estimate appears conservative by several orders of magnitude.

Table 2. Expected Increase in the Area 5 RWMS SOFs and the Inventory of Radionuclides Contributing Significantly to the SOFs

Nuclide	FY 2018 SLB Disposed Geometric Mean Inventory	Geometric Mean INEL198406QR0_0 Inventory	Relative Percent Change
²²⁹ Th	7.1E+11 Bq	1.4E+11 Bq	19.7
²³⁰ Th	7.2E+11 Bq	1.1E+08 Bq	0.01
²³² U	2.7E+12 Bq	7.0E+12 Bq	259
²³³ U	1.6E+14 Bq	2.8E+13 Bq	17.5
²³⁴ U	1.8E+14 Bq	2.8E+11 Bq	0.2
SLB SOFs	0.88	0.88	0.09

3.2 Performance Assessment Modeling

The performance assessment (PA) modeling adds the inventory of the INL TRA Foils waste stream to the Area 5 RWMS v4.203b model and determines if there is a reasonable expectation of meeting the performance objectives contained in DOE Manual DOE M 435.1-1, *Radioactive Waste Management Manual*, Chapter IV, Section P (DOE 2011). The PA model evaluates the INL TRA Foils waste radionuclide activity added to the inventory of post-1988 SLB waste disposed through FY 2018. The UDQE inventory also includes the Pit 6, Pit 13, and post-1988 Greater Confinement Disposal borehole inventories. The model is run with a 2.5-meter (m) closure cover for SLB disposal units.

The mean and median model results are calculated using 5,000 Latin hypercube samples (LHS). A sample size of 5,000 provides stable estimates of the mean and 95th percentile results of the PA model (Bechtel Nevada [BN] 2006). A reasonable expectation of compliance with the performance objectives is assumed if the mean and median are less than the performance objectives for 1,000 years after closure. In every case, the mean was greater than the median. The UDQE only reports the mean results.

For comparison purposes, baseline results are obtained by running the model with the inventory disposed through FY 2018 and without the INL TRA Foils waste stream.

4.0 Results and Interpretation

4.1 Performance Assessment Results

4.1.1 Air Pathway Results

The air pathway annual total effective dose (TED) is evaluated for the resident exposure scenario using 5,000 LHS realizations. The resident exposure scenario estimates the dose to an adult residing in a home at the 100-m Area 5 RWMS boundary. The current PA documentation (BN 2006) provides a more complete description of the exposure scenario.

The annual TED is calculated for a period of 1,000 years after closure. The maximum mean and 95th percentile annual TED occur at 1,000 years and are both less than the 0.1 millisievert (mSv) limit (Table 3). Addition of the INL TRA Foils has no significant effect on the maximum resident air pathway TED at 1,000 years.

Table 3. Maximum Air Pathway Annual TED for a Resident at the Area 5 RWMS 100-m Site Boundary and the Waste Inventory Disposed through FY 2018

Scenario	Time of Maximum (years after closure)	Mean (mSv)	95 th Percentile (mSv)
Resident without INEL198406QR0_0 Waste Stream	1,000	1.8E-4	6.2E-4
Resident with INEL198406QR0_0 Waste Stream	1,000	1.9E-4	6.5E-4

Addition of the INL TRA Foils increases the air pathways mean annual TED slightly throughout the compliance period (Figure 1). The maximum relative increase, 5.4%, occurs at 1000 years.

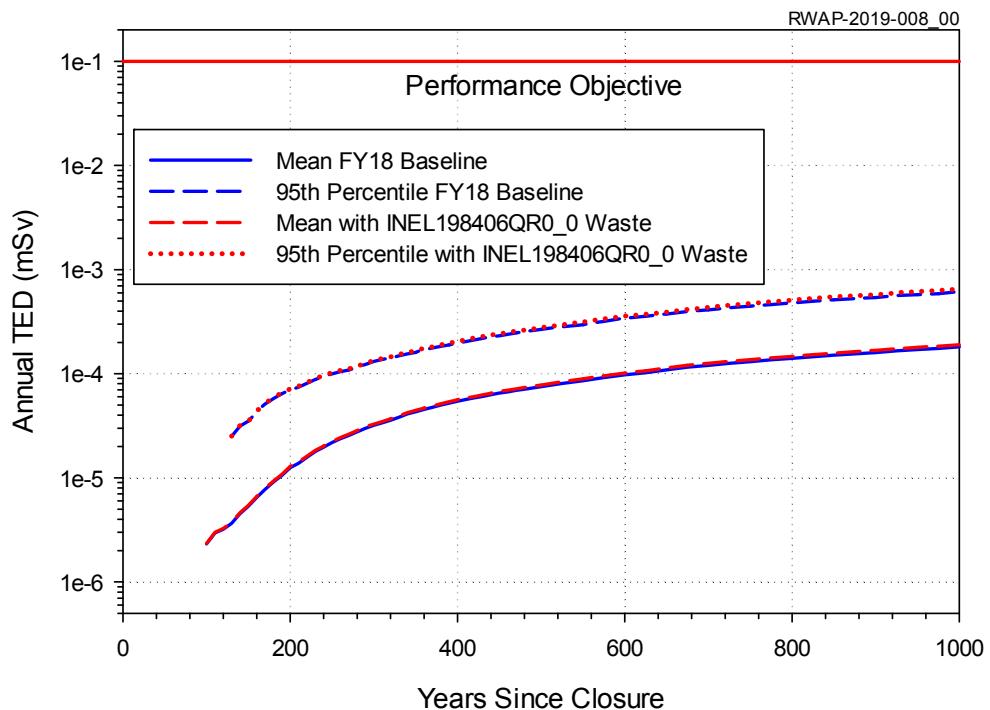


Figure 1. Air Pathway Annual TED Time History for a Resident at the 100-m Boundary with and without the INEL198406QR0_0 Waste Stream

4.1.1.1 Alternative Air Pathway Scenarios

Uncertainty contributed by the selected exposure scenario was evaluated by calculating the air pathway annual TED for alternative scenarios. The scenarios evaluated are the transient occupancy scenario, the resident with agriculture scenario, and open rangeland scenarios for a ranch at two plausible locations: one at the NNSS boundary closest to the Area 5 RWMS and another at Cane Spring. The scenarios and their assumptions are described in the PA (BN 2006).

The maximum mean and 95th percentile TEDs are all less than the performance objective for all of the alternative scenarios (Table 4). Although the exposure scenario is a source of uncertainty, there is a high likelihood of compliance for a range of reasonable scenarios. Addition of the INL TRA Foils INL waste stream increases the maximum result for all scenarios, except the open rangeland scenario at the NNSS boundary.

Table 4. Maximum Air Pathway Annual TEDs for Alternative Scenarios with the FY 2018 Inventory

Scenario	Inventory	Time of Maximum (years after closure)	Mean (mSv)	95 th Percentile (mSv)
Transient Occupancy	FY 2018 Baseline Inventory	1,000	7.3E-5	2.5E-4
	FY 2018 with INEL198406QR0_0	1,000	7.7E-5	2.7E-4
Resident with Agriculture	FY 2018 Baseline Inventory	1,000	3.9E-4	1.3E-3
	FY 2018 with INEL198406QR0_0	1,000	4.1E-4	1.4E-3
Open Rangeland/Cane Spring	FY 2018 Baseline Inventory	1,000	6.3E-9	1.5E-8
	FY 2018 with INEL198406QR0_0	1,000	6.7E-9	1.6E-8
Open Rangeland/NNSS Boundary	FY 2018 Baseline Inventory	1,000	1.1E-7	2.6E-7
	FY 2018 with INEL198406QR0_0	1,000	1.1E-7	2.8E-7

4.1.2 All-Pathways Results

The all-pathways annual TED is also calculated for the resident exposure scenario. The maximum mean and 95th percentile resident all-pathways annual TEDs are less than the 0.25 mSv limit (Table 5). Addition of INL TRA Foils waste stream has no significant effect on the resident all-pathways annual TED.

Table 5. Maximum All-Pathways Annual TED for a Resident at the Area 5 RWMS 100-m Site Boundary and the Waste Inventory Disposed through FY 2018

Scenario	Time of Maximum (years after closure)	Mean (mSv)	95 th Percentile (mSv)
Resident without INEL198406QR0_0 Waste Stream	1,000	1.0E-3	2.7E-3
Resident with INEL198406QR0_0 Waste Stream	1,000	1.0E-3	2.9E-3

Addition of the INL TRA Foils waste stream increases the all-pathways TED throughout the compliance period (Figure 2). The maximum increase in the all-pathways annual TED is 2.4% at 1000 years.

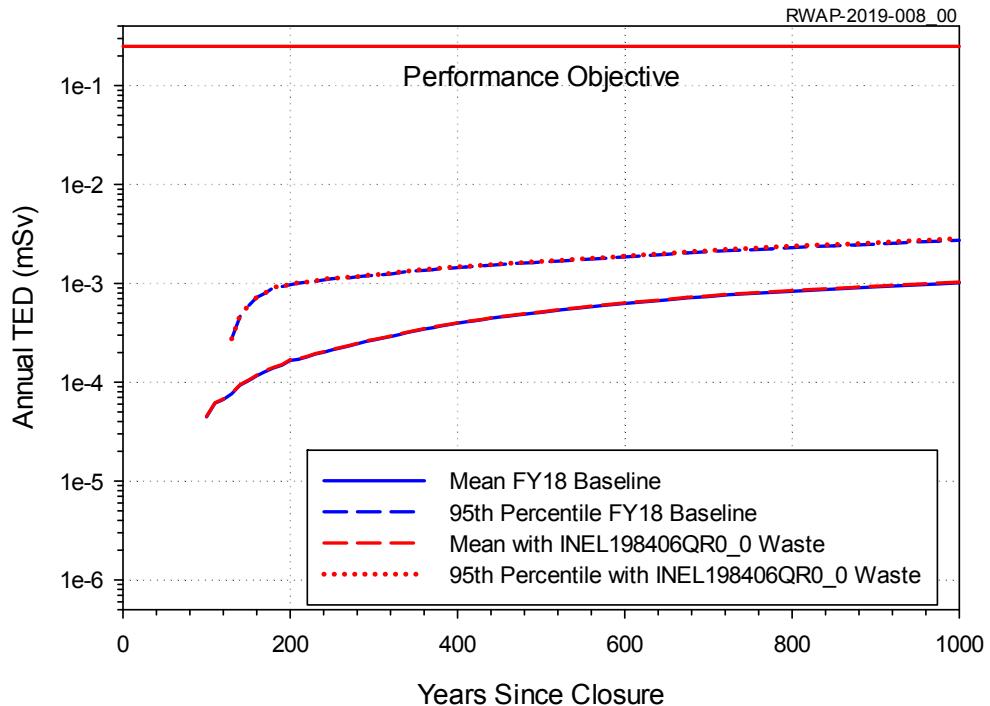


Figure 2. All-Pathways Annual TED Time History for a Resident at the 100-m Boundary with and without INEL198406QR0_0 Waste Stream

4.1.2.1 Alternative All-Pathways Scenarios

Uncertainty contributed by the selected exposure scenarios was evaluated by calculating the all-pathways annual TED for alternative scenarios. The mean and 95th percentile all-pathways annual TEDs are all less than the performance objective for all alternative scenarios (Table 6). Although the exposure scenario is a source of uncertainty, there is a high likelihood of compliance for a range of reasonable scenarios. Addition of the INL TRA Foils waste stream has no significant effect on the maximum annual TED for all scenarios.

Table 6. Maximum All-Pathways Annual TEDs for Alternative Scenarios with the FY 2018 Inventory

Scenario	Inventory	Time of Maximum (years after closure)	Mean (mSv)	95 th Percentile (mSv)
Transient Occupancy	FY 2018 Baseline Inventory	1,000	6.3E-3	1.5E-2
	FY 2018 with INEL198406QR0_0	1,000	6.3E-3	1.5E-2
Resident with Agriculture	FY 2018 Baseline Inventory	1,000	2.6E-2	8.3E-2
	FY 2018 with INEL198406QR0_0	1,000	2.6E-2	8.3E-2
Open Rangeland/Cane Spring	FY 2018 Baseline Inventory	1,000	4.6E-3	1.6E-2
	FY 2018 with INEL198406QR0_0	1,000	4.6E-3	1.6E-2
Open Rangeland/NNSS Boundary	FY 2018 Baseline Inventory	1,000	4.8E-3	1.7E-2
	FY 2018 with INEL198406QR0_0	1,000	4.8E-3	1.7E-2

4.1.3 Intruder Results

Intruder results are evaluated for acute intruder scenarios only. NNSA/NFO institutional control policy is to maintain and enforce use restrictions (NNSA/NFO 2015). The proposed land-use restrictions are assumed to eliminate the possibility of chronic intrusion for 1,000 years.

The acute drilling scenario estimates the TED to a drill crew drilling a water well through a disposal unit. Exposure to contaminated drill cuttings occurs while augering a surface casing for the well. The acute construction scenario estimates the dose to construction workers building a residence on a disposal unit. Construction workers are exposed to waste exhumed from the construction excavation.

The maximum mean acute intruder TEDs occur at 1,000 years and are less than the 5 mSv performance measure for both the drilling and construction acute intrusion scenarios (Table 7). Addition of the INL TRA Foils waste stream has no significant effect on the acute intruder scenario mean results occurring at 1,000 years.

Table 7. Maximum TED for Acute Intrusion Scenarios at the Area 5 RWMS and the Waste Inventory Disposed through FY 2018

Scenario	Time of Maximum (years after closure)	Mean (mSv)	95 th Percentile (mSv)
Drilling Intruder without INEL198406QR0_0	1,000	1.4E-3	2.4E-3
Drilling Intruder with INEL198406QR0_0	1,000	1.4E-3	2.4E-3
Construction Intruder without INEL198406QR0_0	1,000	1.0	1.8
Construction Intruder with INEL198406QR0_0	1,000	1.1	1.8

Addition of the INL TRA Foils waste stream increases the mean intruder construction TED 5.6% at 1000 years (Figure 3).

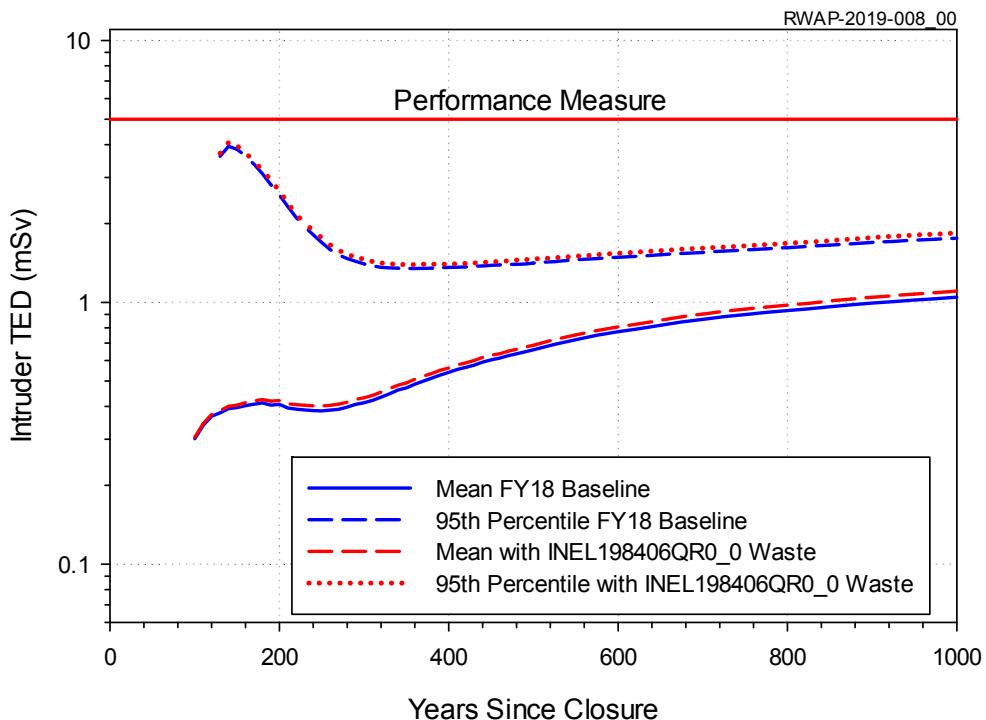


Figure 3. Acute Construction Intrusion Scenario TED Time History with and without the INEL198406QR0_0 Waste Stream

4.1.4 ^{222}Rn Flux Density Results

The radon-222 (^{222}Rn) flux density is averaged over the area of all post-1988 disposal units. The maximum mean and 95th percentile ^{222}Rn flux densities occur at 1,000 years and are less than the 0.74 becquerel per square meter per second ($\text{Bq m}^{-2} \text{s}^{-1}$) performance objective (Table 8).

Addition of the INL TRA Foils waste stream has no significant effect on the maximum ^{222}Rn flux density at 1,000 years. This waste stream does not require an increased depth of burial to attenuate ^{222}Rn flux.

Table 8. Maximum ^{222}Rn Flux Density at the Area 5 RWMS and the Waste Inventory Disposed through FY 2018

Inventory	Time of Maximum (years after closure)	Mean ($\text{Bq m}^{-2} \text{s}^{-1}$)	95 th Percentile ($\text{Bq m}^{-2} \text{s}^{-1}$)
FY 2018 without INEL198406QR0_0	1,000	0.22	0.48
FY 2018 with INEL198406QR0_0	1,000	0.22	0.48

Addition of the INL TRA Foils waste stream has no significant effect on the mean ^{222}Rn flux density throughout the compliance period (Figure 4). The maximum increase, 0.05%, occurs at 350 years.

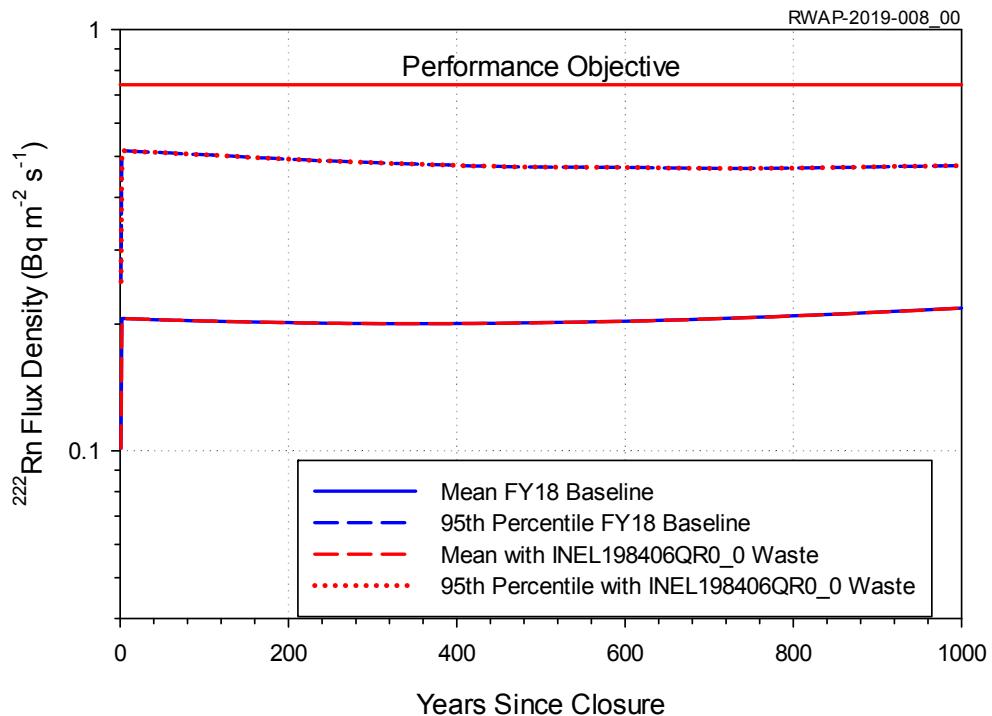


Figure 4. ^{222}Rn Flux Density Time History with and without the INEL198406QR0_0 Waste Stream

5.0 Conclusions

The effect of adding the INL TRA Foils waste stream to the inventory of waste disposed through the end of FY 2018 was evaluated with the Area 5 RWMS v 4.203b PA model. The results indicate that all performance objectives can be met with disposal of the INL TRA Foils waste in an Area 5 RWMS SLB unit. Addition of the waste stream inventory has no significant effect on PA results. All maximum mean and 95th percentile results remain less than their respective performance objectives throughout the compliance period. No result exceeds the Low-Level Radioactive Waste Review Group notification criterion of exceeding 50% of a performance objective. The INL TRA Foils waste stream is acceptable for disposal without conditions.

This Page Intentionally Left Blank

6.0 References

Bechtel Nevada. 2006. *Addendum 2 to the Performance Assessment for the Area 5 Radioactive Waste Management Site at the Nevada Test Site, Nye County, Nevada: Update of Performance Assessment Methods and Results*. Las Vegas, NV: Bechtel Nevada. DOE/NV/11718--176ADD2.

BN, see Bechtel Nevada.

DOE, see U.S. Department of Energy.

Idaho National Laboratory. 2019. TRA Foils Nevada National Security Site Profile Sheet. INEL198406QR0, Rev. 0. 1/7/2019.

INL, see Idaho National Laboratory.

NNSA/NFO, see U.S. Department of Energy, National Nuclear Security Administration Nevada Field Office.

U.S. Department of Energy. 2011. *Radioactive Waste Management Manual*. Washington, D.C.: U.S. Department of Energy. DOE M 435.1-1. 6/8/2011.

U.S. Department of Energy, National Nuclear Security Administration Nevada Field Office, 2015. *Institutional Control of the Nevada National Security Site*. Las Vegas, NV: NFO P 454.X, Rev. 0. 10/14/15.

U.S. Department of Energy, National Nuclear Security Administration Nevada Field Office. 2016. *Nevada National Security Site Waste Acceptance Criteria*. Las Vegas, NV: DOE/NV--325-16-00. November 2016.