



Making the Case: Demonstrating the Integrity of PWR Spent Nuclear Fuel During Long-term Storage and Subsequent Transportation

Ned Larson DOE Office of Nuclear Energy
Sylvia Saltzstein Sandia National Laboratories
Brady Hanson Pacific Northwest National Laboratory

EPRI ESCP Workshop on Evaluating Advanced Fuels Impacts (ATF and Higher Burnup/Enrichment) on Back-end Operations

Charlotte, NC

November 5, 2019

SAND-2019

Sandia National Laboratories is a multimission laboratory managed and operated by National Technology & Engineering Solutions of Sandia, LLC, a wholly owned subsidiary of Honeywell International Inc., for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-NA0003525.

Program is Focused on Obtaining In-Service Data

DOE/EPRI High Burnup Confirmatory Data Project

Goal: To provide confirmatory data for models, future SNF dry storage cask design, to support license renewals, and new licenses for ISFSIs

Steps

1. Loaded a commercially licensed TN-32B storage cask with 4 common cladding alloys of high burn-up fuel in the North Anna Nuclear Power Plan storage pool
2. 63 thermocouples inserted within cask
3. Gas samples taken before going to pad
4. Dried using industry standard practices (completed November 2017)
5. Currently storing at utility dry cask storage site for 10 years
6. After ten years, the US DOE will test rods to quantify mechanical properties. 25 Sibling Pins are currently being tested to obtain baseline mechanical properties.

The Research Project Cask stored at North Anna with a solar panel to power the internal thermocouple data acquisition system.



Photo courtesy of Dominion Energy

Thermal Profiles:

The TN-32B Research Project Cask Bounds Most Cask Loadings

	TN-32 Safety Evaluation Report (generic)	TN-32B Research Project Cask License Amendment
Maximum burnup (GWd/MTU)	≤ 45	≤ 60
Maximum decay heat per assembly	1.02 kW	1.5 kW
Total decay heat	32.7 kW	36.96 kW
Minimum decay time	7-10 years	4.81 years
Est. Peak cladding temperature (PCT)	328°C	348°C



Photo courtesy of Dominion Energy

Slide 3


SSJ1

the FSAR thermal numbers don't match in this and the next slide.

Saltzstein, Sylvia J, 8/1/2019

Thermal Profiles:

Round Robin Analysis Comparison with Measured Data

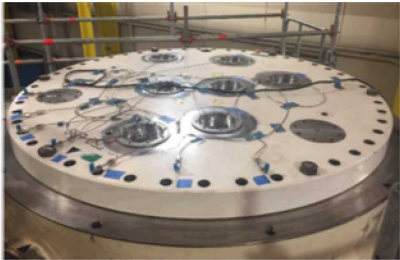

- Steady state PCTs from all models and measurements significantly lower than the design licensing basis:

Parameter	FSAR	LAR	Best-Estimate	HBU Cask Measurements
PCT (model vs data)	348°C	318°C	254-288°C	229°C
Heat Loadouts	36.96kW	32.934kW	30.456kW	30.456kW
Ambient Temperature	100°F	93.5°F	75°F	75°F
Design Specifics	Gaps	Gaps	Gaps	No Gaps?

FSAR: Final Safety Analysis Report

LAR: License Amendment Report (submitted after refinement of model inputs to FSAR)

Courtesy of Al Csontos, Co-chair of EPRI ESCP Thermal Subcommittee

The aluminum basket expands and closes the gaps, but we don't know by how much.

Current Work is focused on identifying biases and conservatisms that overestimate thermal environment.

Slide 4

SSJ2 Why the question mark? after gaps?

Saltzstein, Sylvia J, 8/1/2019

SSJ3 This is for the Demo cask.


Saltzstein, Sylvia J, 8/1/2019

SSJ4 aluminum basket will expand and close gaps, but we don't know by how much.

Saltzstein, Sylvia J, 8/1/2019

Stress Profiles:

When Temperature is Lower, Rod Internal Pressure is Lower (< 5 MPa at 25° C)

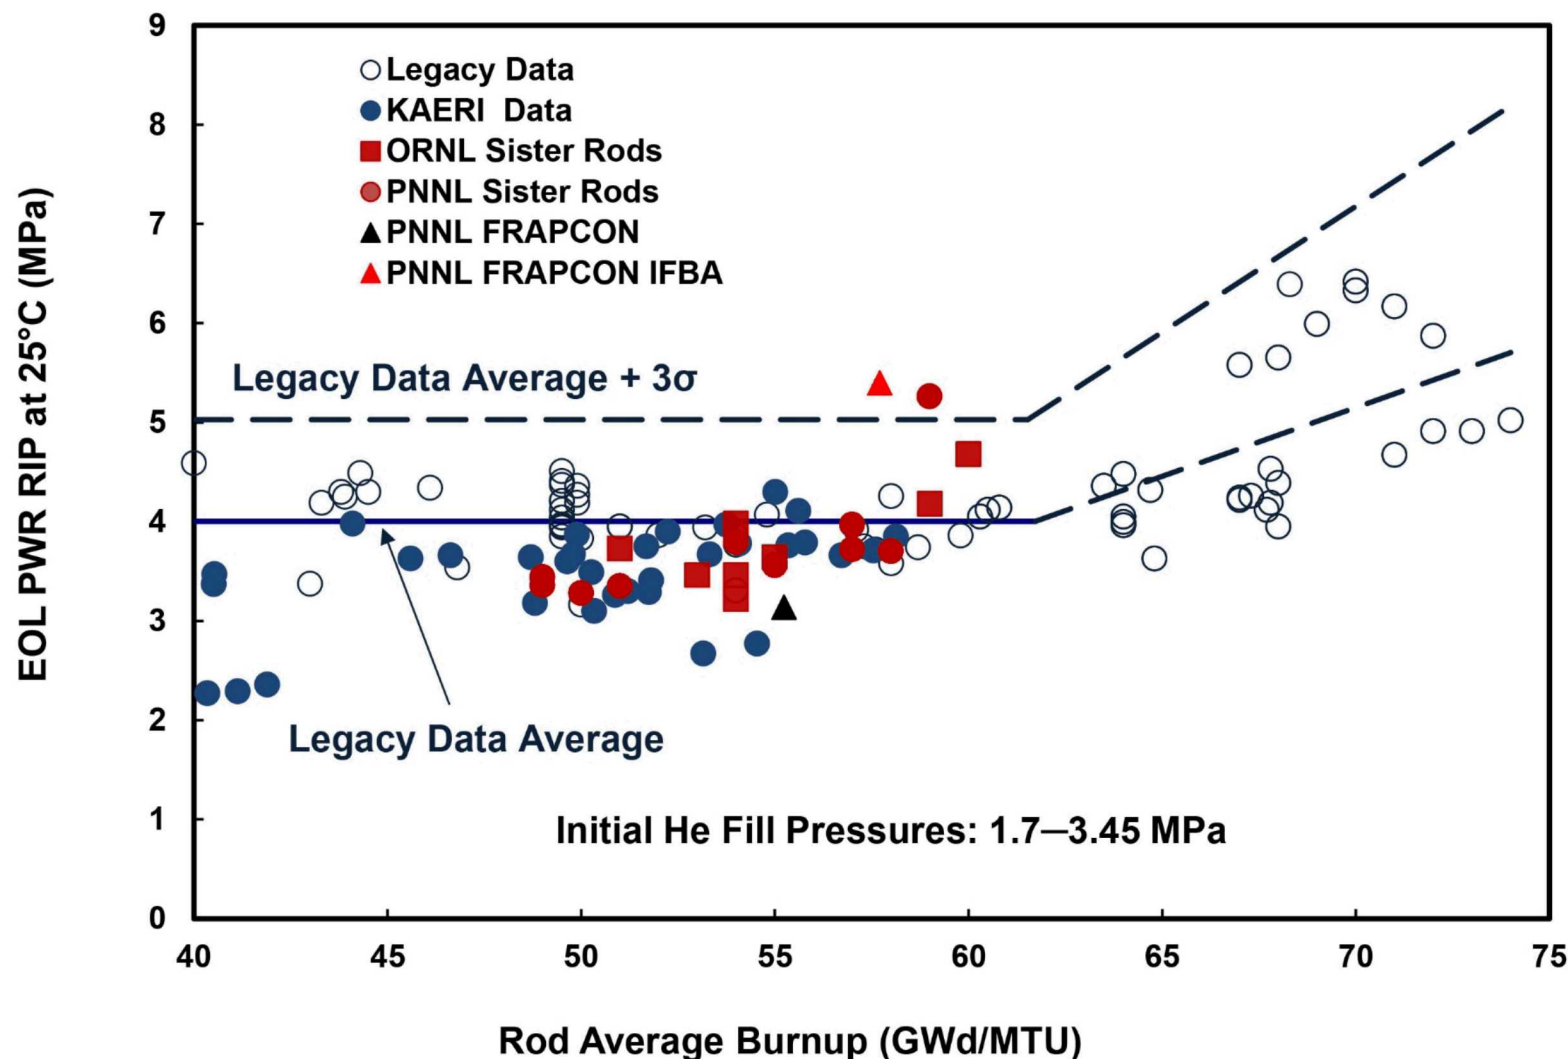

When converted to 400C, non-IFBA 17 x17 rods to have EOL RIP between 6.2 and 11.5 MPa.

Slide 5

SSJ5

The newer fuels get higher burnup, but the rods are smaller and the initial pressure is lower to begin with.

Saltzstein, Sylvia J, 8/1/2019

Stress Profiles:

Modeled Hoop Stress from Rod Internal Pressure

Table 1. Maximum Hoop Stress (MPa) 400°C Peak Temperature

Profile	Vacuum (0.004 atm)	Medium Flow (1 atm)	High Flow (6.8 atm)
Fuel			
10x10	40.0	43.8	41.7
17x17	49.9	53.4	50.5
17x17 IFBA	84.4	88.1	86.3

Model results similar to the Research Project Cask conditions show 53.4MPa @ 400°C, but the Research Project Cask only reached 229 °C.

Table 2. End of Life Rod Internal Pressure (MPa) 400°C Peak Temperature

Profile	Vacuum (0.004 atm)	Medium Flow (1 atm)	High Flow (6.8 atm)
Fuel			
10x10	5.4	6.1	6.4
17x17	6.2	6.8	7.0
17x17 IFBA	10.6	11.1	11.5


Table 3. Maximum Plenum Temperature (all fuel types)

Profile	Temperature (°C)
Vacuum (0.004 atm)	264
Medium (1 atm)	348
High (6.8 atm)	397


Stress Profiles:

Ductile-Brittle Transition Temperature using Ring Compression Tests (RCT)

Apparent threshold for reduced ductility with radial hydride treatment at >90MPa Hoop Stress.

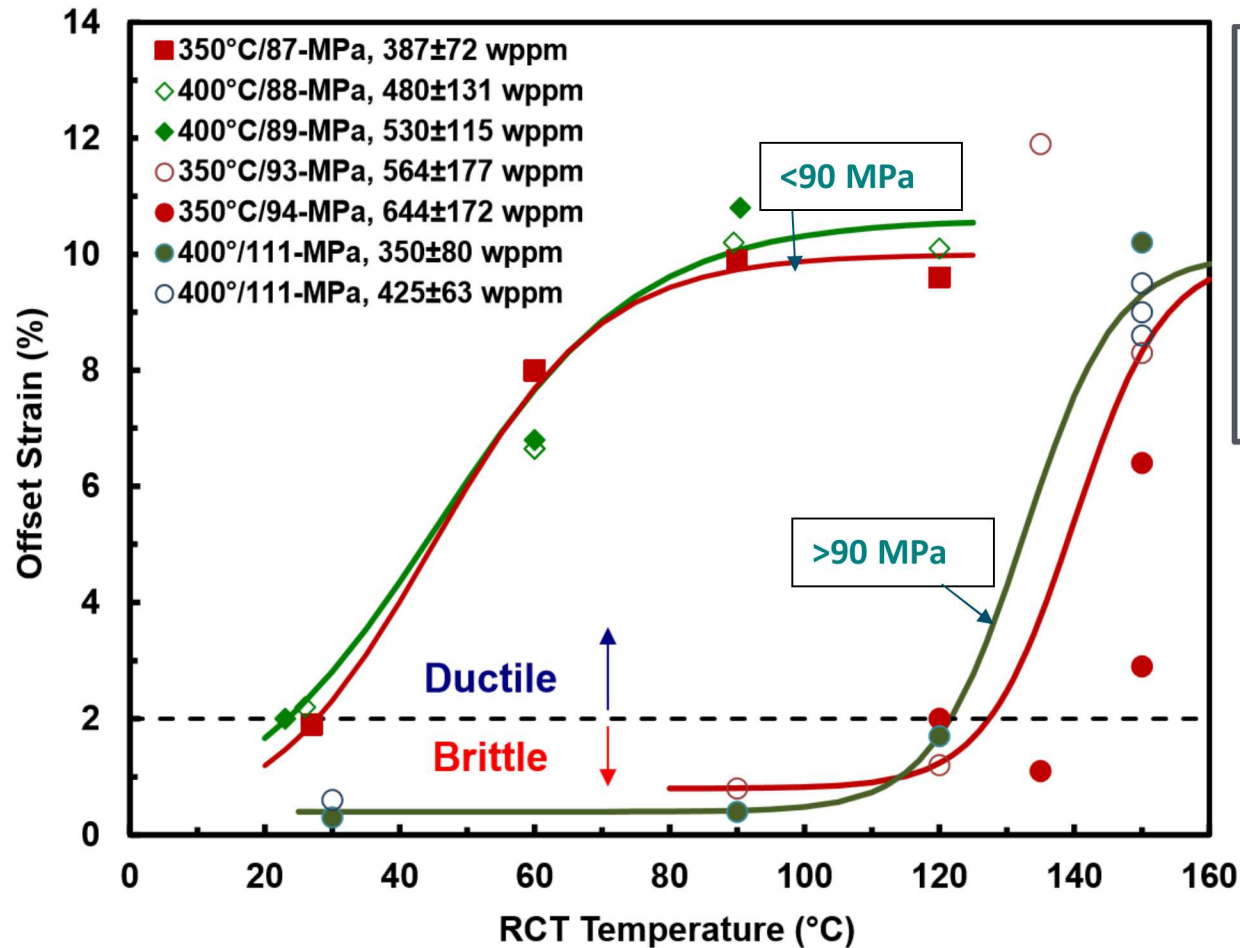

As long as hoop stress is below 90MPa, it remains ductile until room temperature. The Research Project Cask will have a hoop stress of less than **53.4MPa**.

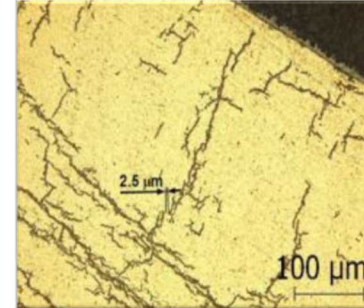

“Data collected during the past five years suggest that radial-hydride-induced embrittlement may not occur in standard PWR fuel-rod cladding because

- EOL RIP values (< 5 MPa at 25° C),
- PCTs (< 400° C),
- average gas temperatures (< 400° C),
- average assembly discharge burnups (< 50 GWd/MTU)

are all much lower than previously anticipated.”

Mechanical Properties: Summary

The lower PCTs mean:


- Less hydrogen is dissolved in the cladding during the drying process.
 - This means that less hydrogen is available to precipitate into a radial orientation during thermal stabilization
- The RIP is lower.
 - Lower RIP results in lower cladding hoop stress and contributes to less radial hydride formation during the drying process.
- Industry loading of high burnup fuel has margin relative to the 400° C regulatory guidance.

Benchmarking of the PCT data from the Research Project Cask supports the ability to model other dry storage systems without having to perform testing for each specific vertical design.

What are Realistic Mechanical Loads?

- most mechanical loads occur during transportation

Mechanical Loading: *Multimodal Transportation and Handling Tests*

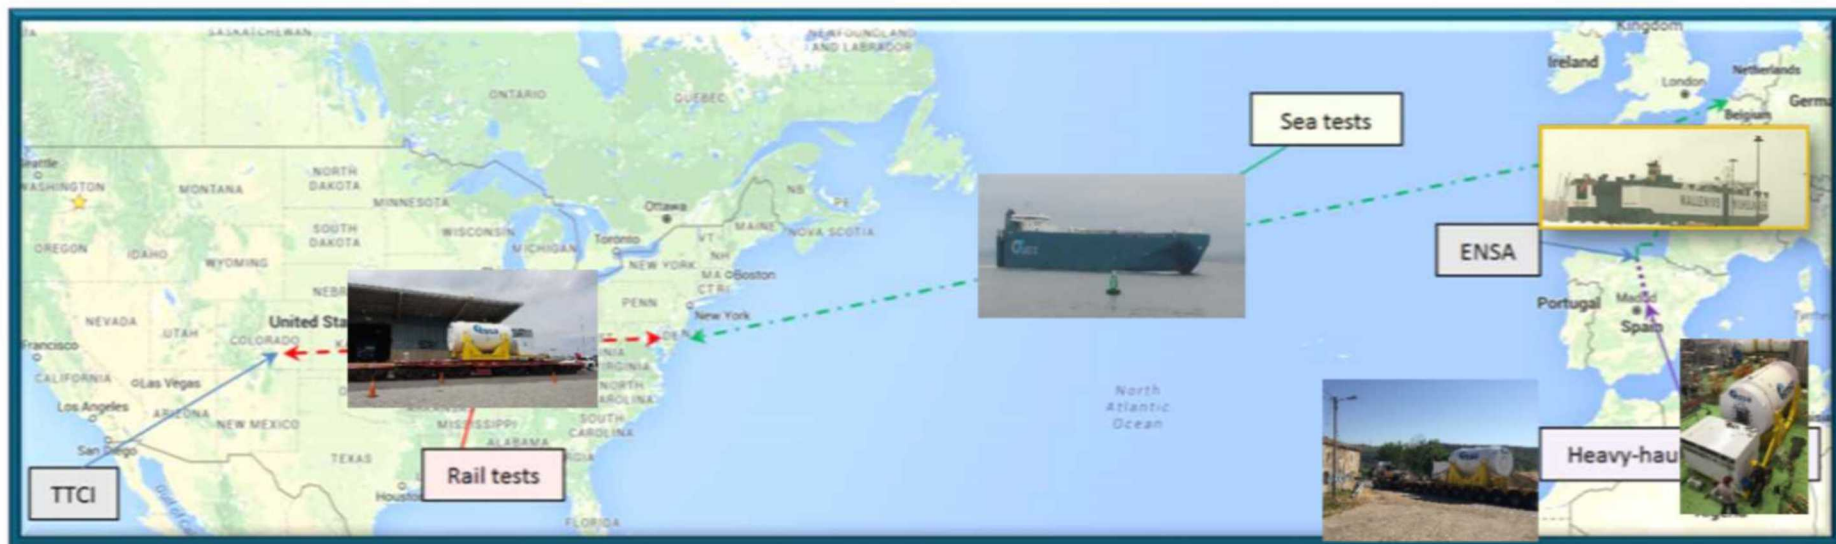


Photos provided by Steve Ross, PNNL

- 1) Heavy-haul truck from within Spain ~ June 14, 2017
- 2) Coastal sea shipment from Santander to large northern European port ~ June 27, 2017
- 3) Ocean transport from Europe to Baltimore
- 4) Commercial rail shipment from Baltimore to Pueblo, Colorado ~ Aug 3, 2017
- 5) Testing completed at the Transportation Technology Center, Inc.
- 6) Return trip to ENSA, September 5, 2017


Data was collected throughout all legs of the transport as well as the transfers between legs.

Mechanical Loading:

Maximum Strains and Accelerations from all Transportation Tests

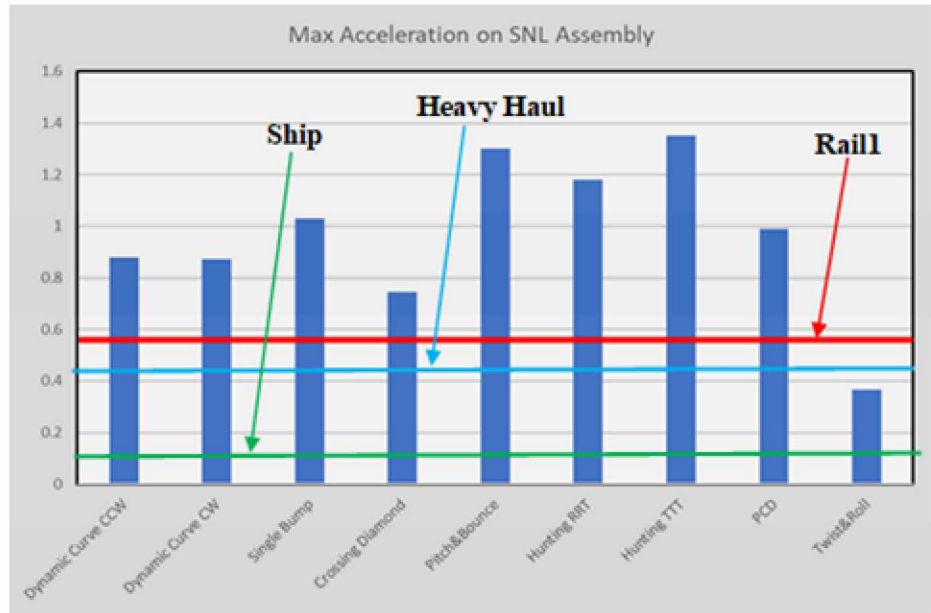

Measured in g

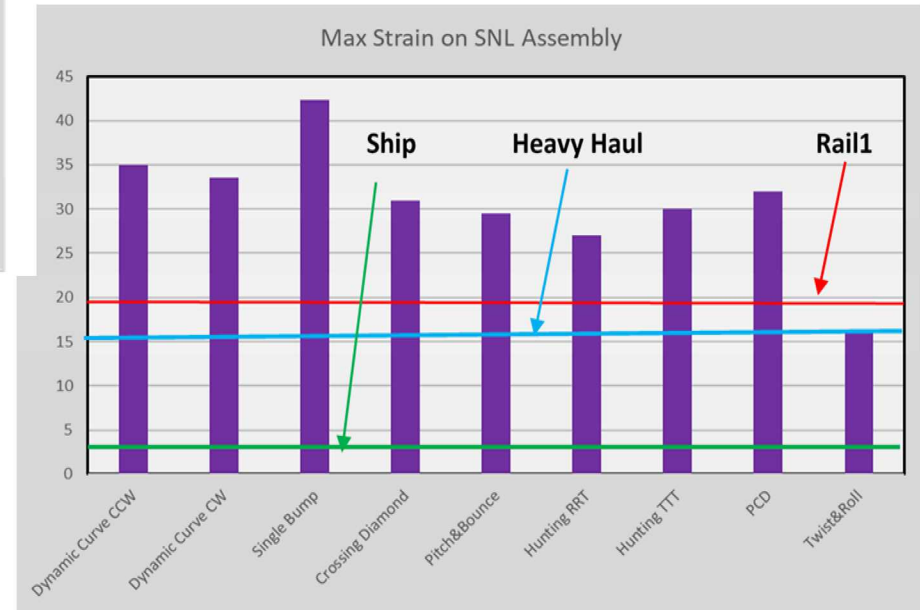

Measured in µε

Measured yield stress levels for irradiated SNF cladding is ~ 7000 – 9000 µε

Stress Profiles:

Cyclic Integrated Reversible-Bending Fatigue Tester (CIRFT) tests fatigue to failure

Goal: To determine the number of cycles to fatigue failure as a function of rod curvature and cladding stress and strain

- Both static bending and cyclic fatigue
 - Developed at ORNL under an NRC program and continued with DOE:NE.


Fatigue life depends on the level of loading

- Pellet-clad and pellet-pellet bonding provides additional stiffness


J-A Wang et. al. Mechanical Fatigue Testing of High-Burnup Fuel for Transportation Applications, NUREG/CR-7198/R1 ORNL/TM-2016/689, Oak Ridge National Laboratory, January 2017.




CIRFT tester out of the hot cell (above) and in the hot cell (right) testing High-Burnup Fuel samples.

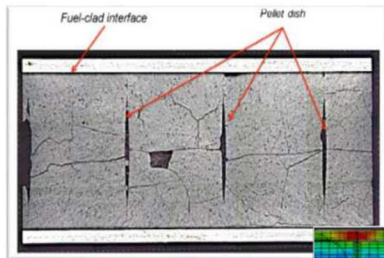

Pellet Clad Bond and resultant stress distribution

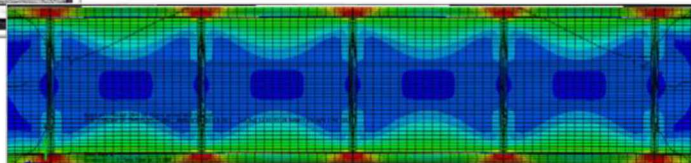


Images courtesy of ORNL.

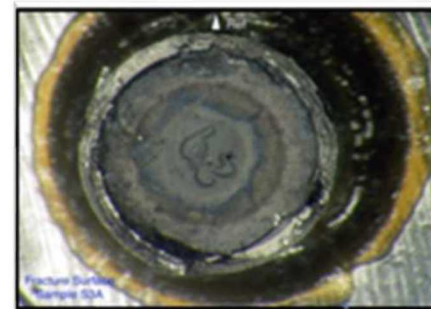

Most rods break cleanly between two pellets.

Mechanical Loading:

Will Fatigue Failure Occur During Normal Conditions of Transport?

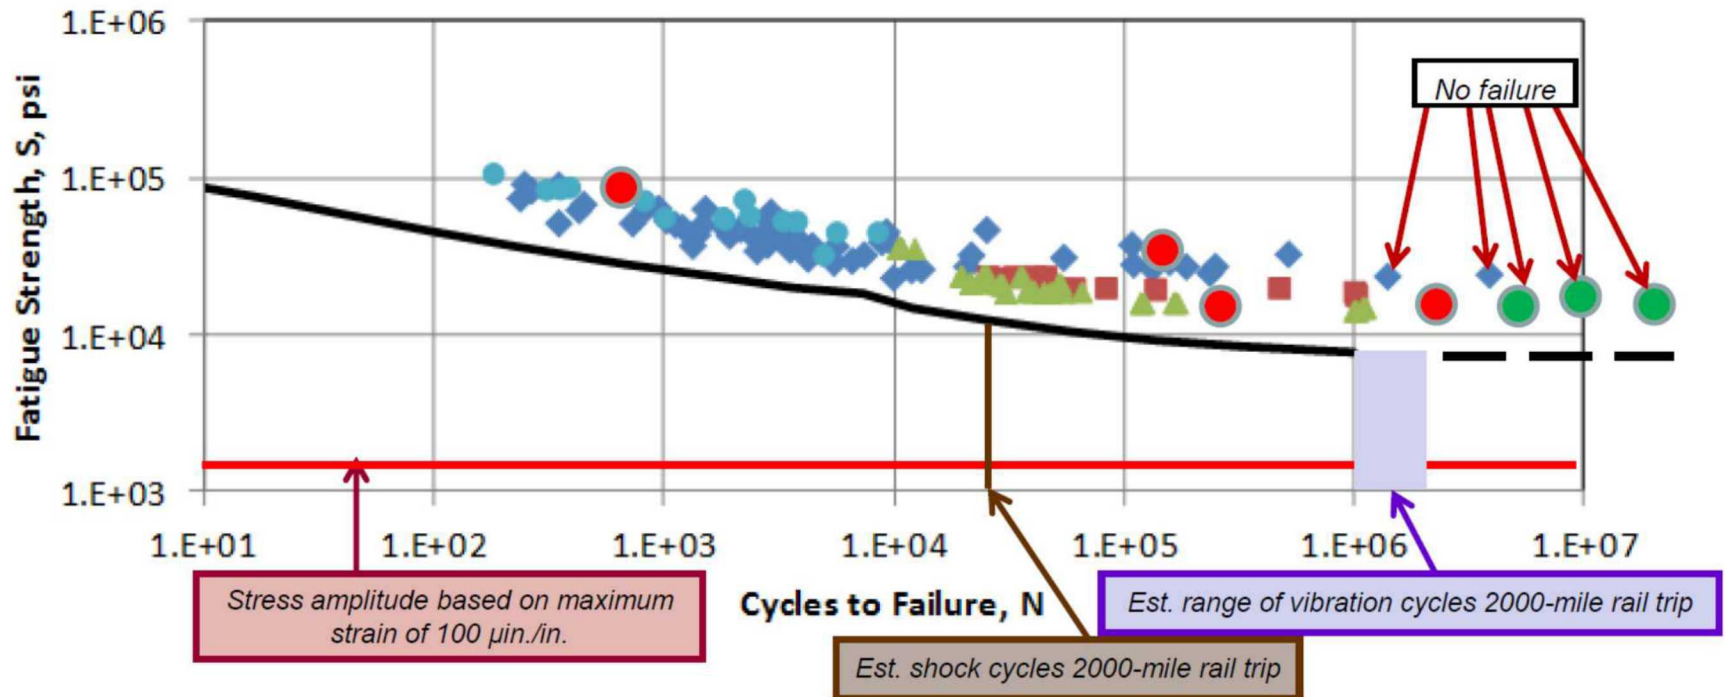


Fatigue design curve (—): O'Donnell and Langer, "Fatigue Design Basis for Zircaloy Components," Nucl. Sci. Eng. 20, 1, 1964. (cited in NUREG-0800, Chapter 4)

Data plot courtesy of Ken Geelhood, PNNL
The large circles are ORNL HBR data

J-A Wang et. al. Mechanical Fatigue Testing of High-Burnup Fuel for Transportation Applications, NUREG/CR-7198/R1 ORNL/TM-2016/689, Oak Ridge National Laboratory, January 2017.

- Large red and green circles represent CIRFT data.
- Horizontal red line represents highest recorded stress value from the multimodal tests.
- Bold black line represents failure criteria above which failure may occur. Stress levels and the number of fatigue cycles from the multimodal tests are well below the failure limits.

Spent Fuel Transportability Following Extended Storage – Cladding Fatigue Damage (Baltimore to Pueblo)

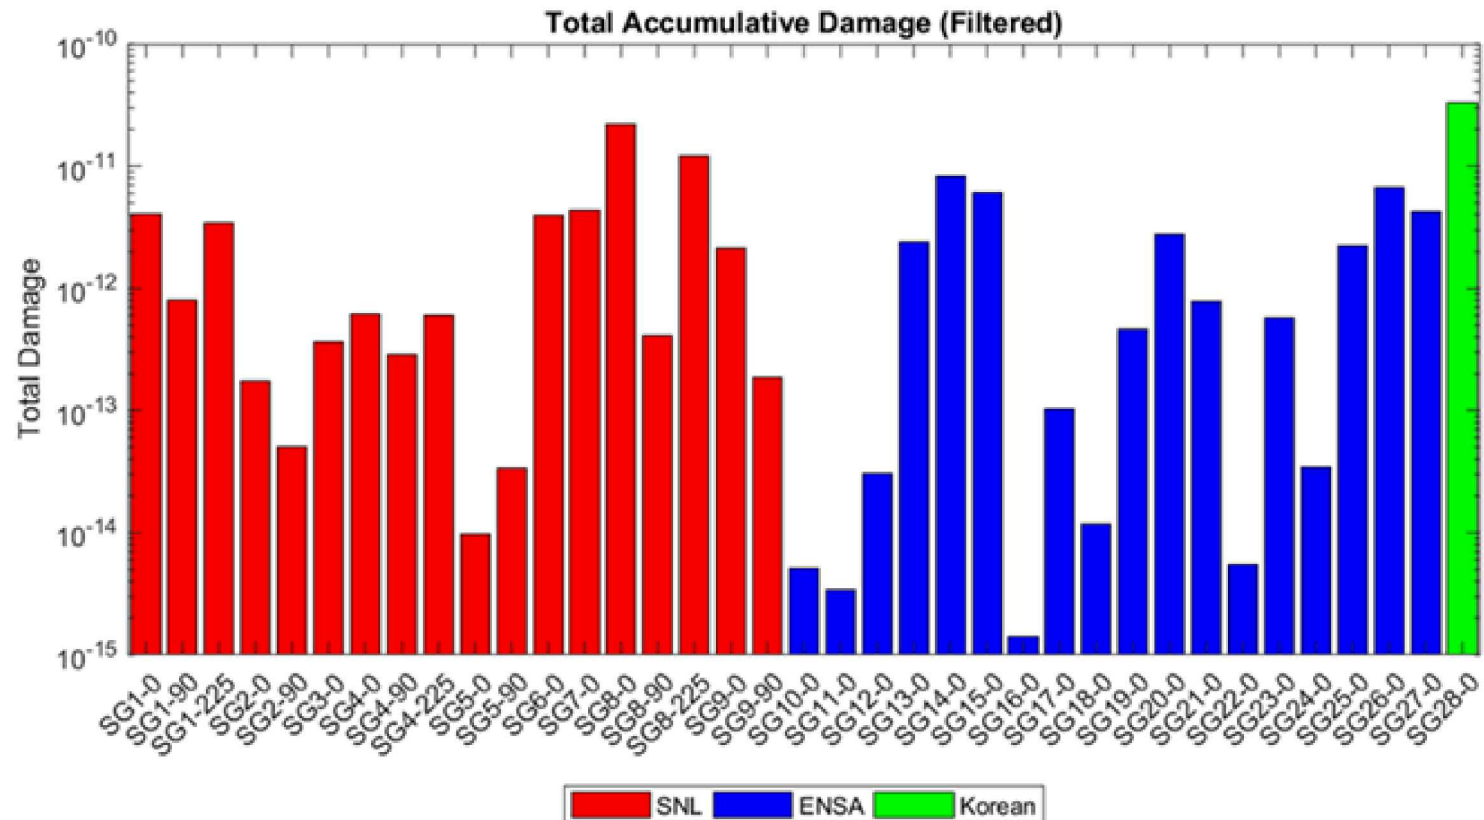

Damage Fraction of 1 represents failure. Strain data is 12 orders of magnitude below fatigue failure. Accumulated fatigue damage is approximately zero.

Conclusions

- Models can accurately predict cask and component temperatures when accurate inputs are provided.
 - Future work will benchmark models to horizontal dry storage systems data.
- Measured PCT (229°C) from the demonstration cask were far below the regulatory threshold of 400°C.
 - Limits amount of hydrogen that is available to reorient in the radial position during drying
 - Since the PCT is lower, the rod internal pressure and associated hoop stress are lower
- Ring Compression Tests show that cladding operating in representative storage environments will behave in a ductile fashion.
 - Upper bound tests at 90 MPa and 400°C were well above the demonstration cask values of 50 MPa and 229°C .
- Estimated stresses from measured mechanical loads are far below yield stress levels and fatigue limits of high burnup spent nuclear fuel.


With the data that is currently available and using the integrated approach, cladding integrity will not be challenged during extended storage and normal conditions of transport.

Yet, extended storage is not a final solution. Deep Geologic Disposal is still required.

References

- Billone2018. Billone, M., Burtseva, T., “Results of Ring Compression Tests”, SFWD-SFWST-2018-000510, ANL-18/36. September 2018.
- Bryan2018. Bryan, C., Schindelholz, E., “FY18 Status Report: SNL Research into Stress Corrosion Cracking of SNF Interim Storage Canisters”, M2SF-18SN010201049, September 2018.
- EPRI2014. “High Burnup Dry Storage Cask Research and Development Project: Final Test Plan”, DOE Contract No. DE-NE-0000593, February 2014.
- Durbin2019. Durbin, S. et al., “Test Plan for the Horizontal Dry Cask Simulator”, M2SF-19SN010203032, February 2019.Sch
- Hanson2012. Hanson, B., et al., “Gap Analysis to Support Extended Storage of Used Nuclear Fuel, Rev. 0”, FCRD-USED-2011-000136 Rev. 0, PNNL-20509, January 2012.
- Hanson 2019a. Hanson, B., Alsaed, H., “Gap Analysis to Support Extended Storage of Used Nuclear Fuel: Five Year Delta”,
- Hanson2019b. Hanson, B., “Phase 1 Testing Sister Rod Program”, INMM 34th Spent Fuel Management Seminar, PNNL-SA-140748, January 2019.
- Kalinina2018. Kalinina, E., et al., “Data Analysis of ENSA/DI Rail Cask Tests”, SFWD-SFWST-2018-000494, SAND2018-13258 R.
- Larson 2019. Larson, N., “DOE Spent Fuel Research for Storage and Transportation”, NEI Spent Fuel Management Conference, May 2019.
- Montgomery2019. Montgomery, R., et al., “Sister Rod Destructive Examinations”, M2SF-19OR010201028, ORNL/SPR-2019/1112, March 2019.
- NRC2003. Interim Staff Guidance (ISG)-11, Revision 3, “Cladding Considerations for Cladding for Storage and Transportation of Spent Fuel”, November 2003, ML033230335.
- NRC2018. NUREG-2224 (Draft), “Dry Storage and Transportation of High Burnup Spent Nuclear Fuel: Draft Report for Comment”, July 2018.
- Pan, G., et al, “Characteristics and Performance Of Zirlo Cladding Used Fuel” TOP FUEL 2019, Seattle Washington, 2019
- Saltzstein2019. Saltzstein, S., et al., “Gap Analysis to Guide DOE R&D in Supporting Extended Storage and Transportation of Spent Nuclear Fuel: An FY2019 Assessment”, publication pending.
- Shimskey2019. Shimskey, R., et al., “Initial Results of Destructive Examination of Ten Sister Rods at PNNL”, PNNL-28548, March 2019.
- Wang2017, Wang, J.A., et al, “FY2017 Status Report: CIRFT Data Update and Data Analyses for Spent Nuclear Fuel Vibration Reliability Study” M3SF-17OR01201026, ORNL/SR-2017/291

Questions?

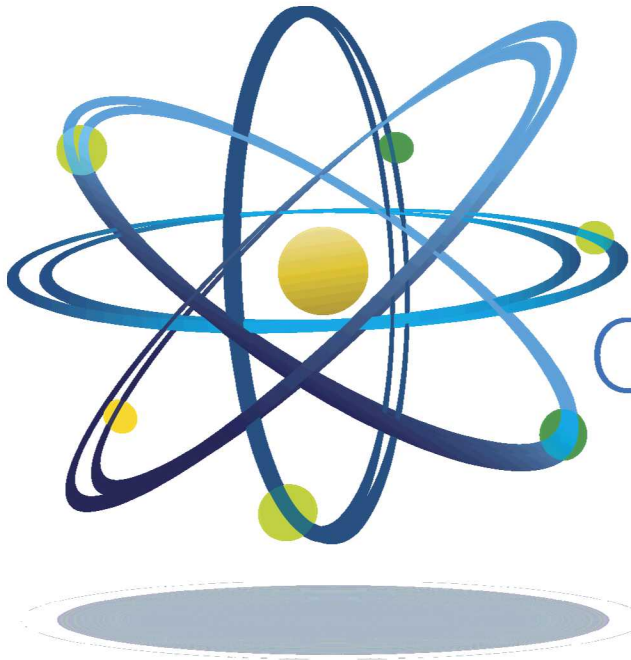

Clean. **Reliable. Nuclear.**