

February 16, 2011

Summary of Impact Analyses of Renewable Energy Technologies on Aviation and Airports

Clifford K. Ho

**Concentrating Solar Technologies Department
Sandia National Laboratories**
ckho@sandia.gov



Sandia National Laboratories is a multi-program laboratory managed and operated by Sandia Corporation, a wholly owned subsidiary of Lockheed Martin Corporation, for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-AC04-94AL85000.



Sandia National Laboratories



Overview

- **Introduction**
- **Glint and Glare Analysis**
- **Thermal Signature Analysis**
- **Summary**



Introduction

- **Multiple agencies are interested in evaluating potential safety impacts from emerging energy technologies**
 - Air Force
 - Impact on training missions at Nevada Test and Training Range
 - FAA
 - California Energy Commission
 - Solar power plant Applications for Certification
 - National Academies – Transportation Research Board
 - Synthesis Report on “Investigating Safety Impacts of Energy Technologies on Airports and Aviation”



Air Force White Papers

- **Series of white papers covering renewable energy technologies (PV, CPV, CSP, etc.)**
- Potential impacts include the following:
 - Ground-based and airborne radar interference
 - Radio frequency interference
 - Glare impact on pilots and sensors
 - Infrared emissions (“thermal signature”)
 - Overflight restrictions
 - Sonic overpressure



Overview

- Introduction
- Glint and Glare Analysis
- Thermal Signature Analysis
- Summary



Introduction

- **Glint and glare may cause unwanted visual impacts**
 - Glint is momentary flash of light; glare is more continuous source of excessive brightness
 - Visual impacts range from flash blindness to retinal burn
- **Need quantified analysis of glint/glare to reduce uncertainties associated with visual impacts of CSP installations**
 - Industry, military, government agencies (e.g., California Energy Commission, Transportation Research Board)



Examples of Glint/Glare



Solar One
(10 MW_e power
tower, Daggett,
CA)



Central Receiver
Test Facility
(SNL, NM)




National Solar Thermal Test Facility
(SNL, NM)



Kramer Junction
(150 MW_e parabolic trough, Mojave
Desert, CA)




Glare Types

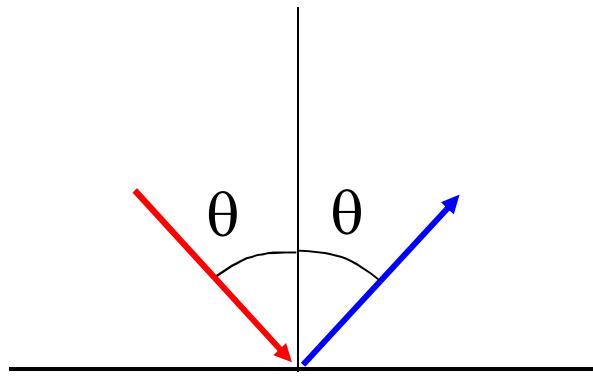

Specular
Reflection

(polished surfaces;
e.g., mirrors)

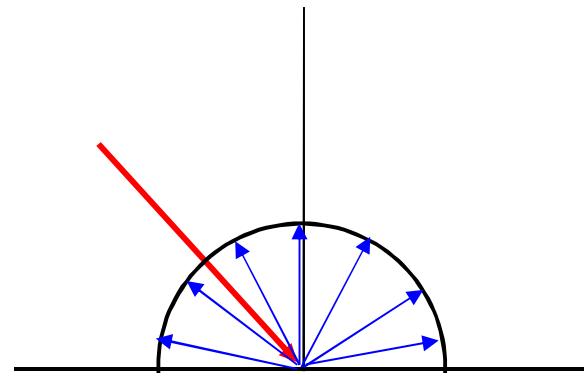

Diffuse
Reflection


(rough surfaces;
e.g., receivers)






Specular Reflections


- Point Focus and Line Focus Collectors

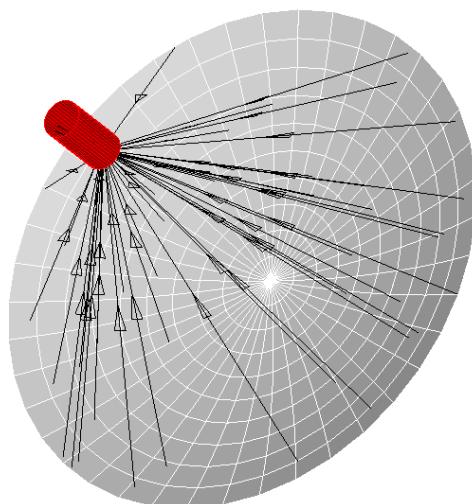

Dish

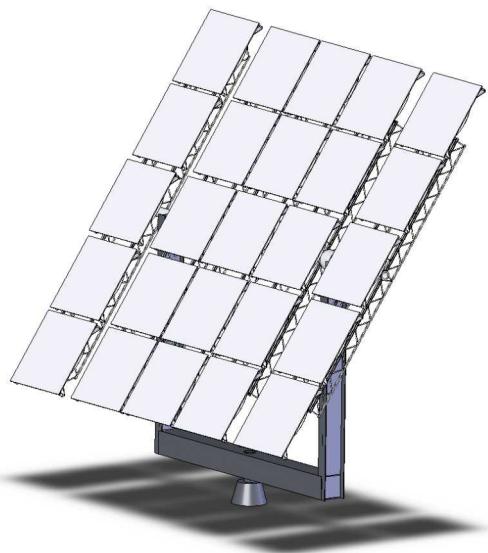

Heliostat

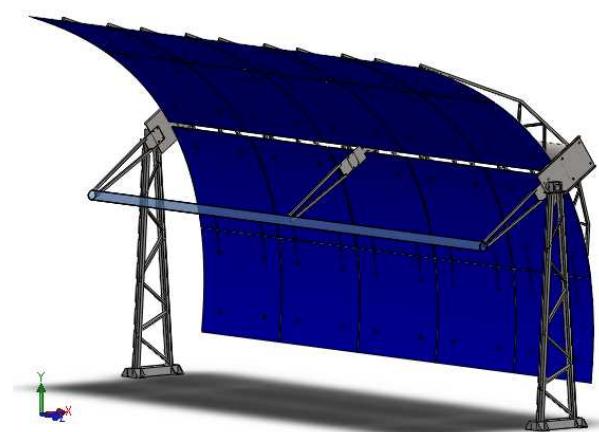


Parabolic Trough




Specular Glare


- Potential for glint and glare from collectors
 - Off-axis; misalignment; moving to or from stow/standby
 - End-loss and spillage for troughs

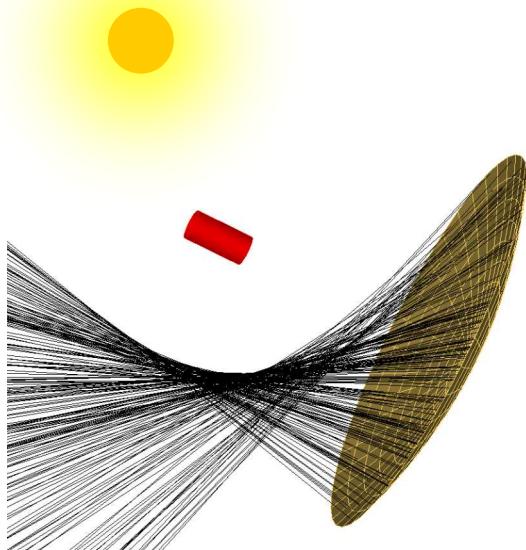

Off-axis Dish

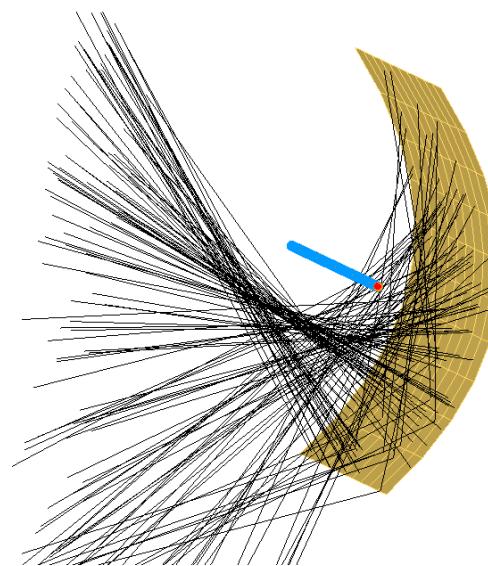

Off-axis Trough

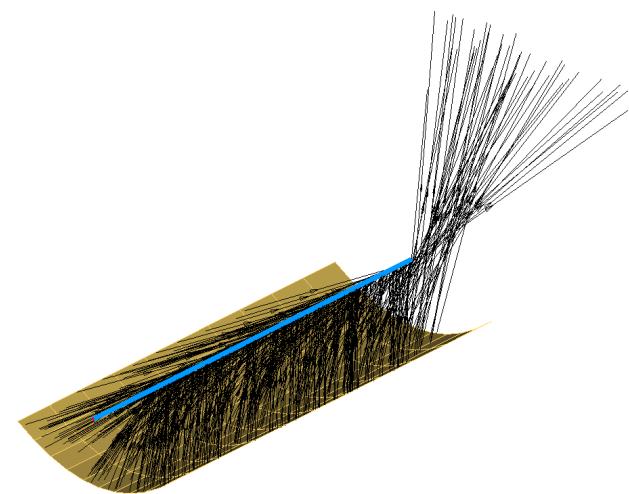

End-Loss from Trough



Previous Work

(Pertaining to CSP Glint and Glare)

- **1976-1984: Brumleve, T.D., SAND76-8022 and SAND83-8035**
 - Performed analysis and tests of glare from heliostats and receivers using retinal burn metrics from Sliney and Freasier (1973)
 - Determined exclusion zones and developed beam control strategies
- **2009: Ho, C.K., C.M. Ghanbari, and R.B. Diver, SolarPACES 2009**
 - Developed safety metrics for both retinal burn and temporary flash blindness using data from multiple literature sources



Previous Work (cont.)


(Pertaining to CSP Glint and Glare)

- 2010: Ho, C.K., C.M. Ghanbari, and R.B. Diver, **ASME Energy Sustainability Conference**
 - Developed analytical equations to evaluate specular and diffuse glare using retinal burn and temporary flash blindness metrics; performed validation tests
- 2010: Ho, C.K. and S.S. Khalsa **(this paper)**
 - Derived explicit equations to determine distances that cause retinal burn and temporary flash blindness for specular glare
 - Introduced web-based tool




Glare Analysis

Retinal Irradiance

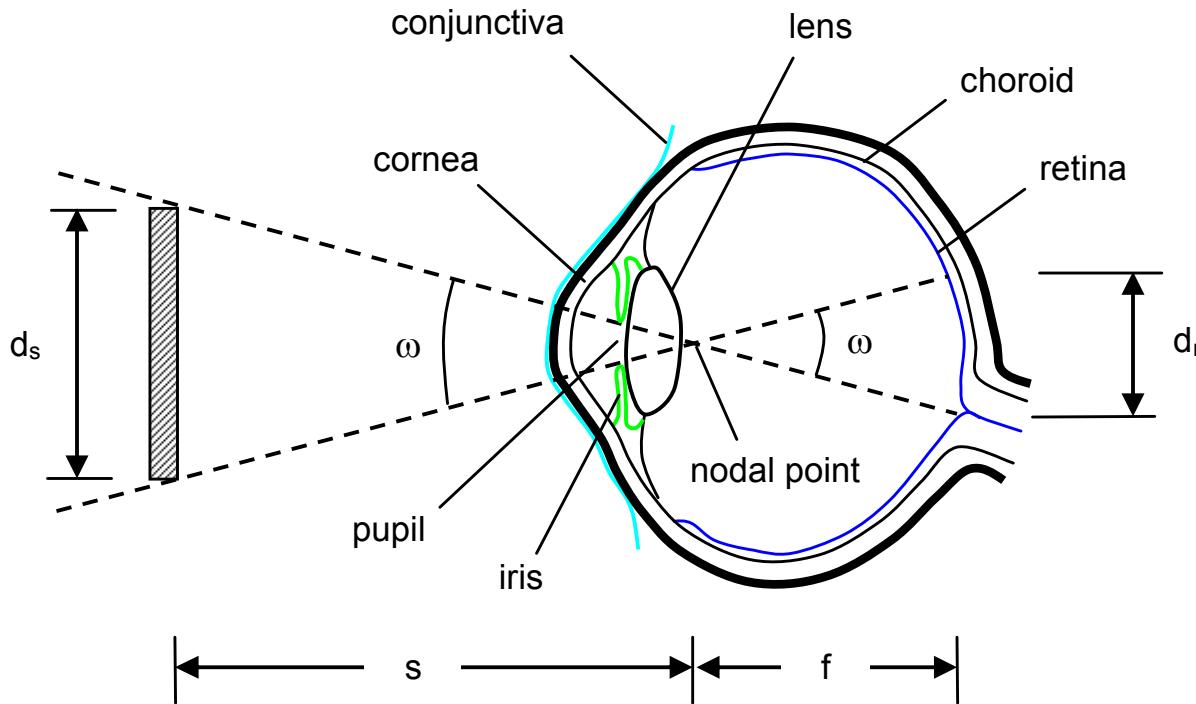

- **Need to calculate**
 - Power entering eye
 - Function of irradiance at the cornea (front of eye)
 - Subtended angle of glint/glare source

Potential Impacts

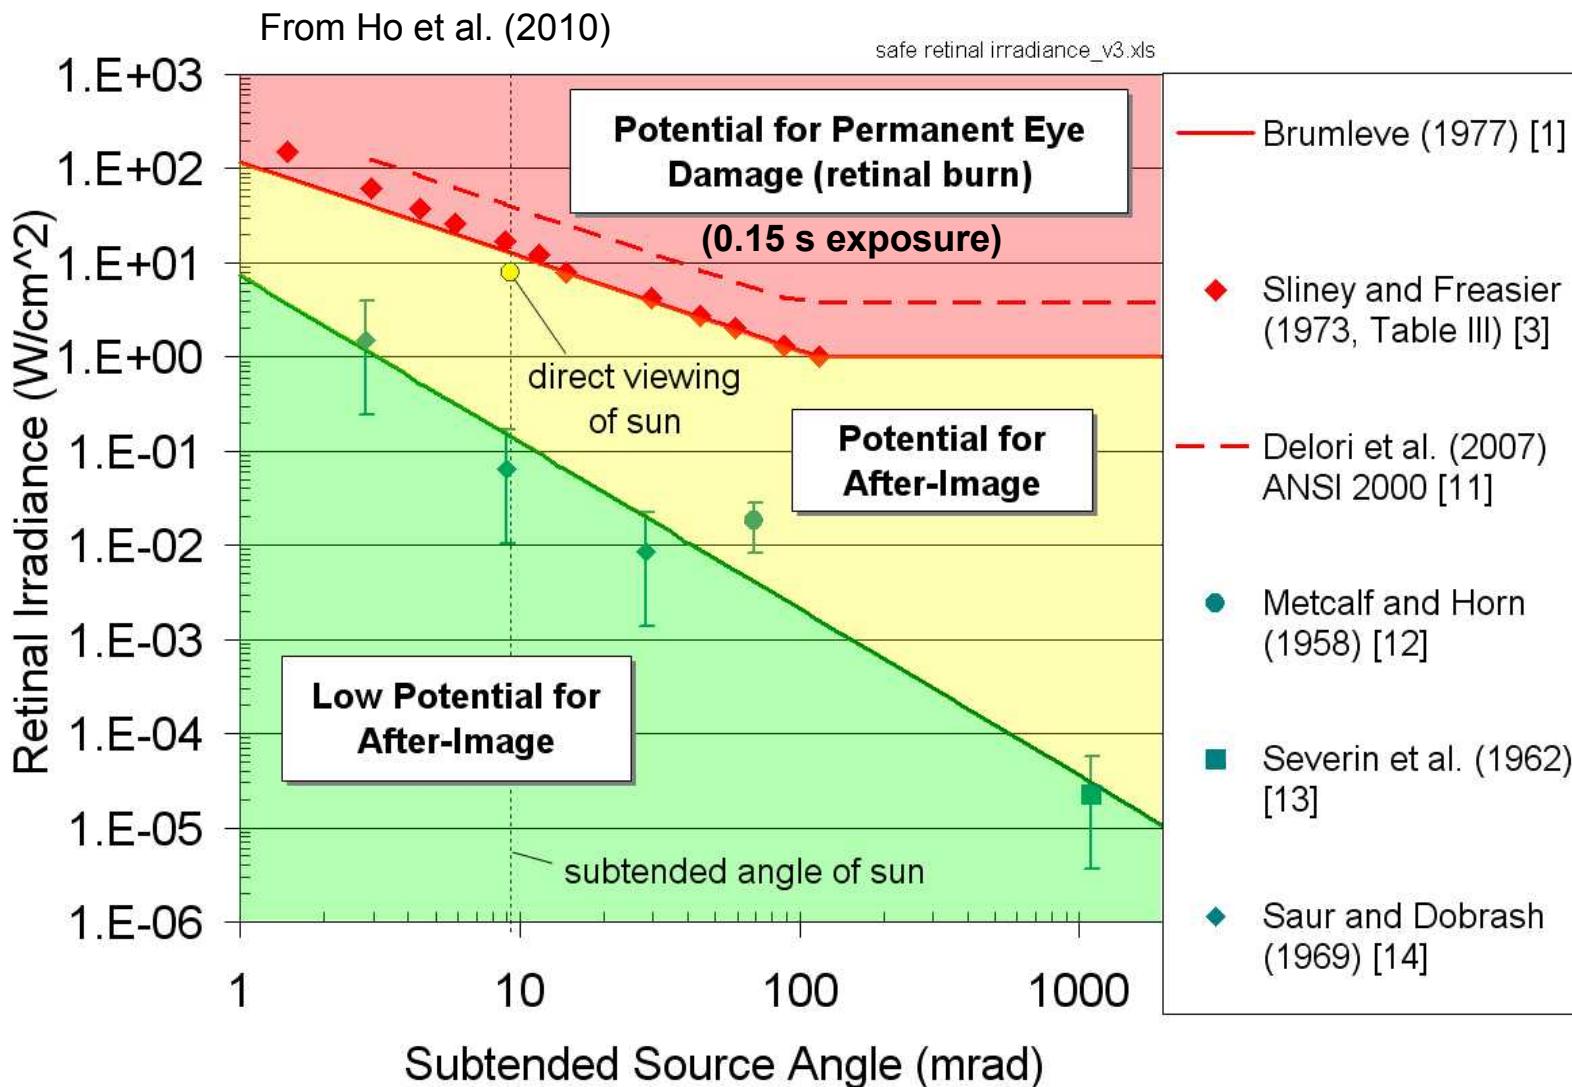




Analysis Steps

(from ASME ES2010 paper)

- **Calculate retinal irradiance using equations in paper for specular or diffuse reflections**
 - Collector optical properties, DNI, pupil diameter
- **Calculate subtended angle using equations in paper**
 - For diffuse reflections, source is given by size of receiver or reflecting source
 - For specular reflections, use equations
- **Identify potential impact using plot of retinal irradiance vs. subtended source angle**

Comparison to Safety Metrics

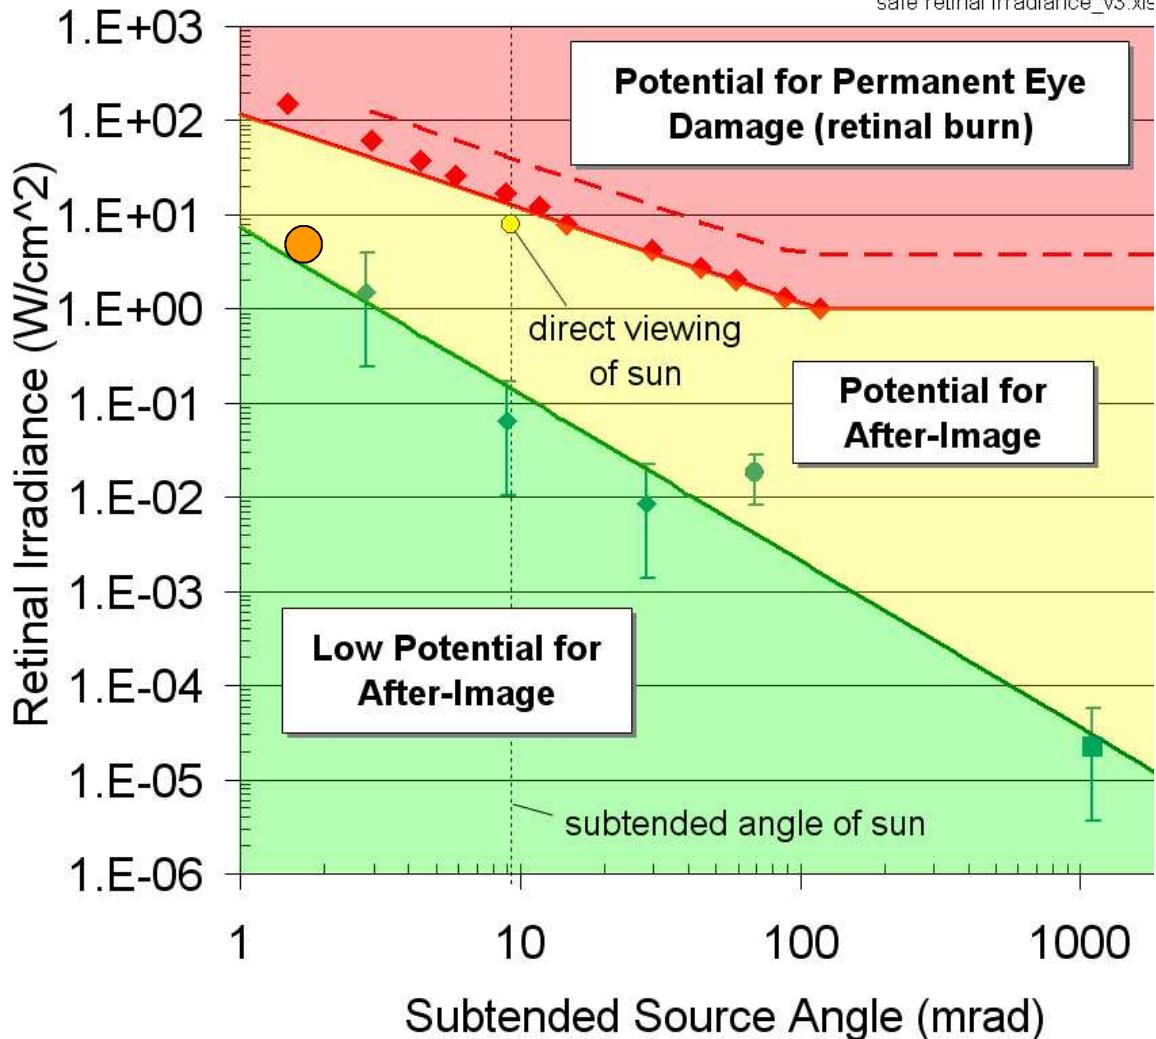

$$\rho = 0.94$$

RMS slope
error = 1 mrad

aperture = 12 m


focal length = 7 m

50 m viewing
distance

⇒ Retinal irradiance
= 5 W/cm²

⇒ Subtended source
angle = 1.8 mrad

Distances for Retinal Burn and Temporary After-Image

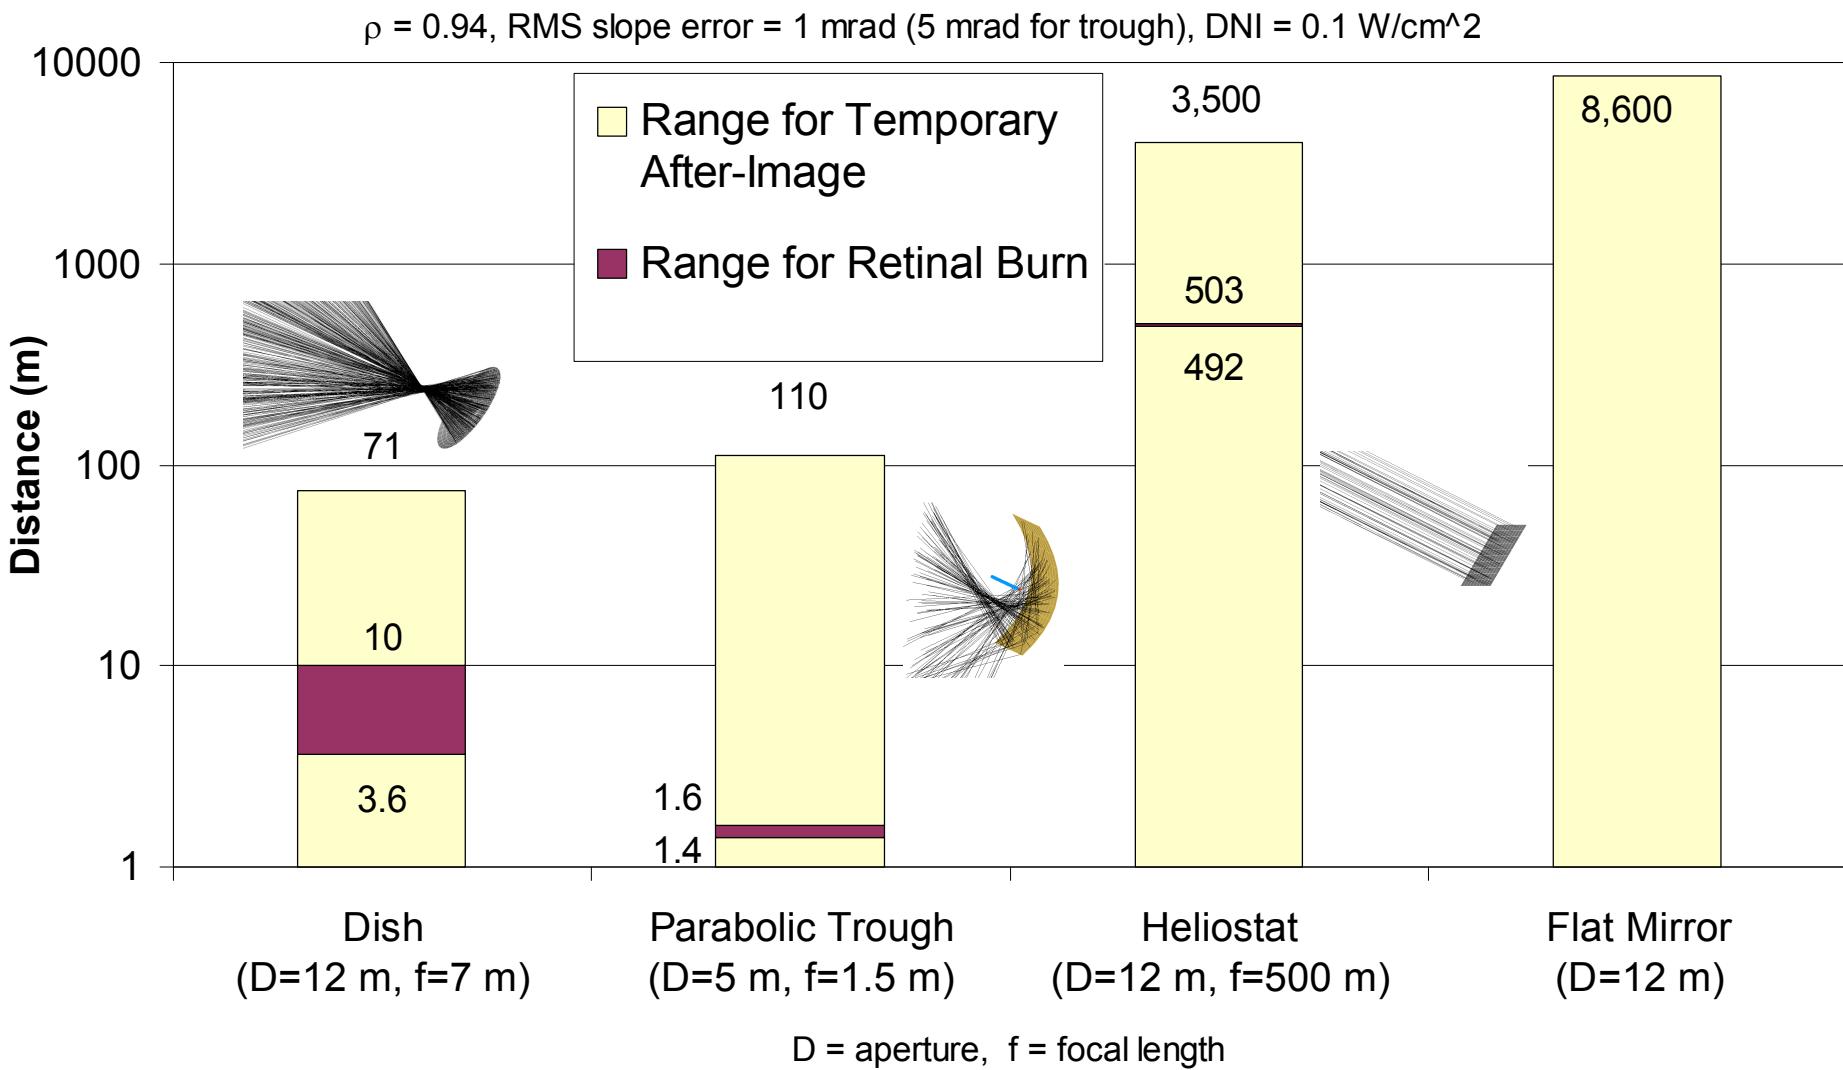



Glare Web Tool

PHLUX Web Tool

Photographic Flux Tools for Solar Glare and Flux Mapping

Sandia National Laboratories: Solar Glare and Flux Mapping Tools - Mozilla Firefox

File Edit View History Bookmarks Tools Help

sandia.gov https://share.sandia.gov/glare/

Sandia National Laboratory https://share.sandia.gov/glare/ Employee Locator | Index | Site Map

Search

Solar Glare and Flux Mapping Tools


Measurement of reflected solar irradiance is receiving significant attention by industry, military, and government agencies to assess potential impacts of glint and glare from growing numbers of solar power installations around the world. In addition, characterization of the incident solar flux distribution on central receivers for concentrating solar power applications is important to monitor and maintain system performance.

This website provides tools to analytically and empirically quantify glare from reflected light and determine the potential impact (e.g., temporary flash blindness, retinal burn). In addition, tools are being developed that will evaluate the irradiance distribution on a central receiver. Empirical results are based on digital photographs uploaded by the user. Instructions are included in each of the links below.


Empirical Glare Analysis
Upload Glare Photos



Analytical Glare Analysis



Flux Mapping Analysis
Upload Receiver Photos



©2010 Sandia Corporation | Questions and Comments | Privacy and Security | News release RSS feed

Done

Sandia National Laboratories

Empirical Analysis



Images are uploaded with relevant information

Digital photographs are taken of the glare

Empirical Analysis - Mozilla Firefox

File Edit View History Bookmarks Tools Help

sandia.gov https://share.sandia.gov/glare

Empirical Analysis

Analysis Title: Dish_Glare

Reflection Raw Image: C:\Documents and Settings\ [Browse...]

Sun Raw Image: C:\Documents and Settings\ [Browse...]

Reflection Image Filter Factor: 512

Sun Image Filter Factor: 1024

DNI (W/m²): 854

Number of Points for Irradiance Plots: 50

Analyze

Done

Laboratories

Selection Tools

Empirical Analysis - Mozilla Firefox

File Edit View History Bookmarks Tools Help

sandia.gov https://share.sandia.gov/glare/cgi-bin/upload.cgi

Empirical Analysis

Uploading Images... Done!


Sun Image

Ellipse Definition

Axis 1, Point 1, x (pixels):	1276	Axis 1, Point 1, y (pixels):	920
Axis 1, Point 2, x (pixels):	1523	Axis 1, Point 2, y (pixels):	1187
Axis 2 Length (pixels):	364	<input type="button" value="Done"/>	

Measurement Tools

Image Measurement

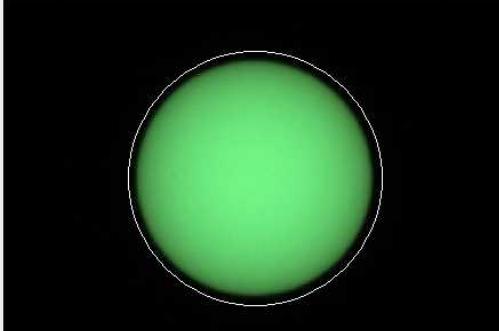


Reflection Image

Ellipse Definition

Axis 1, Point 1, x (pixels):	1487	Axis 1, Point 1, y (pixels):	974
Axis 1, Point 2, x (pixels):	1593	Axis 1, Point 2, y (pixels):	1075
Axis 2 Length (pixels):	73	<input type="button" value="Done"/>	





Measurement Tools

Image Measurement

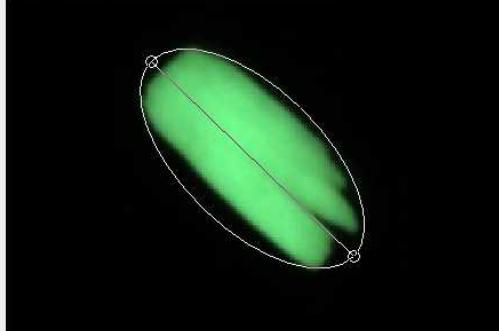

 Sandia National Laboratories

Output

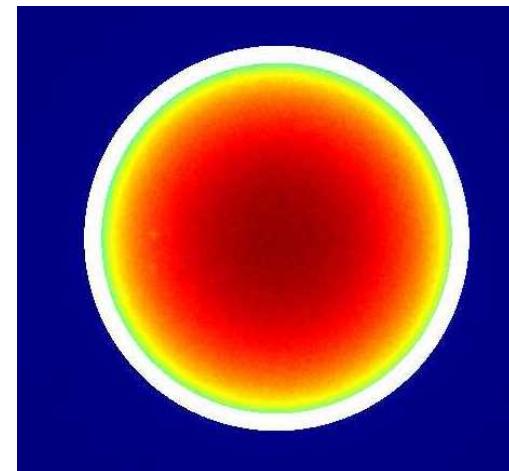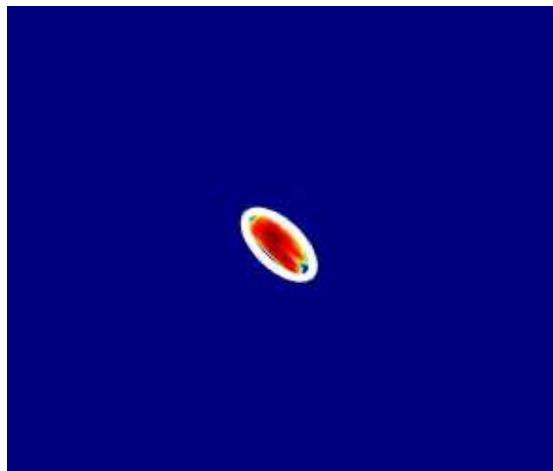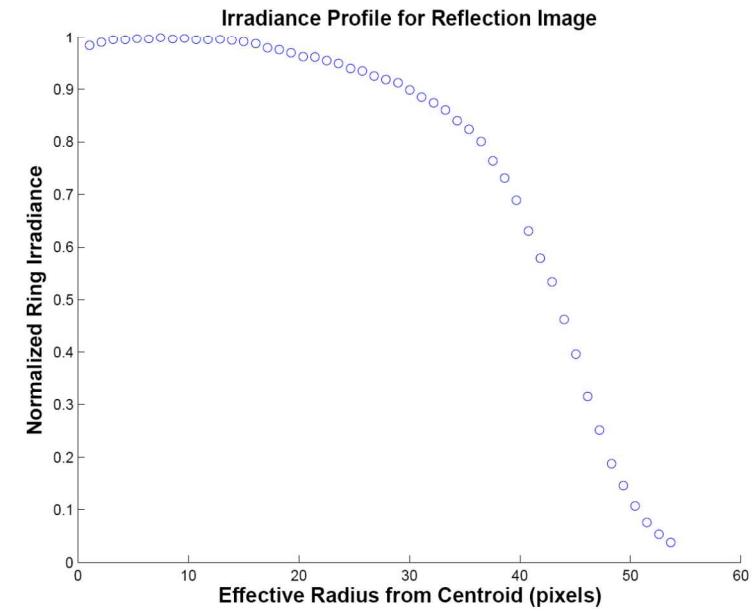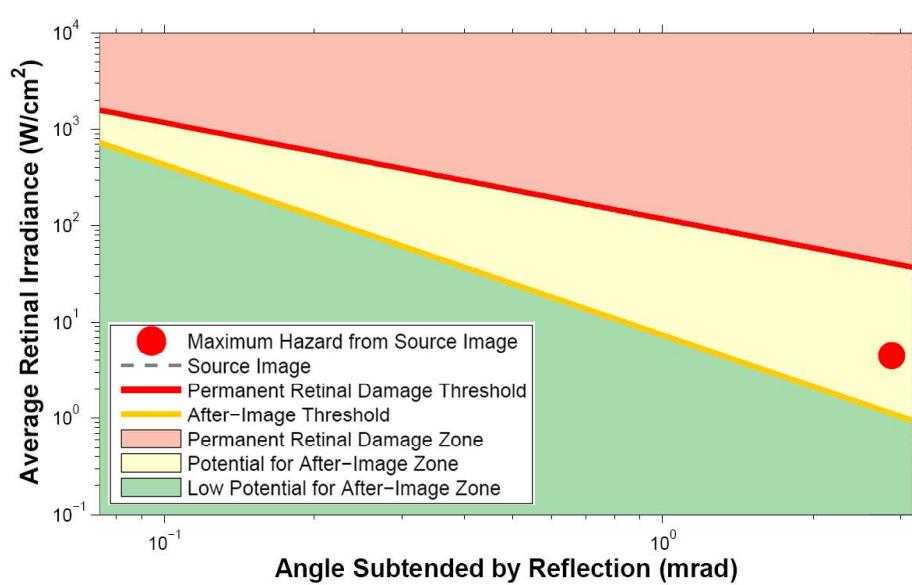



Recent Examples of Glare from CSP Facilities



Concentrated Glare from Troughs





Nevada Solar One



Drive-by video of Nevada Solar One Glare, Boulder City, NV (6/29/10, noon)



Kramer Junction



Air Force Flyovers (F-16 and C-12) of Kramer Junction Parabolic Trough Plant in 2010 (CA)



Helicopter Flyover of NSTTF





November 10, 2010







Glare Analysis

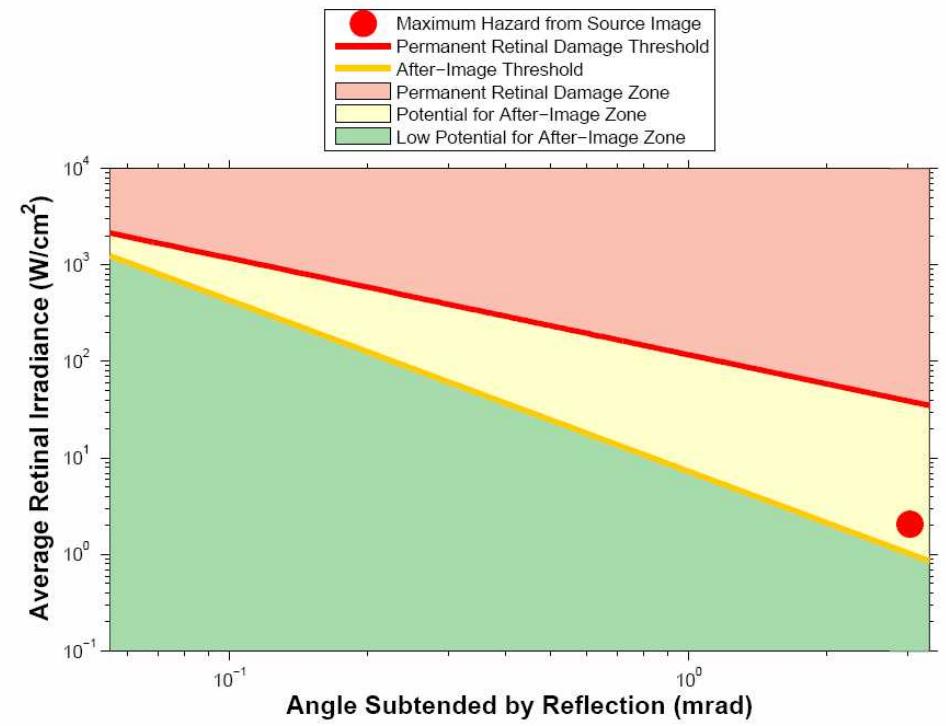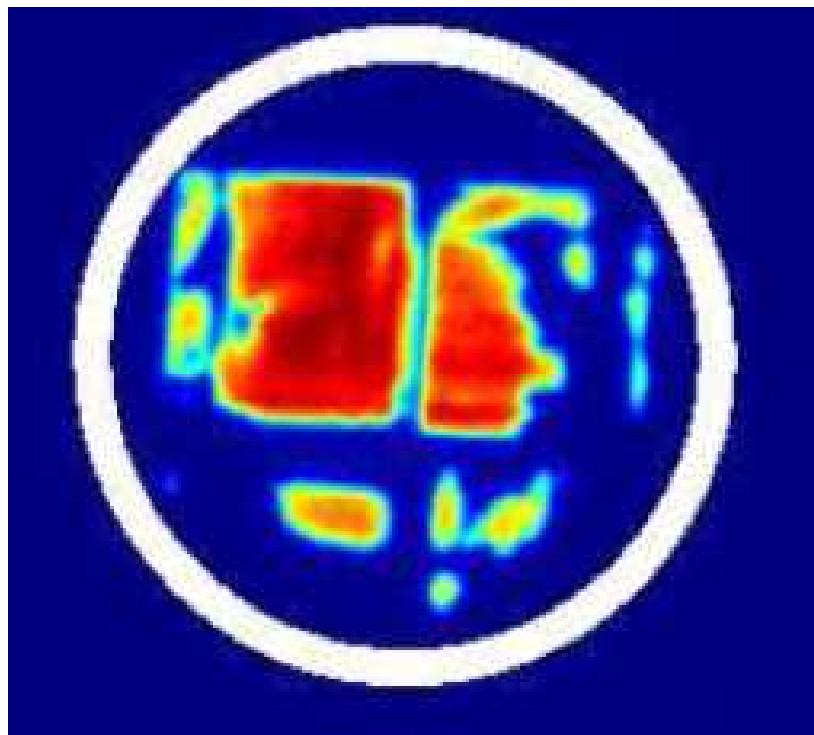



Overview

- Introduction
- Glint and Glare Analysis
- Thermal Signature Analysis
- Summary




Infrared Emissions

- Heated objects can emit infrared radiation that may interfere with infrared sensors
 - Air Force interested in ~3 – 8 micron range




Spectral Emissive Power

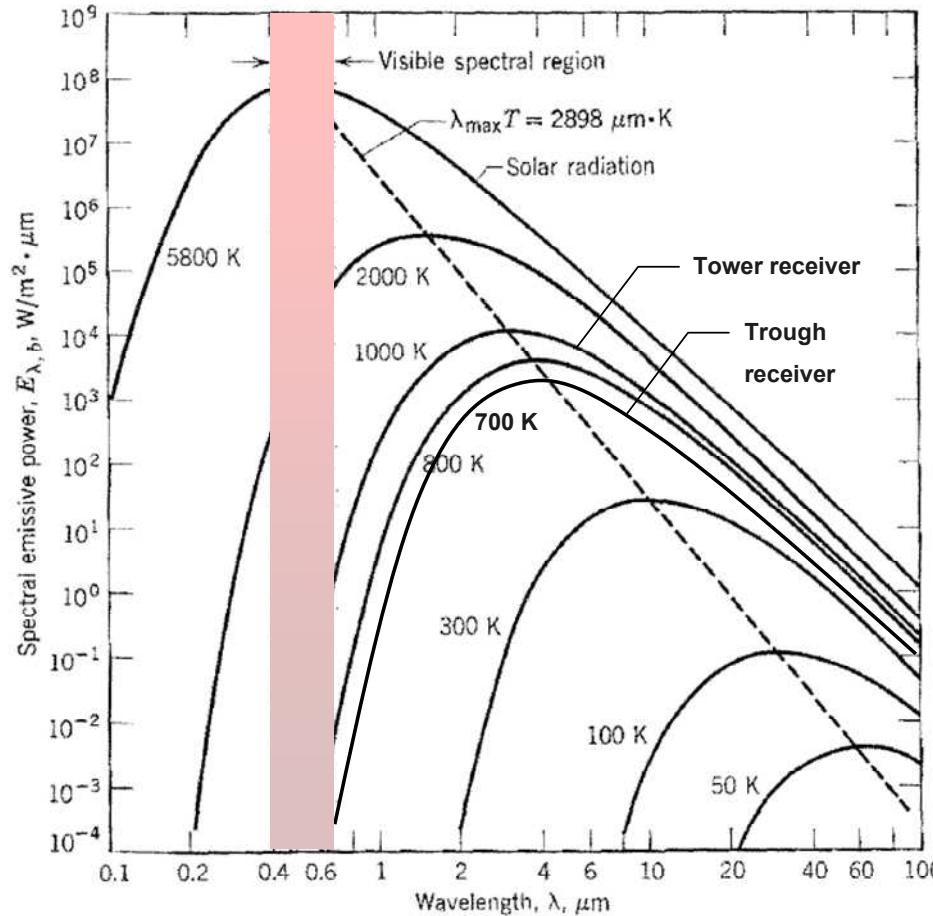

Spectral blackbody emissive power as a function of wavelength and temperature
(adapted from Incropera and DeWitt, 1985).

Example of Irradiance Received from Hot Photovoltaic Array

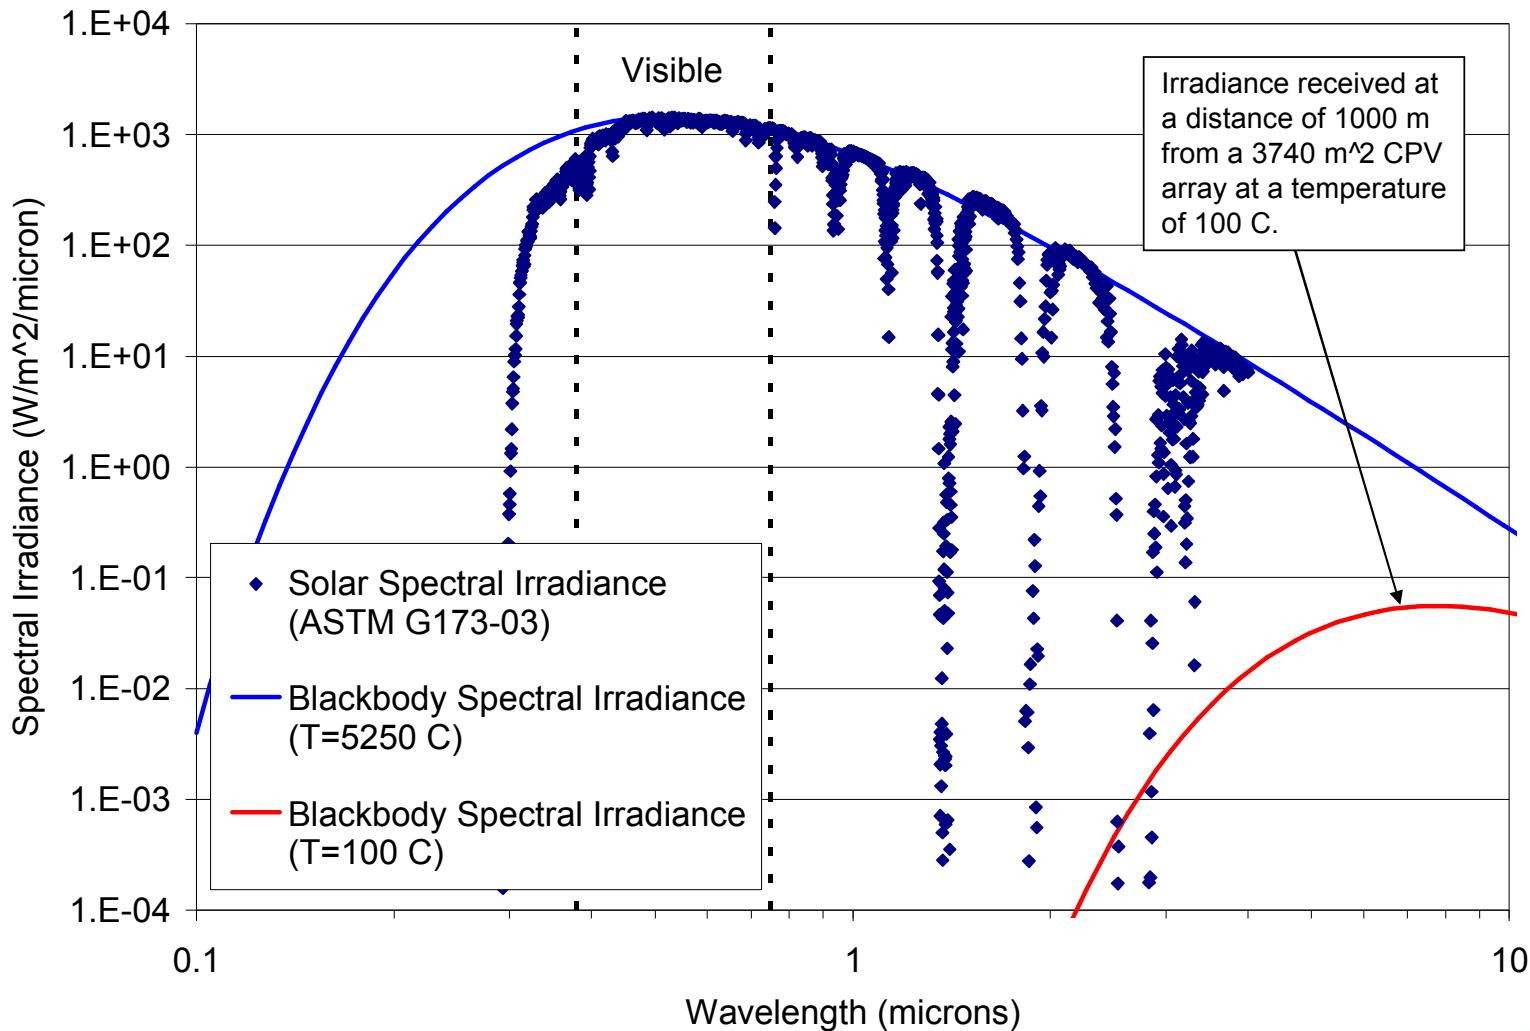



Overview

- Introduction
- Glint and Glare Analysis
- Thermal Signature Analysis
- Summary



Summary

- **Glint and Glare can cause unwanted visual impacts**
 - Analytical models and safety metrics have been developed to quantify glint and glare
 - Models have been validated with test data
 - Web tool has been developed
- **Infrared emissions from heated objects can interfere with infrared sensors**
 - Provide quantification of spectral irradiance for different technologies
 - Temperature and time dependent (e.g., cooling of tower receiver)



Summary

- **Identification and quantification of potential impacts will help agencies to develop appropriate mitigations, measures, and/or requirements**
 - California Energy Commission
 - Air Force
 - FAA
 - National Academies – Transportation Research Board