

WATCHMAN Analysis

Using antineutrino detectors for nonproliferation

Analysis of use cases for antineutrino detectors

This analysis seeks to understand the feasibility of using antineutrino detectors for nonproliferation monitoring.

- ▶ Collaborative effort
 - ▶ WATCHMAN project team and Sandia Systems Analysis group
 - ▶ High-level, objective analysis comparing technical capabilities of antineutrino detectors to needs of nonproliferation mission
- ▶ Analysis approach
 - ▶ “Can antineutrino detectors fulfill core requirements of different nonproliferation applications?”
 - ▶ Supported by feedback from nonproliferation experts (SNL / LLNL)
 - ▶ For completeness, evaluated all plausible use cases
 - ▶ New technologies generate options that may drive usage

Applications of large antineutrino detectors

“By 2016, demonstrate remote monitoring capabilities for reactor operations.”

-NNSA Strategic Plan (May 2011)

- ▶ Key features of antineutrino signal
 - ▶ Produced after fission events
 - ▶ Highly penetrating - detectable at long ranges
 - ▶ Effectively impossible to falsify, disguise, or shield
- ▶ Antineutrinos can be used to determine...
 - ▶ Existence of reactor
 - ▶ Operational status of reactor (e.g., on/off)
 - ▶ Power level of reactor
 - ▶ Burnup of reactor fuel
- ▶ Identified several reactor monitoring and discovery scenarios
 - ▶ Verifying reactor exclusion zone
 - ▶ Ensuring only declared reactors are operating
 - ▶ Characterizing reactor operations
 - ▶ Investigating potential reactor sites
- ▶ Examined other applications that would benefit from these properties
 - ▶ Monitoring for nuclear detonations
 - ▶ Monitoring spent-fuel repositories

Highlights from SME interviews

Spoke with 8 nonproliferation SMEs from SNL and LLNL

- ▶ Reactor characteristics available from antineutrinos are the right ones for nonproliferation
- ▶ Potential applications have value for nonproliferation community
 - ▶ No consensus on which applications would be most valuable
- ▶ Capabilities of antineutrinos are unique and very interesting
 - ▶ Selectivity to fission, high standoff, persistence, non-intrusiveness, tamper resistance
- ▶ Antineutrino detectors may create diplomatic options
 - ▶ Dual science/nonproliferation missions
 - ▶ Limited transparency (only reveal fission)
- ▶ Important operational features
 - ▶ Ease of operation; timeliness of information; ease of interpreting data
- ▶ Size/installation might be an issue
 - ▶ Unlikely that a country would allow installation of large, permanent detector
- ▶ Generally excited by antineutrino detectors, but questioned whether they are necessary
 - ▶ Other options are not as capable, but might be “good enough”
 - ▶ Greatest interest in better assurances regarding undeclared reactors

Reactor exclusion zone

Ensure that there are no reactors operating in an area

- ▶ Search for excess antineutrino signal above natural background
- ▶ Best suited to finding reactors built after detector installation
 - ▶ Might work for existing reactors (higher count rate required)
- ▶ Potentially subject to countermeasures
 - ▶ Declared reactor that masks signal from smaller, undeclared reactor

Ensuring only declared reactors

Ensure that only declared reactors are operating (no undeclared reactors)

- ▶ Search for excess antineutrino signal above background
 - ▶ Background includes both natural sources and declared reactors
 - ▶ Background from other reactors depends on operating conditions
 - ▶ Higher background decreases sensitivity
- ▶ Similar to previous case except it requires real-time estimates of background from other reactors
 - ▶ Could build small detectors near each declared reactor and/or model expected background based on safeguards declarations
- ▶ Potentially subject to countermeasures
 - ▶ Declared reactor near detector to mask other signals
 - ▶ Manipulating operations of declared reactors to hide undeclared reactor

Characterize reactor operations

Understand how reactors are being operated

- ▶ Determine operational status (on/off), power level, and/or burnup of fuel in one or more reactors
 - ▶ Antineutrino data is complementary to other safeguards
 - ▶ Remote, persistent, nonintrusive monitoring
 - ▶ Direct information about conditions in the core and bulk quantities of mat'l
 - ▶ Opportunity to independently assess reactor operations and/or verify declarations
- ▶ Higher antineutrino count rates needed
 - ▶ Some measurements use antineutrino energy spectrum (~10x events)
- ▶ May be difficult to monitor many reactors with one detector
 - ▶ Challenging to deconvolve signals
- ▶ Medium- or high-standoff detectors unlikely to be useful due to higher cost and potential for including multiple reactors

IAEA – Focused Workshop on Antineutrino Detection for Safeguards Applications

- ▶ IAEA internal workshop identified following inspector needs:
 - ▶ “...improved capability to determine the power levels of a research reactor;”
 - ▶ “...improved capability to quantify & identify fuel/material in core of research reactor;”
 - ▶ “...improved capability to evaluate research reactor power cycle time;”
 - ▶ “...improved method to determine reactor status;”
 - ▶ “Power monitors not currently used in power reactors;”
 - ▶ “Research reactor activities can change between visits.”
- ▶ “In all cases the AEG [Antineutrino Experts Group] deemed that all needs could be fully or partially fulfilled by an antineutrino detection system...”
- ▶ “It is recommended that the IAEA consider antineutrino detection and monitoring in its current R&D program for safeguarding bulk-process reactors.”
- ▶ “...[antineutrino detection] differs significantly from, and is complementary to, the item accountancy, containment and surveillance measures ...”
- ▶ “Several detectors, built specifically for safeguards applications, have demonstrated robust, long-term measurements of these metrics in actual installations at operating power reactors...”



Monitor for nuclear detonations

Verify that there are no unauthorized nuclear detonations (e.g., nuclear tests)

- ▶ Search for bursts of antineutrinos
- ▶ Subject of prior study
 - ▶ Bernstein, West, and Gupta, 2001
 - ▶ 50 kT detector could sense 1 kT test within 10 km
 - ▶ 1 kT test at 100 km with 3 MT detector
- ▶ Largest feasible detector still has relatively limited range
 - ▶ Might be useful for treaty verification of former test site

Rejected applications

- ▶ **Monitoring spent-fuel repositories**
 - ▶ *Use antineutrino detectors to detect changes in the amount or configuration of spent fuel in a repository*
 - ▶ Signal from spent fuel is $\sim 1\%$ that of operating reactor
 - ▶ Repository might have enough fuel to yield statistically significant signal overall, but detector would not be sensitive to changes in spent fuel
- ▶ **Rapid follow-up to investigate potential reactor sites**
 - ▶ *Use antineutrino detectors to investigate signs that a site might be hosting a clandestine nuclear reactor*
 - ▶ Lengthy timescale for installing WATCHMAN-type detectors makes them poorly suited for responsive deployment

Sensitivity ranges for reactor discovery (worst case – maximum RN background)

Reactor size →	10 MW _{th}				3875 MW _{th}			
Detector size →	1 kT		1 MT		1 kT		1 MT	
Overburden (mwe) →	400	1500	1500	5000	400	1500	1500	5000
Exclusion zone (excess counts)	2.7	3.5	36	45	11	13	160	190
Exclusion zone (on/off cycle)	0.95	1.2	13	16	25	32	340	420
Only declared (excess counts)								
Only declared (on/off cycle)								

Values in table represent maximum distance (km) at which detector could determine presence of undeclared reactor at 3σ level

- By measuring excess counts on timescale required to produce 1 IAEA S.Q. of Pu + 90 days, or
- By detecting on/off difference on timescale required for reactor refueling
 - 14 days for research reactor; 40 days for power reactor

Sensitivity ranges for reactor discovery (best case – no RN background)

Reactor size →	10 MW _{th}				3875 MW _{th}			
Detector size →	1 kT		1 MT		1 kT		1 MT	
Overburden (mwe) →	400	1500	1500	5000	400	1500	1500	5000
Exclusion zone (excess counts)	3.8	6.0	82	125	14	18	333	450
Exclusion zone (on/off cycle)	1.3	1.9	30	43	35	52	770	~1000
Only declared (excess counts)								
Only declared (on/off cycle)								

Values in table represent maximum distance (km) at which detector could determine presence of undeclared reactor at 3σ level

- By measuring excess counts on timescale required to produce 1 IAEA S.Q. of Pu + 90 days, or
- By detecting on/off difference on timescale required for reactor refueling
 - 14 days for research reactor; 40 days for power reactor

Detector sizes for reactor characterization

Reactor size →	10 MW_{th}		3875 MW_{th}	
Distance →	25 m	1 km	25 m	1 km
Overburden (mwe) →	25	100	25	400
Verify on/off cycle				
Verify power level				
Verify burnup of fuel				

Values in table represent minimum detector size required to achieve 3σ confidence level

- Verification of reactor on/off status within one shutdown cycle
 - 14 days for research reactor; 40 days for power reactor
- Verification of power level to uncertainty of 1 IAEA S.Q. of Pu over one operating cycle
 - ~18 months for power reactor
- Determination of fuel burnup to accuracy of 1 IAEA S.Q. of Pu over course of one operating cycle

Analysis overview

- ▶ Several deployment regimes
 - ▶ Non-cooperative - presumed to require cross-border installation at “far” range
 - ▶ Niche applications may exist at shorter ranges
- ▶ High-level gap analysis (closed session)
 - ▶ Not a detailed comparison of options
- ▶ Not targeting any particular agency, treaty, etc.
- ▶ Primarily considered WATCH-MAN-type detectors, but many results are applicable to anti-neutrino detectors in general

Standoff	Range	Approx. detector size
Near	< 1 km	~1 Ton
Medium	1 – 25 km	~1 kT
Far	25 – 1000 km	~1 MT

Engagement with state being monitored	
Cooperative	Allows installation of detector, but may limit further access to detectors and/or data
Non-cooperative	Does not permit installation of detectors; presumed to require cross-border (“far”) deployment

Analysis focused on technical suitability

- ▶ Studied ability of antineutrinos to meet core requirements of each potential application
 - ▶ Determined critical detector characteristics for each use case
 - ▶ Type of signal to be detected
 - ▶ Ability to achieve desired standoff
 - ▶ Ability to provide high assurance (not susceptible to countermeasures)
 - ▶ Also identified other useful (“nice to have”) features
 - ▶ Evaluated performance of antineutrino detectors against these characteristics
- ▶ Antineutrino detectors have many other features that might be relevant to individual deployments (*next slide*)
 - ▶ Importance depends heavily on particulars of situation
- ▶ When comparing to other technologies, additional factors would be relevant
 - ▶ Cost, technical risk, sustainability, ruggedness, ...
 - ▶ This analysis serves as initial screen for technical feasibility

Features of antineutrino detectors that may affect particular deployments

- ✓ Remote, semi-autonomous, continuous monitoring is possible
 - ▶ Less invasive for state being monitored
 - ▶ Reduced inspection burden for monitoring agency/state
- ✓ Signal is directly related to fission process (and only reveals fission)
 - ▶ Many other measurements are only indirectly related to fission
 - ▶ Limited (granular) transparency may be more acceptable to state being monitored and/or host nation
- ✓ Supports dual missions of nonproliferation and science (*next slide*)
- ✗ WATCHMAN technology requires large, underground detectors
 - ▶ Unilateral and/or mobile deployments are not feasible
 - ▶ May not be welcomed by host country
- ✗ Observations typically have low signal-to-noise ratio
 - ▶ Multiple streams of evidence may be needed to corroborate findings
 - ▶ Many valuable detection technologies face similar challenges

Potential for dual missions

Antineutrino detectors can support nonproliferation monitoring and fundamental science research.

Potential for dual missions may enhance nonproliferation usage by ...

- ▶ Providing advantages to host country
 - ▶ Access to world-class research facility and possible influx of foreign investment
 - ▶ Incentive for a state to permit monitoring or for a third-party state to allow cross-border monitoring
- ▶ Allowing cost sharing with scientific organizations
 - ▶ Host nation may pay for detectors to enhance scientific capabilities
 - ▶ Foreign states may contribute to join collaboration
- ▶ Supporting multinational scientific collaboration
 - ▶ Interpersonal and organizational relationships might ease diplomatic tensions
 - ▶ Sharing data may enhance transparency


Example: SESAME project in Jordan

SESAME Project

- ▶ International, multi-user synchrotron facility in Jordan, modeled after CERN
- ▶ Mission:
 - ▶ Foster scientific and technological excellence in the Middle East and neighboring countries by enabling world-class scientific research
 - ▶ Build scientific and cultural bridges between diverse societies
- ▶ Formed under auspices of UNESCO
 - ▶ German government donated decommissioned synchrotron
 - ▶ UNESCO and international community funded creation (Including US Dept. of State)
 - ▶ Ongoing costs borne by members
- ▶ Members (2013)
 - ▶ Bahrain, Cyprus, Egypt, Iran, Israel, Jordan, Pakistan, the Palestinian Authority, and Turkey



**Synchrotron-light for
Experimental Science and
Applications in the Middle East**

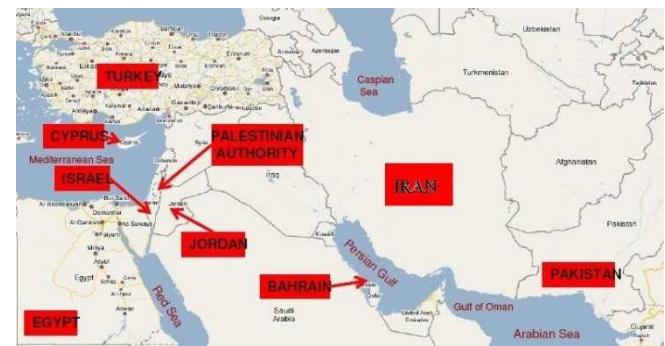

Reactor exclusion zone - Analysis

- Consider all employment options
 - Cooperative: Near, medium, and far
 - Non-cooperative: Far only

Reactor exclusion zone - Analysis

Characteristic	Standoff →	Cooperative			Non-Cooperative
		Near	Med	Far	Far
	Reveals existence of operating reactor within range				
	Can achieve desired standoff				
	Difficult to shield signal				
	High selectivity towards undeclared reactors				
	Reveals location of reactor(s) generating signal				

- Identify core characteristics associated with each use case

Reactor exclusion zone - Analysis

Characteristic	Standoff →	Cooperative			Non-Cooperative
		Near	Med	Far	Far
Reveals existence of operating reactor within range		X	X	X	X
Can achieve desired standoff		X	X	X	X
Difficult to shield signal		X	X	X	X
<i>High selectivity towards undeclared reactors</i>		/	/	/	/
<i>Reveals location of reactor(s) generating signal</i>		-	O	/	/
Overall Rating					

- Evaluate importance of each characteristic for each option
 - *(Italicized if not required)*

X	Required for core mission
/	Offers substantial improvement in capability
O	Optional, but helpful - “nice to have”
-	Low importance

Reactor exclusion zone - Analysis

Characteristic	Standoff →	Cooperative			Non-Cooperative
		Near	Med	Far	Far
Reveals existence of operating reactor within range		X	X	X	X
Can achieve desired standoff		X	X	X	X
Difficult to shield signal		X	X	X	X
<i>High selectivity towards undeclared reactors</i>		/	/	/	/
Reveals location of reactor(s) generating signal		-	○	/	/

- Evaluate performance of antineutrino detectors against each characteristic

Performance of antineutrino detectors

Good

Moderate

Poor

Reactor exclusion zone - Analysis

Characteristic	Standoff →	Cooperative			Non-Cooperative
		Near	Med	Far	Far
Reveals existence of operating reactor within range		X	X	X	X
Can achieve desired standoff		X	X	X	X
Difficult to shield signal		X	X	X	X
<i>High selectivity towards undeclared reactors</i>		/	/	/	/
Reveals location of reactor(s) generating signal		-	○	/	/
Overall Rating					

- Determine overall score based on performance against required characteristics

All required characteristics are “good”
 Some req’d characteristics are “moderate”
 Some req’d char “poor” - no clear use case

Reactor exclusion zone - Analysis

Characteristic	Standoff →	Cooperative			Non-Cooperative
		Near	Med	Far	Far
Reveals existence of operating reactor within range		X	X	X	X
Can achieve desired standoff		X	X	X	X
Difficult to shield signal		X	X	X	X
<i>High selectivity towards undeclared reactors</i>		/	/	/	/
Reveals location of reactor(s) generating signal	-	O	/		/
Overall Rating		Good	Good	Good	Good

X	Required for core mission
/	Offers substantial improvement in capability
O	Optional, but helpful - “nice to have”
-	Low importance

Performance of antineutrino detectors		
Good	Moderate	Poor
All required characteristics are “good”	Some req'd characteristics are “moderate”	Some req'd char “poor” - no clear use case

Ensuring only declared reactors - Analysis

Characteristic	Standoff →	Cooperative			Non-Cooperative
		Near	Med	Far	Far
	Reveals existence of operating reactor within range	✗	✗	✗	✗
	Offers selective sensitivity to undeclared reactors*	✗	✗	✗	✗
	Can achieve desired standoff	✗	✗	✗	✗
	Difficult to shield signal	✗	✗	✗	✗
	Difficult to spoof signal**	✗	✗	✗	✗
	Difficult to mask signal**	✗	✗	✗	✗
	Reveals <i>location of reactor(s) generating signal</i>	-	○	/	/
Overall Rating					

* Assumes that calibration detectors or modelling is used to determine expected signal from declared reactors

** Assumes that increasing range raises likelihood of including other reactor signals

Characterize reactor operations - Analysis

Characteristic	Standoff →	Cooperative			Non-Cooperative
		Near	Med	Far	Far
Reveals operational status (on/off) of one or more known reactors	Reveals operational status (on/off) of one or more known reactors	X	X	X	X
	Reveals power level of one or more known reactors	X	X	X	X
	Reveals burnup of fuel in one or more known reactors	X	X	X	X
	Can achieve desired standoff	X	X ^{**}	X ^{**}	X
	Difficult to shield signal	X	X	X	X
	Difficult to spoof signal*	X	X	X	X
	Difficult to mask signal*	X	X	X	X
	Can separate signals from different reactors	O	/	X	X
Overall Rating		Green	Yellow	Red	Yellow

* Assumes that increasing range raises likelihood of including other reactor signals

** Although technically feasible, increased standoff would lower performance by raising background levels and complicating analysis. Scoring reflect the low likelihood of using these standoffs in cooperative case.

Monitor for nuclear detonations - Analysis

Characteristic	Standoff →	Cooperative			Non-Cooperative
		Near	Med	Far	Far
Reveals nuclear detonation		X	X	X	X
Can achieve desired standoff		X	X	X	X*
Difficult to shield signal		X	X	X	X
Difficult to mask signal		X	X	X	X
<i>Offers signal that is selective to nuclear detonation / fission</i>		/	/	/	/
Overall Rating		Green	Green	Yellow	Red

* Overall score reflects the fact that non-cooperative deployment would probably require upper end of standoff range. In contrast, short end of “far” range could find applications in cooperative monitoring.

Suitability of antineutrino detectors

Standoff →	Cooperative			Non-cooperative
	Near	Medium	Far	Far
Exclusion Zone				
Only Declared Reactors				
Reactor Characterization				
Nuclear detonations				
Poor suitability	Moderate suitability, but with caveats	Good suitability		

Suitability of Antineutrino Detectors

Standoff →	Cooperative			Non-cooperative
	Near	Medium	Far	Far
Exclusion Zone				
Only Declared Reactors				<ul style="list-style-type: none">• Antineutrino signal offers unique opportunities for detection of undeclared reactors• All standoffs have potential applications in cooperative regime
Reactor Characterization				
Nuclear detonations				

Poor suitability **Reasonable suitability, but with caveats** **Good suitability**

Suitability of Antineutrino Detectors

Standoff →	Cooperative			Non-cooperative
	Near	Medium	Far	Far
Exclusion Zone				
Only Declared Reactors				
Reactor Characterization	<ul style="list-style-type: none">Similar advantages to cooperative exclusion zoneNeed models and/or calibration detectors to separate signals from declared reactors (esp. for medium- and high-standoff)Potentially subject to countermeasures (esp. in non-coop case)<ul style="list-style-type: none">Cooperative use may decrease likelihood of CM			
Nuclear detonations				

Poor suitability **Reasonable suitability, but with caveats** **Good suitability**

Suitability of Antineutrino Detectors

Standoff →	Cooperative			Non-cooperative
	Near	Medium	Far	Far
Exclusion Zone	<ul style="list-style-type: none">Small, close detector (e.g., outside containment dome or off-site) provides sufficient signal without intruding on reactor operationsFor cooperative case, larger detectors offer no advantage<ul style="list-style-type: none">Increased cost and complexity with no clear benefitsIncreased likelihood of capturing signals from other reactors, which complicates signal analysis			
Only Declared Reactors				
Reactor Characterization	Green	Yellow	Red	Yellow
Nuclear detonations	<ul style="list-style-type: none">Some measurements may not be accessible at higher end of range for non-cooperative case			
Poor suitability		Reasonable suitability, but with caveats		Good suitability

Suitability of Antineutrino Detectors

Standoff →	Cooperative			Non-cooperative
	Near	Medium	Far	Far
Exclusion Zone	<ul style="list-style-type: none">• Largest feasible detector (3 MT) only offers 100-km range<ul style="list-style-type: none">• For non-cooperative (cross-border) case, this range has low likelihood of including sites of interest• Limits cooperative applications, but not prohibitive• Cooperative uses may exist<ul style="list-style-type: none">• Treaty verification; international assurances			
Only Declared Reactors				
Reactor Characterization				
Nuclear detonations				
Poor suitability		Reasonable suitability, but with caveats		Good suitability

Suitability of antineutrino detectors

Standoff →	Cooperative			Non-cooperative
	Near	Medium	Far	Far
Exclusion Zone				
Only Declared Reactors				
Reactor Characterization				
Nuclear detonations				
Poor suitability	Reasonable suitability, but with caveats	Good suitability		

Summary

- ▶ When used for nonproliferation purposes, antineutrinos...
 - ▶ Offer a strongly penetrating signal that is highly tamper-resistant
 - ▶ Permit high-standoff, non-intrusive, persistent, remote monitoring
 - ▶ Are highly selective, representing a “smoking gun” of fission
- ▶ Nonproliferation SMEs seem intrigued by features and capabilities
 - ▶ Use cases and available data match their needs
 - ▶ Some concern about whether host country would allow installation
- ▶ Detection of undeclared reactors is a promising application
 - ▶ Antineutrino detectors are well-suited to this task and nonproliferation community values the result
 - ▶ Presence of other reactors may increase backgrounds, complicate analysis, and decrease sensitivity
 - ▶ Detectors are potentially subject to countermeasures in this mode
 - ▶ Even maximum range may be insufficient for cross-border installation
- ▶ Small detectors are a good match for cooperative monitoring of reactors
- ▶ Monitoring of nuclear test sites also promising for ranges < 100 km