

Recent Memory Versions of Conditional Point Sampling for Transport in 1D Stochastic Media

Emily H. Vu*† and Aaron J. Olson†

*Department of Nuclear Engineering and Radiological Sciences, University of Michigan, Ann Arbor, MI 48109, USA,

emilyhvu@umich.edu, evu@sandia.gov

†Sandia National Laboratories, Albuquerque, NM 87185, USA, aolson@sandia.gov

INTRODUCTION

Conditional Point Sampling (CoPS) is a recently developed algorithm for computing radiation transport quantities in stochastic media. CoPS has some attractive qualities: a high degree of accuracy in 1D [1] and multi-D [2], ability to compute variance in outputs caused by material mixing [1], and exactness in 1D mixtures with Markovian mixing statistics [1]. However, it involves a list of points that grows during simulation causing potentially unbounded increases in runtime and memory requirements and is more complicated to understand and implement than some other notable approximate methods. In this summary, we investigate the accuracy of a simpler “recent memory” approach to CoPS that reduces runtime and memory and bears a resemblance to the well-known Chord Length Sampling [3, 4] (CLS) method.

The “benchmark” method of generating a large ensemble of material realizations and solving transport quantities on each of them was employed to establish the ensemble-averaged benchmark solutions. The atomic mix (AM) approximation [4] is evaluated by solving transport results on one realization that is a homogenization of the constituent materials. Chord Length Sampling (CLS) is the Monte Carlo version of the Levermore-Pomraning closure [3, 4, 5] and involves sampling, but not remembering, one material chord at a time. Memory-enhanced versions of CLS include “Algorithm B,” also known as the Local Realization Preserving (LRP) [3, 4, 6] method, and “Algorithm C” (Alg. C) [3]. In 1D, LRP operates as CLS except that a material chord is remembered until the simulated particle exits the chord. Alg. C remembers the chord on each side in addition to the chord containing the particle.

In CoPS, rather than sampling material chords, material points are sampled on the fly. Delta tracking [7] is used such that the algorithm only needs to know what material it is interacting with at discrete pseudo-collision sites. The probability of sampling a particular material at a pseudo-collision site is based on material abundance and spatial correlation with points that have already been sampled. A conditional probability function incorporates these factors to determine the probabilities of sampling each possible material at a newly sampled point. To date, there are three primary versions of CoPS for 1D mixtures with Markovian mixing statistics [1] differentiated only by the conditional probability function used: CoPS2 (uses 2-point material correlations), CoPS3 (uses 3-point material correlations in a way easily extensible to multi-D [2]), and CoPS3PO (uses 3-point material correlations and is errorless for 1D, Markovian-mixed media; “PO” stands for “Pseudo-interface Optimum”). In each of these versions, all sampled material points are stored in computer memory and used in future conditional probability function evaluations.

In this summary, we investigate a simpler “recent mem-

ory” form of CoPS that stores only the sampled material assignments of the most recently visited locations by a history rather than that of every location. This simpler form trades accuracy for simplicity making the method more approachable—giving it a direct analogy to the celebrated Chord Length Sampling (CLS) method and derivatives—as well as faster-running and less memory intensive. In this study, we numerically investigate limited-memory versions of CoPS2 and CoPS3PO using the notation CoPSp-N to denote use of “ p ”-point material correlations based on the N most recently visited pseudo-collision sites, and compare its accuracy and runtime for several different user parameters to that of a collection of approximate methods on a common benchmark set [4, 5]. Results for all methods except the new limited memory CoPS were produced for Ref. [1] and reused here. It is the hope of the authors that this “recent memory” approach will improve theoretical and practical understanding of Conditional Point Sampling and play an impactful role in a broader “limited memory” scheme to come that maintains the attractive qualities of CoPS while reducing runtime and computer memory requirements.

THEORY

The following stochastic transport equation and boundary conditions describe transport in 1D, binary, Markovian-mixed media on a slab geometry with an isotropic boundary source and otherwise vacuum boundary conditions:

$$\mu \frac{\partial \psi(x, \mu, \omega)}{\partial x} + \Sigma_t(x, \omega) \psi(x, \mu, \omega) = \frac{\Sigma_s(x, \omega)}{2} \int_{-1}^1 d\mu' \psi(x, \mu', \omega), \quad (1a)$$

$$0 \leq x \leq L, -1 \leq \mu \leq 1; \quad (1b)$$

$$\psi(0, \mu) = 2, \mu \geq 0, \psi(L, \mu) = 0, \mu < 0, \quad (1c)$$

where x and μ are the particle spatial and angular variables, respectively, ω is the material realization, and L is the length of the domain.

A common way to generate a Markovian-mixed realization is by successively sampling chord lengths beginning at a boundary [4, 5]. Another method is based on the property that the average number of pseudo-interfaces, I , per slab length r is Poisson-distributed [8]. The average number of pseudo-interfaces is

$$I = \frac{r}{\Lambda_c}, \quad (2)$$

where in binary media, the correlation length Λ_c is computed using Λ_α and Λ_β , the average chord lengths of materials α and β , respectively [8]:

$$\Lambda_c = \frac{\Lambda_\alpha \Lambda_\beta}{\Lambda_\alpha + \Lambda_\beta}. \quad (3)$$

The number of pseudo-interfaces in a particular realization is computed using the frequency of k pseudo-interfaces

$$f(k, I) = \frac{I^k}{k!} e^{-I}, \quad (4)$$

and each pseudo-interface is distributed in a realization using a spatially uniform distribution. The material type of each cell defined by these pseudo-interfaces is sampled using material abundances. For binary media composed of materials α and β , the abundance or probability of sampling materials α and β , respectively, are

$$P_\alpha = \frac{\Lambda_\alpha}{\Lambda_\alpha + \Lambda_\beta}, \quad (5a)$$

$$P_\beta = 1 - P_\alpha. \quad (5b)$$

CONDITIONAL POINT SAMPLING

In Conditional Point Sampling (CoPS), the use of delta tracking [7] enables on-the-fly material point assignments. The algorithm begins by initializing the particle position and direction, x and μ . A streaming event is selected by taking the minimum of the distance to boundary and distance to potential collision, $d_c^* = -\frac{1}{\Sigma_t^*} \ln(\xi)$, where Σ_t^* is the largest total cross section (i.e. the majorant cross section) in the domain, and ξ is a randomly generated number uniformly sampled between 0 and 1. If the particle streams to a pseudo-collision, the pseudo-collision is accepted by sampling against the probability of a true collision, expressed as the ratio between the true and majorant cross sections: $P_{col} = \frac{\Sigma_t}{\Sigma_t^*}$.

The material type at a pseudo-collision site is sampled using the material abundance (Eq. 5a) if no other points have been defined. However, if other point-based material assignments have already been made, a derived conditional probability function specific to the domain's governing spatial statistics is used to sample the material type at the new point conditionally on neighboring points. For 1D, binary, Markovian-mixed media, conditional probability functions dependent on only the nearest point or only the nearest point on each side of a new point were derived in Ref. [1]. “CoPS2” uses a 2-point conditional probability function to compute the probability of sampling material α at a new point (in which κ denotes that the material type has not been sampled yet) conditionally on knowing the material type of the point at distance r_1 away:

$$\pi(\alpha, \alpha|\alpha, \kappa) = 1 - P_\beta \left(1 - e^{-\frac{r_1}{\Lambda_c}}\right), \quad (6a)$$

$$\pi(\beta, \alpha|\beta, \kappa) = P_\alpha \left(1 - e^{-\frac{r_1}{\Lambda_c}}\right). \quad (6b)$$

“CoPS3PO,” in which the “PO” stands for “pseudo-interface optimum”, uses a 3-point conditional probability function based on the nearest point on each side of a new point that is errorless for 1D binary mixtures with Markovian mixing statistics. The probability of sampling material α at the new point based on points of material type m_1 and m_2 distances r_1 and r_2 away on the left and right, respectively are

$$\pi(\alpha, \alpha, \alpha|\alpha, \kappa, \alpha) = 1 - \frac{P_\beta \left(1 - e^{-\frac{r_1}{\Lambda_c}}\right) \left(1 - e^{-\frac{r_2}{\Lambda_c}}\right)}{1 - \frac{P_\beta}{P_\alpha - 1} e^{-\frac{r_1+r_2}{\Lambda_c}}}, \quad (7a)$$

$$\pi(\beta, \alpha, \beta|\beta, \kappa, \beta) = \frac{P_\alpha \left(1 - e^{-\frac{r_1}{\Lambda_c}}\right) \left(1 - e^{-\frac{r_2}{\Lambda_c}}\right)}{1 - \frac{P_\alpha}{P_\beta - 1} e^{-\frac{r_1+r_2}{\Lambda_c}}}, \quad (7b)$$

$$\pi(\alpha, \alpha, \beta|\alpha, \kappa, \beta) = \frac{\left(1 - e^{-\frac{r_2}{\Lambda_c}}\right) \left[1 - P_\beta \left(1 - e^{-\frac{r_1}{\Lambda_c}}\right)\right]}{1 - e^{-\frac{r_1+r_2}{\Lambda_c}}}. \quad (7c)$$

In “CoPS3” an alternative derivation and notation are used that are straightforward to extend to multi-D [2]. CoPS3 is not as accurate as CoPS3PO in 1D; the two versions of CoPS are compared in more detail in Ref. [1]. The probability of sampling material α at the new point based on the nearest, non-excluded points is denoted $\pi(\alpha|\mathbf{m})$ where $\mathbf{m} = \{m_1, m_2, \dots\}$ is a vector containing the material types of the points and $\mathbf{r} = \{r_1, r_2, \dots\}$ is a vector of distances to the points:

$$\pi(\alpha|\{\alpha, \alpha\}) = 1 - P_\beta \left(1 - e^{-\frac{r_1}{\Lambda_c}}\right) \left(1 - e^{-\frac{r_2}{\Lambda_c}}\right), \quad (8a)$$

$$\pi(\alpha|\{\beta, \beta\}) = P_\alpha \left(1 - e^{-\frac{r_1}{\Lambda_c}}\right) \left(1 - e^{-\frac{r_2}{\Lambda_c}}\right), \quad (8b)$$

$$\pi(\alpha|\{\alpha, \beta\}) = \frac{\left(1 - e^{-\frac{r_2}{\Lambda_c}}\right) \left[1 - P_\beta \left(1 - e^{-\frac{r_1}{\Lambda_c}}\right)\right]}{1 - e^{-\frac{r_1+r_2}{\Lambda_c}}}. \quad (8c)$$

RESULTS AND ANALYSIS

Here, we present mean leakage and total runtime results produced using the 2-point (CoPS2) and errorless 3-point (CoPS3PO) implementations of CoPS that remember a maximum of $N = 0, 1, 2, 3, 10, 50$ and 100 most recent points using 1E6 particle histories for a set of problem parameters provided in Ref. [5]. CoPSp-1 draws analogy to CLS in that each new point is sampled based only on knowledge of the most recently visited point similar to how CLS samples each new chord based only on knowledge of which material type the particle is in. CoPSp- N for $N > 1$ is analogous to memory-enhanced versions of CLS, i.e., LRP and Alg. C, in that additional memory of previously sampled geometry features are remembered. In the limit as $N \rightarrow \infty$, the original versions of CoPS are recovered; for brevity CoPSp- ∞ is denoted CoPSp.

The problem parameters of Tables 10-18 in Ref. [5] for planar geometry are listed in Table I, where $\Sigma_{t,j}$ is the total cross section, Λ_j is the average chord length, and c_j is the scattering ratio for each material $j \in \{0,1\}$. Only slab length $L = 10$ is considered. To compare the accuracy of each

TABLE I. Benchmark Set Parameters

| Case Number | $\Sigma_{t,0}$ | $\Sigma_{t,1}$ | Λ_0 | Λ_1 |
|-------------|----------------|----------------|-------------|-------------|
| 1 | 10/99 | 100/11 | 99/100 | 11/100 |
| 2 | 10/99 | 100/11 | 99/10 | 11/10 |
| 3 | 2/101 | 200/101 | 101/20 | 101/20 |
| Case Letter | c_0 | c_1 | | |
| a | 0.0 | 1.0 | | |
| b | 1.0 | 0.0 | | |
| c | 0.9 | 0.9 | | |

method, the relative error is calculated using

$$E_R = \frac{x_{approx} - x}{x}, \quad (9)$$

where x is the benchmark leakage value and x_{approx} is the leakage value computed by the various solvers. The root mean squared (RMS), mean absolute, and maximum absolute relative error of leakage results are computed for each solver using the relative error E_{R_i} of each case i for N cases:

$$\text{RMS } E_R = \sqrt{\frac{1}{N} \sum_i E_{R_i}^2}, \quad (10)$$

$$\text{Mean}|E_R| = \frac{1}{N} \sum_i |E_{R_i}|, \quad (11)$$

$$\text{Max}|E_R| = \max |E_{R_i}|. \quad (12)$$

Table II provides mean leakage results using the benchmark, CoPS2, CoPS3, and CoPS3PO methods published in Ref. [1]. CoPS2, CoPS3, and CoPS3PO results from this reference were produced by remembering all points defined throughout a particle history, which is effectively CoPS p - ∞ . This table also provides CoPS2- N mean leakage results up to $N = 3$ and total runtime freshly computed for all reported CoPS methods. In Table III are the root mean squared (RMS), mean, and maximum relative error of established approximate methods published in Ref. [1] and of CoPS2- N computed for up to $N = 3$. In parentheses are the standard error of the mean on the last digit. Figure 1 shows the behavior in RMS E_R and total runtime of CoPS2 and CoPS3PO as a function of maximum points remembered compared to other approximate methods for reflectance and transmittance.

In Table III and Figure 1, CoPS2 and CoPS3PO are similar in accuracy to the atomic mix (AM) approximation when remembering zero points and to Chord Length Sampling (CLS) when remembering one point for both reflectance and transmittance. Remembering more recent points improves the accuracy of CoPS monotonically with the upper limit of accuracy being that achieved by CoPS when remembering all points. For reflectance, CoPS3PO-50 achieves comparable accuracy to LRP and CoPS2, and at $N = 100$, CoPS3PO approaches the accuracy of Alg. C. When remembering a maximum of 100 points, CoPS2- N approaches its accuracy limit (CoPS2- ∞). For transmittance, CoPS2 and CoPS3PO achieve an accuracy close to that of LRP for $N = 5$. CoPS2-50 is almost as accurate as Alg. C while CoPS3PO-50 surpasses it. CoPS3PO-100 surpasses the accuracy of CoPS2- ∞ . Compared to CoPS p - ∞ , remembering a maximum of $N = 3$ and $N = 0$ points yields runtime savings of about a factor of 2 and 6, respectively. On average, about 55 material points were remembered using one particle per realization in CoPS p - ∞ for these problems. If more than one particle was run on a single realization [1] or transport was performed in multi-D [2], this number could significantly increase, whereas using a recent memory version of CoPS would cap the number of remembered points at N . Scalar flux results were computed for each method but are not shown here due to lack of space. CoPS p -0 and CoPS p -1 flux results were roughly as accurate as AM and CLS results, respectively, and accuracy improved as $N \rightarrow \infty$ as expected.

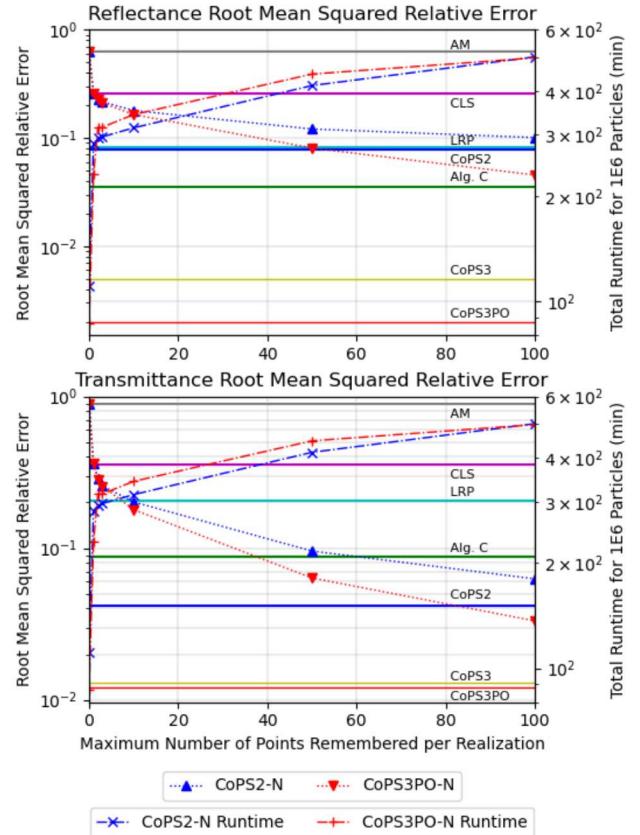


Fig. 1. Reflectance (top) and transmittance (bottom) root mean squared relative error and total runtime for 1E6 particles of each approximate method

CONCLUSIONS

The accuracy of recent memory versions of Conditional Point Sampling (CoPS) remembering N most recent material points were investigated using 2-point and errorless 3-point conditional probability functions on a common benchmark suite. Accuracy was compared to other approximate methods. Notably, CoPS2 and CoPS3PO were roughly as accurate as the atomic mix approximation for $N = 0$ and Chord Length Sampling for $N = 1$. Increasing the number of points remembered increased total runtime and monotonically increased the accuracy; at 100 points remembered, the accuracy was meaningfully improved over few points remembered but had not yet reached the accuracy achieved when remembering all points.

In the future, we plan to investigate other memory reduction techniques in CoPS designed to retain a high degree of accuracy while improving runtime and memory efficiency as well as hybrids of new techniques with the recent memory technique presented here. We plan to extend to multi-D.

ACKNOWLEDGMENTS

Supported by the Laboratory Directed Research and Development program at Sandia National Laboratories, a multi-

TABLE II. Computed CoPS p - N Reflectance and Transmittance Results

| $\langle L \rangle$ | Case | Bench [1] | CoPS2-0 | CoPS2-1 | CoPS2-2 | CoPS2-3 | CoPS2 [1] | CoPS3 [1] | CoPS3PO [1] |
|----------------------|------|-----------|------------|-----------|-----------|-----------|-----------|-----------|-------------|
| $\langle R \rangle$ | 1a | 0.4360(5) | 0.4951(5) | 0.3778(5) | 0.3894(5) | 0.3951(5) | 0.4282(5) | 0.4372(5) | 0.4368(5) |
| | 1b | 0.0850(3) | 0.0196(1) | 0.0584(2) | 0.0590(2) | 0.0594(2) | 0.0747(3) | 0.0846(2) | 0.0849(3) |
| | 1c | 0.4778(5) | 0.4778(5) | 0.3694(5) | 0.3888(5) | 0.3955(5) | 0.4514(5) | 0.4785(4) | 0.4775(5) |
| | 2a | 0.2373(5) | 0.4957(5) | 0.1804(4) | 0.1913(4) | 0.1984(4) | 0.2339(4) | 0.2375(4) | 0.2375(4) |
| | 2b | 0.2876(5) | 0.0198(1) | 0.2182(4) | 0.2187(4) | 0.2189(4) | 0.2605(4) | 0.2862(5) | 0.2865(5) |
| | 2c | 0.4326(5) | 0.4778(5) | 0.2889(5) | 0.3157(5) | 0.3295(5) | 0.4073(5) | 0.4332(5) | 0.4332(5) |
| | 3a | 0.6904(5) | 0.7861(4) | 0.6068(5) | 0.6226(5) | 0.6307(5) | 0.6825(5) | 0.6903(5) | 0.6909(5) |
| | 3b | 0.0364(2) | 0.00197(4) | 0.0242(2) | 0.0242(2) | 0.0245(2) | 0.0310(2) | 0.0360(2) | 0.0363(2) |
| | 3c | 0.4452(5) | 0.4778(5) | 0.3268(5) | 0.3508(5) | 0.3632(5) | 0.4212(5) | 0.4436(5) | 0.4447(5) |
| Total Runtime (min.) | | 110.7 | 282.1 | 293.0 | 296.11 | 598.3 | x | 627.1 | |

TABLE III. Reflectance and Transmittance Ensemble Error Metrics of Reproduced Results [1] and Computed CoPS p - N Results

| $\langle L \rangle$ | Error | AM | CLS | LRP | Alg. C | CoPS2 | CoPS3 | CoPS3PO | CoPS2-0 | CoPS2-1 | CoPS2-2 | CoPS2-3 |
|---------------------|--------------|-------|-------|-------|--------|-------|-------|---------|---------|---------|---------|---------|
| $\langle R \rangle$ | RMS E_R | 0.631 | 0.257 | 0.080 | 0.035 | 0.078 | 0.005 | 0.002 | 0.632 | 0.256 | 0.229 | 0.215 |
| | Mean $ E_R $ | 0.465 | 0.246 | 0.069 | 0.021 | 0.064 | 0.003 | 0.001 | 0.465 | 0.245 | 0.216 | 0.200 |
| | Max $ E_R $ | 1.088 | 0.341 | 0.148 | 0.087 | 0.146 | 0.011 | 0.004 | 1.089 | 0.335 | 0.334 | 0.325 |
| $\langle T \rangle$ | RMS E_R | 0.894 | 0.355 | 0.207 | 0.087 | 0.042 | 0.013 | 0.012 | 0.893 | 0.362 | 0.288 | 0.257 |
| | Mean $ E_R $ | 0.881 | 0.260 | 0.139 | 0.045 | 0.033 | 0.008 | 0.008 | 0.881 | 0.267 | 0.216 | 0.197 |
| | Max $ E_R $ | 1.000 | 0.765 | 0.489 | 0.239 | 0.099 | 0.030 | 0.026 | 1.000 | 0.779 | 0.610 | 0.538 |

mission laboratory managed and operated by National Technology and Engineering Solutions of Sandia LLC, a wholly owned subsidiary of Honeywell International Inc. for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-NA0003525. This paper describes objective technical results and analysis. Any subjective views or opinions that might be expressed in the paper do not necessarily represent the views of the U.S. Department of Energy or the United States Government. This material is based upon work supported by a Department of Energy Nuclear Energy University Programs Graduate Fellowship.

REFERENCES

1. E. VU and A. OLSON, "Conditional Point Sampling: A Monte Carlo method for radiation transport in stochastic media," *J. Quant. Spectrosc. and Rad. Transfer* (2020).
2. A. J. OLSON and E. H. VU, "An extension of Conditional Point Sampling to multi-dimensional transport," in "M&C2019," American Nuclear Society, Portland, OR (2019).
3. G. B. ZIMMERMAN and M. L. ADAMS, "Algorithms for Monte-Carlo particle transport in binary statistical mixtures," *Trans. Am. Nucl. Soc.*, **63**, 287 (1991).
4. P. S. BRANTLEY, "A benchmark comparison of Monte Carlo particle transport algorithms for binary stochastic mixtures," *J. Quant. Spectrosc. and Rad. Transfer*, **112**, 599–618 (2011).
5. M. L. ADAMS, E. W. LARSEN, and G. C. POMRANING, "Benchmark results for particle transport in a binary Markov statistical medium," *J. Quant. Spectrosc. and Rad. Transfer*, **42**, 4, 253–266 (1989).
6. P. S. BRANTLEY and G. B. ZIMMERMAN, "Benchmark comparison of Monte Carlo algorithms for three-dimensional binary stochastic media," *Trans. Am. Nucl. Soc.*, **117**, 765–768 (2017).
7. N. M. STEEN, "A simple method to improve the efficiency of the Σ_a/Σ_t estimator in Monte Carlo programs," *Trans. Am. Nucl. Soc.*, **9**, 204 (1966).
8. S. D. PAUTZ, B. C. FRANKE, A. K. PRINJA, and A. J. OLSON, "Solution of stochastic media transport problems using a numerical quadrature-based method," in "M&C 2013," American Nuclear Society, Sun Valley, ID (2013).