

Advancing Geophysical Techniques to Image a Stratigraphic Hydrothermal Resource

Paul Schwering¹, Carmen Winn¹, Piyoosh Jaysaval², Hunter Knox², Drew Siler³, Christian Hardwick⁴, Bridget Ayling⁵, James Faulds⁵, Elijah Mlawsky⁵, Emma McConville⁶, Jack Norbeck⁶, Nicholas Hinz⁷, Gabe Matson⁷, and John Queen⁸

¹ Sandia National Laboratories

² Pacific Northwest National Laboratory

³ United States Geological Survey

⁴ Utah Geological Survey

**⁵ Great Basin Center for Geothermal Energy; Nevada Bureau of Mines and Geology;
University of Nevada, Reno**

⁶ Fervo Energy

⁷ Geologica Geothermal Group, Inc.

⁸ Hi-Q Geophysical, Inc.

Keywords

stratigraphic, sedimentary, basin, hydrothermal, geophysics, exploration, inversion, play fairway

ABSTRACT

Sedimentary-hosted geothermal energy systems are permeable structural, structural-stratigraphic, and/or stratigraphic horizons with sufficient temperature for direct use and/or electricity generation. Sedimentary-hosted (i.e., stratigraphic) geothermal reservoirs may be present in multiple locations across the central and eastern Great Basin of the USA, thereby constituting a potentially large base of untapped, economically accessible energy resources. Sandia National Laboratories has partnered with a multi-disciplinary group of collaborators to evaluate a stratigraphic system in Steptoe Valley, Nevada using both established and novel geophysical imaging techniques. The goal of this study is to inform an optimized strategy for subsequent exploration and development of this resource and analogous ones. Building from prior Nevada Play Fairway Analysis (PFA), this team is primarily 1) collecting additional geophysical data, 2) employing novel joint geophysical inversion/modeling techniques to update existing 3D geologic models, and 3) integrating the geophysical results to produce a working, geologically constrained thermo-hydrological reservoir model. Prior PFA work highlights Steptoe Valley as a favorable

resource basin that likely has both sedimentary and hydrothermal characteristics. However, there remains significant uncertainty on the nature and architecture of the resource(s) at depth, which increases the risk in exploratory drilling. Newly acquired gravity, magnetic, magnetotelluric, and controlled-source electromagnetic data products, in conjunction with new and preexisting geoscientific measurements and observations, are being integrated and evaluated for efficacy in understanding stratigraphic geothermal resources and mitigating exploration risk. Furthermore, the influence of hydrothermal activity on sedimentary-hosted reservoirs in favorable structural settings, and whether fault-controlled systems may locally enhance temperature and permeability in some deep stratigraphic reservoirs, will also be evaluated.

1. Introduction

Sedimentary-hosted geothermal resources are characterized by permeable stratigraphic or structural-stratigraphic horizons hosted in areas with dominantly conductive thermal regimes and with temperatures that can be suitable for power production and/or direct use. Developed power-producing, sedimentary-hosted geothermal resources are present in half a dozen countries in Europe (e.g., Rühaak et al., 2010; Ćubrić, 2012; Vidal and Genter, 2018; Flechtner and Aubele, 2019). Potential resources that are broadly similar to the developed sedimentary-hosted resources in Europe have been identified in the USA; however, most have had minimal exploration and none of these resources have yet been developed. To assist with exploration and resource assessment methodologies of sedimentary-hosted geothermal projects in the USA, the Steptoe Valley resource area in the eastern Great Basin was selected for study. This selection was based on available data, site access, and that it is likely analogous to other undeveloped resources in the United States.

Steptoe Valley likely hosts a sedimentary-hosted geothermal resource, with elevated temperatures initially documented during oil and gas well drilling (Allis, et al., 2011, 2012; Kirby, 2012; Allis and Moore, 2014; Gwynn et al., 2014). Steptoe Valley is in northeastern Nevada and is part of a region with multiple possible sedimentary-hosted resources (e.g., Allis et al., 2015; Hinz et al., 2015; Johnston et al., 2020). Based on available temperature data, the potential resources in this region have temperatures that range from 170 to 250°C at 3 to 4 km depth (Figure 1a; Allis and Moore, 2014). Each of the resource areas in this region are associated with thick sections of Paleozoic carbonates and clean Jurassic sandstones and limestones that are covered by ~2 to 3+ km of low thermal conductivity Tertiary basin-infilling sediments (Figure 1b; Allis et al., 2012).

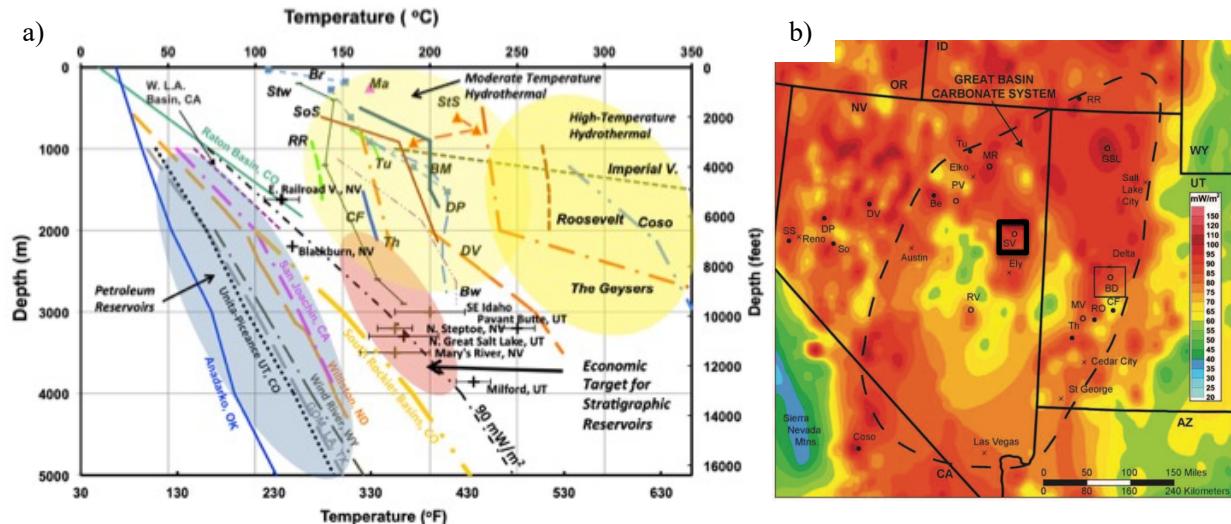


Figure 1: a) Figure from Allis and Moore (2014) of geothermal resource temperature regimes. b) Figure adapted from Allis et al. (2012), with location of Steptoe Valley outlined by a thick black box, of regional heat flow based on existing temperature data.

This applied research collaboration has been assembled to comprehensively assess the geothermal potential of Steptoe Valley by collecting additional geophysical data, employing novel joint inversion/modeling techniques to inform a 3D geologic map, and integrating the geophysical data to produce a geologically constrained thermal-hydrological working reservoir model. New gravity, magnetic, magnetotelluric (MT), and controlled-source electromagnetic (CSEM) data and results will be integrated and evaluated for efficacy in understanding stratigraphic geothermal resources and mitigating exploration risk. We will assess the potential influence of hydrothermal activity in favorable structural settings on sedimentary-hosted reservoirs and consider whether fault-controlled systems may locally enhance temperature and permeability in some deep stratigraphic reservoirs. All data will be integrated to develop one or more conceptual models for use in comparison with developed stratigraphic geothermal resources in Europe for guidance in completing updated power capacity estimates for Steptoe Valley.

2. Geothermal Resource Potential

Steptoe Valley was highlighted for geothermal resource favorability throughout the course of the Nevada Play Fairway Analysis (PFA) studies (Figure 2a; Faulds et al., 2015; Faulds et al., 2016; Hinz et al. 2020). Northern Steptoe Valley has substantial potential as a sedimentary-hosted geothermal resource prospect; it also has surface thermal manifestations (e.g., hot springs) that are likely associated with deep circulation systems (Figure 2b; Hinz et al., 2020). Northern Steptoe Valley is associated with a combination of stratigraphic and fault-controlled permeability. This has important implications for understanding the natural state thermal regime of the basin, resource distribution and targeting, development strategies, and assessing power capacities.

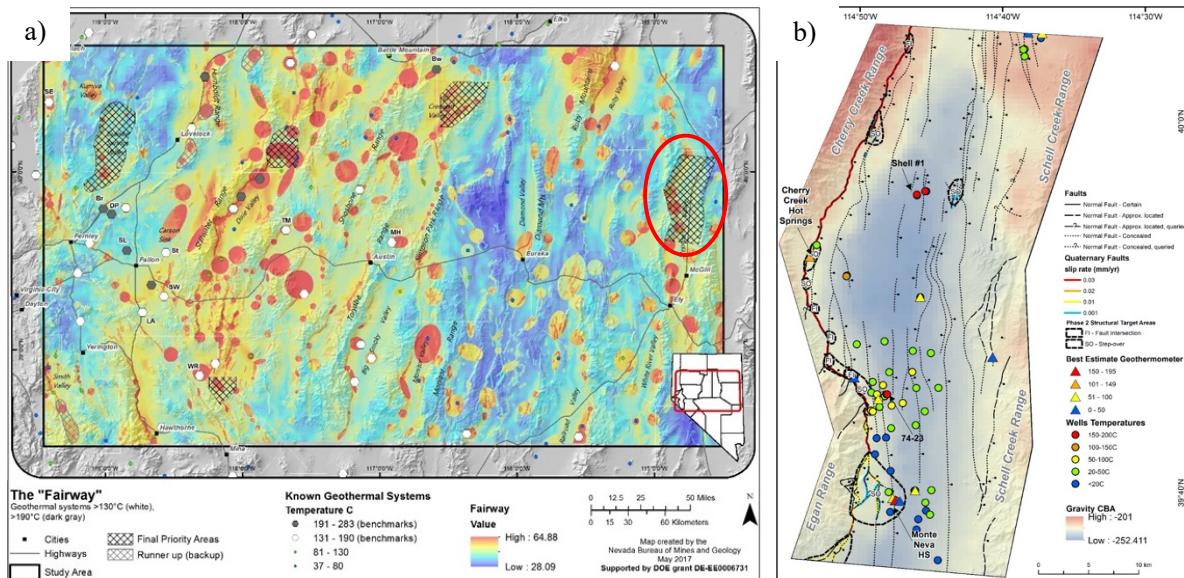


Figure 2: a) Nevada PFA Map of Faulds et al. (2015), with location of northern Steptoe Valley circled in red.
b) Structural map of northern Steptoe Valley from Hinz et al. (2020).

2.1 Geologic Setting

Steptoe Valley is an elongate north-trending, late Cenozoic west-tilted half graben located directly north of Ely, Nevada. Late Cenozoic extension was accommodated by a system of N- to NNE-striking, dominantly east-dipping normal faults. This includes a segmented range-front fault along the west side of the basin, as well as numerous synthetic and antithetic intrabasinal faults (Figure 2b; Hinz et al., 2020). Quaternary fault scarps mark the trace of the range-front fault system. In ascending stratigraphic order, major lithologic units in the area include up to 10 km of Paleozoic carbonate sections and lesser clastic sedimentary rocks; as much as 1 km of Oligocene-Miocene volcanic and lesser sedimentary rocks; and late Miocene to recent basin fill sediments locally approaching 3 km in thickness. Two hot springs in the area (Monte Neva and Cherry Creek) are both associated with normal fault step-overs (Figure 2b; Hinz et al., 2020). Monte Neva Hot Springs have the hottest surface discharge of fluids in the area at 79°C, and these springs are also marked by a 0.3 km² travertine spring mound. No other surficial geothermal features have been observed in Steptoe Valley.

2.2 Exploration History and Available Data

Hunt Oil Company drilled approximately 50 temperature gradient (TG) holes and two deep geothermal wells in the Steptoe basin during the 1970s. Two petroleum exploration wells, Shell #1 and 17-14, were also drilled by other companies in northern Steptoe Valley in the 1970s and 1980s. TG holes consistently yielded linear temperature increase with depth (i.e., a conductive temperature gradient) to depths of 600 m (Chovanec, 2003). Measured temperatures from the two exploration wells, in addition to other deep wells in Steptoe Valley, indicate a conductive temperature gradient at depths ranging from 1.5 to 3.5 km (Figure 3; Hinz et al., 2015). These measurements are consistent with a generalized conceptual model applicable to Steptoe Valley and stratigraphic reservoirs in the region, in which a thick section of low thermal conductivity basin fill acts as a thermal insulator which locally retains elevated temperatures from regionally high conductive heat flow at depth (e.g., Allis et al., 2011, Allis and Moore 2014, Hinz et al., 2020).

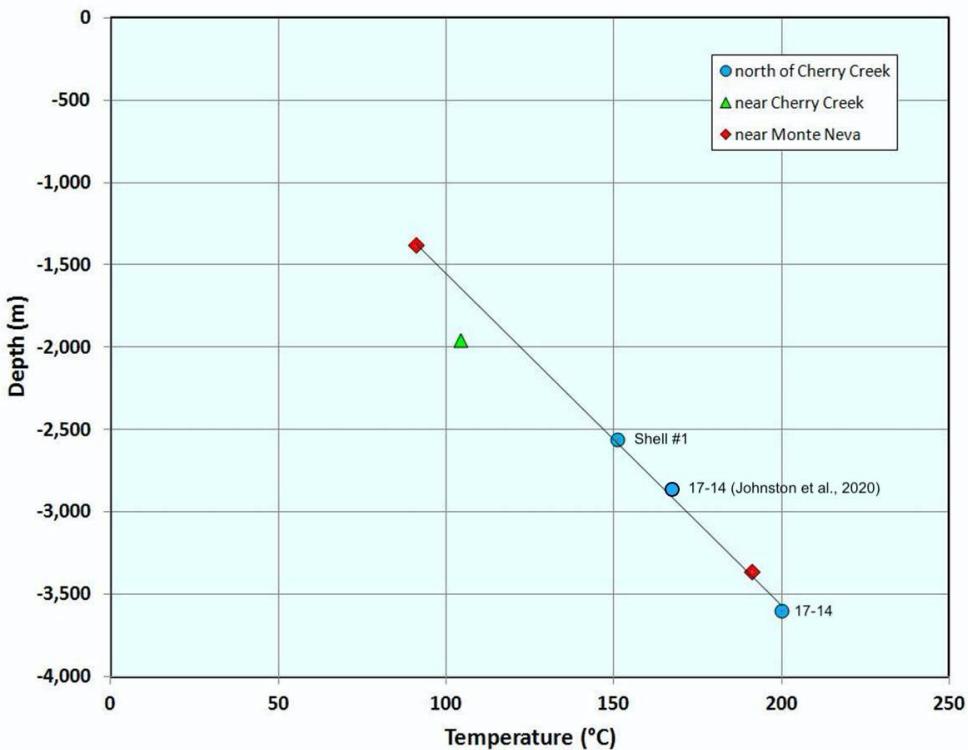


Figure 3: Bottomhole temperature plot adapted from Hinz et al. (2015) illustrating the linear/conductive temperature gradient measured from deep exploration wells in Steptoe Valley. Measurements from the Shell #1 and 17-14 wells from the northern Steptoe Valley study area are annotated. A shallower measurement from well 17-14, reported by Johnston et al. (2020), is also added/annotated on the figure and is consistent with the conductive temperature gradient.

Existing geoscience datasets include a Quaternary fault map of the basin, slip and dilation tendency analysis of Quaternary faults, logs and cuttings from the oil/gas and geothermal exploration wells, gravity data, legacy 2D seismic reflection profiles, depth to basement modeling along select profiles, fluid geochemistry from wells and springs, and thermal conductivity data. Moreover, lithologic logs from 25 wells, geologic map data, 16 cross sections including data from 14 seismic reflection profiles (e.g., Figure 4), and depth to basement modeled from gravity data were integrated into an initial 3D geologic map of Steptoe Valley. In addition, 40 samples of well cuttings from key stratigraphic units were analyzed for thermal conductivity. Existing temperature data, new thermal conductivity measurements, and the 3D geologic model were used to develop a new heat flow model for the northern Steptoe Valley area (Hinz et al., 2020).

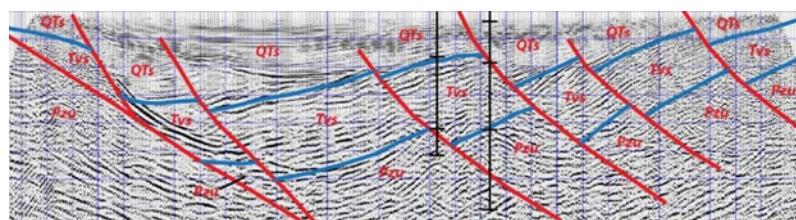


Figure 4: Interpreted seismic section from Hinz et al. (2020).

3. Applied Research Methods

The field campaign for northern Steptoe Valley is focused on geophysical surveys to image the subsurface stratigraphy and structural architecture of the subsurface. The photos in Figure 5 illustrate the applied, comprehensive approach to imaging and assessing the geothermal resource potential in northern Steptoe Valley. Ground gravity and airborne magnetic surveying are conducted first, followed by MT/CSEM surveying in a more focused part of the basin surrounding the two legacy exploration wells. The well data will calibrate interpretation of the geophysical data and in turn, the geophysical imaging will provide insight on geologic layer shape/distribution around the wells. Targeted geologic mapping and geochemical surveying are also integral parts of the field study to provide context and constraint for developing and interpreting the geophysical results. New data collected from this study will be posted on the Geothermal Data Repository (<https://gdr.openei.org/>).

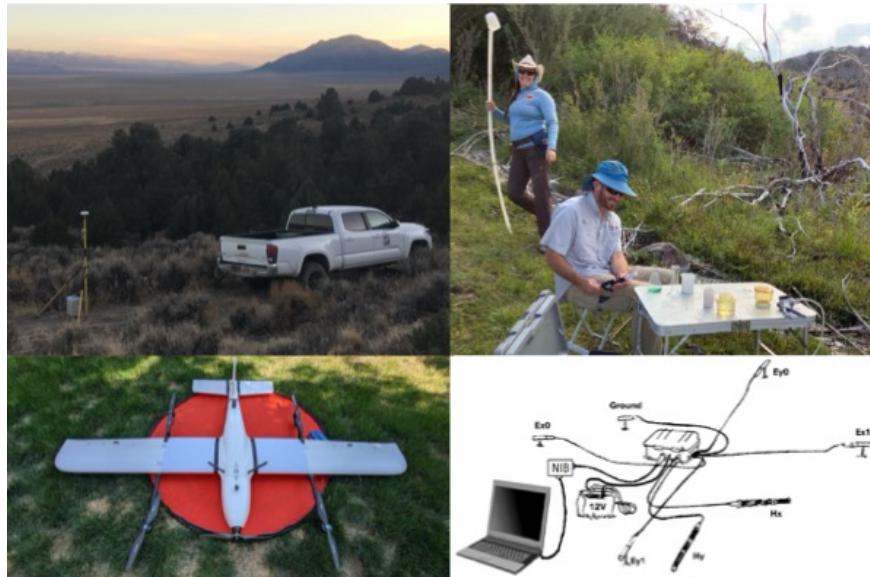


Figure 5: Pictures illustrating the field campaign for northern Steptoe Valley. Counterclockwise from top left: gravity surveying in Steptoe Valley conducted in FY22, an airborne magnetic vehicle, a schematic diagram of an MT receiver station, and spring sampling in Steptoe Valley performed in FY22.

The suite of planned surveys will provide information about different physical properties of the formations and inform the structural-stratigraphic model. Our plan includes joint modeling of gravity and magnetic data since they can be treated similarly in potential field geophysics for a more robust interpretation (versus evaluating independently). Density and magnetic susceptibility information will be compiled from legacy and modern data to constrain modeling. These data will be processed and inverted jointly using codes under development at Pacific Northwest National Laboratory (PNNL) to create 3D subsurface geometry models and checked against local geologic data from wells and surface mapping. The resulting 3D models will be compared to other potential field inversion results to identify any geometric consistencies/inconsistencies. PNNL's joint inversion of MT/CSEM data is expected to combine the high-resolution imaging capability of CSEM (e.g., Darnet et al., 2020) and deep imaging capability of MT (e.g., Hardwick et al., 2015).

4. Progress Report

4.1 Gravity Surveying

A total of 260 new gravity stations from this study were added to 279 stations collected during the Nevada PFA study (Hinz et al., 2020). These 539 modern gravity stations were combined with 1,453 legacy gravity stations in the area to achieve better coverage in and around Steptoe Valley basin (Figure 6). Station spacing on valley transects is 500 m and later increased to 1 km for fill-in of other areas. Legacy gravity data was sourced from Pan-American Center for Earth and Environmental Studies (PACES). Field measurements were made using two Scintrex CG-5 gravimeters following the methods of Gettings et al. (2008); we used a 10-minute time series with reoccupations of local and regional bases. Elevation control on most of the stations is better than 0.1 m, which was achieved through post-processing of high-precision GPS data, resulting in a gravity accuracy of better than 0.03 mGal. The Complete Bouguer Gravity Anomaly (CBGA) was computed using a reduction density of 2.67 g/cm³ and the formulas outlined by Hinze et al. (2005) followed by calculations of the horizontal gravity gradient.

The CBGA map shows that the dominant basin signal trends in a north-south orientation. This prominent, north-trending, -35 to -40 mGal gravity low is approximately 8 to 10 km wide and is bounded by gravity highs to the east and west. This gravity low is widest in the vicinity of the left stepover near Cherry Creek Hot Springs identified by Hinz et al. (2020) and contains the lowest CBGA value in the vicinity (-250 mGal). The gravity signal is asymmetrical, with the largest changes in the gravity field located on the west side of the valley as indicated by the increased horizontal gradient of the CBGA. These large gradients on the west side of the basin are interpreted as the gravity signature of steep changes in basement topography delineating the major east-dipping normal fault system along the western margin of Steptoe Valley (Hinz et al., 2020).

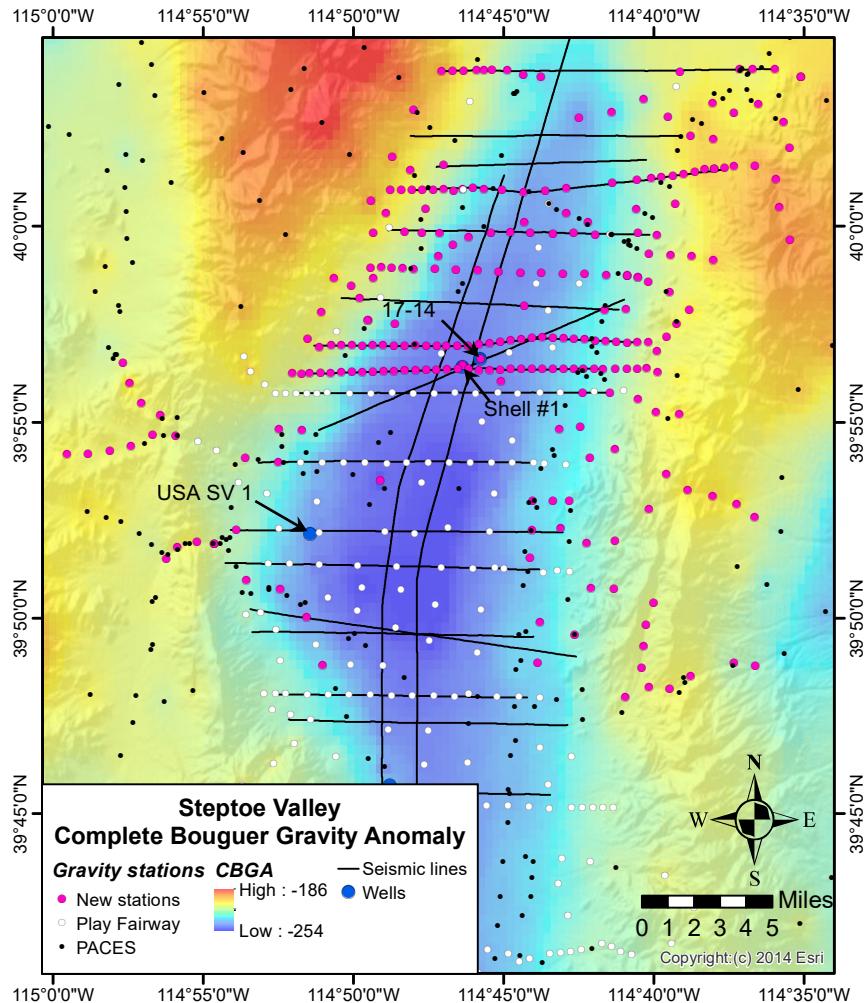


Figure 6: Preliminary CBGA color map of northern Steptoe Valley, with cooler colors (e.g., blue) delineating areas of basin sediment fill within Steptoe Valley and warmer colors (e.g., red) indicating dense bedrock exposed in the surrounding mountain ranges. Gravity survey coverage is overlaid with locations of new stations collected during this study (magenta circles), stations collected as part of Nevada PFA (white circles; Hinz et al., 2020), and stations from the PACES database (black dots). Locations of legacy seismic profiles (black lines) and exploration wells (blue circles, labeled with well names) are also shown.

4.2 Geochemical Sampling

Water samples were collected from 12 cold springs in northern Steptoe Valley in September 2021 (Figure 7) to evaluate possible mixing relationships between the known thermal springs in the valley (e.g., Monte Neva hot springs and Cherry Creek springs) and see if other chemical indicators of thermal fluids might be detectable in the cold springs. Detection of thermal fluids in these cold springs is not expected because developed stratigraphic geothermal systems in the world are typically not associated with surface manifestations (e.g., Rühaak et al., 2010; Ćubrić, 2012; Flechtner and Aubele, 2019). Given the abundant structural settings along this basin that are prospective for hosting deep circulation geothermal systems, however, these geochemical surveys provide guidance on the presence or absence of previously unknown deep circulation geothermal resources in this basin. Analysis of the fluids thus far indicate that all sampled cold springs have

neutral pH, are relatively low salinity (conductivity < 600 $\mu\text{S}/\text{cm}$), and are calcium-magnesium-bicarbonate dominated (Figure 7b; Table 1).

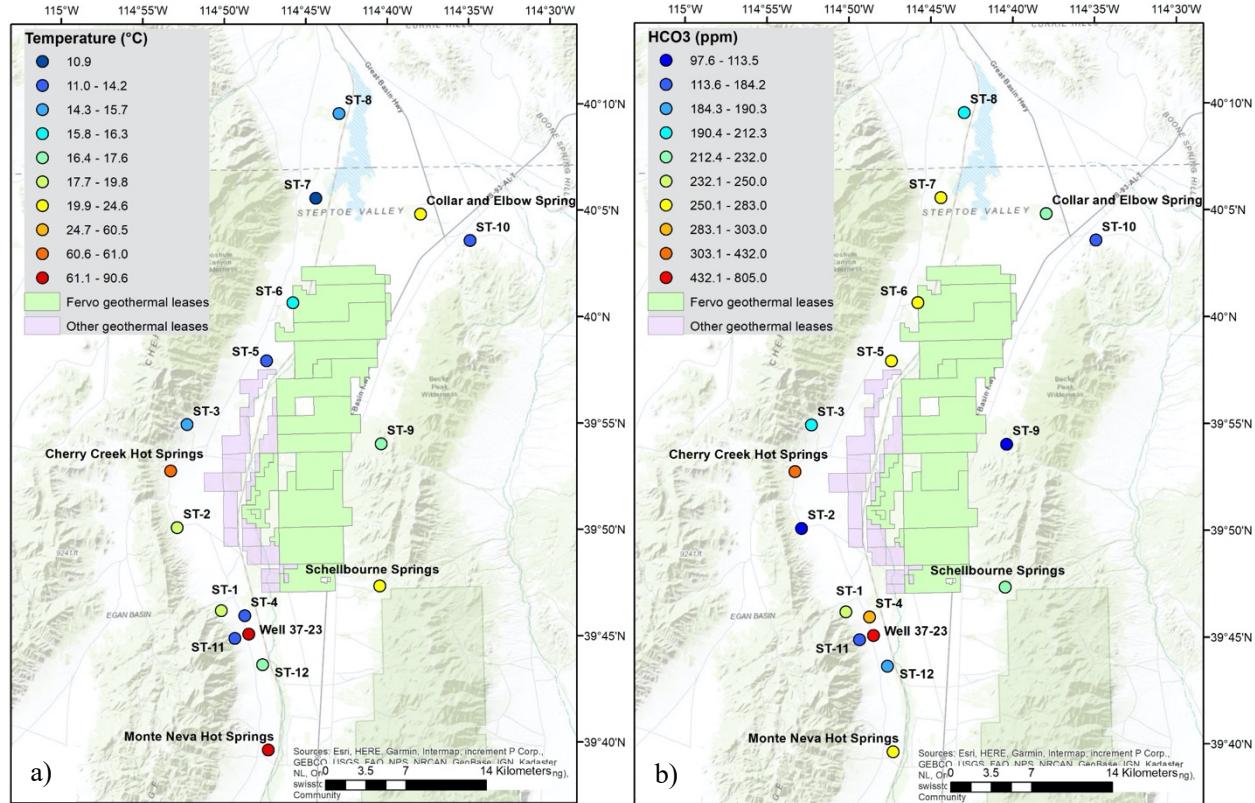


Figure 7: Locations of newly sampled springs (sample IDs preceded by 'ST') and other springs in Steptoe Valley; a) measured temperatures and b) bicarbonate concentrations.

Sample	Date	Temp °C	pH	Li ppm	Na ppm	K ppm	Ca ppm	Mg ppm	SiO ₂ ppm	B ppm	Cl ppm	F ppm	SO ₄ ppm	HCO ₃ ppm	Cond $\mu\text{S}/\text{cm}$	d ¹⁸ O ‰	dD ‰
ST-1	9/14/2021	19.0	7.33	0.0048	6.62	1.13	54.5	24.9	11.1	0.036	3.5	0.1	18.9	248	404	-16.28	-123.4
ST-2	9/14/2021	19.8	7.7	0.014	16.75	1.21	26.7	4.5	24.7	0.035	3.4	2.28	25.2	98	223	-15.9	-121.4
ST-3	9/14/2021	15.7	7.57	0.0141	11.4	2.68	89.4	28.4	11.5	0.05	4.5	0.24	151	212	596	-16.13	-124.1
ST-4	9/14/2021	14.2	7.47	0.0067	9	1.24	65.7	28.1	13.4	0.042	4.5	0.1	21.9	294	464	-16.2	-123.6
ST-5	9/15/2021	14.0	7.83	0.0161	7.16	1.59	60	23.5	15.9	0.036	2.2	0.1	10.6	273	415	-16.17	-122.8
ST-6	9/15/2021	16.3	7.57	0.0058	5.67	1.3	57	24.6	15.6	0.032	2.7	0.04	9.9	278	425	-16.73	-126.6
ST-7	9/15/2021	10.9	8.3	0.0056	9.49	1.29	62.2	24.2	14.4	0.043	4.8	0.11	20.8	283	449	-16.62	-126.8
ST-8	9/15/2021	15.5	7.74	0.005	9.75	1.56	42.2	20.4	27.6	0.03	3.2	0.07	11.2	212	342	-16.78	-127.1
ST-9	9/16/2021	17.6	7.58	0.0071	17.75	3.11	26.7	5.36	45.4	0.049	7.2	0.15	10.7	113	227	-15.73	-121.7
ST-10	9/16/2021	13.4	7.5	0.0099	21.4	2.9	50.9	8.84	38.0	0.083	19.8	0.25	23.5	179	384	-15.36	-120.6
ST-11	9/17/2021	13.4	7.26	0.0046	6.89	1.22	51.1	10.7	13.1	0.035	4.2	0.1	20.4	184	327	-15.58	-119.7
ST-12	9/17/2021	17.0	7.85	0.0066	10.05	1.32	38.4	15.75	14.9	0.038	5.6	0.08	11.1	190	320	-15.54	-119.4

Table 1: Chemical and isotopic composition of new water samples (sample IDs collected in Steptoe Valley).

Measured spring temperatures at the 12 sites range between 10 to 20°C. The water samples are chemically distinct from the Cherry Creek Hot Springs as well as a sample previously collected

from the 37-23 geothermal exploration well (Figure 8; Hinz et al., 2020). However, the fluids generally align along a mixing trend for some solutes and share chemical characteristics associated with Monte Neva Hot Springs fluids. This may suggest a common formation process and/or depth of circulation in the basin (Figure 8). Further work will be conducted as this study progresses to evaluate potential fluid mixing relationships and how these relate to conceptual modeling of fluid flow in northern Steptoe Valley.

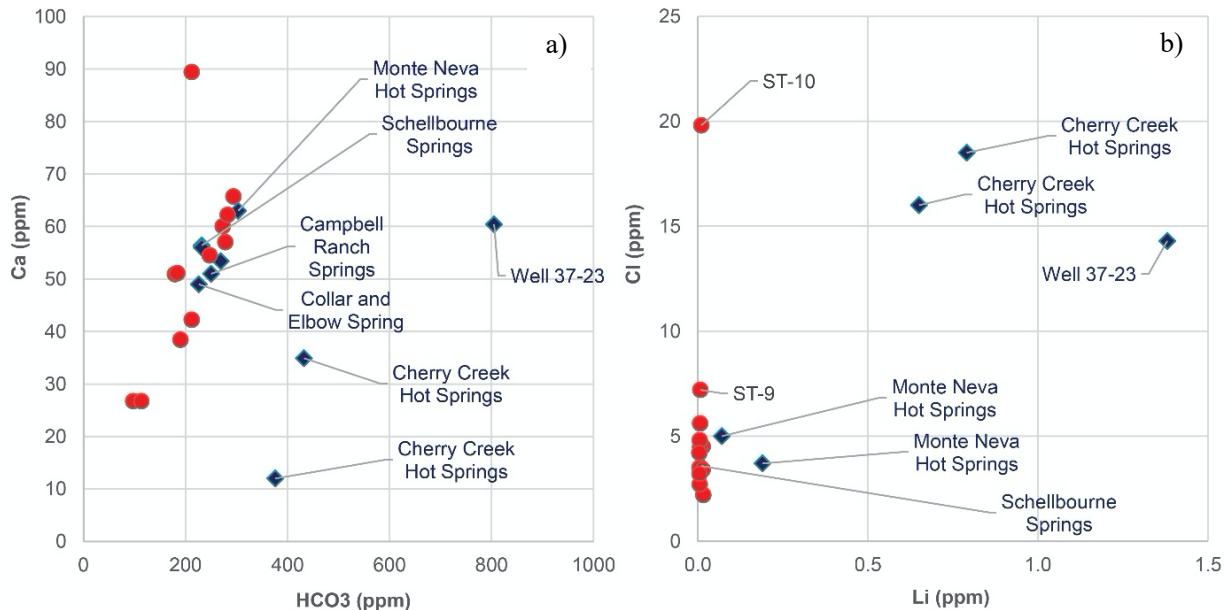


Figure 8: Cross plots of major element chemistry for Steptoe water samples; a) Ca vs HCO₃ and b) Cl vs Li. Red dots are from samples collected during this study and blue diamonds are from existing data.

4.3 Upcoming Geophysics

A high-sensitivity aeromagnetic survey vehicle will be utilized to collect magnetic field data along critical transects in northern Steptoe Valley. This magnetic data will be combined with gravity data for joint inversion models along the existing seismic profile lines. MT/CSEM surveying shall also be conducted along select gravity/aeromagnetic/seismic profiles (Figure 9). The legacy seismic profiles will also be reevaluated for interpretation.

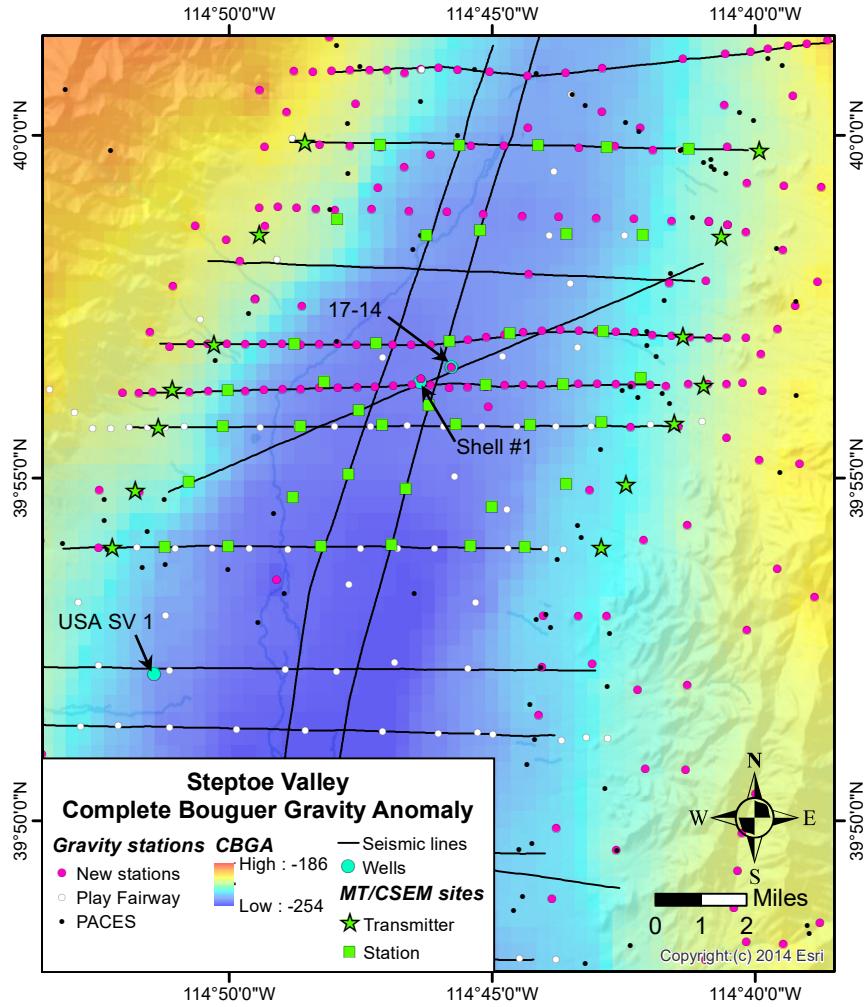


Figure 9: Planned locations of MT/CSEM transmitter and receiver locations plotted on the CBGA map adapted from Figure 6. Station spacing is approximately 2 km, though has irregularities to mitigate site accessibility and cultural (i.e., electromagnetic interference) issues.

5. Characterization Strategy and Implications

This study builds on the PFA results and utilizes a confluence of applied geoscientific methods to demonstrate the efficacy of advanced geophysical imaging, 3D geologic mapping, and conceptual resource modeling in characterizing stratigraphic geothermal resources. Implications both to and from analogous geothermal systems are also being evaluated.

5.1 Geophysical Imaging

Jointly modeled gravity/magnetic datasets and MT/CSEM datasets, combined with re-interpreted legacy seismic data, are expected to provide robust imaging results to depths of 2 to 4 km in northern Steptoe Valley. The results will be calibrated for interpretation using lithologic logs of local wells and physical rock properties of local well data and analogous deep basins, as needed. Density-depth relationships for basin fill and rock density values will be taken from existing well logs and laboratory-measured physical rock properties of field samples and drill cuttings.

Calibrated physical rock property values will then be used in subsequent 2D joint inversion models to develop a depth-to-basement map consistent with interpretation of existing seismic line profiles.

Regarding the electromagnetic techniques, we developed forward and inverse models using MT and CSEM methods at Steptoe Valley to explore depth sensitivities and survey design (Jaysaval et al., 2021). Modeling suggests that the MT method recovers resistivity structures of the shallow subsurface (i.e., the basin) based on generalized geological and geophysical parameters. MT is less robust at recovering the relatively conductive geothermal reservoir and in accurately resolving depth/thickness of the related geologic layers. On the other hand, the CSEM modeling indicates better resolution in the deeper subsurface, particularly in recovering the depth/thickness in resistivity structures, as well as resolving the relatively conductive geothermal reservoir 2 to 4 km deep. Based on this survey design analysis, MT and CSEM data will both be collected using a receiver grid spacing of approximately 2 km and CSEM transmitters on the east/west ends of the receiver grid (Figure 9). Inversion and interpretation of MT/CSEM data will be performed using a massively parallel 3D CSEM/MT modeling and inversion code (Jaysaval et al., 2021).

5.2 Geologic Mapping and Resource Modeling

A 3D geologic map of the northern part of Steptoe Valley was developed from previous work in Steptoe Valley (Figure 10; Hinz et al., 2020). Interpretation of 2D seismic reflection profiles, 2D geologic cross section, 2D forward models of potential field data will be integrated with surface geologic data to build the 3D structural and stratigraphic framework similar to established 3D geologic mapping methods (Siler et al., 2019). Key parameters of the structural and stratigraphic architecture that may relate to the sedimentary-hosted geothermal system will be constrained. These parameters will include geometry, lateral extent, depth, and volume of relatively intact (unfaulted) Paleozoic basement blocks. Geometry and location of faults and fault intersections that may contribute to secondary permeability, or alter primary permeability, will also be incorporated.

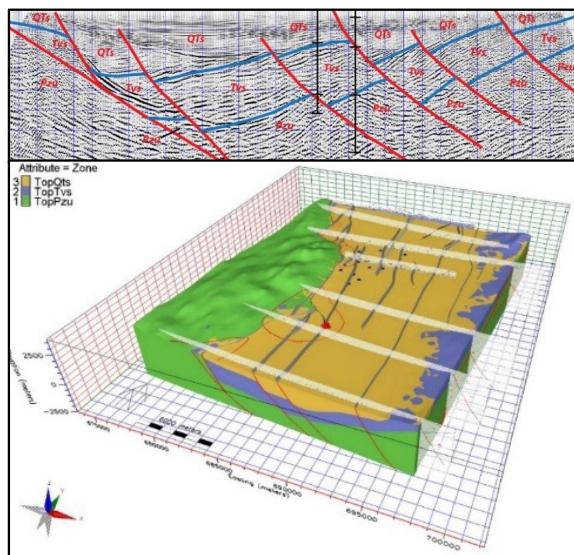


Figure 10: Interpreted seismic profiles used to constrain and develop a 3D geologic map of Steptoe Valley; figure adapted from Hinz et al. (2020).

The team's combined expertise in reservoir engineering and geomechanics will be applied to further refine modeling and estimation of the northern Steptoe Valley stratigraphic resource.

Applying a range of well spacing patterns and development scenarios will improve resource capacity and power density estimates. The approach employs 3D reservoir simulation that integrates detailed wellbore models, discrete fractures, flow/heat transfer in fractures and matrix rock, and mechanical deformation of fractures (e.g., McClure and Kang, 2017). Model inputs will consist of measured rock properties from this work and previous studies in conjunction with regional analogues.

5.3 Analogous Geothermal Systems, Conceptual Modeling, and Power Capacity Estimates

Data are being compiled and reviewed for developed analogue stratigraphic resources (e.g., Rühaak et al., 2010; Ćubrić, 2012; Vidal and Genter, 2018; Flechtner and Aubele, 2019) to guide selection of parameters for the power capacity estimates of Steptoe Valley. The next step will be conceptual modeling of the resource by integrating the geologic, geophysical, and geochemical data compiled in this study. The final step will be to complete a power capacity estimate for the sedimentary-hosted resource in Steptoe Valley using analogue-based power density and/or volumetric methods.

6. Summary and Outlook

A comprehensive geophysical imaging project, founded upon previous PFA studies and constrained by geological and geochemical information, is underway in northern Steptoe Valley. This site represents a potential archetype of sedimentary-hosted geothermal energy resources that are estimated to be prolific across the Great Basin and likely exist within other basins in similar stratigraphic/tectonic settings. Gravity and geochemical surveys are complete and preliminary results suggest the presence/mechanisms of structural controls that are common to Great Basin hydrothermal systems are also pertinent to the stratigraphic resource in northern Steptoe Valley. Additional work, including aeromagnetic and MT/CSEM surveying in the field and review of legacy seismic profiles, are being conducted to apply joint inversion and integrated interpretation techniques that are expected to provide robust imaging of the subsurface to depths of 2 to 4 km. Advanced techniques in 3D mapping, thermal-hydrological reservoir modeling, and geothermal resource estimation will leverage these geophysical results to assess the resource geometry and energy potential.

The completion of this project is intended to establish a decision point for follow-on work in northern Steptoe Valley. The next foreseeable and crucial step in exploration of the site is to calibrate the resulting geological/thermal-hydrological model with stratigraphic reservoir data from at least one new, targeted vertical well. This geophysical imaging and modeling project will provide a basis for optimal well targeting. From the sedimentary-hosted resource perspective, it will also be essential to identify and target a lateral horizon suitable for reservoir stimulation/production. Decisions on the specific design aspects of this well (e.g., location, depth, bottom-hole diameter, completion, drilling method) and logging/test protocol to measure reservoir parameters (e.g., core/cutting analyses, well logs, diagnostic fracture injection testing), balanced with non-technical considerations, will be informed by completion of this study.

Acknowledgements

This material was based upon work supported by the U.S. Department of Energy, Office of Energy Efficiency and Renewable Energy (EERE), Office of Technology Development, Geothermal Technologies Office under the FY2020 Hydrothermal Imaging Lab Call. Sandia National Laboratories is a multimission laboratory managed and operated by National Technology & Engineering Solutions of Sandia, LLC, a wholly owned subsidiary of Honeywell International Inc., for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-NA0003525. This paper describes objective technical results and analysis. Any subjective views or opinions that might be expressed in the paper do not necessarily represent the views of the U.S. Department of Energy or the United States Government. The United States Government retains, and the publisher, by accepting the article for publication, acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this manuscript, or allow others to do so, for United States Government purposes. Access to Public Lands was authorized in coordination with representatives of the United States Bureau of Land Management. The authors thank: Barbi Harmon and the team at Kautz Environmental Consultants, Inc. for assessing and ensuring compliance with respect to cultural resources, Chet Lide of Zonge International, Inc. for the guidance and consultation to conduct the electromagnetic surveying, and Kirsten Chojnicki of PNNL for researching and compiling fundamental background information needed for this project.

REFERENCES

Allis, R. and Moore, J. "Can Deep Stratigraphic Reservoirs Sustain 100 MW Power Plants?" *Geothermal Resources Council Transactions*, 38 (2014).

Allis, R., Blackett, B., Gwynn, M., Hardwick, C., Moore, J., Morgan, C., Schelling, D., and Sprinkel, D. "Stratigraphic Reservoirs in the Great Basin – the Bridge to Development of Enhanced Geothermal Systems in the U.S." *Geothermal Resources Council Transactions*, 36 (2012).

Allis, R., Gwynn, M., Hardwick, C., Mines, G., and Moore, J. "Will stratigraphic reservoirs provide the next big increase in U.S. geothermal power generation?" *Geothermal Resources Council Transactions*, 39 (2015).

Allis, R., Moore, J., Blackett, B., Gwynn, M., Kirby, S., and Sprinkel, D. "The Potential for Basin-Centered Geothermal Resources in the Great Basin." *Geothermal Resources Council Transactions*, 35 (2011).

Chovanec, Y. "Geothermal Analysis of Schellbourne, East-Central Nevada, Steptoe Valley." *M.S. Thesis: The University of Texas at Arlington* (2003).

Ćubrić, S. "Basic Characteristics of Hydraulic Model for the Velika Ciglena Geothermal Reservoir." *NAFTA*, 63(5–6):173–179 (2012).

Darnet, M., Wawrzyniak, P., Coppo, N., Nielsson, S., Schill, E., and Fridleifsson, G. "Monitoring Geothermal Reservoir Developments with the Controlled-Source Electro-Magnetic method – a Calibration Study on the Reykjanes Geothermal Field." *Journal of Volcanology and Geothermal Research*, 391 (2020).

Faulds, J., Hinz, N., Coolbaugh, M., Shevenell, L., and Siler D. "The Nevada Play Fairway Project – Phase II: Initial Search for New Viable Geothermal Systems in the Great Basin Region, Western USA." *Geothermal Resources Council Transactions*, 40 (2016).

Faulds, J., Hinz, N., Coolbaugh, M., Shevenell, L., Siler, D., dePolo, C., Hammond, W., Kreemer, C., Oppiger, G., Wannamaker, P., Queen, J., and Visser, C. "Discovering Blind Geothermal Systems in the Great Basin Region: an Integrated Geologic and Geophysical Approach for Establishing Geothermal Play Fairways." *Final report submitted to the Department of Energy*, DE-EE0006731 (2015).

Flechtner, F. and Aubele, K. "A Brief Stock Take of the Deep Geothermal Projects of Bavaria, Germany." *Proceedings: 44th Workshop on Geothermal Reservoir Engineering*, Stanford University, Stanford, CA (2019).

Gettings, P., Chapman, D.S., and Allis, R. "Techniques, Analysis, and Noise in a Salt Lake Valley 4D Gravity Experiment." *Geophysics*, 73(6):WA71–WA82 (2008).

Gwynn, M., Allis, R., Sprinkel, D., Blackett, R., and Hardwick, C. "Geothermal Potential in the Basins of Northeastern Nevada." *Geothermal Resources Council Transactions*, 38 (2014).

Hardwick, C., Allis, R., and Wannamaker, P. "Observations and Implications of Magnetotelluric Data for Resolving Stratigraphic Reservoirs Beneath the Black Rock Desert, Utah, USA." *Geothermal Resources Council Transactions*, 39 (2015).

Hinze, W.J., Aiken, C., Brozena, J., Coakley, B., Dater, D., Flanagan, G., Forsberg, R., Hildenbrand, T., Keller, G.R., Kellogg, J., Kucks, R., Li, X., Mainville, A., Morin, R., Pilkington, M., Plouff, D., Ravat, D., Roman, D., Urrutia-Fucugauchi, J., Veronneau, M., Webring, M., and Winester, D. "New Standards for Reducing Gravity Data—The North American Gravity Database." *Geophysics*, 70(4):J25–J32 (2005).

Hinz, N., Coolbaugh, M., and Faulds, J. "Geothermal Resource Potential Assessment – White Pine County, Nevada." *Nevada Bureau of Mines and Geology Report* 55 (2015).

Hinz, N., Faulds, J., Coolbaugh, M., Hardwick, C., Gwynn, M., Queen, J., and Ayling, B. "Play Fairway Analysis of Steptoe Valley, Nevada: Integrating Geology, Geochemistry, Geophysics, and Heat Flow Modeling in the Search for Blind Resources." *Geothermal Resources Council Transactions*, 44 (2020).

Jaysaval, P., Knox, H., Chojnicki, K., Schwering, P., Winn, C., Hardwick, C., Norbeck, J., Hinz, N., Matson, G., Ayling, B., Mlawsky, E., and Faulds, J. "Feasibility Study of Magnetotelluric and Controlled-Source Electromagnetic Methods for Geothermal Exploration at Steptoe Valley, NV." *Geothermal Rising Conference*, Poster Session (2021).

Johnston, H., Kolker, A., Rhodes, G., and Taverna, N. "Sedimentary Geothermal Resources in Nevada, Utah, Colorado, and Texas." *National Renewable Energy Laboratory Technical Report*, TP-5500-76513 (2020).

Kirby, S. "Summary of Compiled Permeability with Depth Measurements for Basin Fill, Igneous, Carbonate, and Siliciclastic Rocks in the Great Basin and Adjoining Regions." *Utah Geological Survey Open-File Report*, 602 (2012).

McClure, M. and Kang, C. "A Three-Dimensional Reservoir, Wellbore, and Hydraulic Fracturing Simulator that is Compositional and Thermal, Tracks Proppant and Water Solute Transport,

Includes non-Darcy and non-Newtonian Flow, and Handles Fracture Closure.” *SPE Reservoir Simulation Conference*, SPE 182593-MS (2017).

Pan-American Center for Earth and Environmental Studies (PACES). Gravity Database of the US: Online, University of Texas, El Paso, <http://research.utep.edu/paces> (last accessed June 2012).

Rühaak, W., Rath, V. and Clauser, C. “Detecting Thermal Anomalies within the Molasse Basin, Southern Germany.” *Hydrogeology Journal*, 18:1897–1915 (2010).

Siler, D., Faulds, J., Hinz, N., Dering, G., Edwards, J., and Mayhew, B. “Three-Dimensional Geologic Mapping to Assess Geothermal Potential: Examples from Nevada and Oregon.” *Geothermal Energy*, 7(2) (2019).

Vidal, J. and Genter, A. “Overview of Naturally Permeable Fractured Reservoirs in the Central and Southern Upper Rhine Graben: Insights from Geothermal Wells.” *Geothermics*, 74, 57–73 (2018).