




Rotor Aerodynamics Aeroelastics & Wake Project

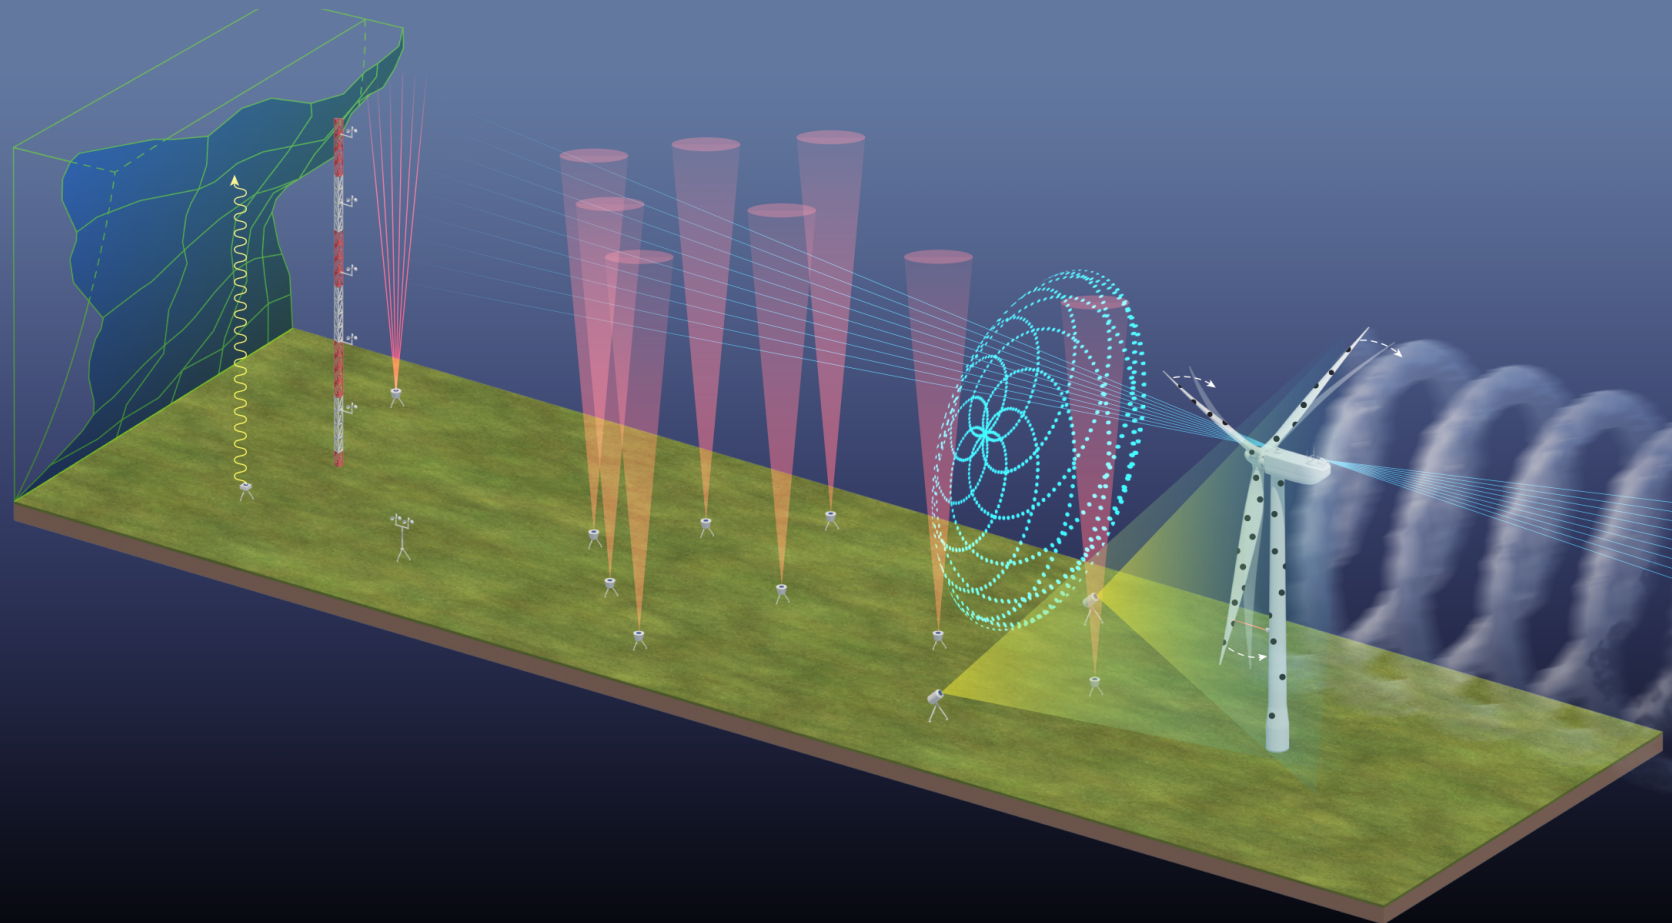

C L Kelley

Sandia National Laboratories

P Doubrawa

N Hamilton


National Renewable Energy Laboratory

J Naughton

University of Wyoming, Sandia National Laboratories

What is **RAAW** ?



- A 3-year (2021-2024) project
- A partnership
 - **GE Renewable Energy**
 - United States Department of Energy (DOE)
 - National Renewable Energy Laboratory (**NREL**)
 - Sandia National Laboratories (**SNL**)
 - Others
 - Danish Technical University (DTU)

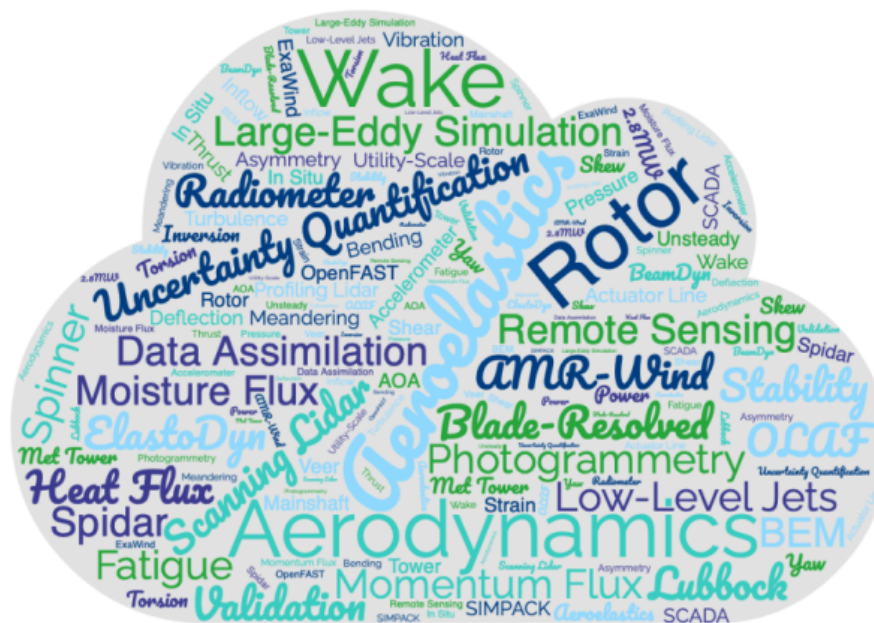

- A 1-year field campaign
 - Is performed using a 2.8-MW wind turbine
 - Collects detailed inflow, rotor and wake measurements
 - Includes extensive model validation activities
 - Design-level
 - Blade-resolved codes

Why RAAW?

The model improvement cascade:
highest fidelity simulations improve lower fidelity models used to design new technology

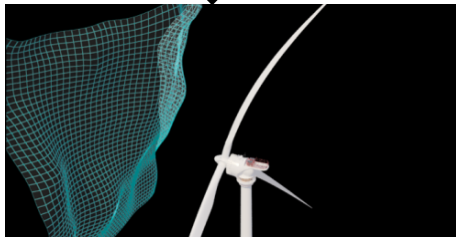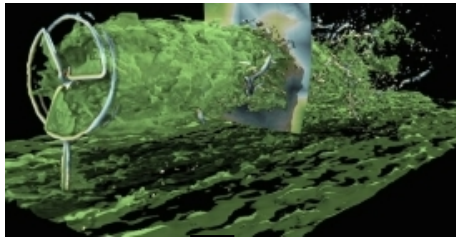


only works if highest fidelity codes are validated against relevant and accurate measurements

Shortcomings in available datasets

Solutions proposed by RAAW

<p>Turbine data available for input to models is often limited</p>	<p>Sufficient wind turbine information is available to build a detailed, high-fidelity model of the system</p>	
<p>Inflow data available for initial and boundary conditions to models is often limited</p>	<p>The inflow will be extensively measured covering a large area and supplying the quantities and resolutions required</p>	
<p>Data available for comparisons with model output is often limited</p>	<p>The wind turbine response and wake will be measured at high resolution</p>	
<p>Available datasets are primarily based on scaled-down and stiffer rotors</p>	<p>The wind turbine size and aerodynamic design are representative of modern land-based technology</p>	

Why **RAAW**?

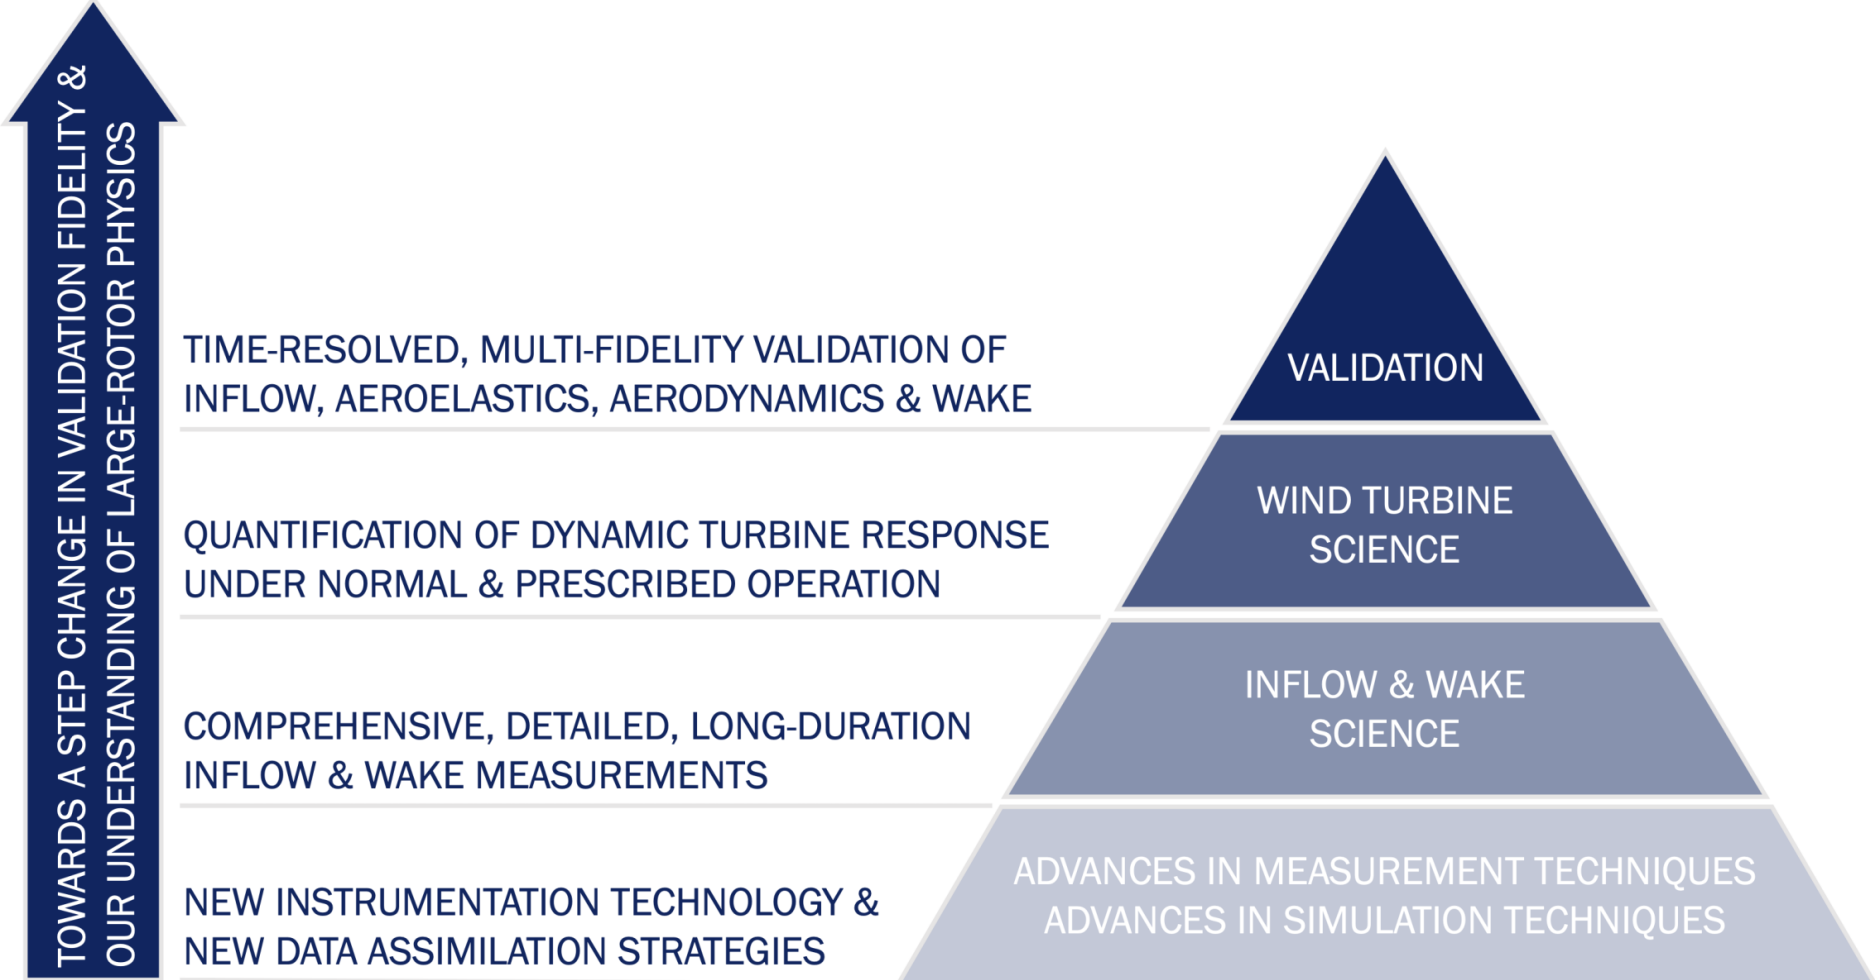

The Primary Objectives of

Model Validation

- Time series validation of inflow, wind turbine response and wake
- Statistical validation of inflow and wind turbine response
- Uncertainty quantification of measured signals

Model Development

- Inflow data assimilation in mid-fidelity simulations
- Inflow data assimilation in high-fidelity simulations

Wind Turbine Science

- Quantification of blade deflection
- Quantification of aerodynamic loads
- Characterization of wind turbine response under off-normal (wind/operational) conditions


Wind and Wake Science

- Comprehensive spatiotemporal characterization of inflow
- Characterization of mean and dynamic near-to-far wake

Advances in Instrumentation Techniques

- Large-scale photogrammetry for blade bending measurements
- Blade aerodynamic measurements for an operational wind turbine
- Spatially and temporally detailed inflow characterization

The **RAAW** timeline

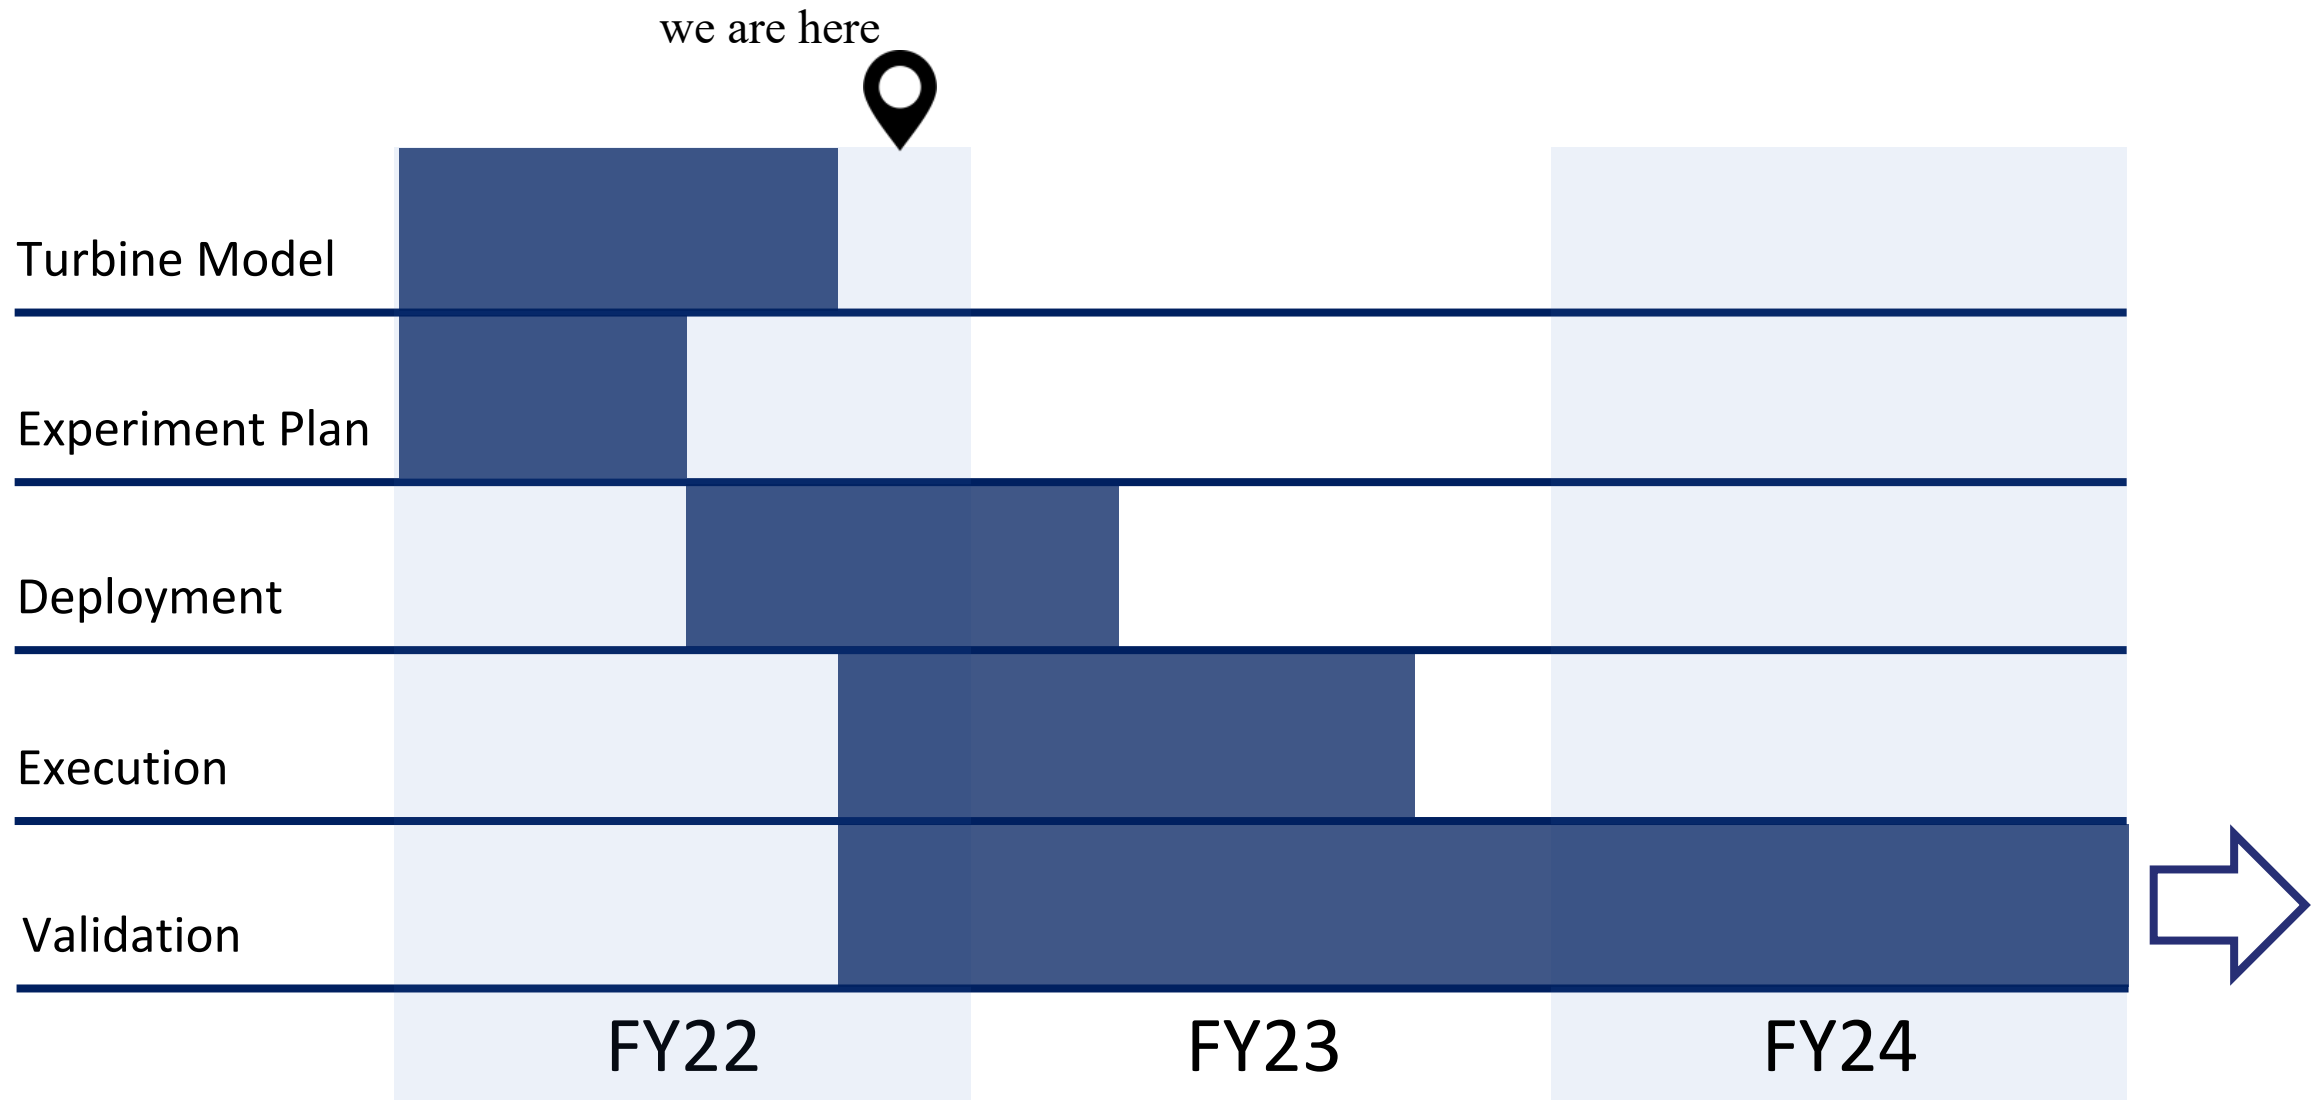

The **RAAW** field campaign




- Campaign Location
 - Lubbock, Texas
- Campaign Timing
 - June 2022 – June 2023
- Campaign Turbine
 - GE 2.8MW
 - 120-m hub height
 - 127-m rotor diameter
- Campaign Data Management
 - A2e Data Archive Portal

<https://a2e.energy.gov/projects/raaw>

The **RAAW** field campaign


- Heavy focus on **inflow** for accurate atmospheric characterization and initial and boundary conditions for validation simulations
- Detailed **structural response** measurements with in-situ (strain gages, accelerometers) and remote (photogrammetry, laser clearance) systems
- **Concurrent** inflow, turbine response, and wake measurements
- **Intentional** instrument placement and measurement strategies
- Normal and prescribed, **off-design** for specific validation cases

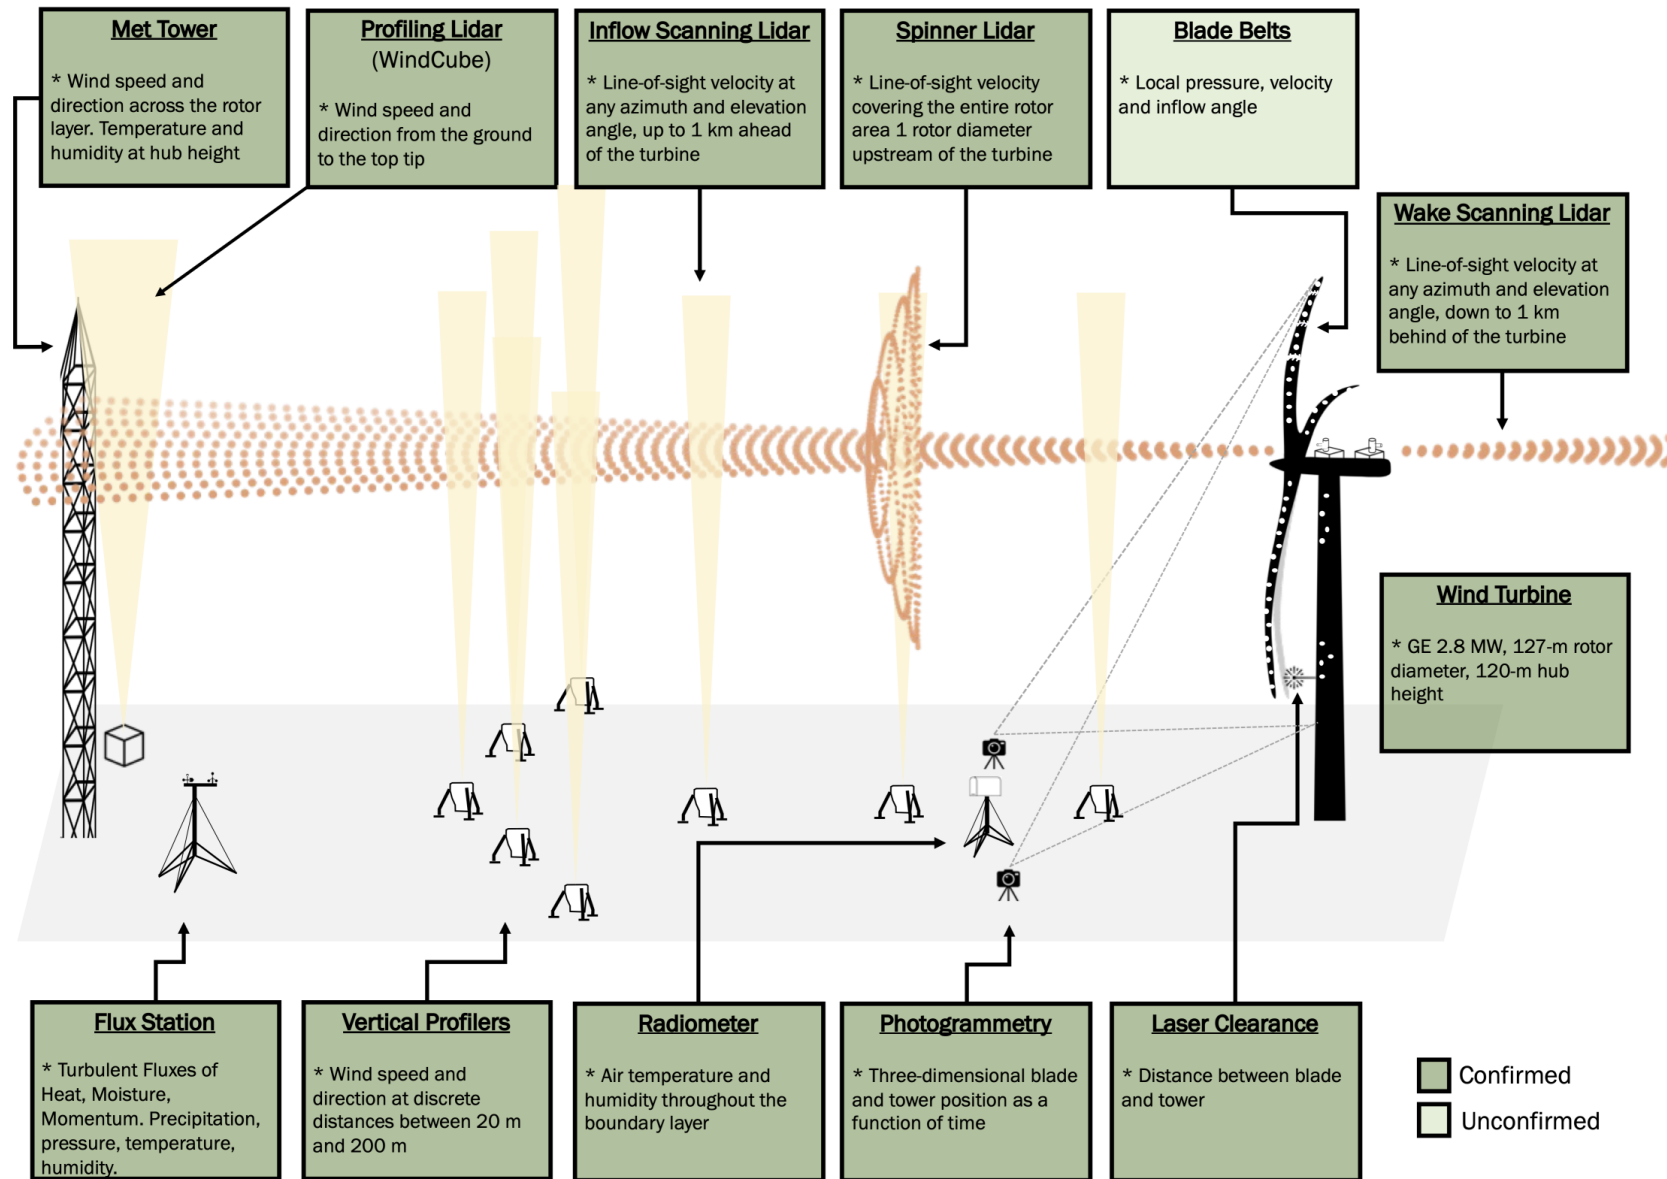

The **RAAW** field campaign



Met tower and Surface Met Station

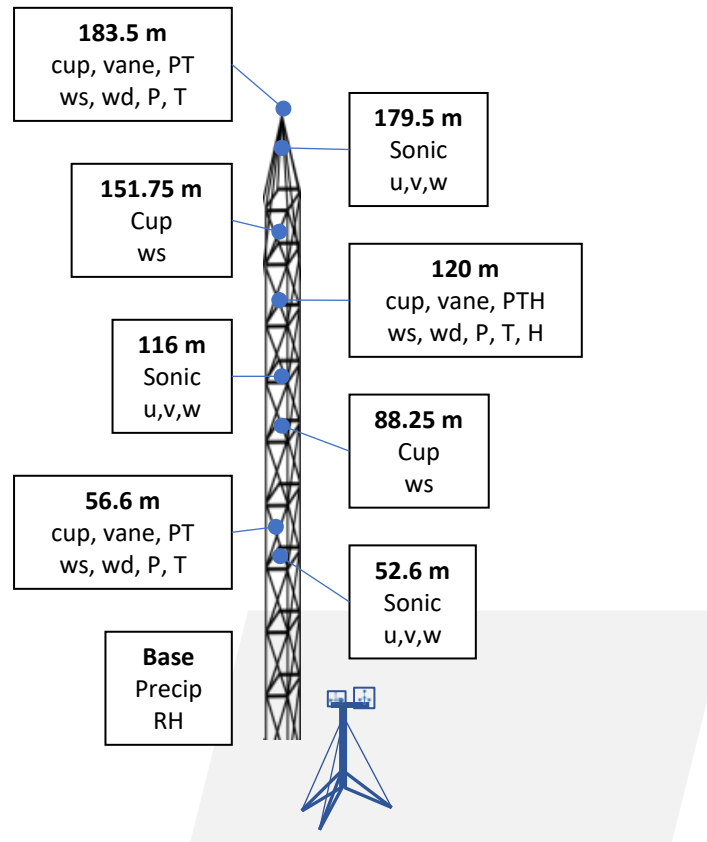

Met Tower

* Wind speed and direction across the rotor layer.
Temperature and humidity at hub height

Flux Station

* Turbulent Fluxes of Heat, Moisture, Momentum.
Precipitation, pressure, temperature, humidity.

The **RAAW** field campaign


• Nacelle-Mounted Lidars

- Halo Photonics Streamline XR
- Forward-facing 200-216 for inflow measurements
- Rearward-facing 200-217 for wake measurements
- Range up to 1 km



The **RAAW** field campaign

- Microwave Radiometer
 - Radiometrics MP3000A
 - Measures irradiance spectra/brightness temperatures

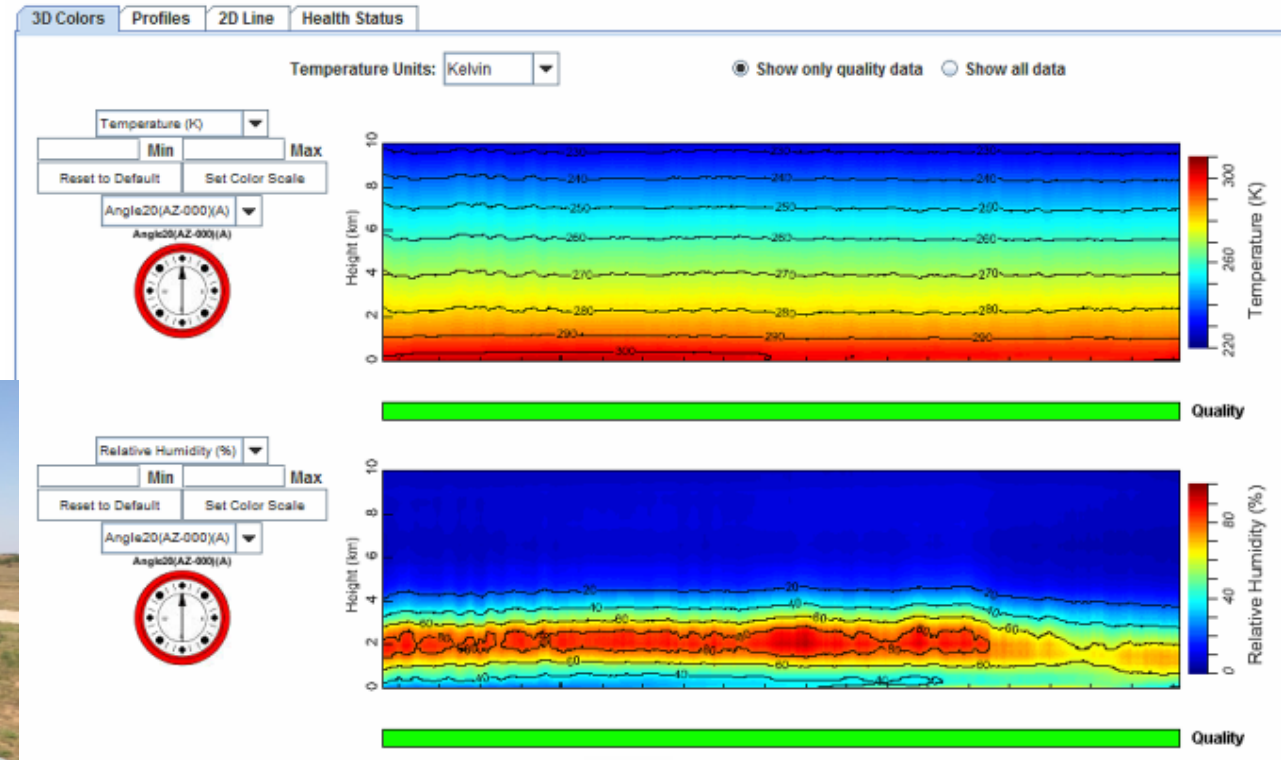


- Calculates profiles of temperature and humidity
- Integrated into the DAP

The **RAAW** field campaign



- Photogrammetry

- Trilion Quality Systems LLC
- Aramis 12 MP cameras
- Stereoscopic images to measure 3D location of ~120 points on the tower and blades at 25 Hz
- Decals hung by a ropes crew

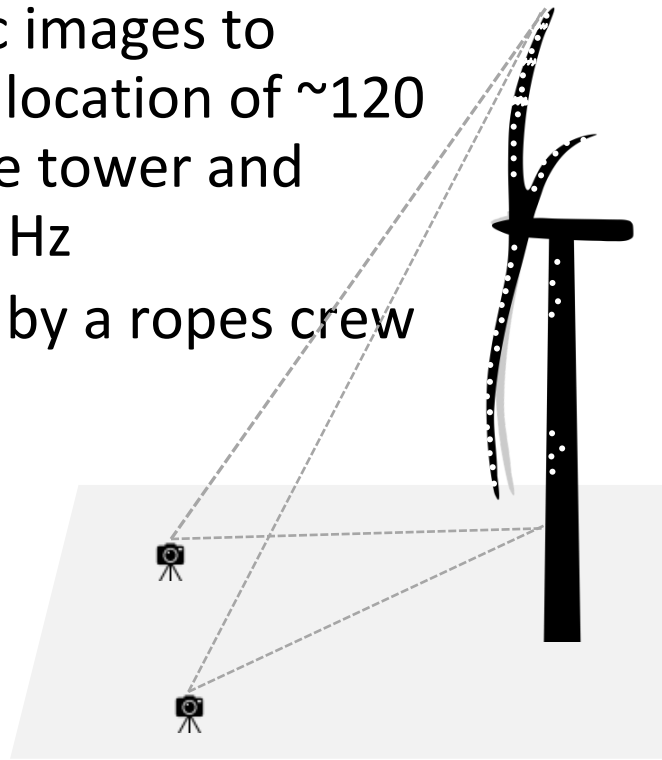


The **RAAW** field campaign


- Spinner Lidar
 - DTU system
 - Previously used at SWiFT

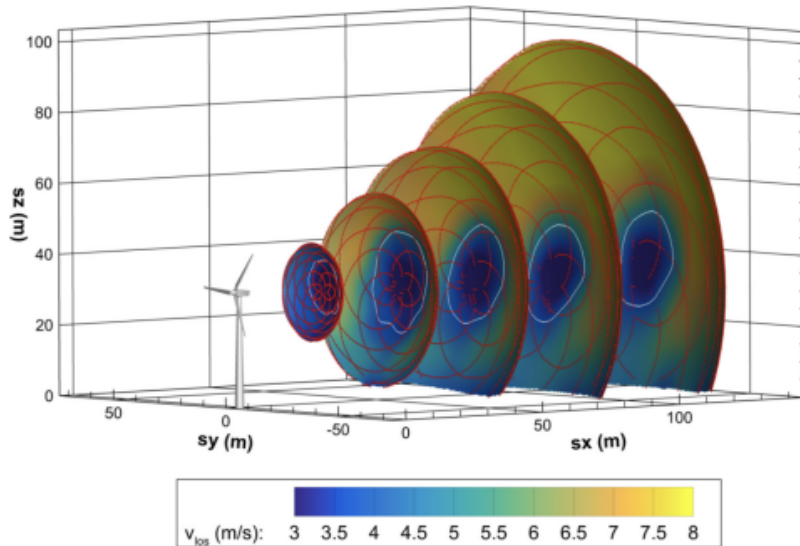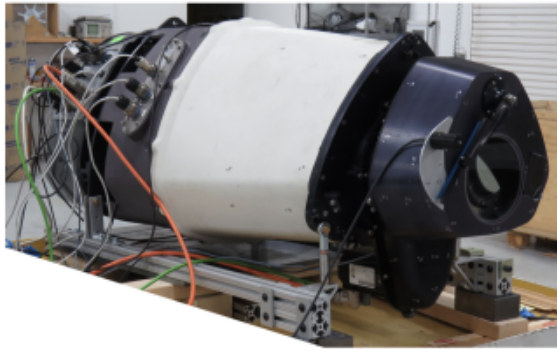

- Scans a region 1 D upstream of hub
 - Captures plane every 1-2 seconds

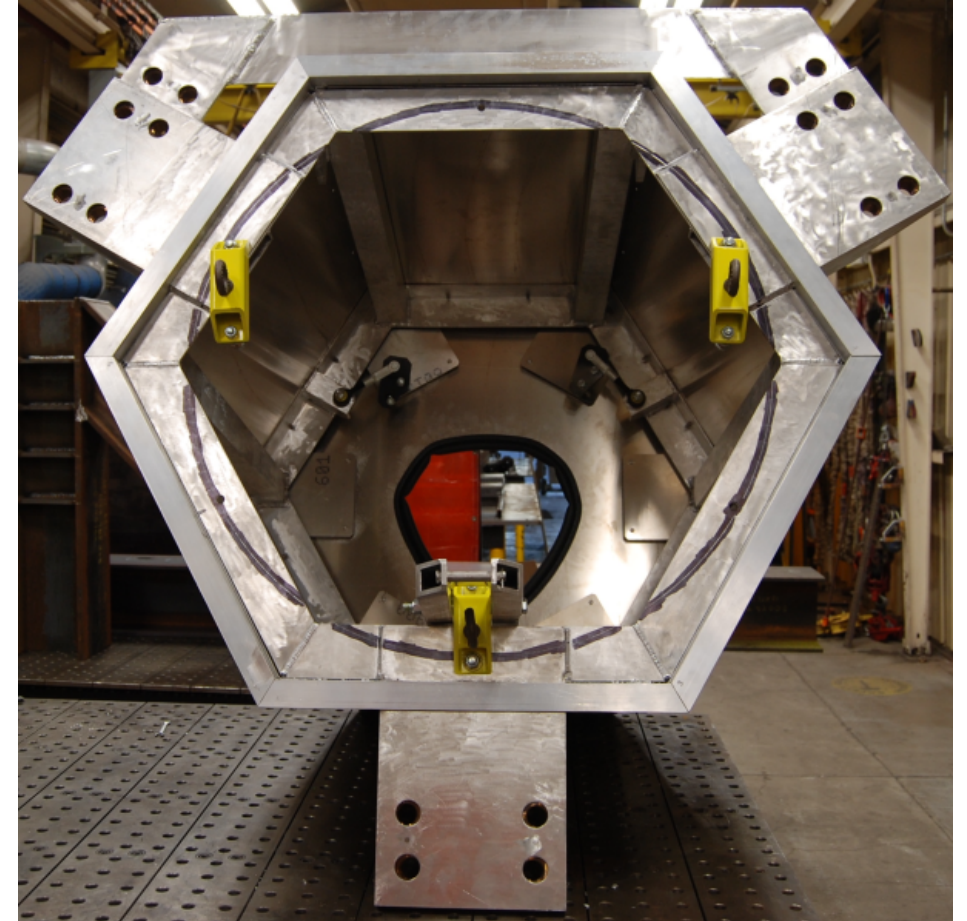


The **RAAW** research products

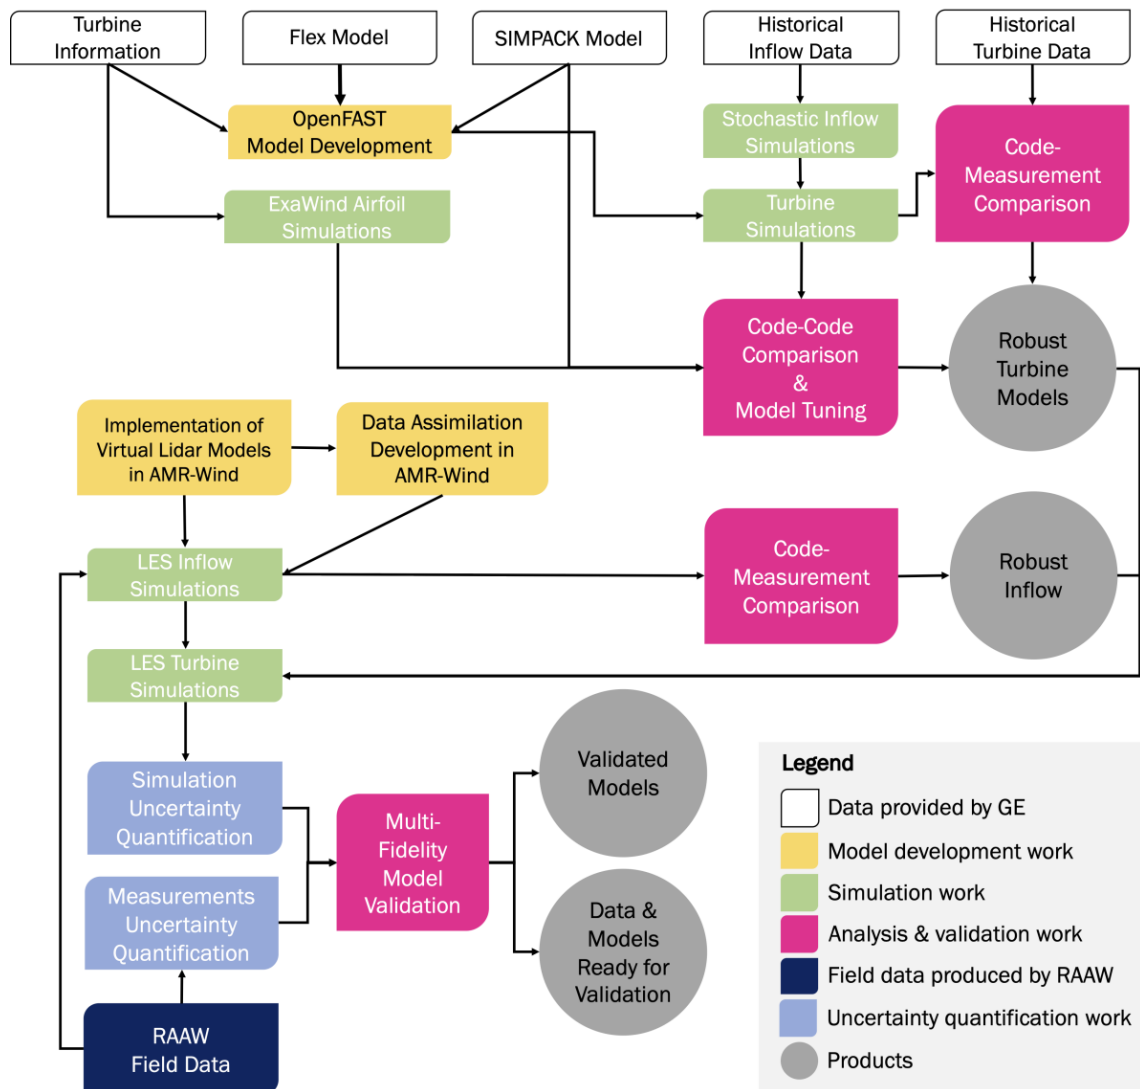


- **Open-source validated models** can be used by the international community
- Interaction between turbulent inflow, tall towers, flexible rotors, and wake generation provide a greater understanding of the **system dynamics**
- **Validation and science results** will be disseminated
- Validation **benchmarks** will be shared with the international community
- All released data will protect proprietary data

The **RAAW** simulation products

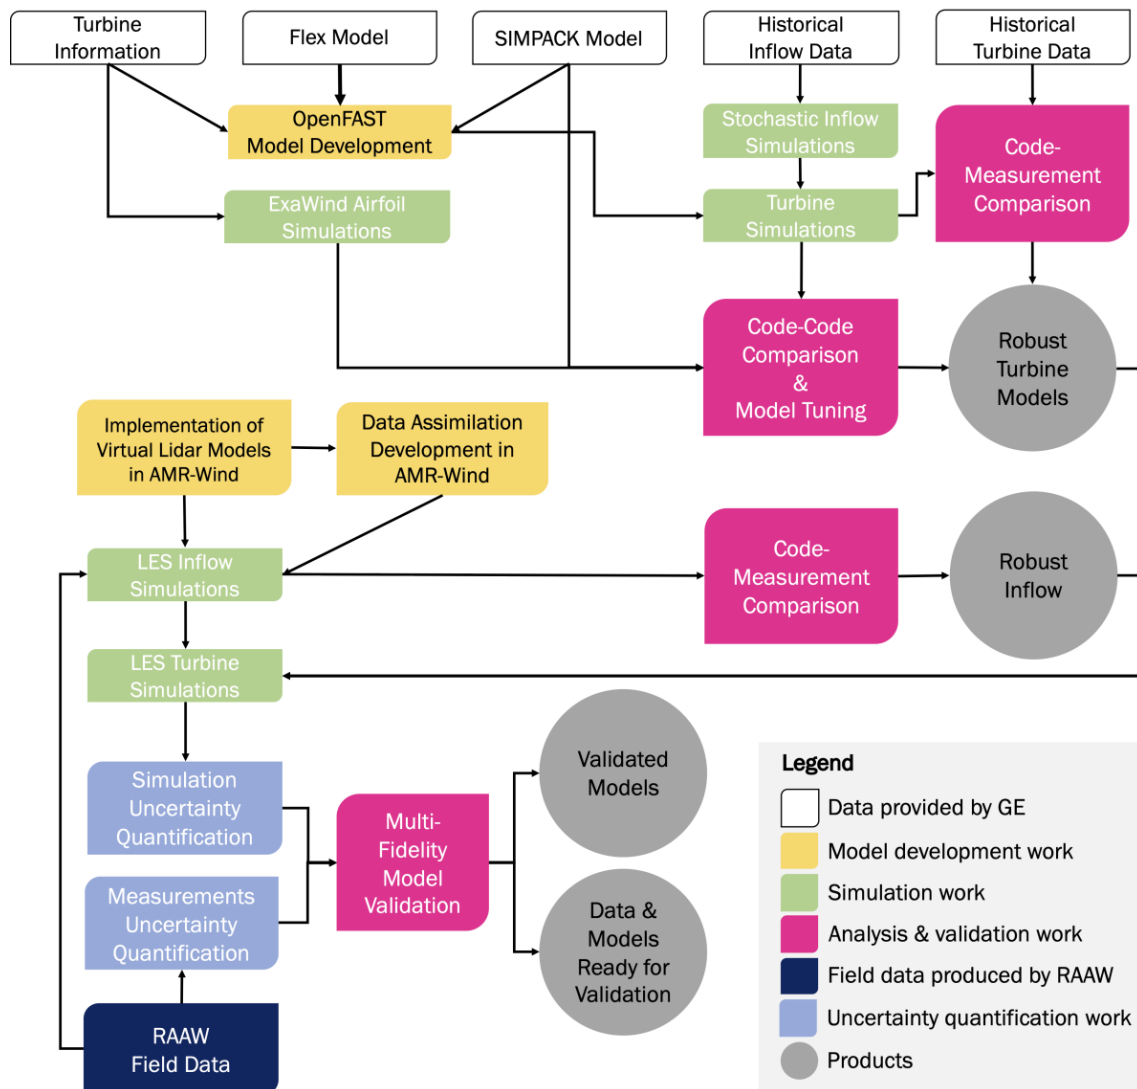

- Robust **wind turbine models**
 - Ready to use for validation
 - Well documented
 - Based on detailed wind turbine data
 - Validated against measurements
 - Validated against other simulation tools
- **Data assimilation** capabilities
 - Ready to use for time-resolved validation
 - Implemented into ExaWind
 - Validated
 - Well documented and portable
- Robust **inflow models**
 - Ready-to-use framework for inflow generation in mid-fidelity and high-fidelity codes
 - Applicable to statistical and time-resolved validation activities

Questions?

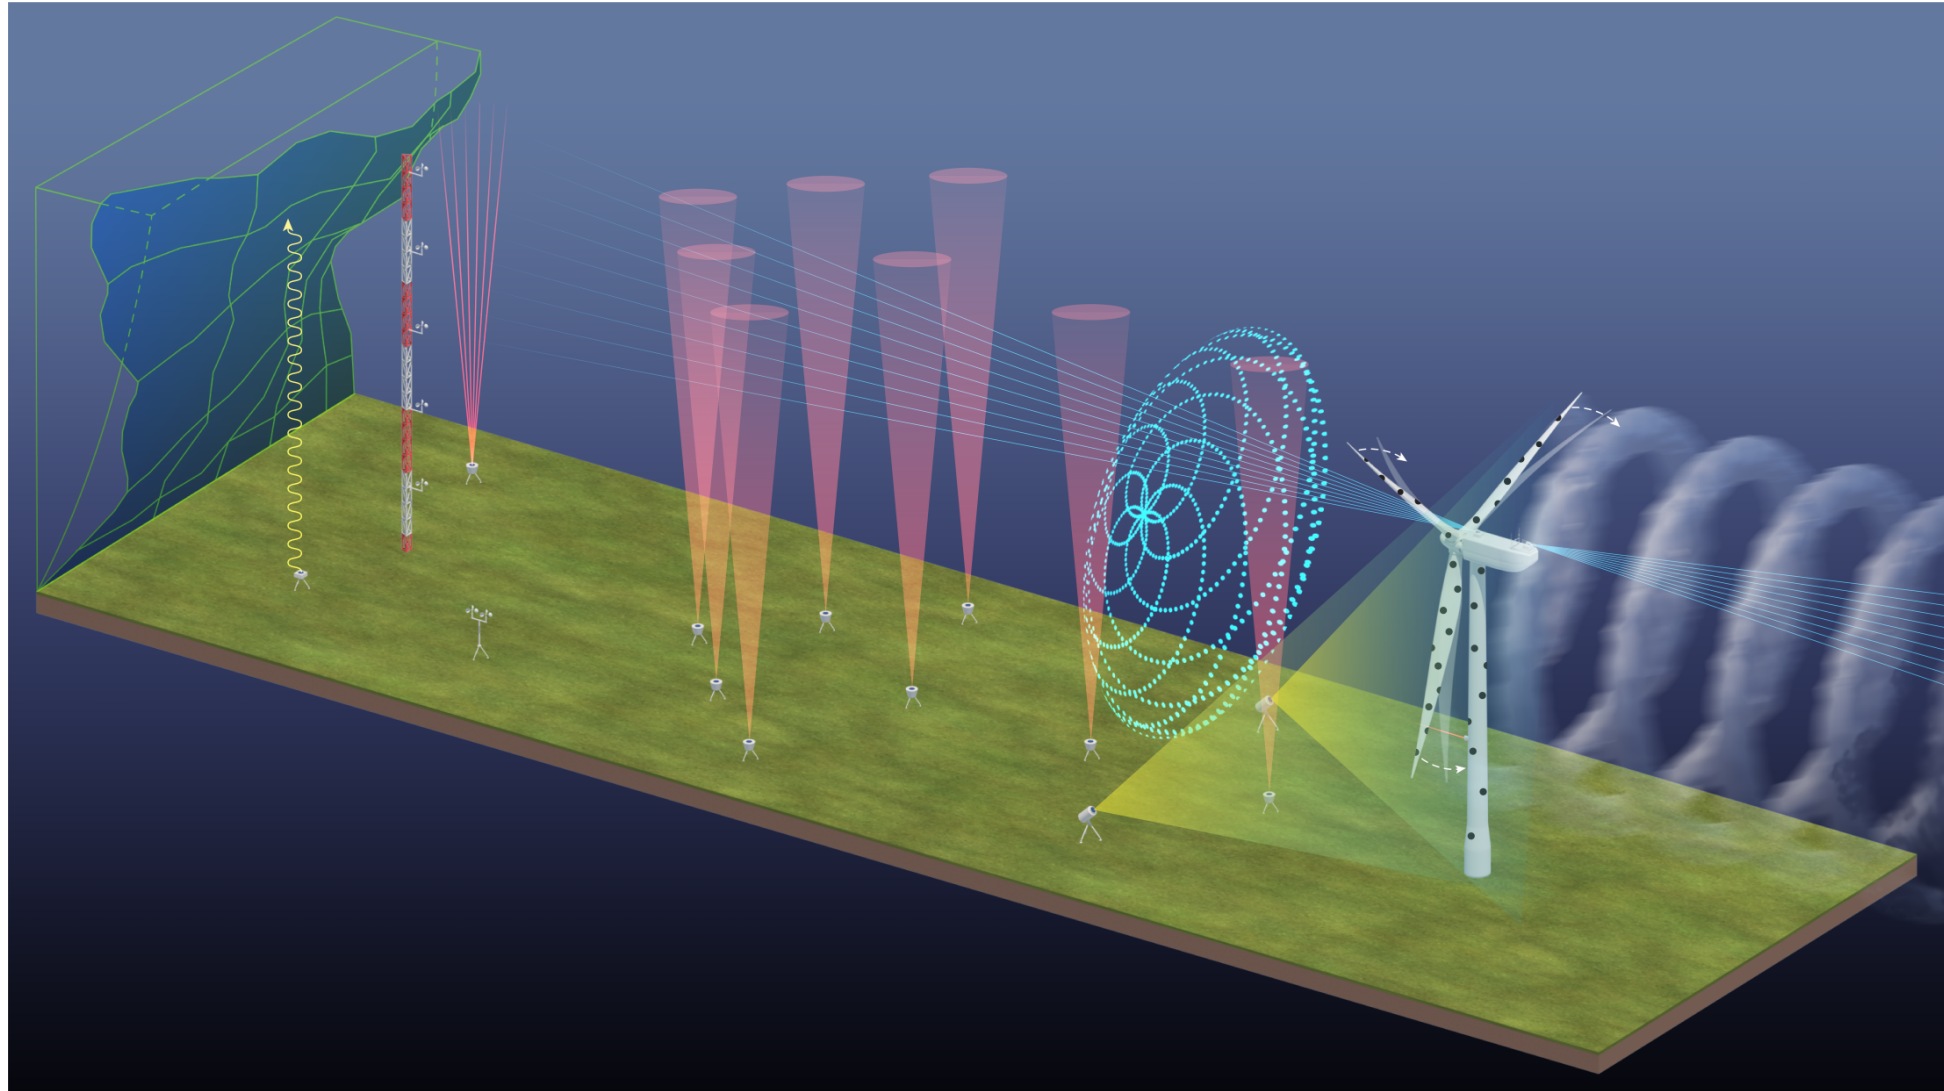

Instrument Summary Backup

Instrument	Description
GE Wind Turbine	2.8 MW, 127 m diameter
Trilion Photogrammetry	Blade deflection, torsion, and tower deflection tracking
Blade Tower Clearance	Blade tip to tower distance
VPG Micro-Measurements Strain Gauges	Blade flap and edge strains
DTU Aerodynamic Pressure Belts and 5-hole probes	Pressure, lift, drag, inflow speed and inflow angle
Meteorological Tower	Wind speed, wind direction, pressure, temperature, and humidity
LUMIBIRD Streamline XR	Wake line-of-sight velocity measurements up to 1 km
DTU SpinnerLidar	Rotor inflow Line-of-sight velocity over rotor plane 1D upstream
NRG Spidar	Wind speed and wind direction with induction
Surface Flux Station	Measuring turbulent heat flux
Radiometrics Radiometer	Air temperature and humidity
Leosphere WindCube	Vertical profiling lidar
NRG LDR1 Profiling Lidar	Test data for new product comparison to met tower