


Quantum Sensing for Energy Applications

Hari Paudel^{1,2}; Scott Crawford¹; Gary Lander^{3,4}; Matthew Brister^{1,2}; Jeffrey Wuenschell¹; Michael Buric³; Ruishu Wright¹; Benjamin Chorpene³; Yuhua Duan¹

¹National Energy Technology Laboratory, 626 Cochran Mill Road, Pittsburgh, PA 15236, USA; ²NETL Support Contractor, 626 Cochran Mill Road, Pittsburgh, PA 15236, USA; ³National Energy Technology Laboratory, 3610 Collins Ferry Road, Morgantown, WV 26505, USA; ⁴NETL Support Contractor, 3610 Collins Ferry Road, Morgantown, WV 26505, USA


Quantum Sensing for Energy Applications

- Quantum sensing is creating potentially transformative opportunities to exploit intricate quantum mechanical phenomena in new ways to make ultrasensitive measurements of multiple parameters.
- A growing interest in quantum sensing has created opportunities for its deployment to improve processes pertaining to energy production, distribution, and consumption.
- NETL is leveraging experimental and computational quantum tools to enhance sensitivity of hybrid quantum-classical ultrasensitive sensors for the detection of hydrocarbons and rare earth elements (REEs).

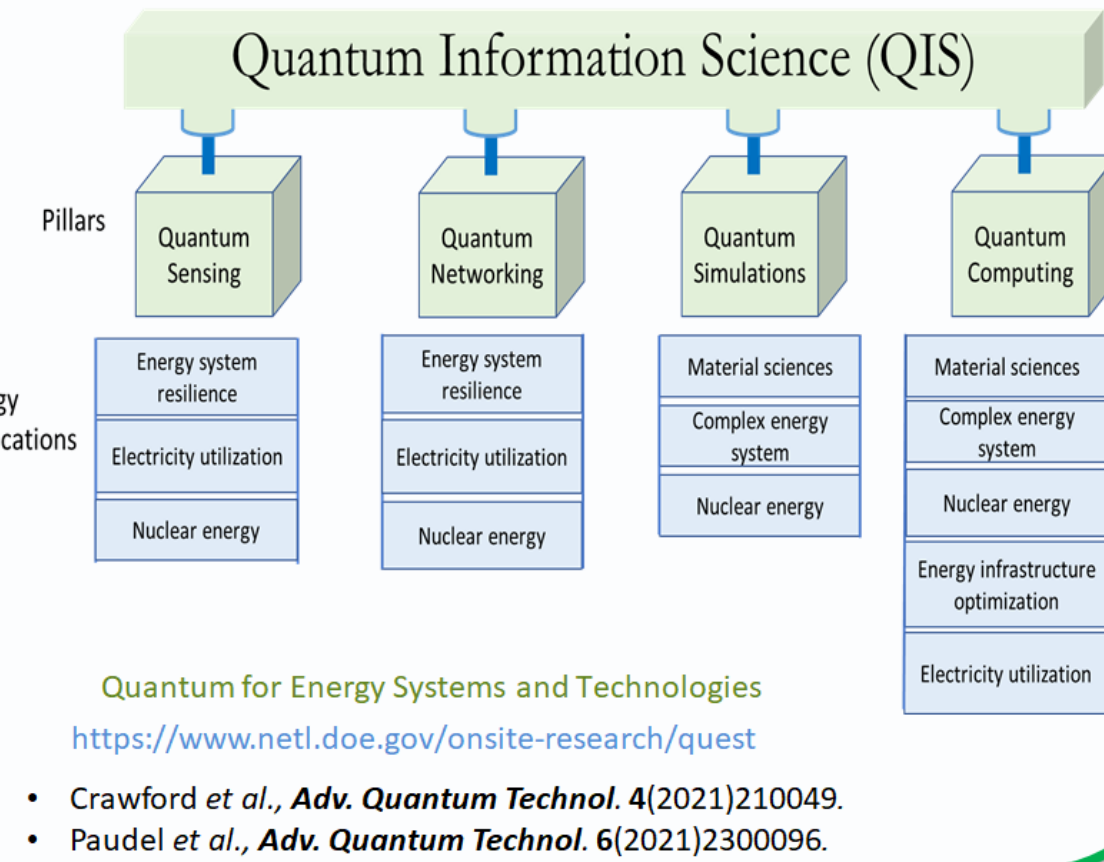


Hybrid Quantum-Classical Sensing: Advantages and Scopes

The application of rapidly evolving quantum technologies to real-world systems is challenging. Taking stock of the current state-of-the-art technology in sensing and identifying potential energy sector problems that could benefit from quantum sensing represents a key step forward.

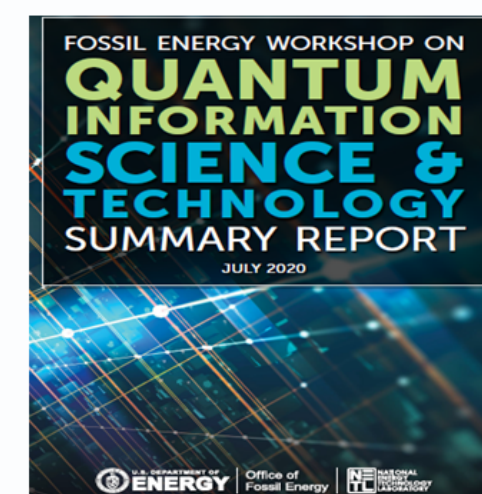

Paudel et al., *ACS Eng. Au*, 2(2022)151-196.

NETL Strategy on Quantum Information Science (04/15/2019)
 NETL key initiative on QIS

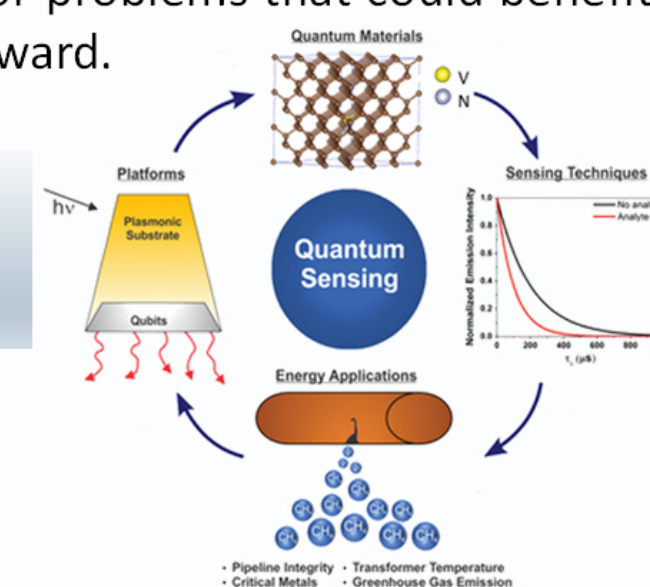

Crawford et al., *Adv. Quantum Technol.* 4(2021)210049.

Traditional Sensors


- Provide wide bandwidth and range
- High update rate and high dynamic range in the data collection
- Sensitivity: $\sim 1 \text{ nm}/^\circ\text{C}$ to $3 \text{ nm}/^\circ\text{C}$
 $\sim 100 \text{ nm}/\text{mT}$
 $\sim \Delta n \approx 10^{-10} RIU/\sqrt{\text{Hz}}$
- Simple and low cost
- Slow responses ($\sim \text{ms}$)

Quantum Sensors

- Provide extreme accuracy without error or noise (Typically, bandwidth is a Hz (one per second))
 $\sim 8 \text{ nT}/\sqrt{\text{Hz}}$ @ $T = 300 \text{ K}$
 $\sim \mu\text{K}/\sqrt{\text{Hz}}$ @ $170\text{-}700 \text{ K}$
- Low update rate but highly accurate for the measurement at a given point
- Ultrahigh sensitivity
- May not be simple but low cost
- Extremely fast (ns)


Color Centers in Nanodiamond

- Atomic impurity (N, Si, Sn, etc.) and carbon vacancy in a diamond lattice: spin qubits**
- Information stored in spin states are optically readable:**
 - Optically detected magnetic resonance (magnetometry, thermometry, electrometry)
 - Spin relaxometry (ion and pH sensing)
 - Zero phonon line emission (thermometry)
 - Room temperature operation

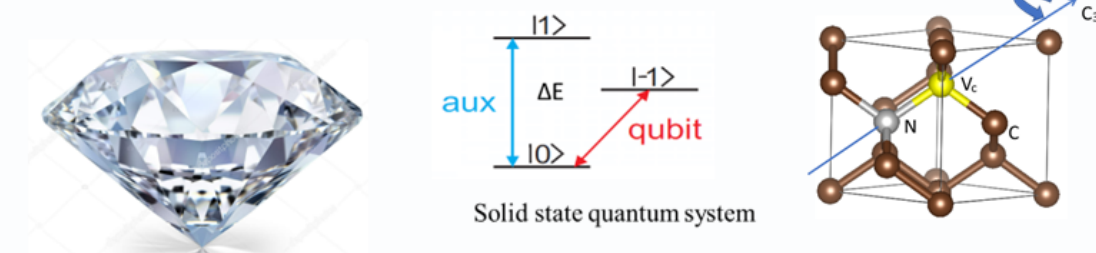


Nanodiamond (ND)/Metal-Organic Framework (MOF) Composites

Functionalization of nanodiamonds (NDs) with a porous coating provides a flexible scaffold for selective analyte uptake for quantum sensing. Quantum sensing properties are preserved in a metal organic framework (MOF) embedded ND and enhanced optically-detected magnetic resonance (ODMR) and spin relaxometry performances are observed using a custom-built optical setup.

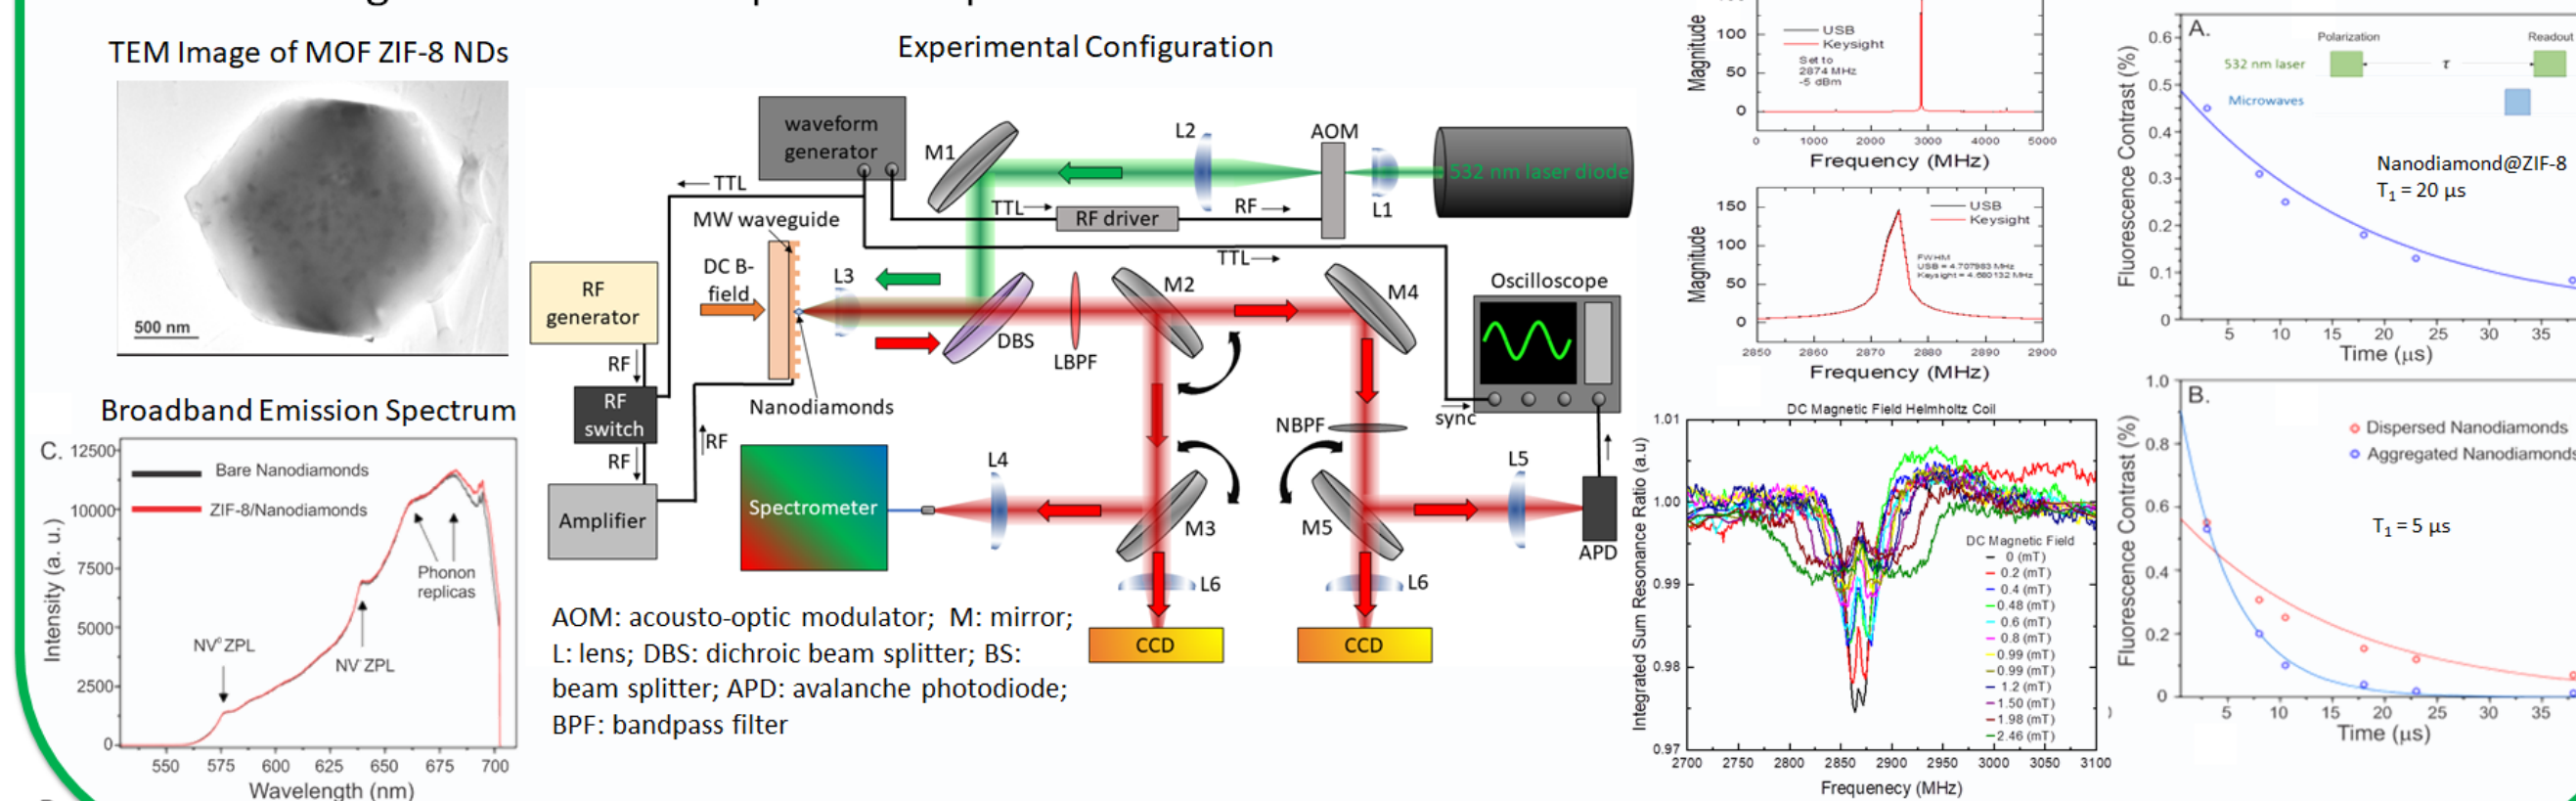


Modeling of Diamond with Nitrogen Vacancy (NV) Center for Field and Pressure Sensing

- Changes exist in the electronic and optical properties of bulk diamond with N impurities and/or N with a carbon (C) vacancy defect that can be utilized for sensing-related applications.
- Sensitivity at the nanoscale can be achieved using NV centers in diamond. NV center-based sensors show almost few order of magnitude improvement over traditional

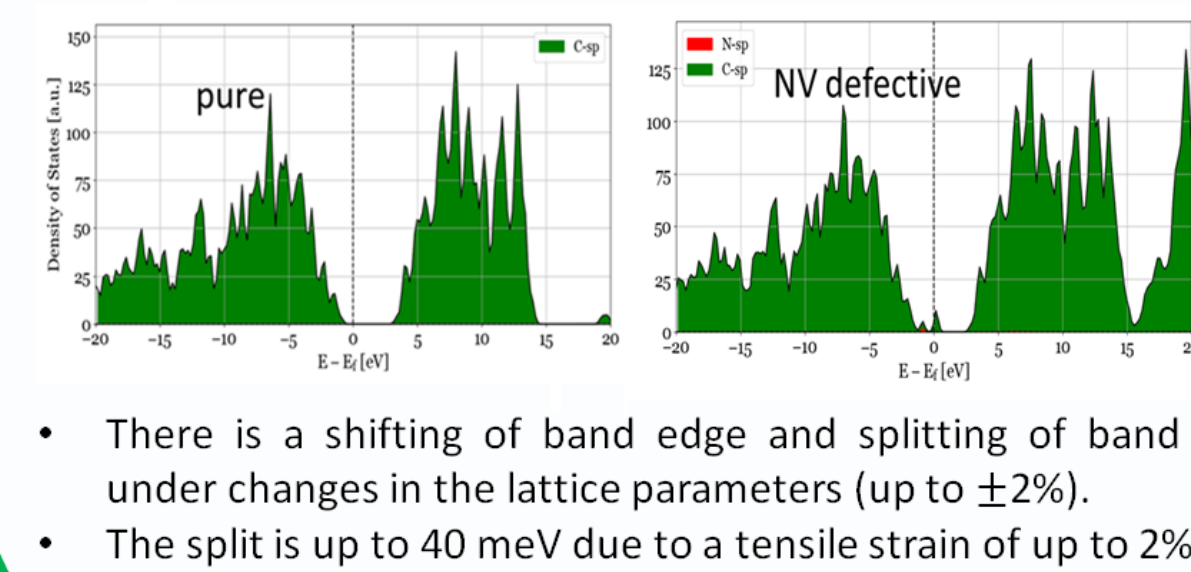


Paudel, Lander, Crawford, Duan, *Nanomaterials* 14(2024)675.

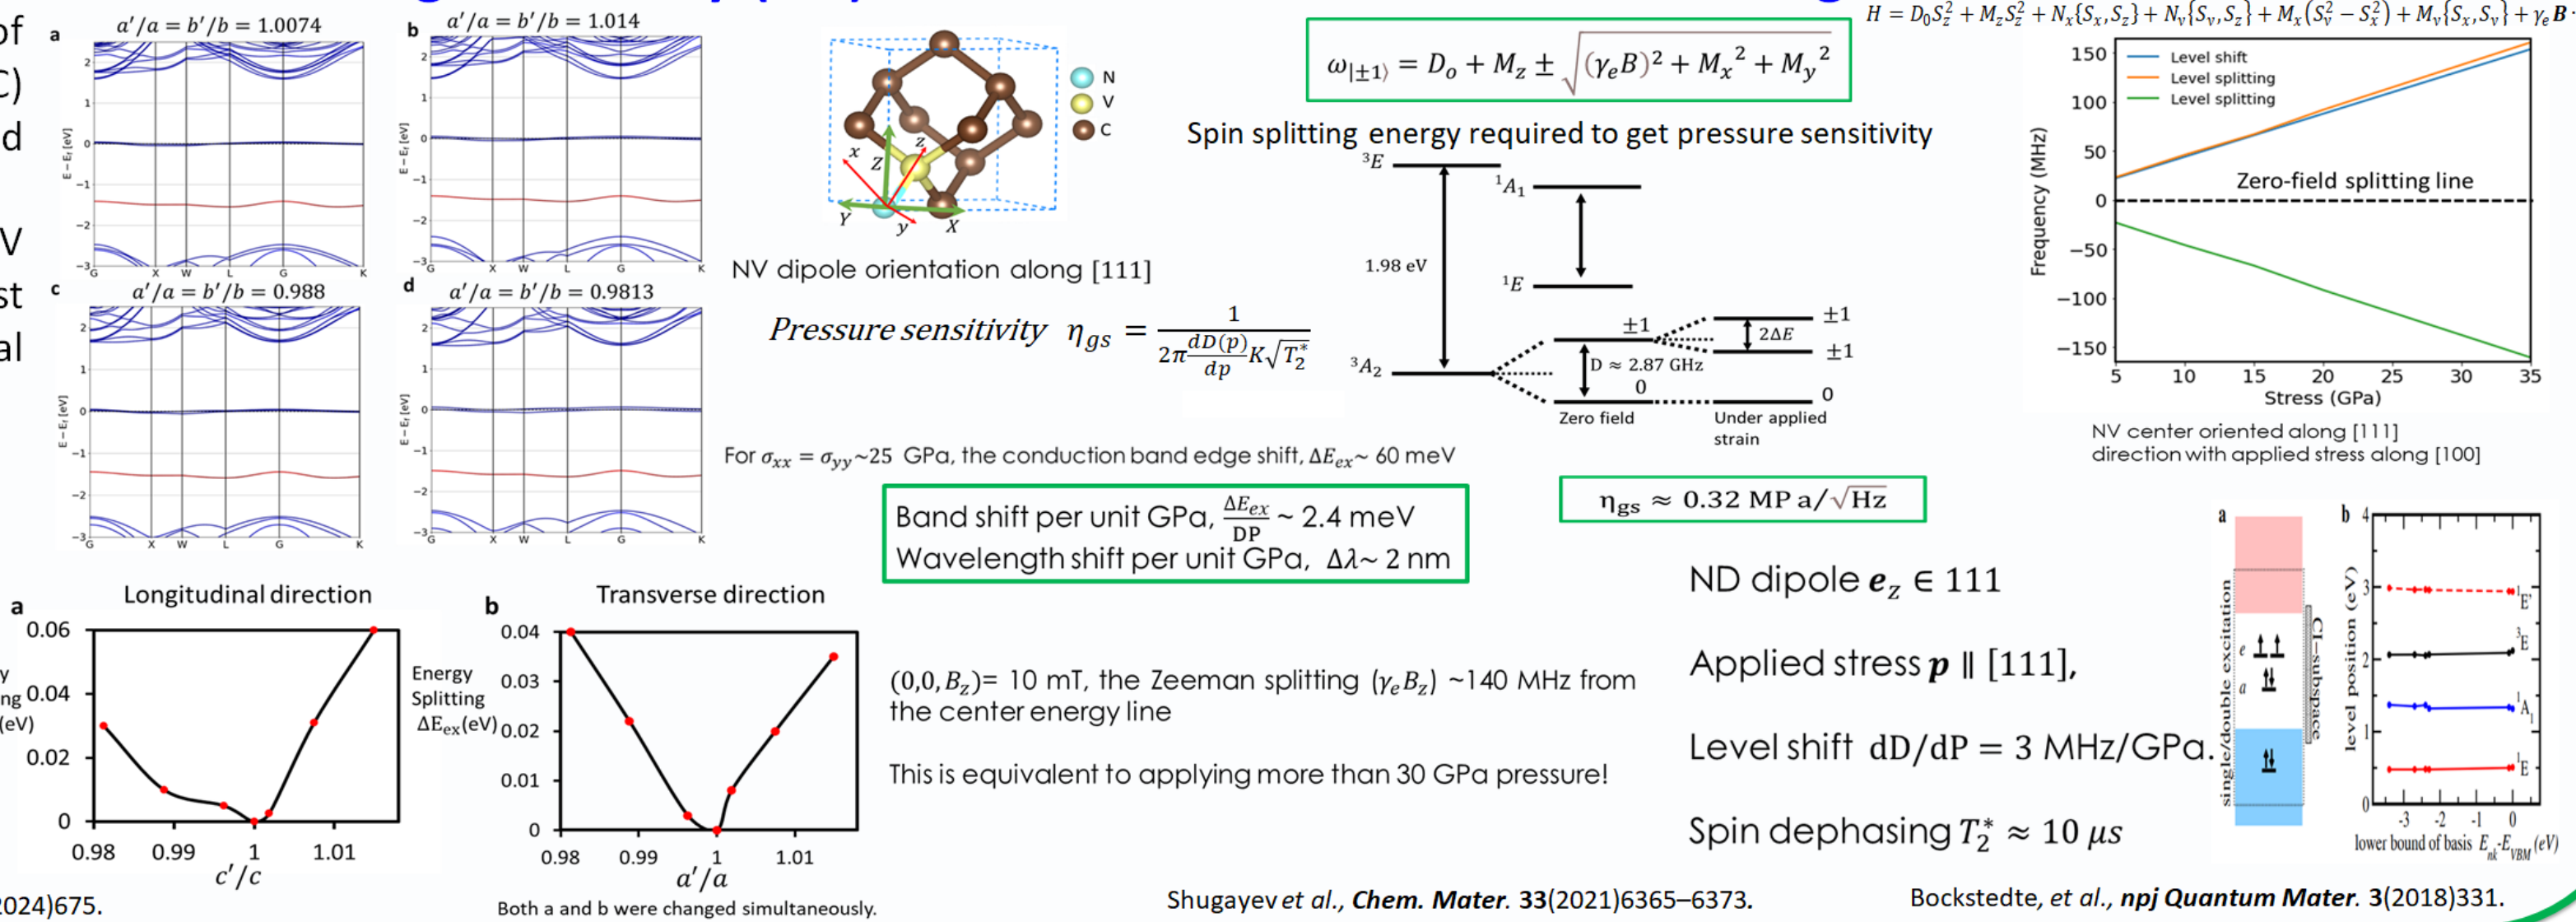


A Quantum Manometer

- Hydraulic fracturing of clay, sand, and rocks requires fluid injection under tens of MPa pressure through high-pressure wellbores.
- Can monitor deep geological CO₂ storage and seismic vibrations that trigger earthquakes (stress could reach up to 10-15 MPa).

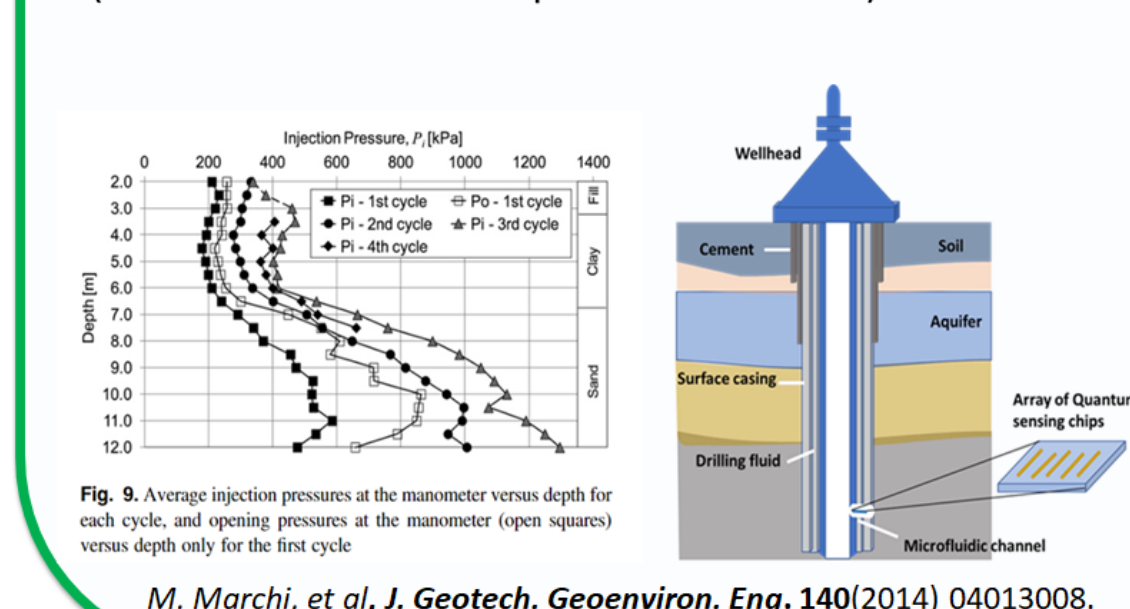

Sensing of Gas Molecules in Porous Materials

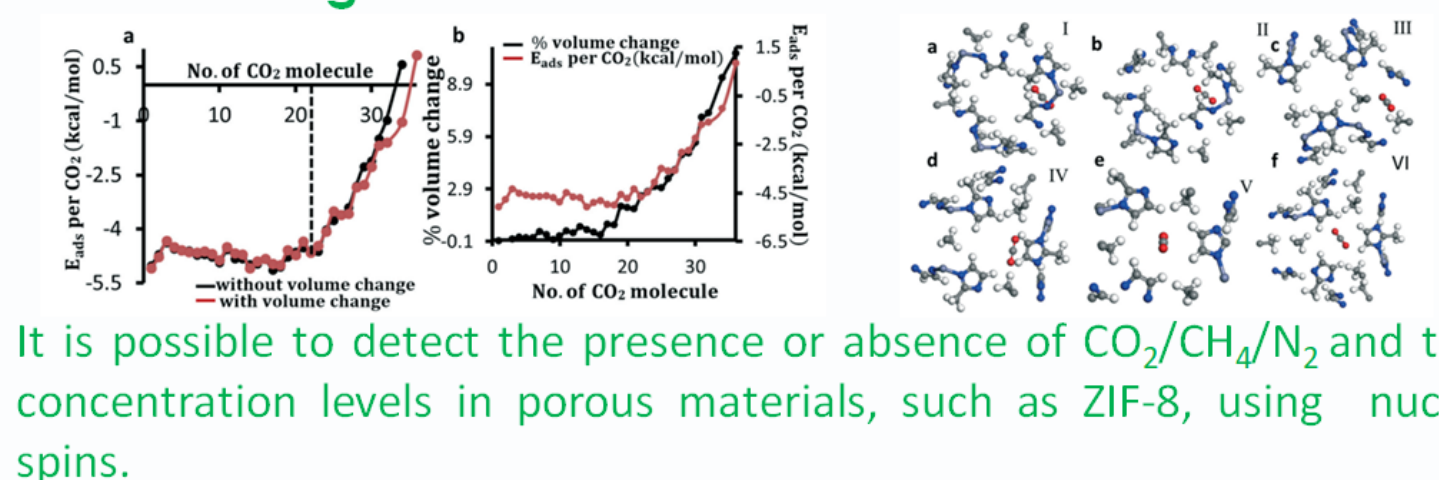

It is possible to detect the presence or absence of CO₂/CH₄/N₂ and their concentration levels in porous materials, such as ZIF-8, using nuclear spins.

Probing Liquid Samples Using NV Center and Nuclear Magnetic Resonance


- It has been shown that UiO-66 grown on a NV diamond can realize the confinement of nanoscale volumes of liquid-state sample nuclei near the NV-quantum sensors for nuclear magnetic resonance spectroscopy applications.

Liu et al., *Nano Lett.* 22(2022)9876-9882.

Paudel, Shi, Hopkinson, Steckel, Duan, *React. Chem. Eng.* 6(2021)990-1001.

Spoof Plasmons for Enhanced ND Emission


Microwave interactions are crucial for many quantum experiments, but the weak spontaneous emission of quantum emitters makes implementation challenging. Here, significant emission enhancement (up to 10¹¹) using microwave spoof plasmon (SPP) waveguides is demonstrated.

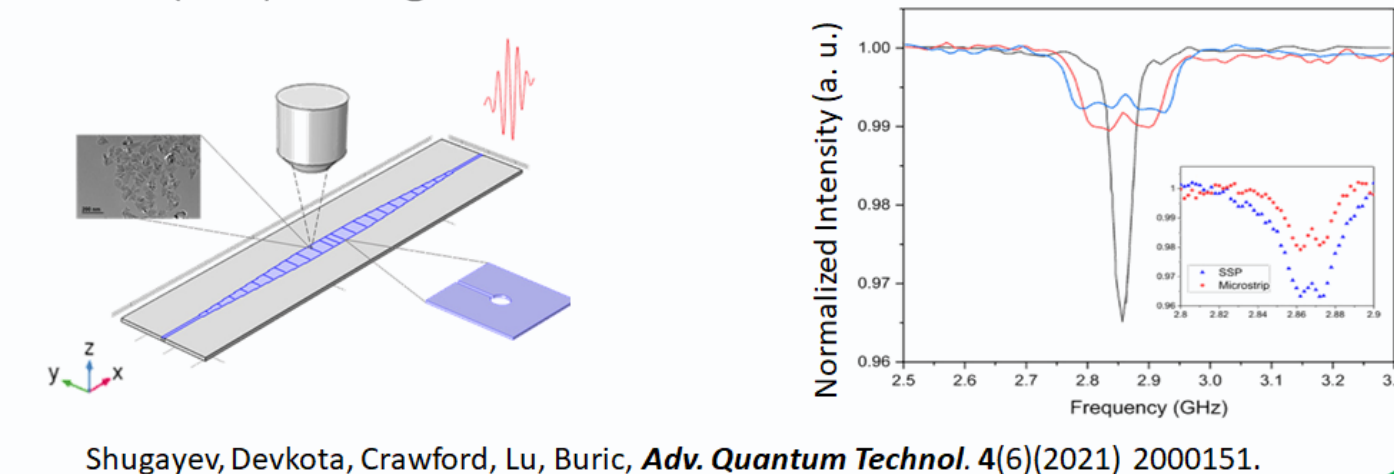

Shugayev, Devkota, Crawford, Lu, Buric, *Adv. Quantum Technol.* 4(6)(2021) 2000151.

Hong-Ou-Mandel Effect Quantum Sensor

Theoretical research indicates that by using superradiant near-field coupled emitters positioned across a beamsplitter gap, the coincident emission source required for Hong-Ou-Mandel interference can be created locally. Such a setup can be integrated into a practical sensor setup for quantum sensing applications.

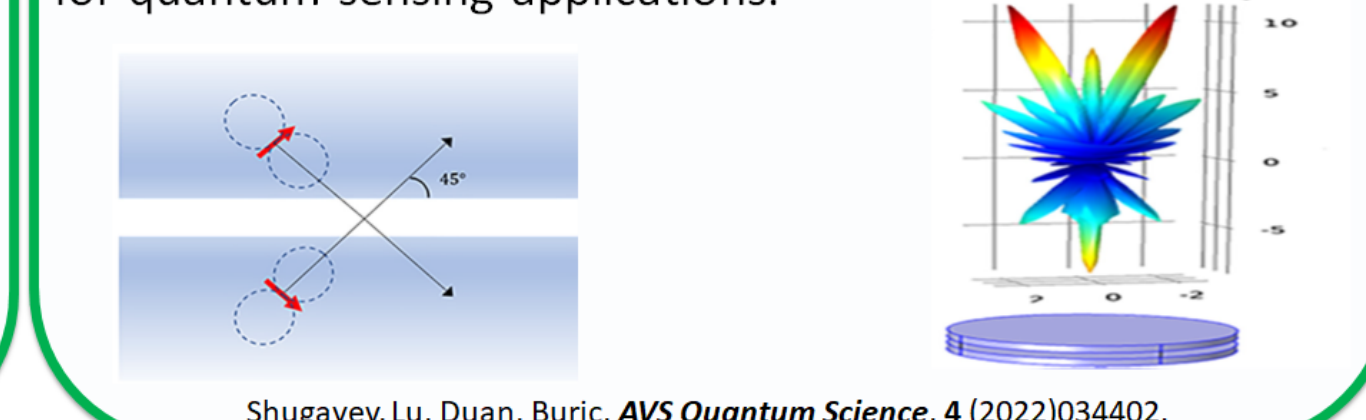

Shugayev, Lu, Duan, Buric, *AVS Quantum Science*, 4 (2022)034402.

Comparison with Traditional Optical Sensors

Compare resolve frequency per unit pressure

Band shift per unit GPa, $\frac{\Delta E}{\Delta P} \sim 2.4 \text{ meV}$ from the bandstructure calculations	Typical spin level shift/split per unit GPa
$\sim 3 \times 10^5 \text{ MHz/GPa}$	$\sim 2.4 \text{ MHz/GPa}$

- Quantitatively this is approximately a fourth order of magnitude improvement over traditional optical sensors!
- This shows a superiority of stress sensitivity behavior that could be achieved by manipulating the ground state spin levels in NV center nanodiamond over the traditional optical sensor based on the band edge or band gap shifting.

Paudel, Lander, Crawford, Duan, *Nanomaterials* 14(2024)675.

Disclaimer: This project was funded by the United States Department of Energy, National Energy Technology Laboratory, in part, through a site support contract. Neither the United States Government nor any agency thereof, nor any of their employees, nor the support contractor, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.