


Flashback Measurements in Hydrogen Enriched Low Swirl Flames Using High Speed OH-PLIF

Pradeep Parajuli and Peter Strakey

*National Energy Technology Laboratory, 3610 Collins
Ferry Road, Morgantown, WV 26505, USA*

*Presented at the 2024 University Turbine
Systems Research and Advanced Turbines
Project Review Meeting, September 24-25,
Tuscaloosa, AL*

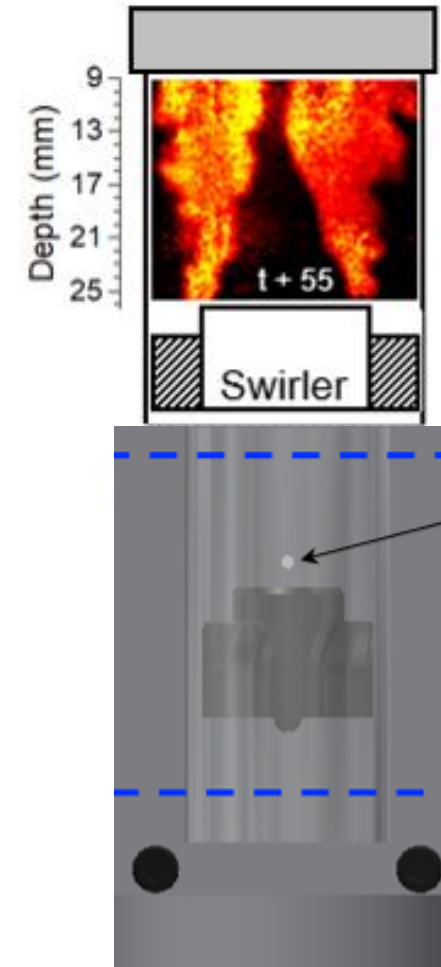

This project was funded by the United States Department of Energy, National Energy Technology Laboratory, in part, through a site support contract. Neither the United States Government nor any agency thereof, nor any of their employees, nor the support contractor, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Motivational Factors and Background

- Issues with hydrogen gas turbine systems
- Potential of low swirl flames with hydrogen-enriched systems

Experimental Apparatuses

- High-repetition rate ns-pulse laser system
- An optically accessible laboratory-scaled, swirl-stabilized burner

Results and Discussions

- Characterization of low swirl-stabilized flame
- Flashback characterization in low swirl burner
- Effects of fuel composition and varying swirler geometries
- Jet-in-Cross-Flow experiments.


Summary and Ongoing Work

- Jet-in-cross-flow experiments, computational fluid dynamics (CFD) modeling.

Introduction

Hydrogen – a clean and sustainable energy source

- Significantly different combustion characteristics compared to natural gas – higher flame speed and adiabatic temperature
- Supports net zero carbon policy, however, NO_x emissions pose a problem with non-premixed systems
- Ultra-lean premixed hydrogen combustion has a great NO_x reduction potential
- Higher flame speed increases the risk of flashback and equipment damage

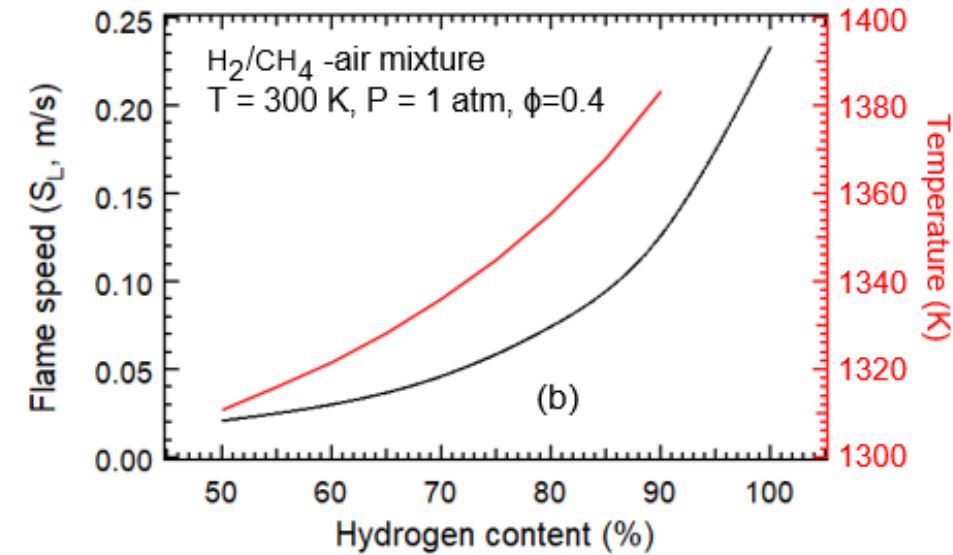

Source: GE Gas Power

- **Swirl-stabilized flames are well-known methods to stabilize premixed flames**
 - Low swirl burners (LSBs) have gained increasing attention
 - Increases flame intensity reduces the flame length
 - LSBs have non-swirling core surrounded by a swirling shroud and produce freely propagating lifted flames
- **OH-PLIF diagnostic technique – a well-known laser diagnostic tool to gain insight into flashback phenomena**



- Study reported two peak values of turbulence intensities showing presence of inner and outer shear layer and credited its role for the flame flashback ^[1]

Objective of the current study:

Characterize the flashback process observed in a swirl-stabilized, atmospheric-pressure burner with hydrogen-enriched flames.

- Develop correlations
- Validate CFD models

[1] Cheng, C&F (1995)

[2] Huang et al., Prog. Energy & Comb. Sci. (2009)

[3] Johnson et al., PROCI (2005)


Experimental Apparatuses – Laser and Imaging System

Laser system


- Pump laser: A ns-duration Nd:YVO4 laser (INNOSLAB, Model: IS400-2-L), P ~ 75 W @ 20 kHz-repetition rate emitting a unique 3 mm × 8 mm rectangular beam
- Dye laser: Frequency-tunable dye laser (Sirah, Model: CREDO-DYE-N) filled with a solution of rhodamine-6G dye diluted in pure ethanol
- Excitation wavelength: 283.9 nm, E ~ 0.05 mJ/pulse

Imaging system

- Camera: A high-speed CMOS camera (Photron, Model: FASTCAM SA-Z)
- Intensifier: A high-speed intensifier (Invisible Vision, Model: UVi 1850-10 S25)
- UV lens (Cerco, Objectif UV, f/1.8)
- Filter

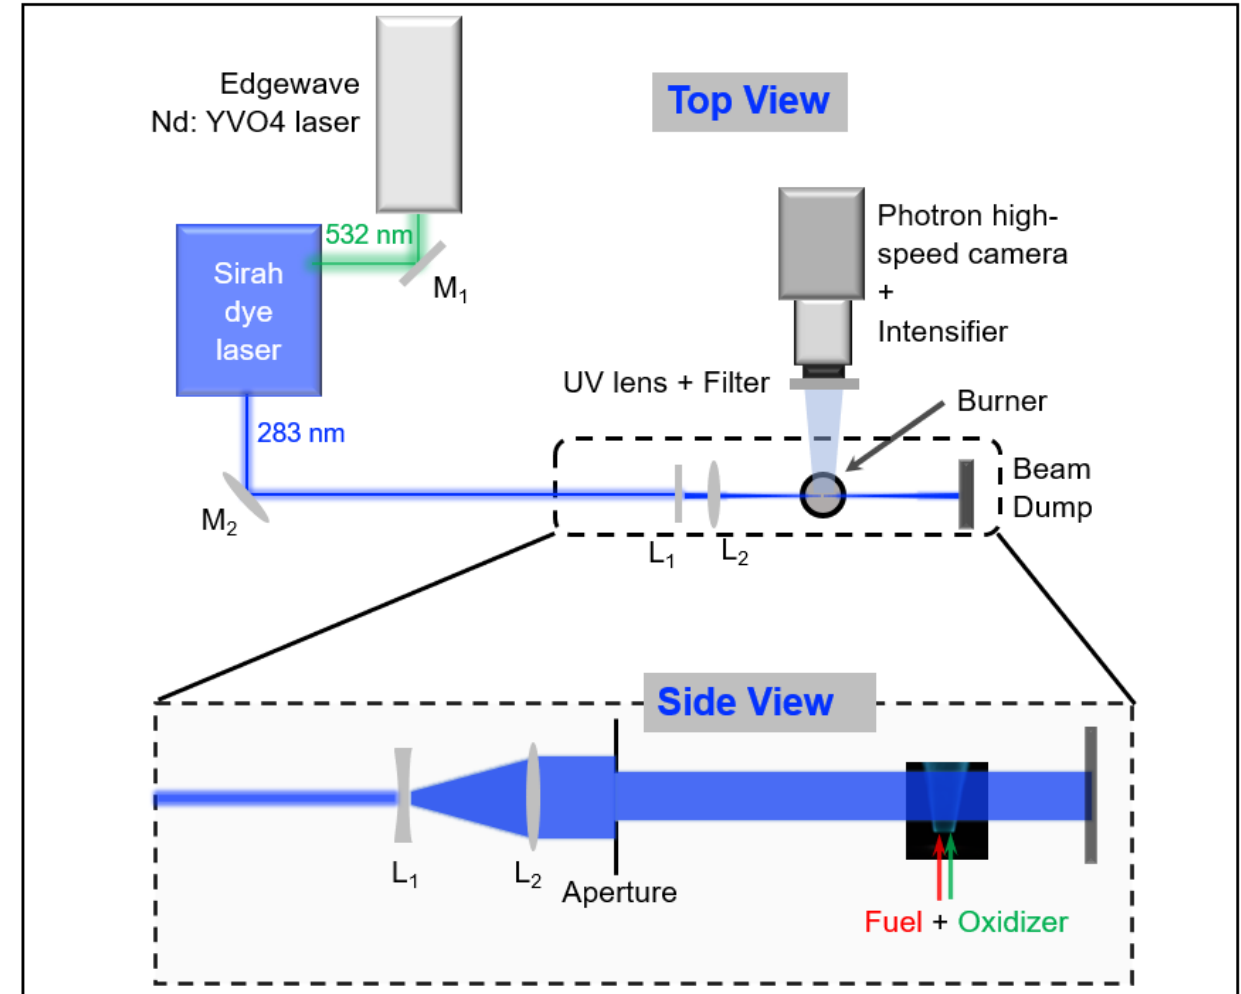


Experimental Apparatuses – Burner System

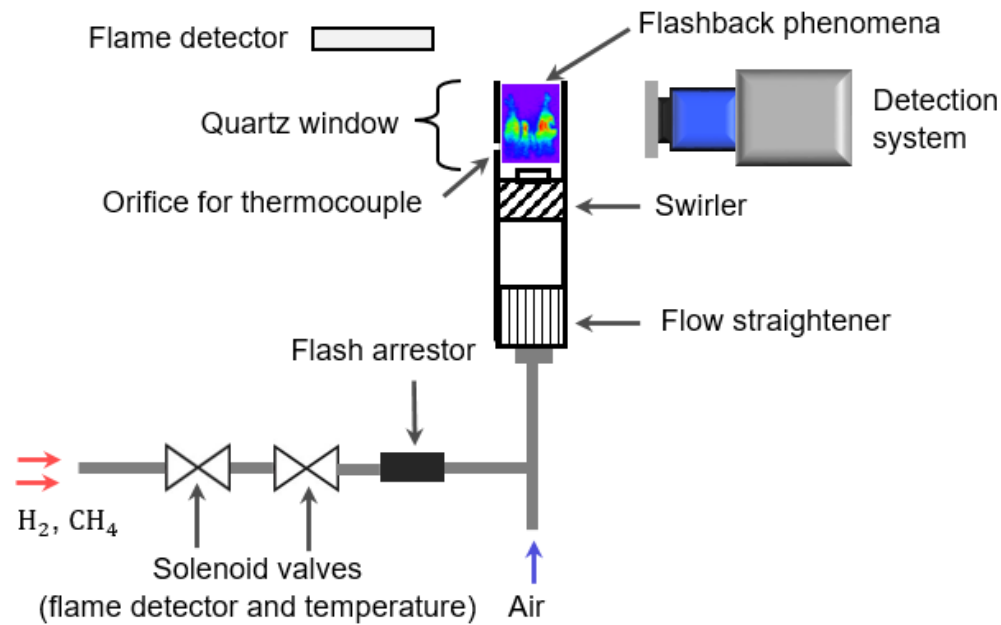

Burner configuration

- A 21.2-mm ID low swirl burner with optically accessible pre-mixer system
- Fuel (H_2 and CH_4) with 50%–90% H_2 by mole
- Thermocouple (inserted in pre-mixer unit) senses the rise in temperature and shuts off fuel

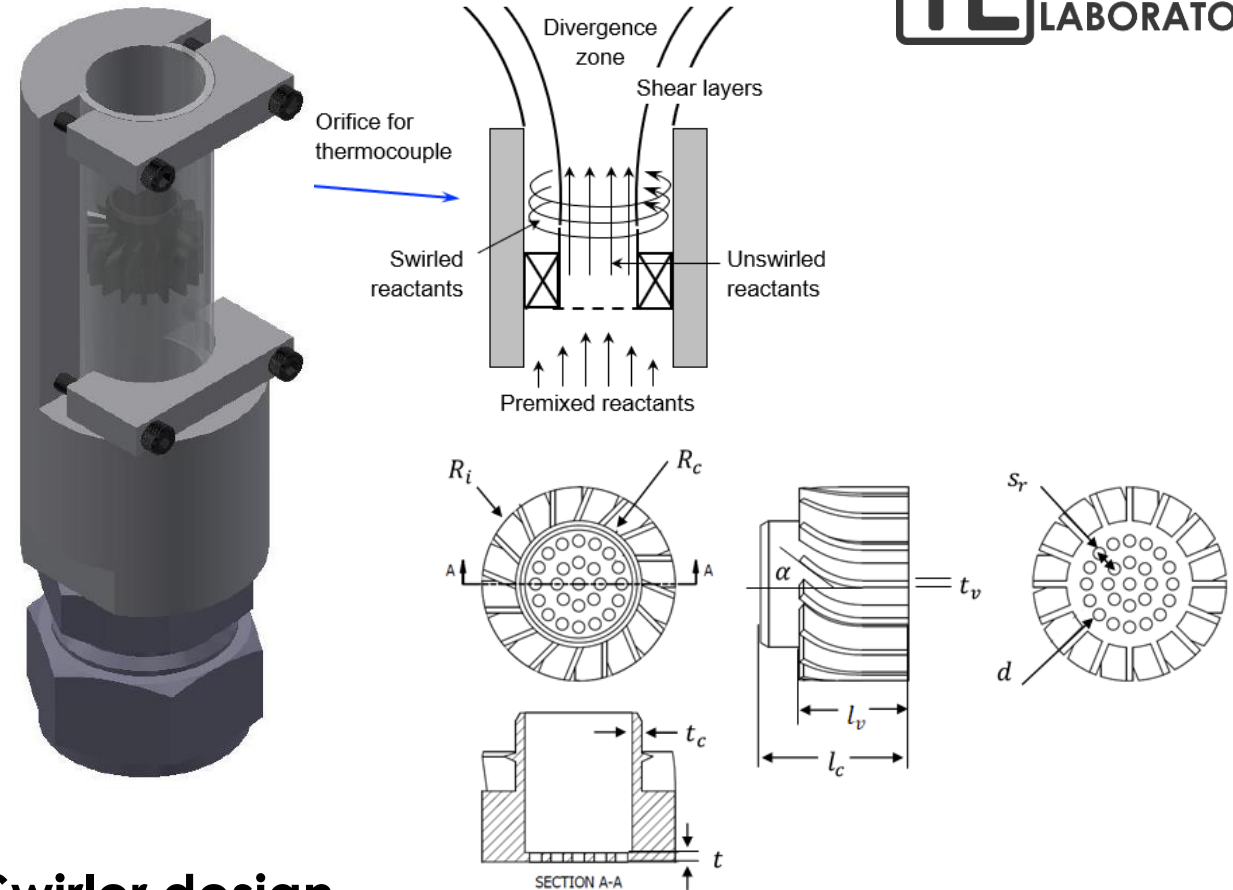

Swirler design

- Swirling vane angles (α) – 26° and 33° .
- Perforated plate hole diameters – 1.08, 1.12 and 1.16 mm.
- Blockage ratio (BR) – 0.783, 0.767, and 0.75.
- Radius ratio – 0.65.


Results and Discussion: Stable Flames

Characterization of Low Swirl Burner Flame – Variation of Fuel Compositions


Effects of Pre-mixer Velocities (V)

- Velocity varied: $5.5 \leq V \leq 10$ m/s
- Lift-off length (L) tends to increase linearly with Velocity
- The local gas velocity is increased compared to flame speed and becomes less flashback prone


70% H_2 /30% CH_4 , $\phi = 0.4$

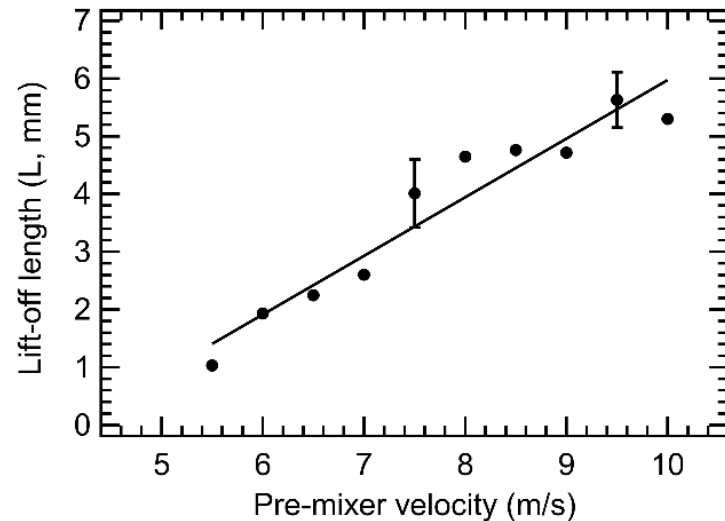

$V = 7.5$ m/s and $\phi = 0.4$

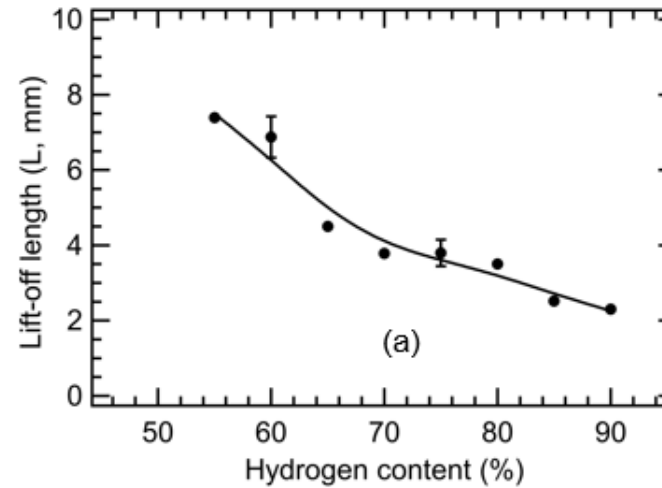

Cantera Calculations


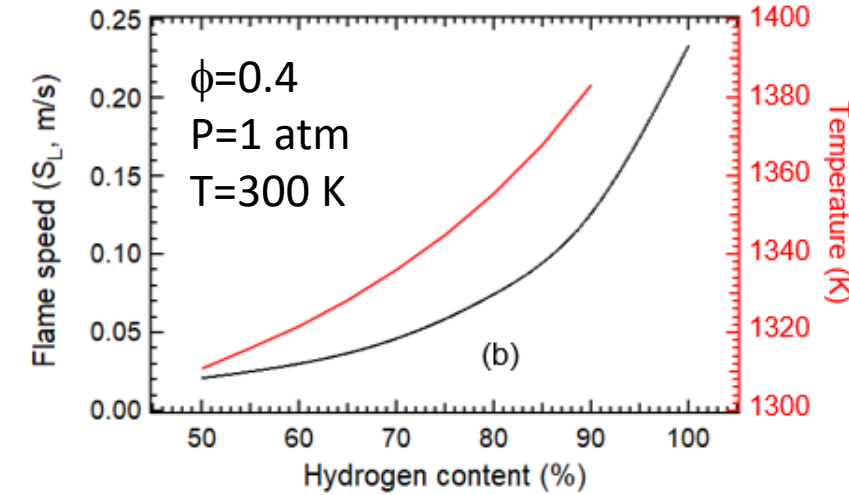


Effects of Hydrogen Content (X_{H_2})


- Increasing X_{H_2} tends to decrease lift-off length and increase the chances of flashback – due to a increase in flame speed
- Expected rise of flame temperature as hydrogen flame is hotter than methane flame at same ϕ

Effects of Equivalence Ratio (ϕ) on Stable Flames

- Increasing ϕ decreases L , i.e., it brings the flame closer to the burner surface, increasing the risk of flashback
- Increasing ϕ increases flame speed
- Lifted-to-attached flame transition can be observed
- OH-PLIF signal increases with increasing ϕ

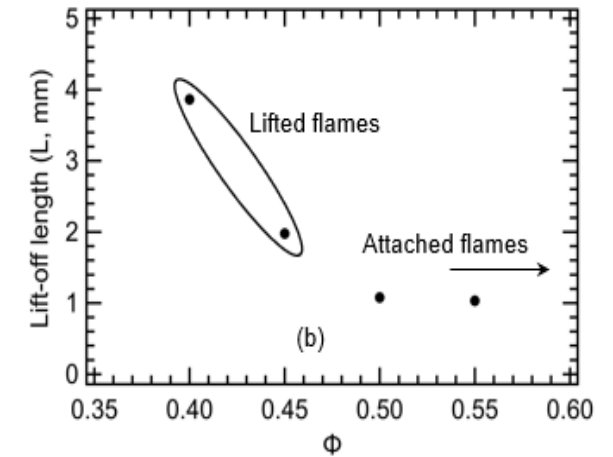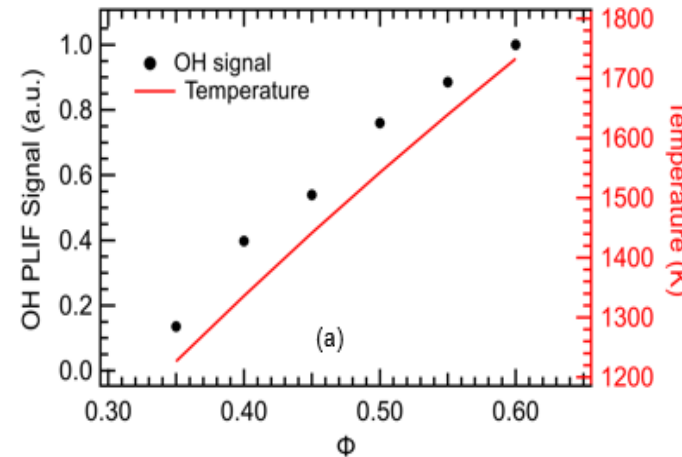

70% H_2 /30% CH_4 -air flame, $V = 7.5$ m/s

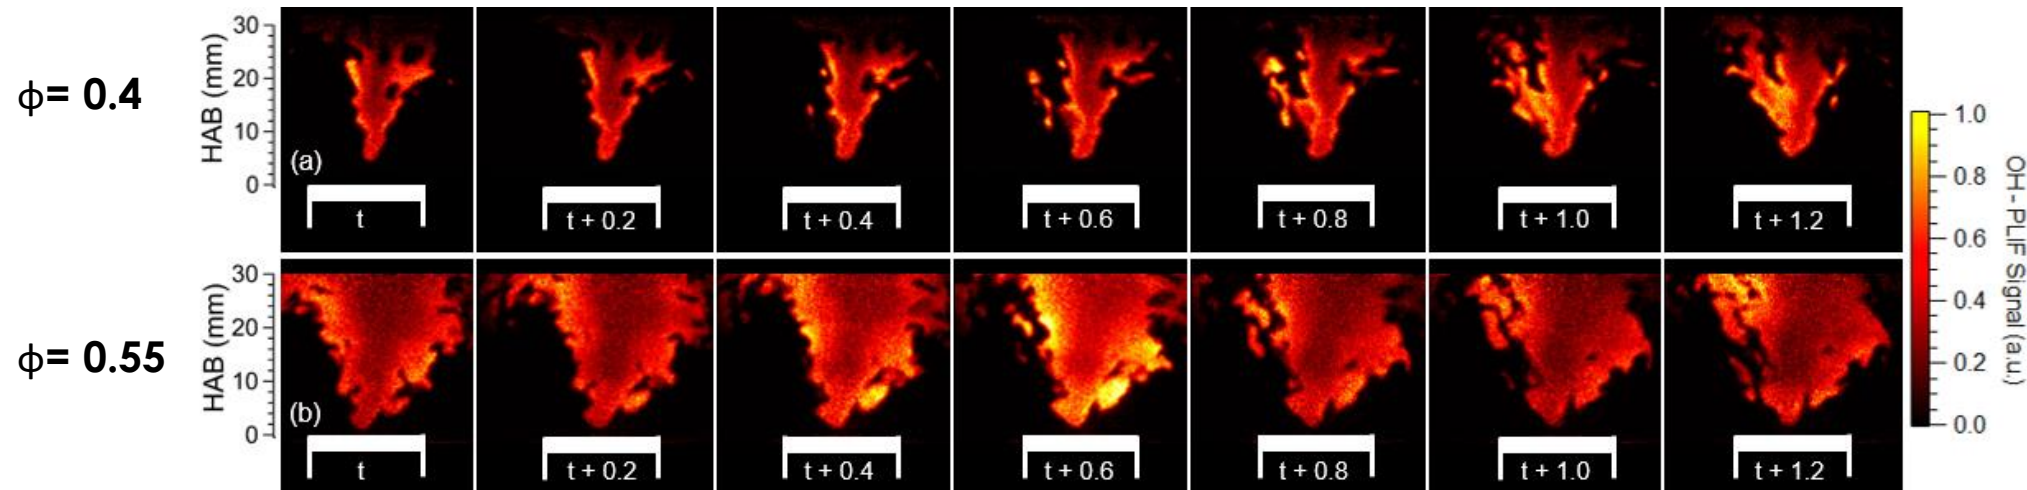


Investigation of Flame Flashback Events


Flashback Characterization in Low Swirl Burner

Experimental test conditions: $5 \leq V \leq 10$ m/s and $50\% \leq X_{H_2} \leq 90\%$

- At low ϕ or H_2 , the flame is lifted and has V shape.
- Increasing ϕ or H_2 pulls the flame closer to the tube exit; however, the general shape remains unchanged.
- Significant change in flame shape occurs at $\phi = 0.65$ or $H_2 = 75\%$.
- High-speed OH-PLIF images show intermittent burning in the outer shear layer.


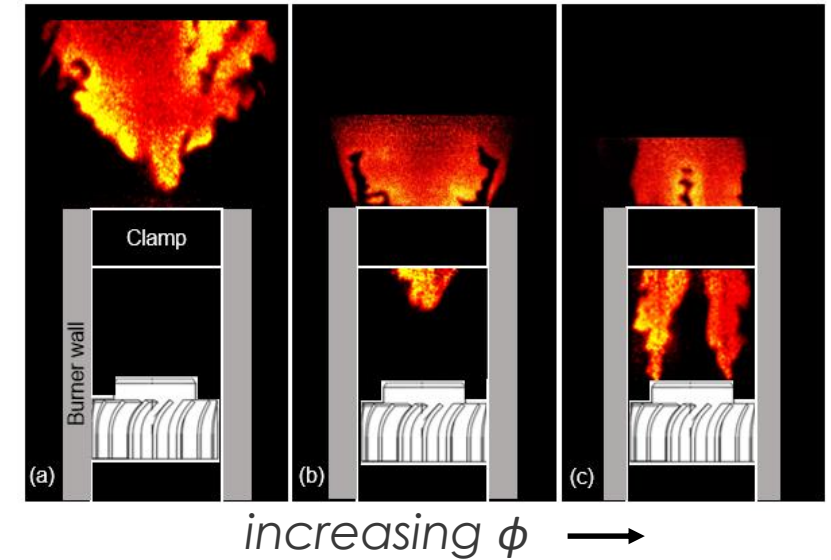


Changes in flame shape and stabilization pattern as a function of ϕ or H_2 at $V = 10$ m/s

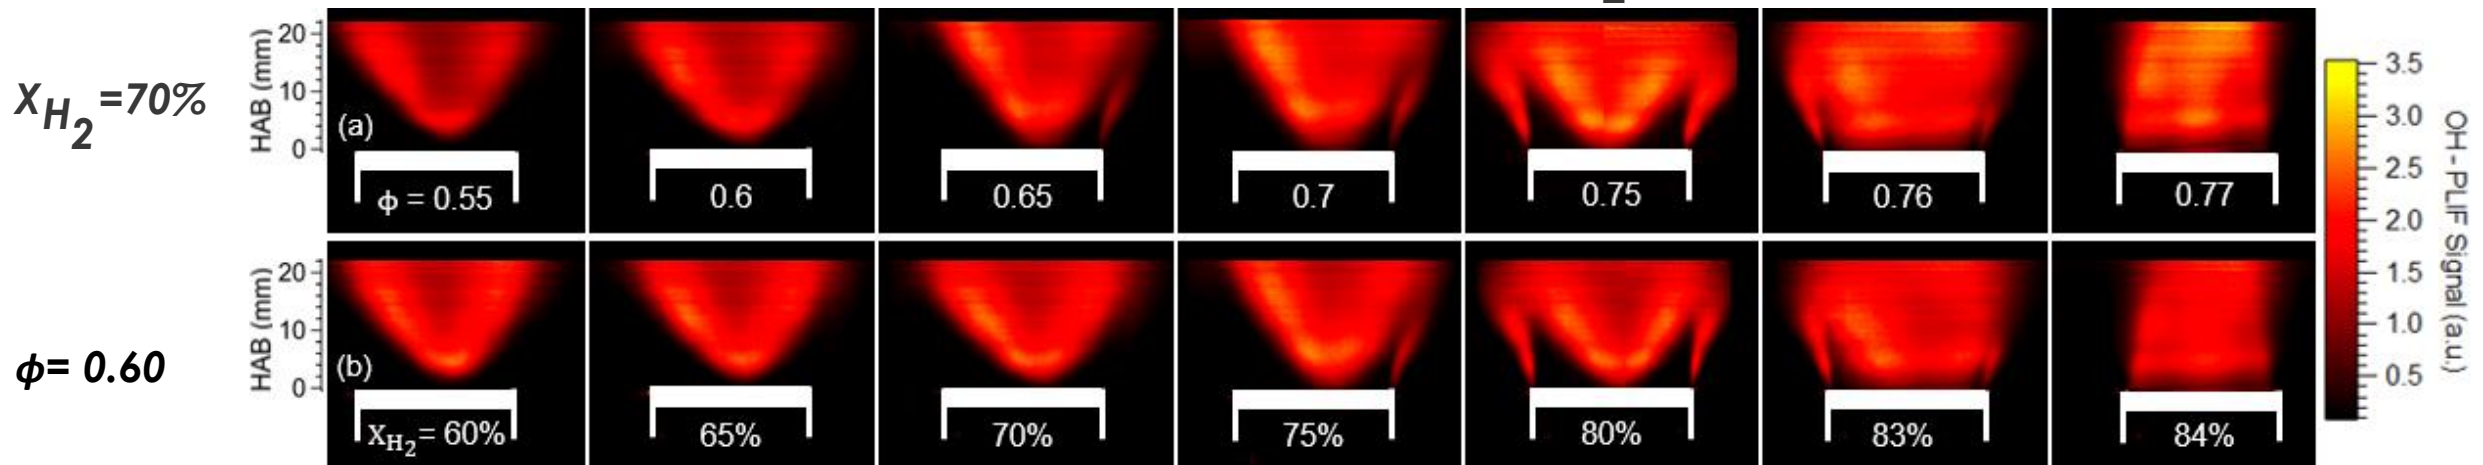

Investigation of Flame Flashback Events

70% H_2 /30% CH_4 -air flame, $V = 7.5$ m/s

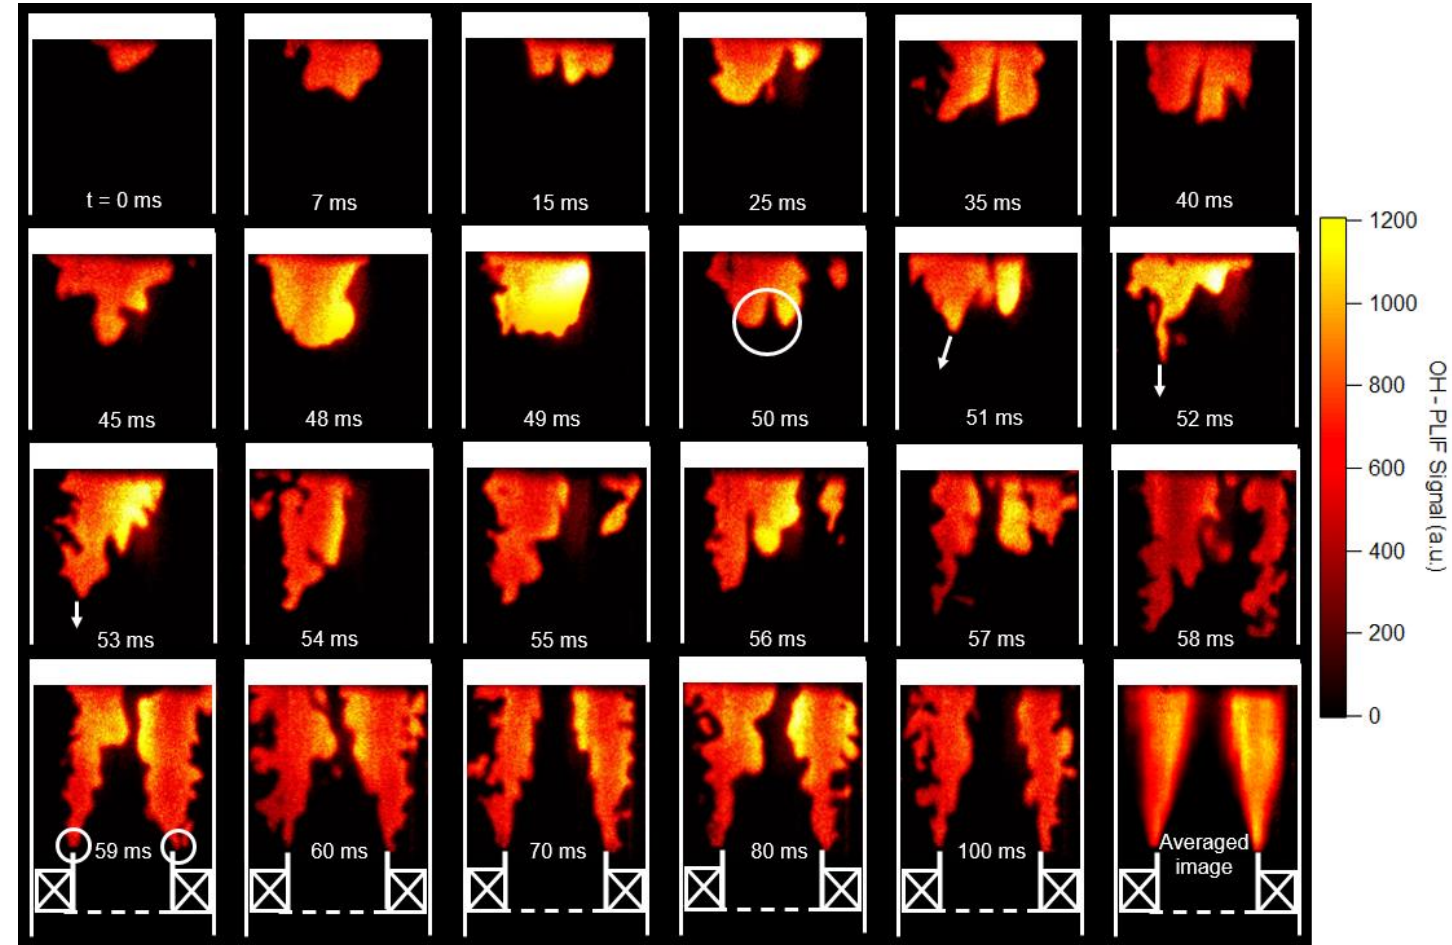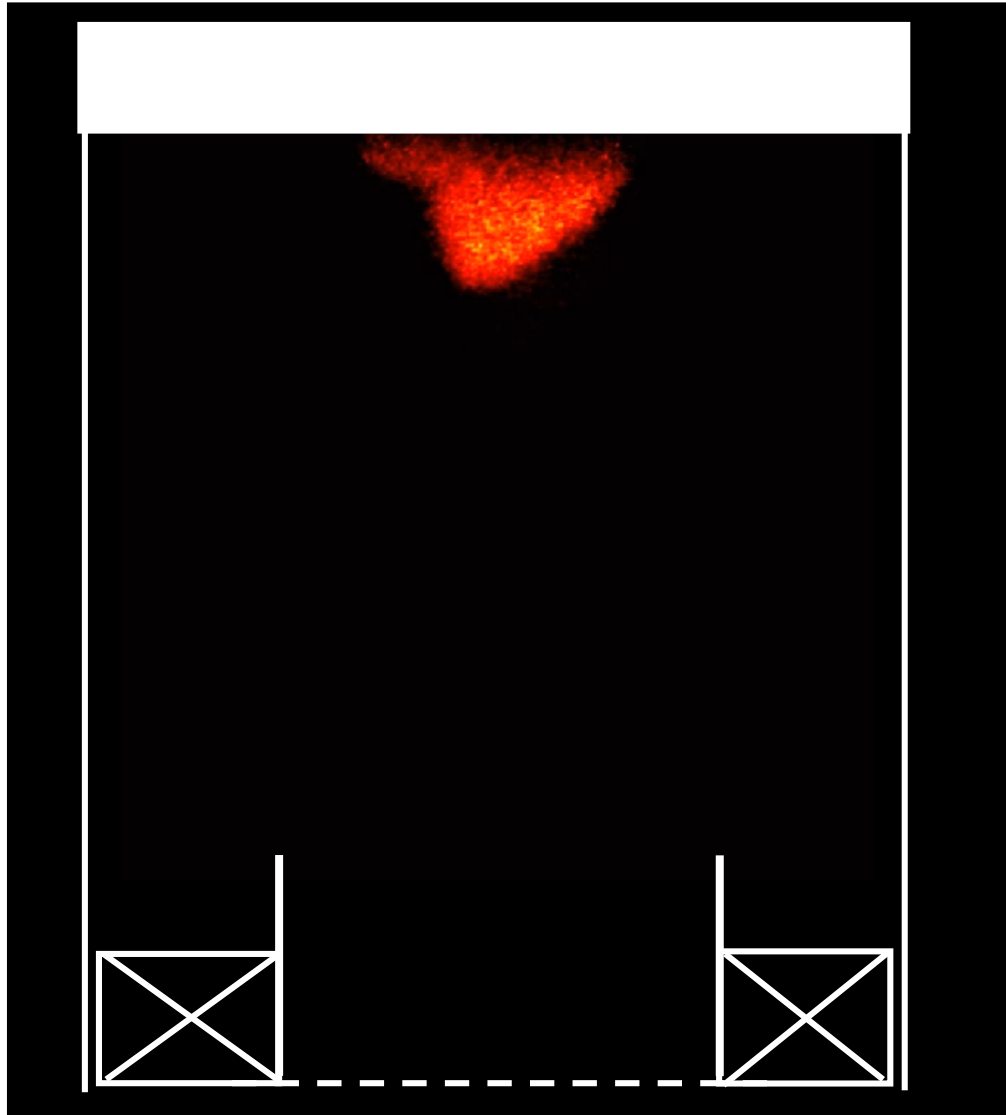

1 kHz frame rate (100 msec video)

Investigation of Flame Flashback Events

Flashback initiation

- Burning of outer shear layer pulls the flame upstream into the nozzle.


Flashback propagation inside the nozzle

- Inner shear layer above the center channel wall (between swirled and unswirled flows) facilitates upstream flame propagation inside the nozzle.

Post-flashback flame holding



- Once a part of flame is attached to the rim of the swirler, it ignites the incoming fresh mixture (likely along the inner shear layer) forming a conical flame
- The flame structures anchor inside the mixing tube between the swirling and non-swirling regions.

70% H_2 /30% CH_4 -air flame, $V = 10$ m/s

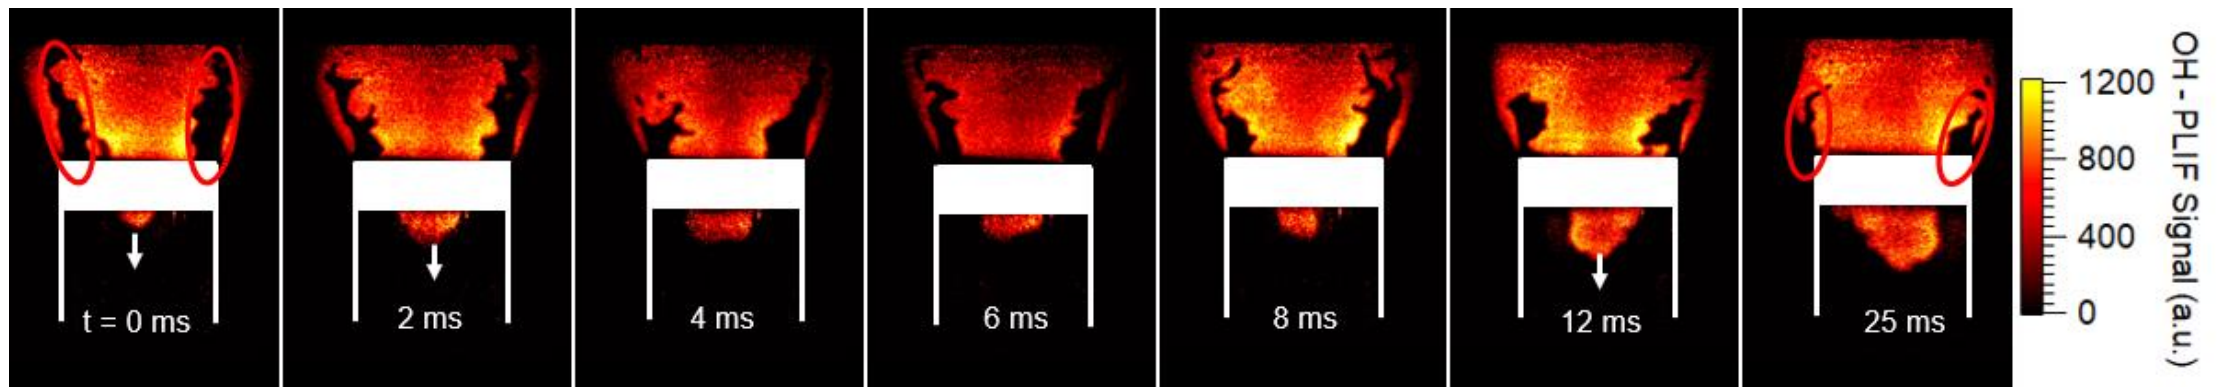

Effects of Fuel Composition



- As X_{H_2} increases, the burner system is more prone to flashback
- ϕ_{FB} decreases linearly with an increase in X_{H_2} in the reactant mixture

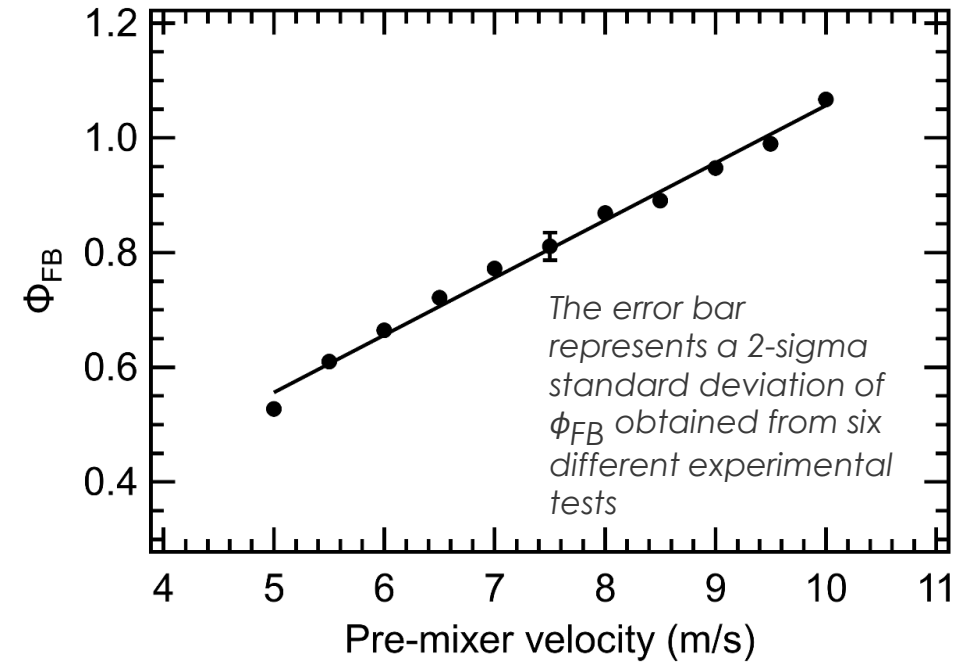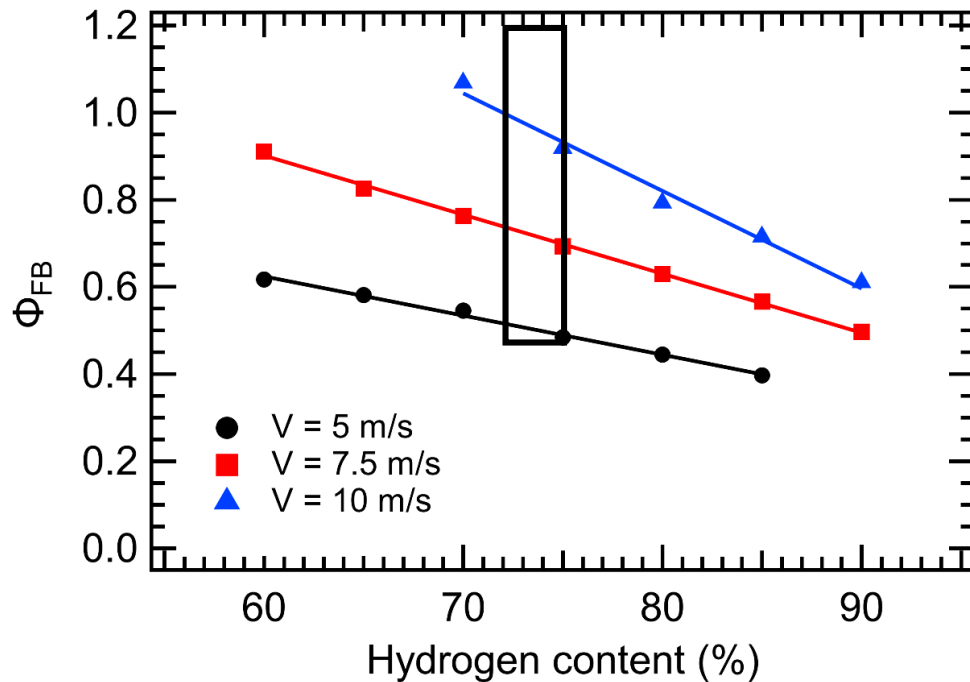

- As V increases, the flashback resistance of the burner system increases
- ϕ_{FB} increases linearly with an increase in pre-mixer velocity

Effects of Varying Swirler Geometries




- Dependence of ϕ_{FB} on X_{H_2} for three different perforated plated hole diameters (d) keeping ' α ' fixed at 33° .
- An increase in ' d ' decreases the blockage ratio which increases the flow via the center-body and the burner system becomes less flashback prone.

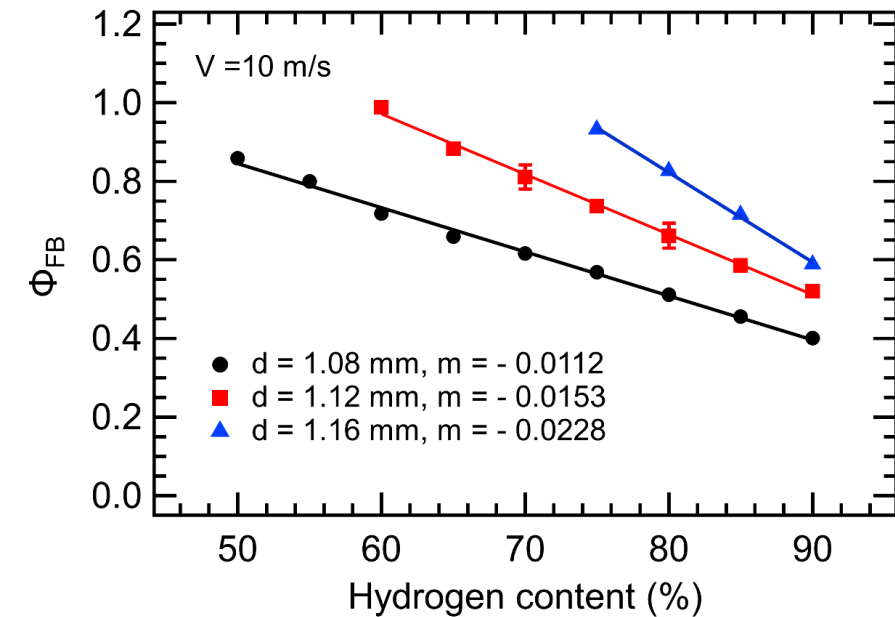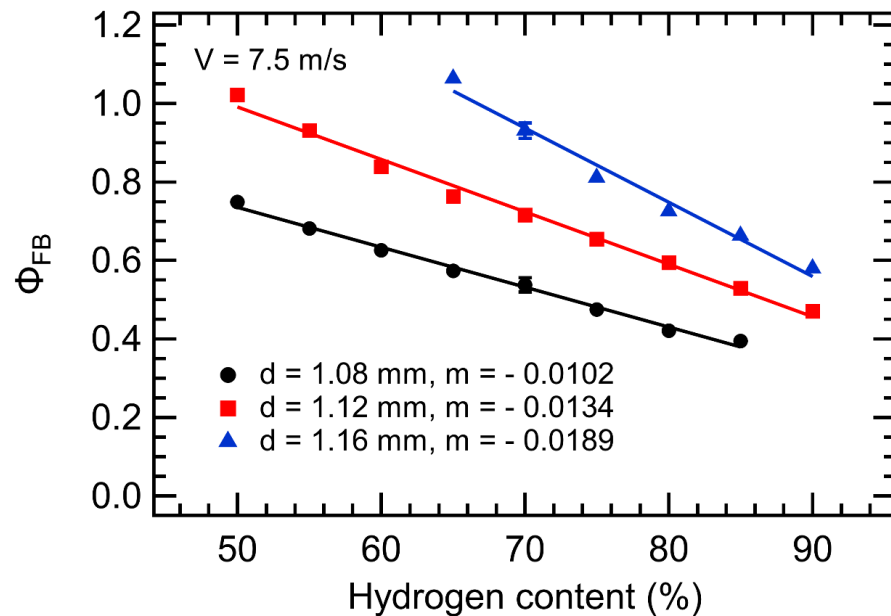

- Another interesting observation is on the slope of the flashback lines which shows a greater negative slope with increasing ' d '
- The error bar represents a 2-sigma standard deviation of ϕ_{FB} obtained from five different experimental tests



Effects of Varying Geometry

- Dependence of ϕ_{FB} on X_{H_2} for two different swirler vane angles keeping perforated plate hole diameter (d) fixed at 1.16 mm.
- ϕ_{FB} increases with an increase in α especially at lower pre-mixer velocities of 5 and 7.5 m/s.
- Higher α may be increasing the core flow.
- ϕ_{FB} lines almost overlap for two α s at $V = 10$ m/s

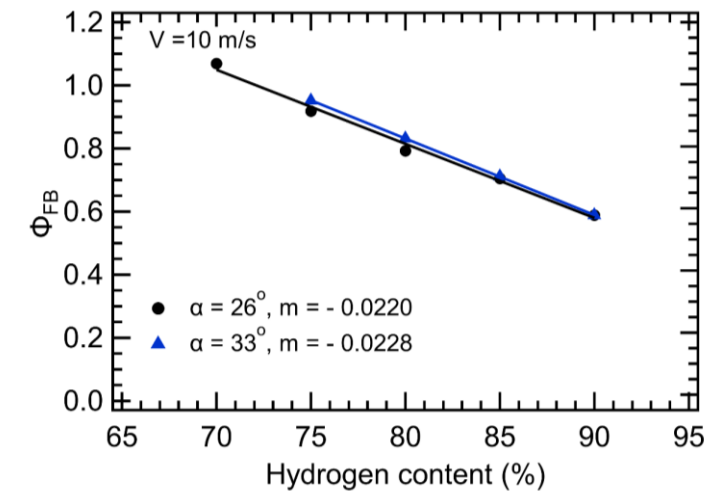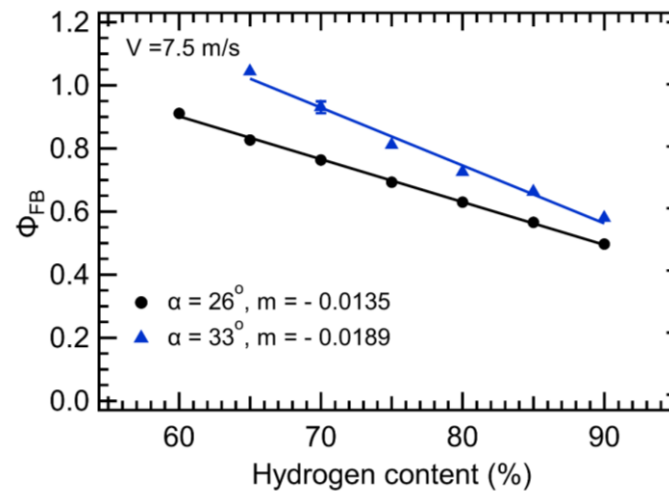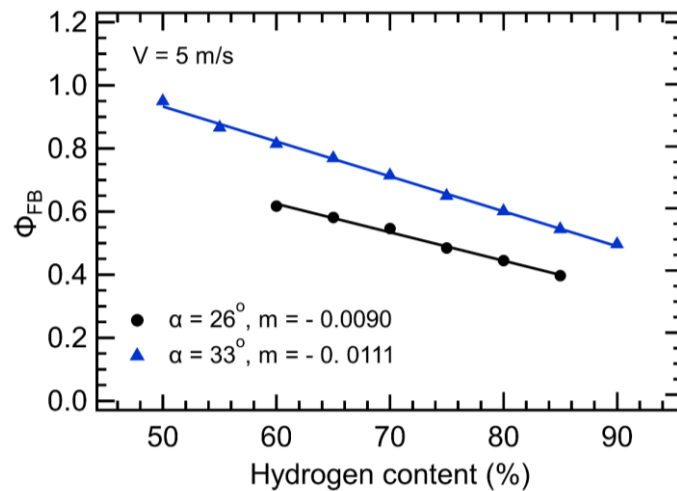


Jet in Cross Flow Experiments

- Objective - Characterize flashback and flame-holding with a jet-in-cross-flow fuel injection strategy. Validate CFD codes.
- JICF used in conventional swirlers as well as micro-mixers for fuel injection.
- Swirler removed and flat plate installed on back side.
- 0.063" fuel jet located in flat plate.
- Lean flame attached to burner tube exit.
- Ramp up equivalence ratio while maintaining H₂/CH₄ ratio and air flow.

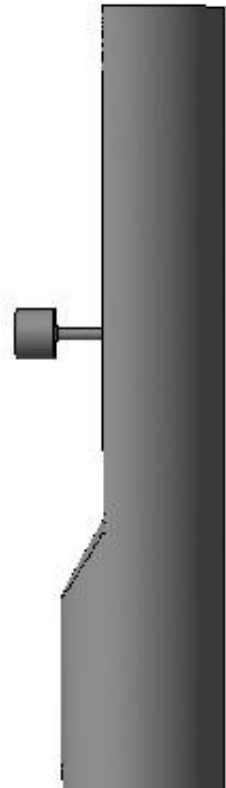
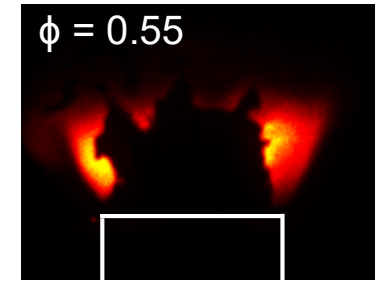


Jet in Cross Flow Experiments

1 kHz; OH-PLIF

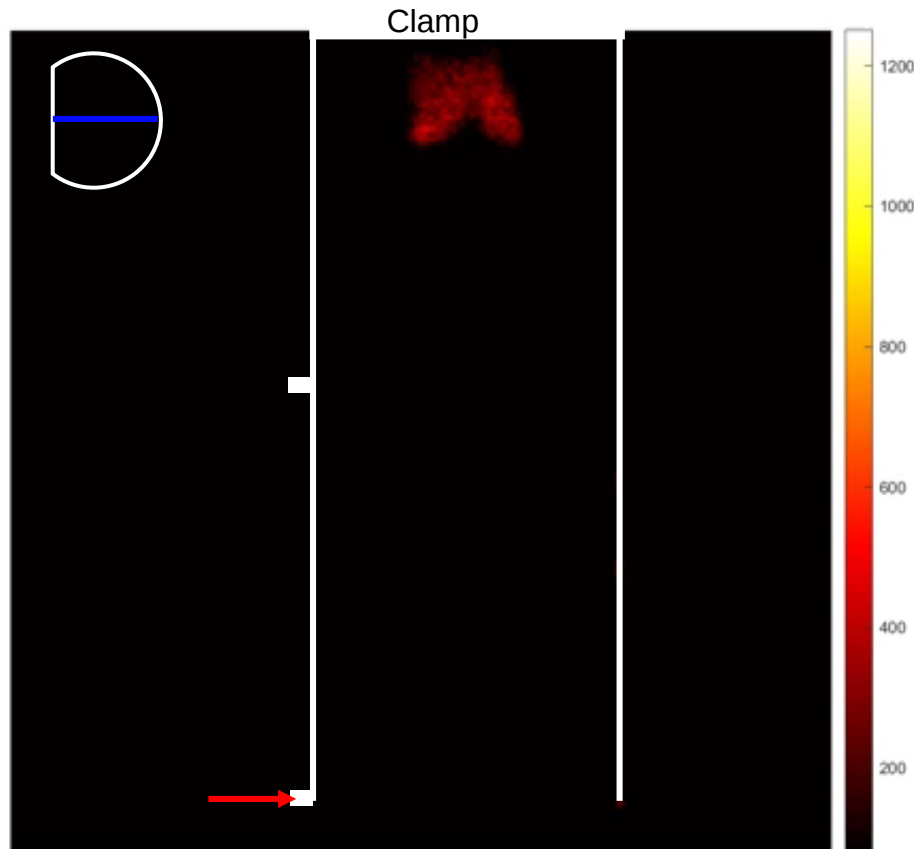

1 kHz; OH* CL

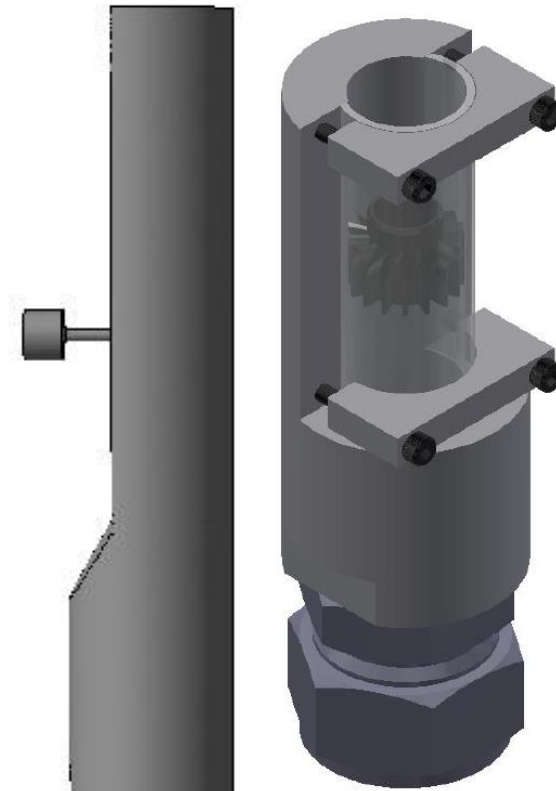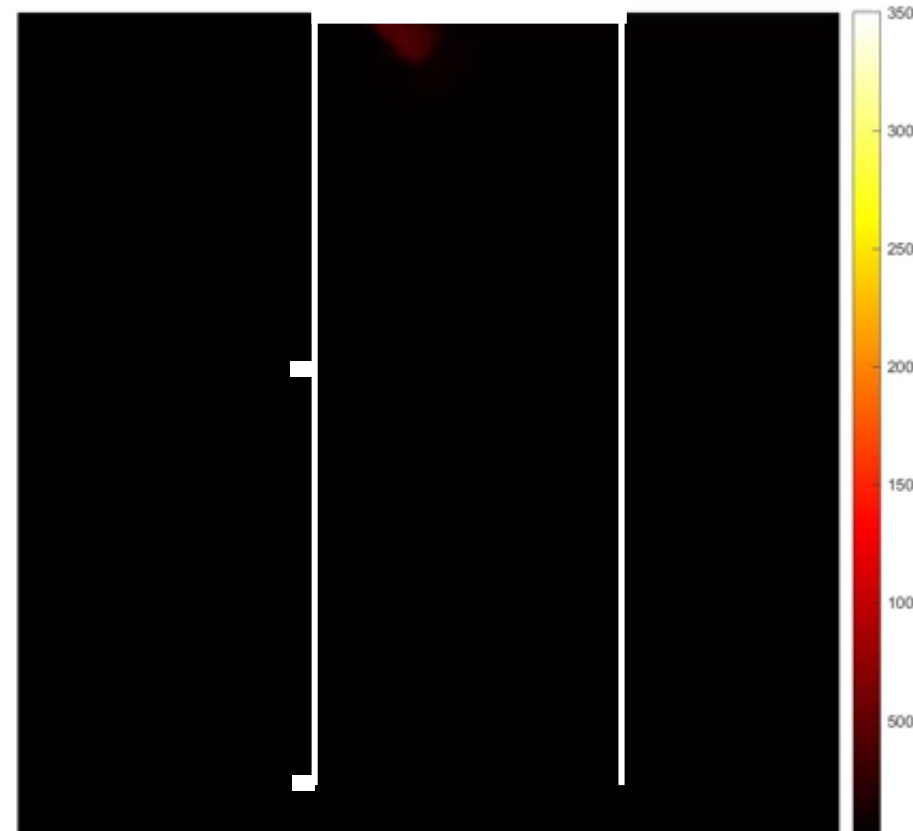


70% H_2 /30% CH_4 -air flame; $\phi_{\text{FB}} = 0.665$; at $V = 4$ m/s


Jet in Cross Flow Experiments

Time-Averaged OH PLIF Images After Flashback


70% H_2 /30% CH_4 -air flame at different pre-mixer velocities

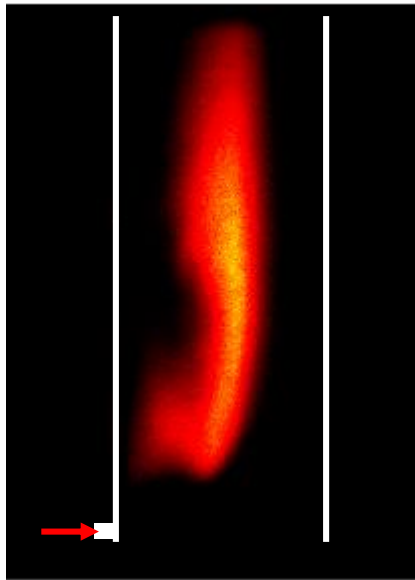


$V = 2 \text{ m/s}$, $\phi_{FB} = 0.4$
Momentum flux ratio, $r = 2.83$

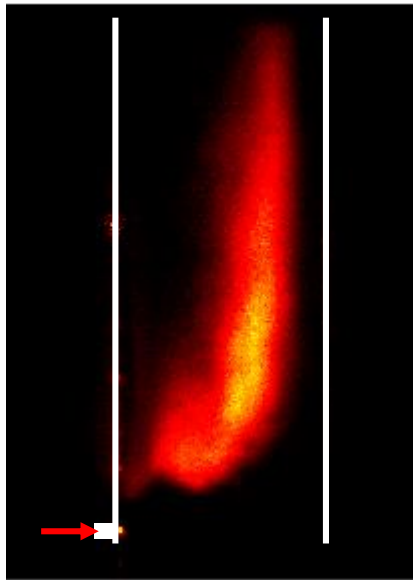


$V = 3 \text{ m/s}$, $\phi_{FB} = 0.5$
 $r = 4.42$

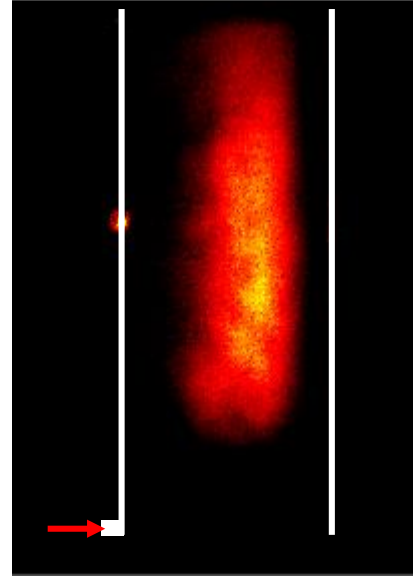

$V = 3.5 \text{ m/s}$, $\phi_{FB} = 0.68$

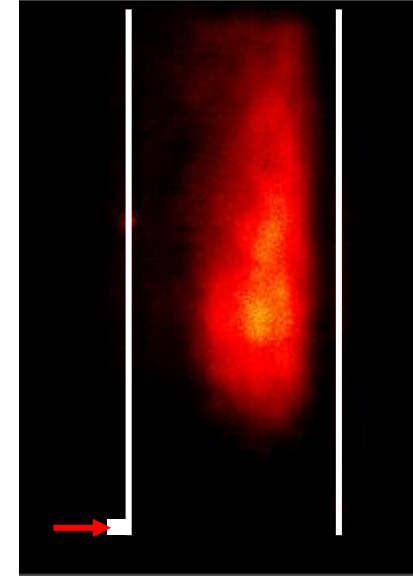

$V = 4 \text{ m/s}$, $\phi_{FB} = 0.665$
 $r = 7.83$

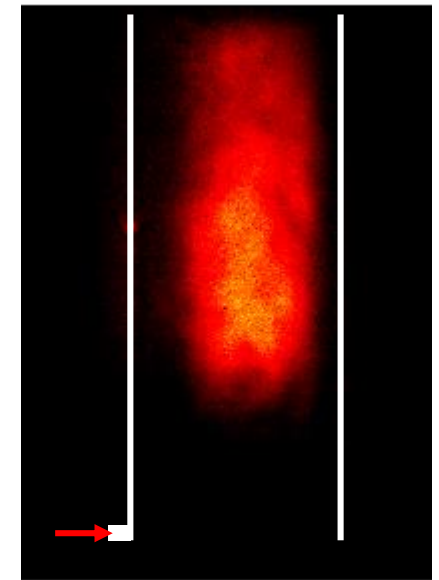

$V = 5 \text{ m/s}$, $\phi_{FB} = 0.73$

Increasing Flowrates ➡

- As momentum flux ratio increases, the flame detaches from the fuel port completely and stabilizes in the form of a lifted flame.
- As r increases, the fuel jets penetrate further into the crossflow and the combustion zone shifts away from the fuel ports.

Jet in Cross Flow Modeling

- Fluent Large Eddy Simulation.
- 9M cells (0.2 mm).
- Skeletal methane-air mechanism (16 species, 45 reaction).
- No turbulence chemistry interaction.
- BCD for momentum, SOU for scalars, 2nd ddt implicit PB solver.
- Chemiluminescence sub-mechanism from Petersen.

!chemiluminescent reactions

!J. Hall, E. Petersen, Int. J. Chem. Kin. 38 (2006) 714-724.

!





H+O+M=OH*+M	3.1E+14	0.0	10000.
OH*+H2O=>OH+H2O	5.92e12	0.5	-861.
OH*+H2=>OH+H2	2.95e12	0.5	-444.
OH*+O2=>OH+O2	2.1e12	0.5	-482.
OH*+OH=>OH+OH	1.5e12	0.5	0.0
OH*+H=>OH+H	1.5e12	0.5	0.0
OH*+O=>OH+O	1.5e12	0.5	0.0
OH*+N2=>OH+N2	1.08e11	0.5	-1238.
OH*=>OH	1.4e6	0.0	0.0

Jet in Cross Flow Experiments

Comparison to Fluent Simulations

$$V = 5 \text{ m/s}, H = 70\%, \phi_{FB} = 0.73$$

- Simulations at highest flowrate shows fuel jet impingement on opposing wall and “horseshoe” shaped flame.
- Limits effectiveness of using planar techniques.
- Integrated line-of-sight chemiluminescence more useful.

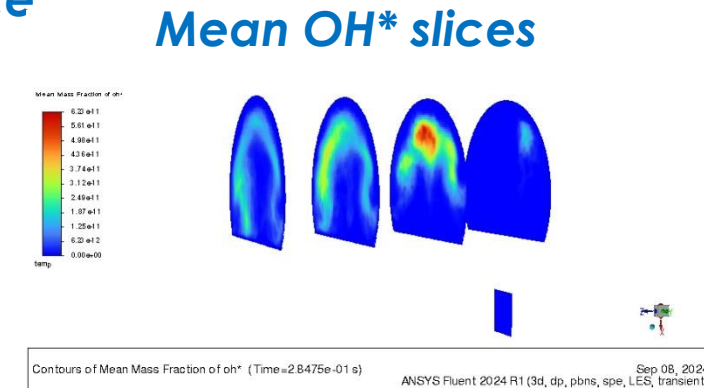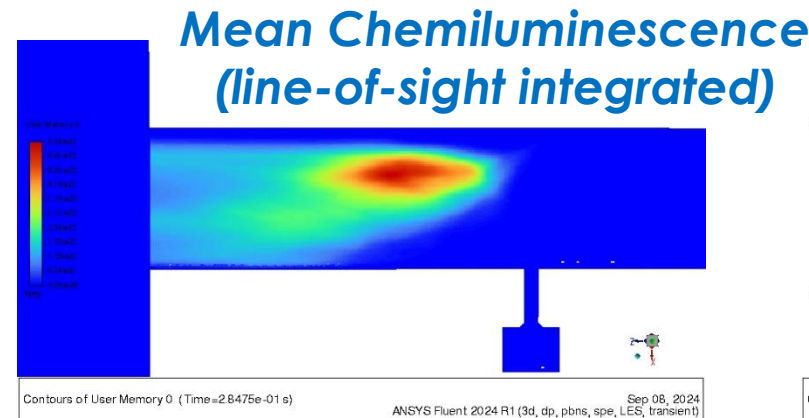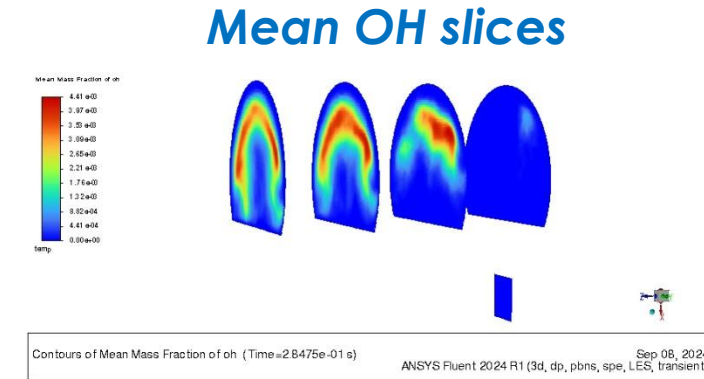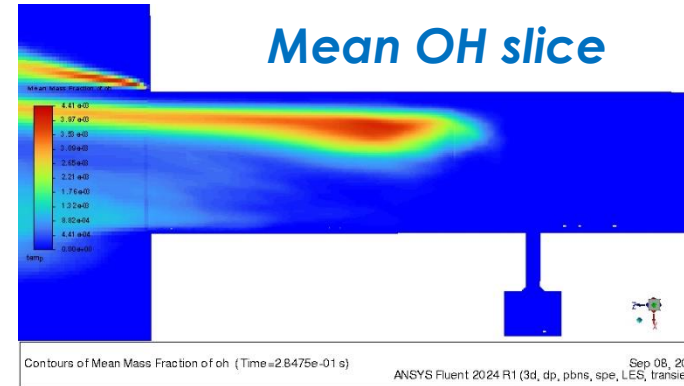


Jet in Cross Flow Experiments



Comparison to Fluent Simulations

- CFD results qualitatively similar.
- Testing sensitivity to air inflow boundary conditions.
- Testing PaSR combustion model.


Mean Chemiluminescence (line-of-sight integrated)

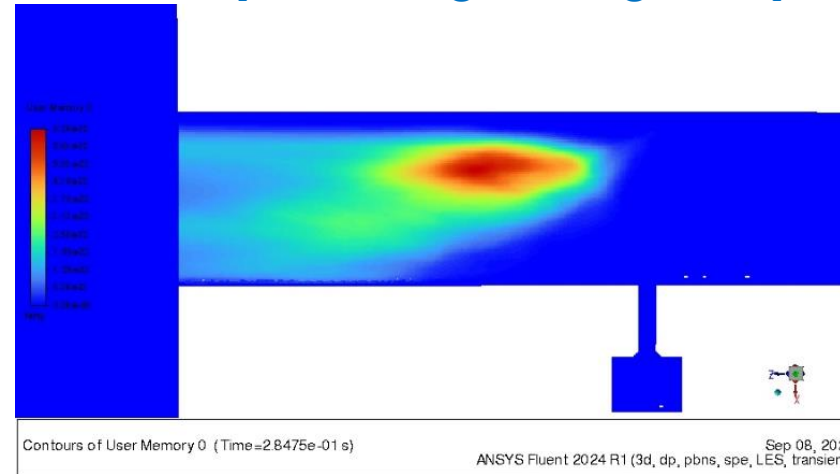

$V = 5 \text{ m/s}$, $H = 70\%$, $\phi_{FB} = 0.73$

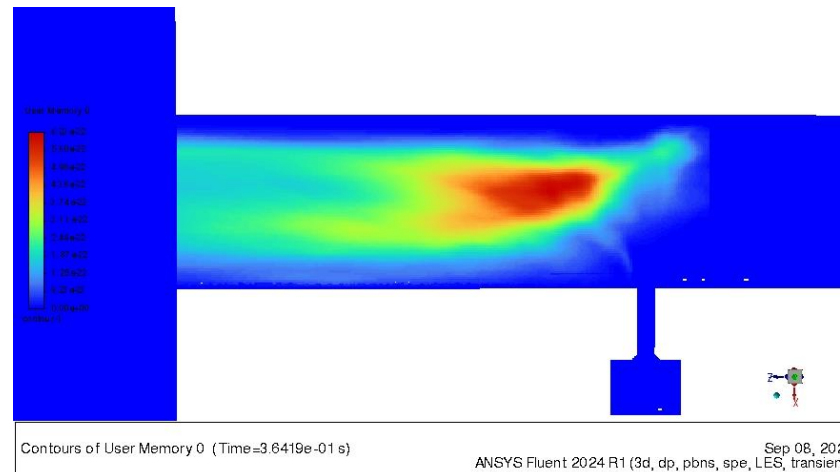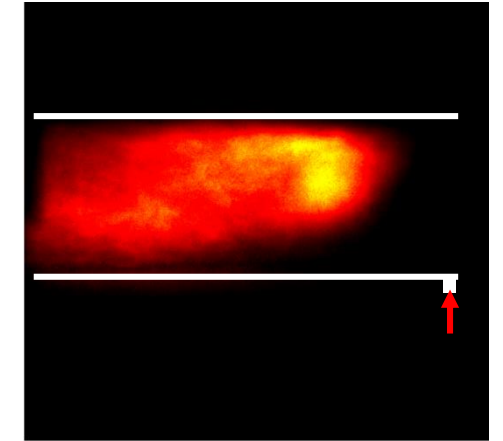


$V = 3 \text{ m/s}$, $H = 70\%$, $\phi_{FB} = 0.5$

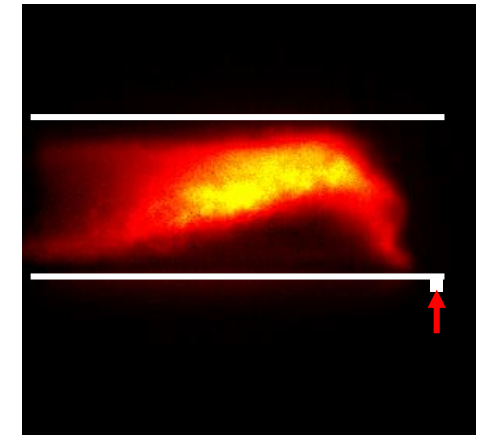

Summary and Ongoing Work

- OH-PLIF fluorescence provides an excellent marker of the lift-off length and can capture transient phenomenon.
- Flashback occurs at high ϕ or X_{H_2} when burning occurs in the outer shear layer and the leading flame brush ingresses into the pre-mixer tube.
- Post-flashback flame is anchored on the rim of center-body between the swirling and non-swirling regions with conical flame front.
- Additional work includes CFD model validation at experimental conditions.
- JICF experiments and CFD modeling continuing.

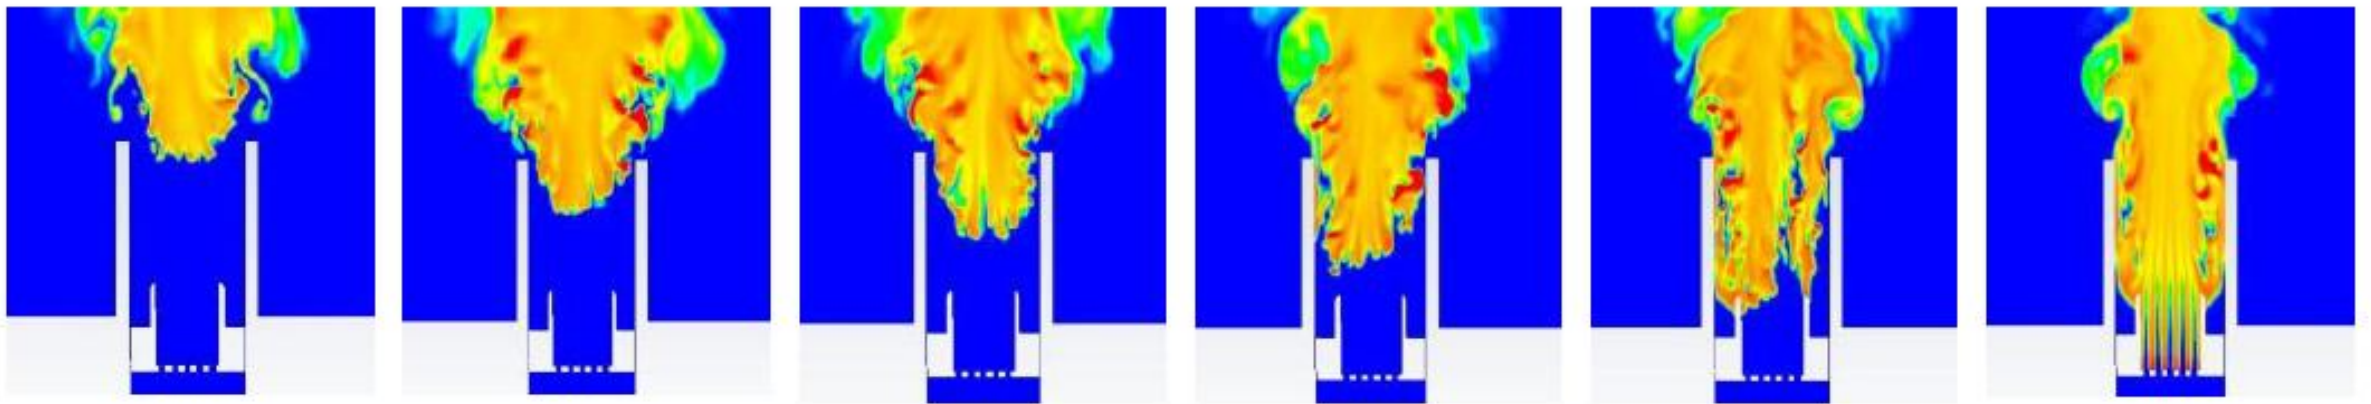

Acknowledgments



This work was performed in support of the U.S. Department of Energy's (DOE) Fossil Energy and Carbon Management's Hydrogen Combustion Research Program and executed through the National Energy Technology Laboratory (NETL) Research & Innovation Center's Turbines Field Work Proposal.

NETL RESOURCES

VISIT US AT: www.NETL.DOE.gov



@NETL_DOE



@NETL_DOE



@NationalEnergyTechnologyLaboratory

CONTACT:

Pradeep Parajuli

pradeep.parajuli@netl.doe.gov

(304) 285-1615

