

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof. Reference herein to any social initiative (including but not limited to Diversity, Equity, and Inclusion (DEI); Community Benefits Plans (CBP); Justice 40; etc.) is made by the Author independent of any current requirement by the United States Government and does not constitute or imply endorsement, recommendation, or support by the United States Government or any agency thereof.



**Sandia
National
Laboratories**

Open-Source Airfoils Summary

Version 1.0

David Maniaci, Chris Kelley, Alan Hsieh, and Nate deVelder
Sandia National Laboratories

Cody Karcher
California State University, Long Beach

Anurag Gupta
National Renewable Energy Laboratory

January 2025



**U.S. DEPARTMENT OF
ENERGY**



Sandia National Laboratories is a multission laboratory managed and operated by National Technology and Engineering Solutions of Sandia, LLC, a wholly owned subsidiary of Honeywell International Inc., for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-NA0003525.

ACKNOWLEDGEMENTS

The Open-Source Offshore (OSO) airfoils have been developed by Sandia National Laboratories in collaboration with California State University—Long Beach, the National Renewable Energy Laboratory, as well as through the advisement of many experts and the support of the DOE Wind Energy Technologies Office.

CONTENTS

1. Description and Characteristics of the Open-Source Airfoils.....	5
2. Airfoil Modeled Performance Data.....	8
2.1. OSO-21-WT1 Performance Data	8
2.2. OSO-30-WT1 Performance Data	14
Appendix A. Airfoil Coordinates.....	22
A.1. OSO-21-WT1 Coordinates	22
A.2. OSO-30-WT1 Coordinates	23

LIST OF FIGURES

Figure 1-1. Shape of the OSO-21-WT1 and OSO-30-WT1 airfoils.	5
Figure 2-1. Shape of the OSO-21-WT1 airfoil.	8
Figure 2-2. CL vs. Alpha, Clean and Rough, OSO-21-WT1	9
Figure 2-3. CL vs. CD, Clean and Rough, OSO-21-WT1	10
Figure 2-4. CM vs. Alpha, Clean and Rough, OSO-21-WT1	11
Figure 2-5. L/D vs. Alpha, Clean and Rough, OSO-21-WT1	12
Figure 2-6. L/D vs. CL, Clean and Rough, OSO-21-WT1	13
Figure 2-7. Shape of the OSO-30-WT1 airfoil.	14
Figure 2-8. CL vs. Alpha, Clean and Rough, OSO-30-WT1	15
Figure 2-9. CL vs. CD, Clean and Rough, OSO-30-WT1	16
Figure 2-10. CM vs. Alpha, Clean and Rough, OSO-30-WT1	17
Figure 2-11. L/D vs. Alpha, Clean and Rough, OSO-30-WT1	18
Figure 2-12. L/D vs. CL, Clean and Rough, OSO-30-WT1	19

LIST OF TABLES

Table 1-1. Open-Source Offshore airfoil design criteria and performance (computed metrics).....	6
Table 3-2. A.1. OSO-21-WT1 Coordinates.....	22
Table 3-2. A.2. OSO-30-WT1 Coordinates.....	23

1. DESCRIPTION AND CHARACTERISTICS OF THE OPEN-SOURCE AIRFOILS

The Open-Source Offshore (OSO) airfoils have been developed for research purposes for offshore wind turbines, offering a set of airfoils that align with modern turbine design requirements and industry design practices without proprietary constraints on research use. The eventual airfoil family will target the IEA 22 MW reference wind turbine [Zahle et al. 2024], which was originally developed with the FFA airfoils. The two airfoils summarized in Table 1 (OSO-21-WT1 and OSO-30-WT1) started development as part of a family of airfoils being designed to target the IEA 22 MW wind turbine.

The criteria used to design these airfoils are summarized in Table 1, which aim to encapsulate requirements of modern airfoils for offshore wind turbine applications, and were developed with feedback from industry and research experts. The airfoils were designed using XFOIL and candidate airfoils were then analyzed in RFOIL, which is considered more accurate than XFOIL for high lift predictions of thicker airfoils. The design process for a preliminary family of airfoils is available, including a more detailed explanation of the design requirements and metrics similar to those used for these airfoils [Karcher et al. 2025].

Most of the design criteria are met for these two airfoils, with two exceptions. For both airfoils, the L/D Roughness Loss metric is exceeded ($42\% > 40\%$ goal) and the desired lift coefficient margin over the design value (“CL_Margin”) was moderately exceeded ($0.43 > 0.3$) while smooth-stall characteristics (computed) were achieved. Note that all of the metrics were computed using RFOIL, and like other new airfoils, these will need to be experimentally validated at a range of Reynolds numbers. The airfoil coordinates will be shared publicly on Sandia National Laboratories’ public Github repository:

(<https://github.com/sandialabs/released-oso-airfoils>).

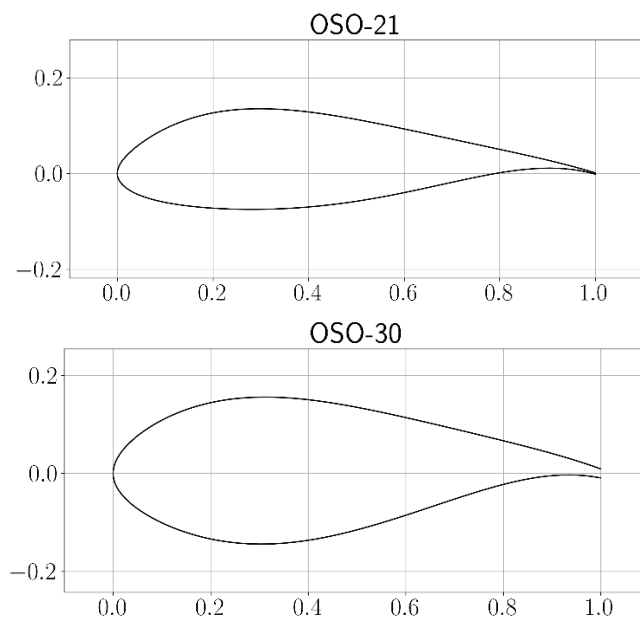


Figure 1-1. Shape of the OSO-21-WT1 (top) and OSO-30-WT1 (bottom) airfoils.

Table 1-1. Open-Source Offshore airfoil design criteria and performance (computed metrics)

	Design Criteria		OSO-21-WT1 Airfoil, tip region	OSO-30-WT1 Airfoil, mid-span
	Modern Airfoil tip region	Modern Airfoil mid-span		
Thickness - t/c	21%	30%	21%	30%
Reynolds Number, Chordwise, design target	Re=12e6+	Re=15e6+	Re=12e6	Re=18e6
CL_Design	1.2-1.6	1.2-1.6	1.47	1.43
L/D - Clean	>200	>160	205	171
L/D - Rough	>115	>95	121	100
L/D Roughness Loss %	<40%	<40%	41%	42%
Stall Margin - Clean	>3 deg.		6.0	5.8
Stall Margin - Rough	>3 deg.		6.0	4.8
CL Margin	CL_Max - CL_Des < 0.3		0.42	0.43
CL Loss Rough	CL Loss due to roughness at Alpha Design (< 10%)		4.3%	6.8%
Post Stall Slope - Clean	(dCL/dAlpha < -0.17/deg. over 2 deg. post stall)		-0.132	-0.103
Post Stall Slope - Rough	(dCL/dAlpha < -0.17/deg. over 2 deg. post stall)		-0.135	-0.091
L/D Robustness - Clean	+/- 5% from peak L/D at +/- 1 deg. from design AoA		1.5%	4.0%
L/D Robustness - Rough	+/- 5% from peak L/D at +/- 1 deg. from design AoA		3.5%	4.8%
CM Magnitude	~Equal or less than existing open airfoils (S-series, DU) < -0.17 < -0.16		-0.150	-0.156
Structures - TE angle	Last 2% of chord must have a wedge angle of at least 10 degrees		✓	✓
Structures - Leading Edge Curvature - Shaped for robust performance, manufacturing, and erosion	LE Radius > 0.01	LE Radius > 0.04	✓	✓
Structures - Aft section upper surface curvature	Limit concave curvature on aft airfoil upper surface for buckling resistance		✓	✓
Structures - Spar location and thickness	Maximum thickness of airfoil measured perpendicular to chord line and located aft of 25% normalized chord		✓	✓
Structures - Bending Stiffness	Quantify that structural performance is at least as good as existing open airfoils, for example by comparing area moment of inertia.		✓	✓

2. AIRFOIL MODELED PERFORMANCE DATA

Airfoil performance predictions made using RFoil (v 1.1) and XFOil (v. 6.99).

2.1. OSO-21-WT1 Performance Data

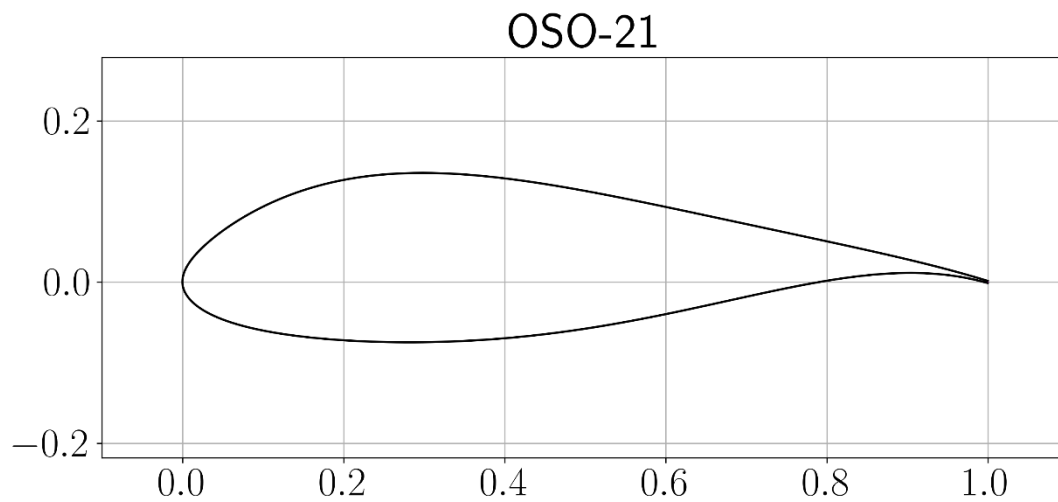


Figure 2-1. Shape of the OSO-21-WT1 airfoil.

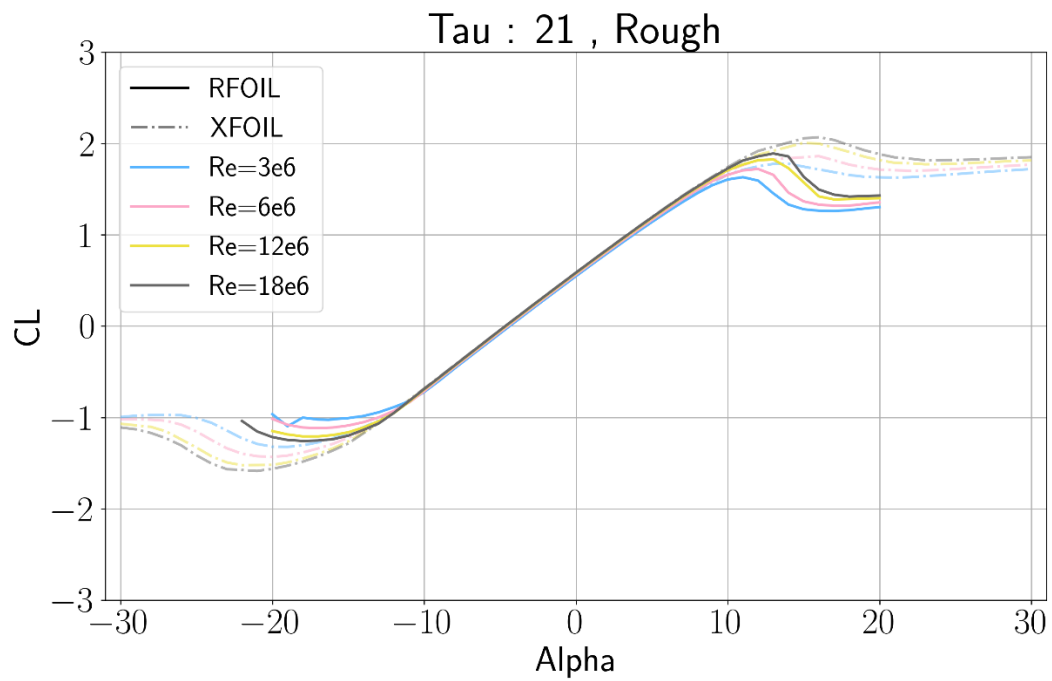
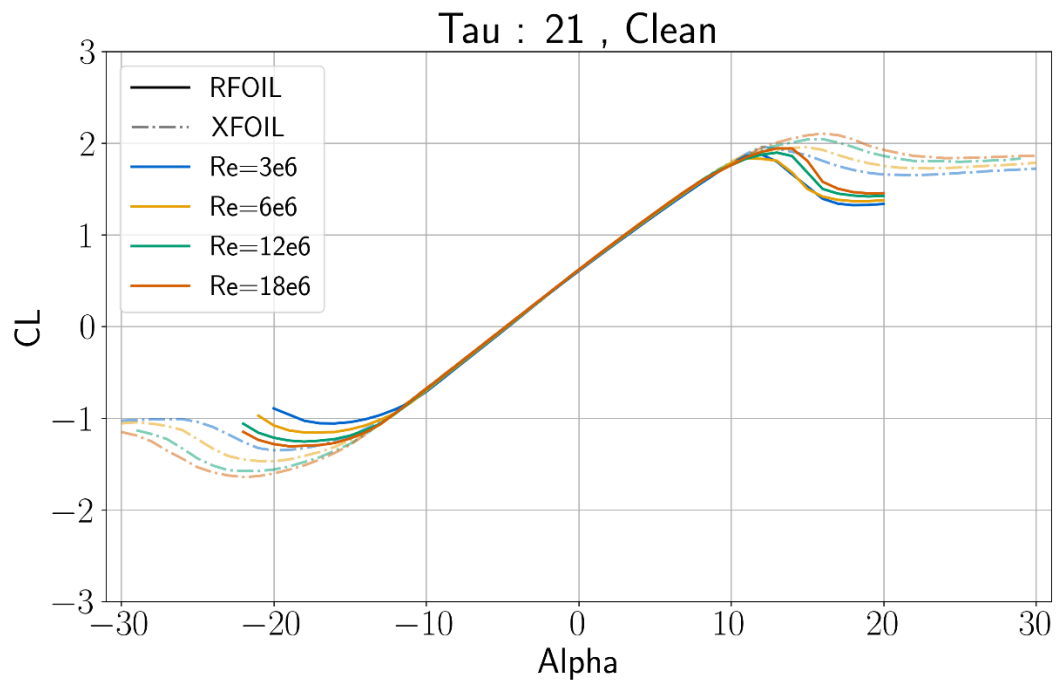


Figure 2-2. CL vs. Alpha, Clean and Rough, OSO-21-WT1

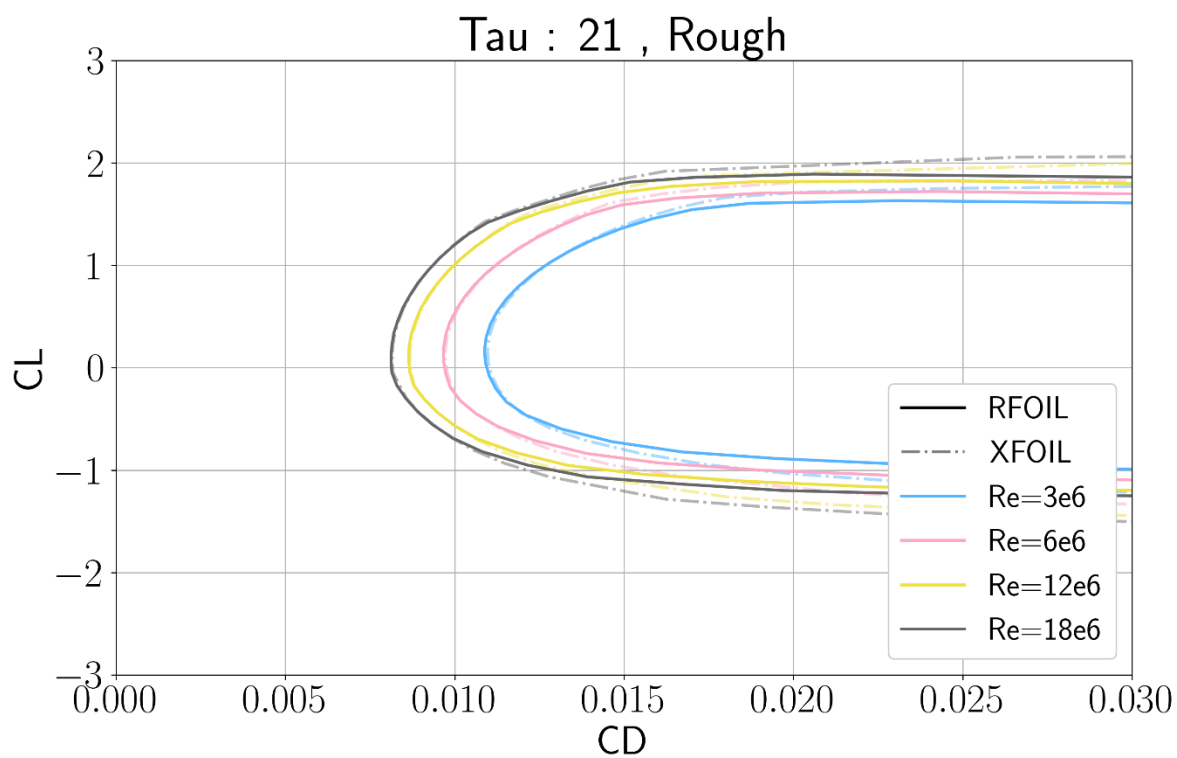
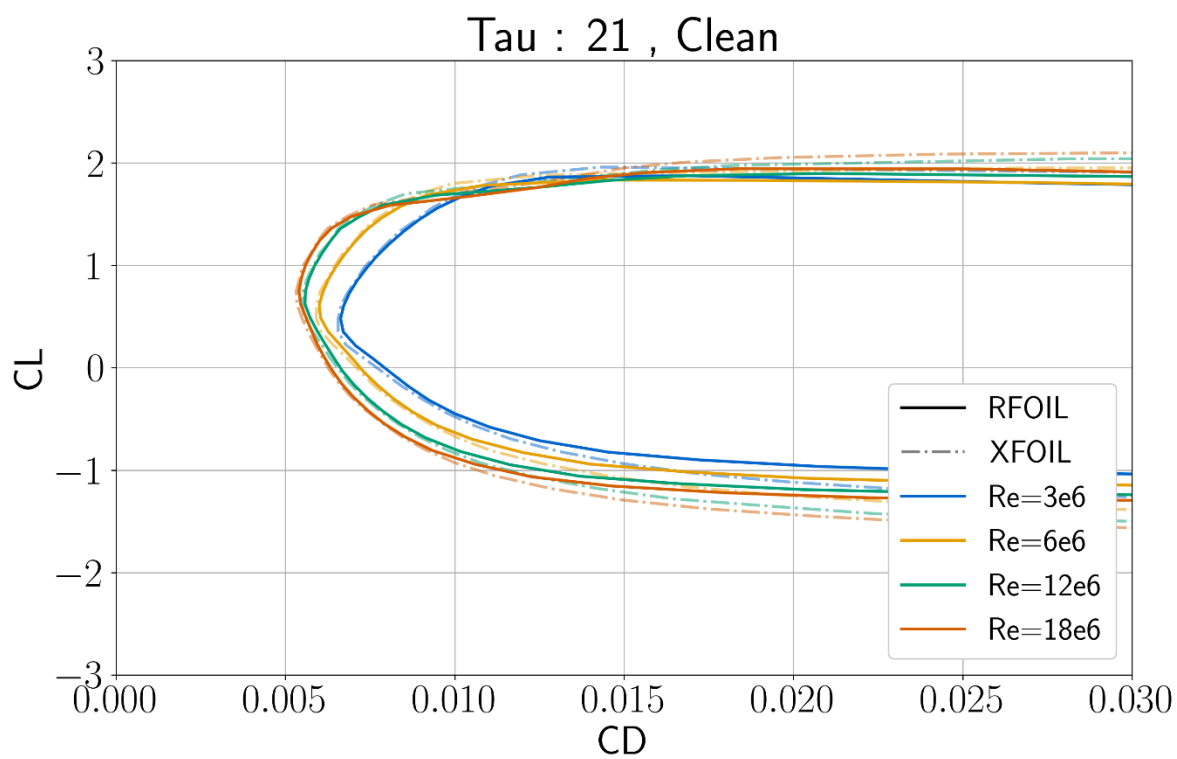


Figure 2-3. CL vs. CD, Clean and Rough, OSO-21-WT1

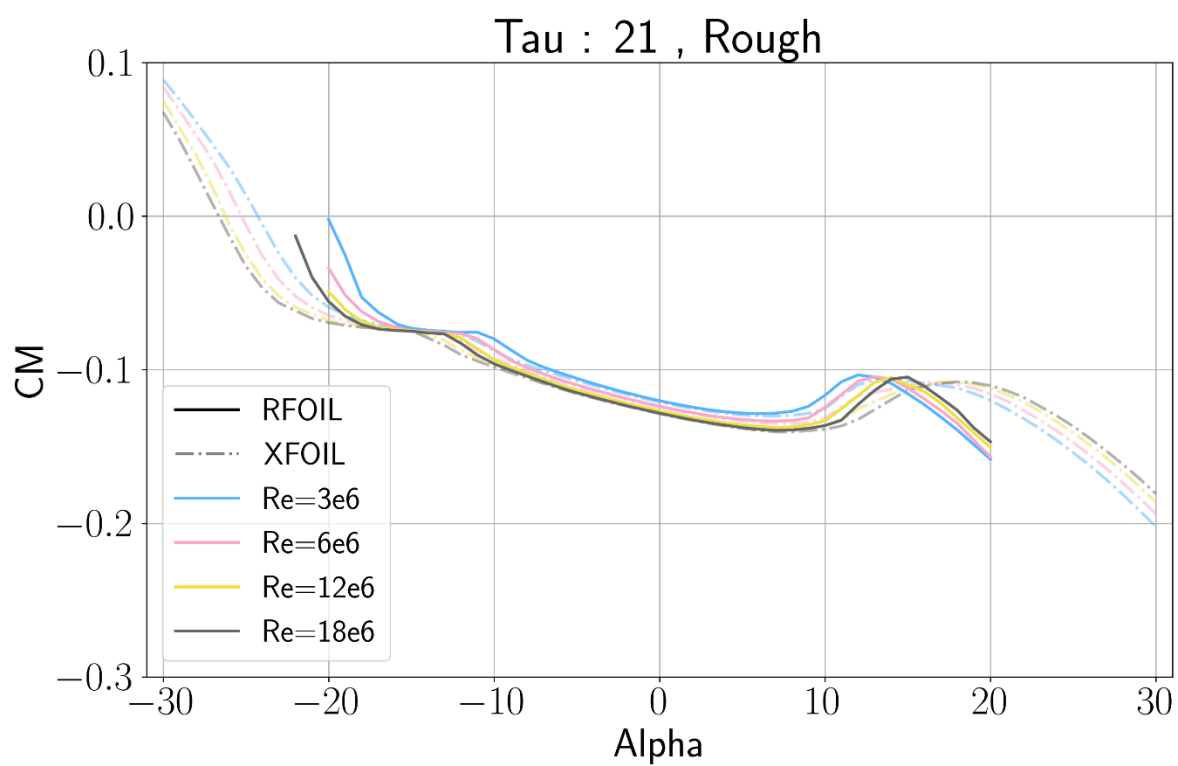
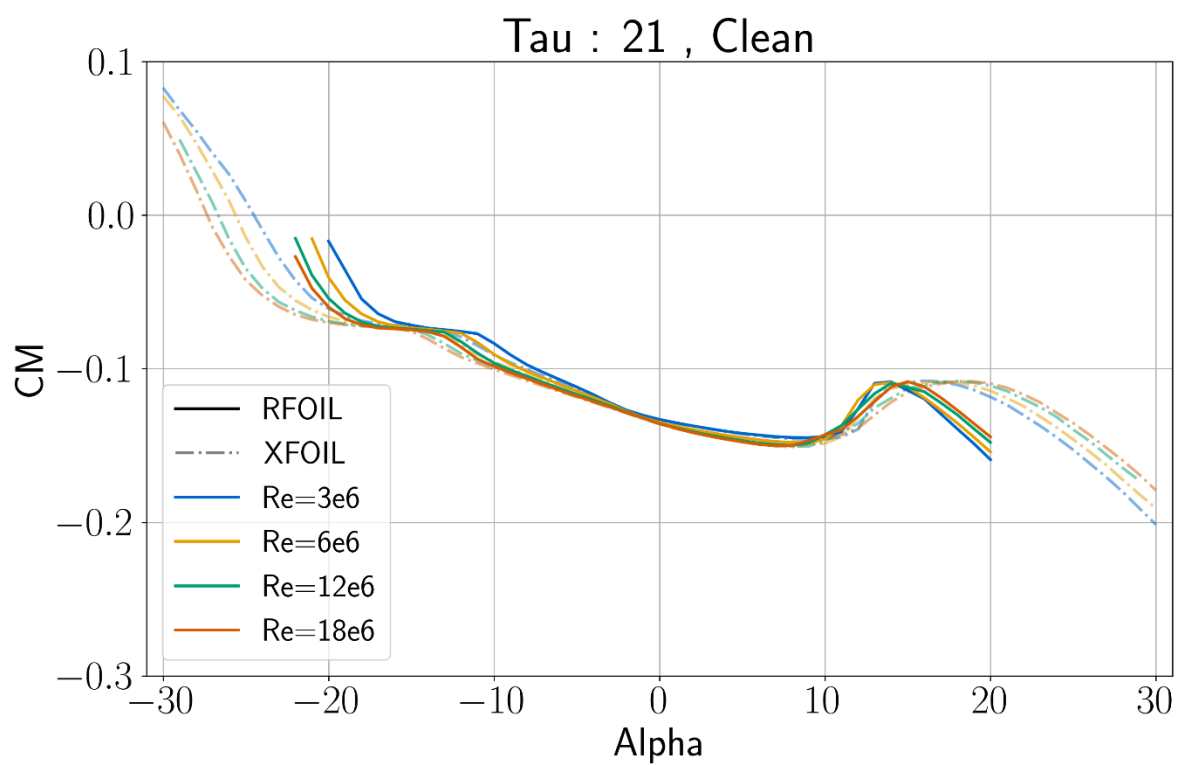


Figure 2-4. CM vs. Alpha, Clean and Rough, OSO-21-WT1

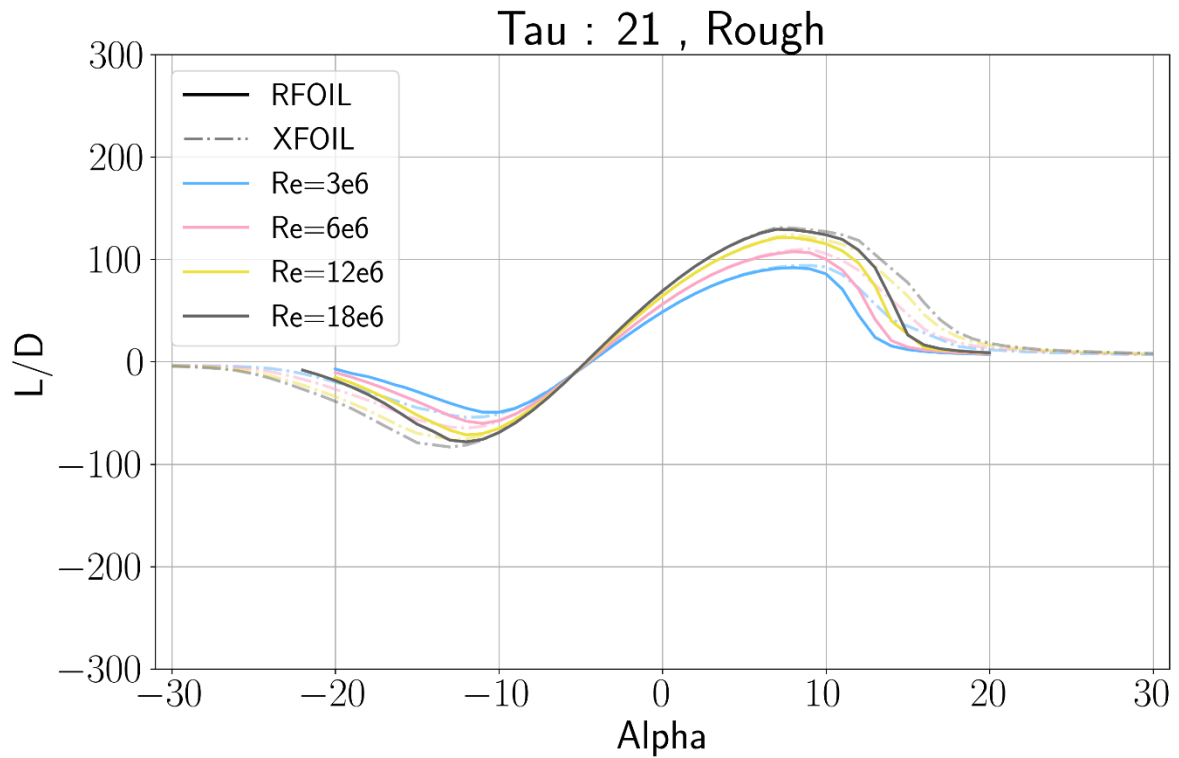
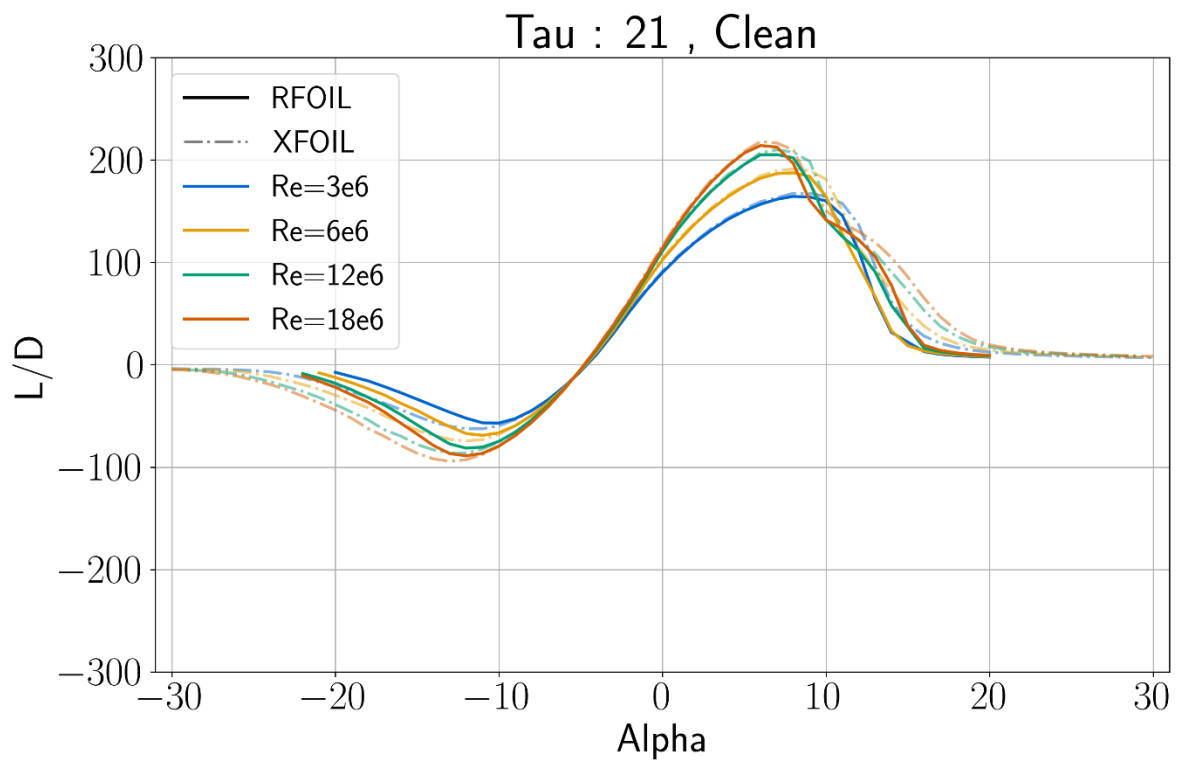


Figure 2-5. L/D vs. Alpha, Clean and Rough, OSO-21-WT1

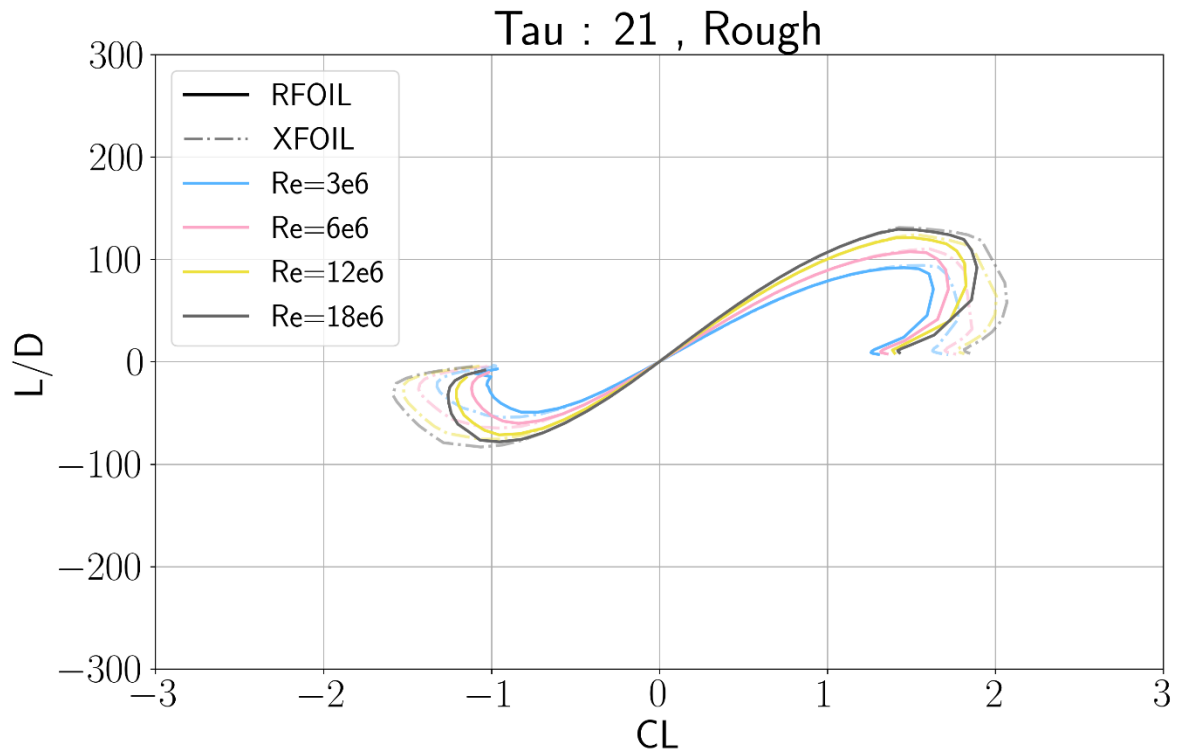
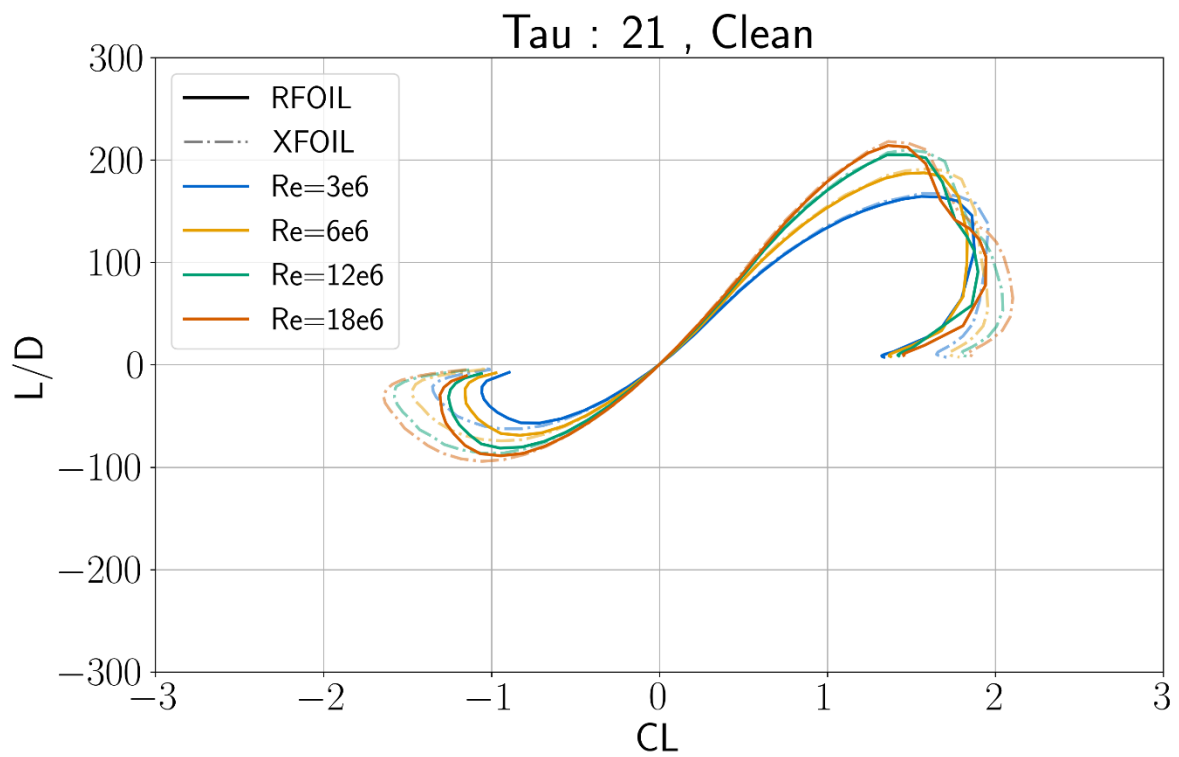


Figure 2-6. L/D vs. CL, Clean and Rough, OSO-21-WT1

2.2. OSO-30-WT1 Performance Data

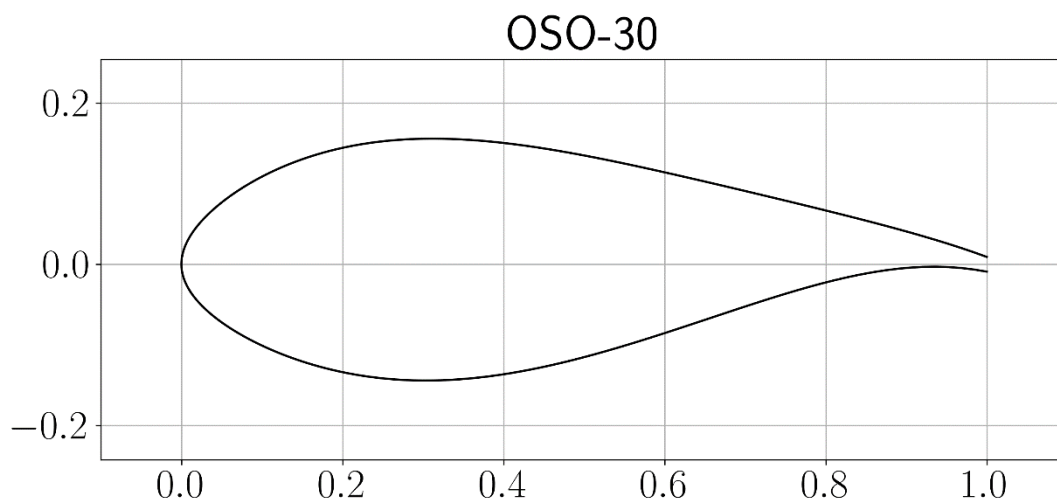


Figure 2-7. Shape of the OSO-30-WT1 airfoil.

For the 30% thick (OSO-30-WT1) airfoil, RFoil will converge to two lift curves at negative angles of attack post-stall for this airfoil. Only the lower in magnitude negative angle of attack lift curve is reported from the RFoil data, the higher in magnitude negative lift curve values are not included and are closer to the reported XFoil values.

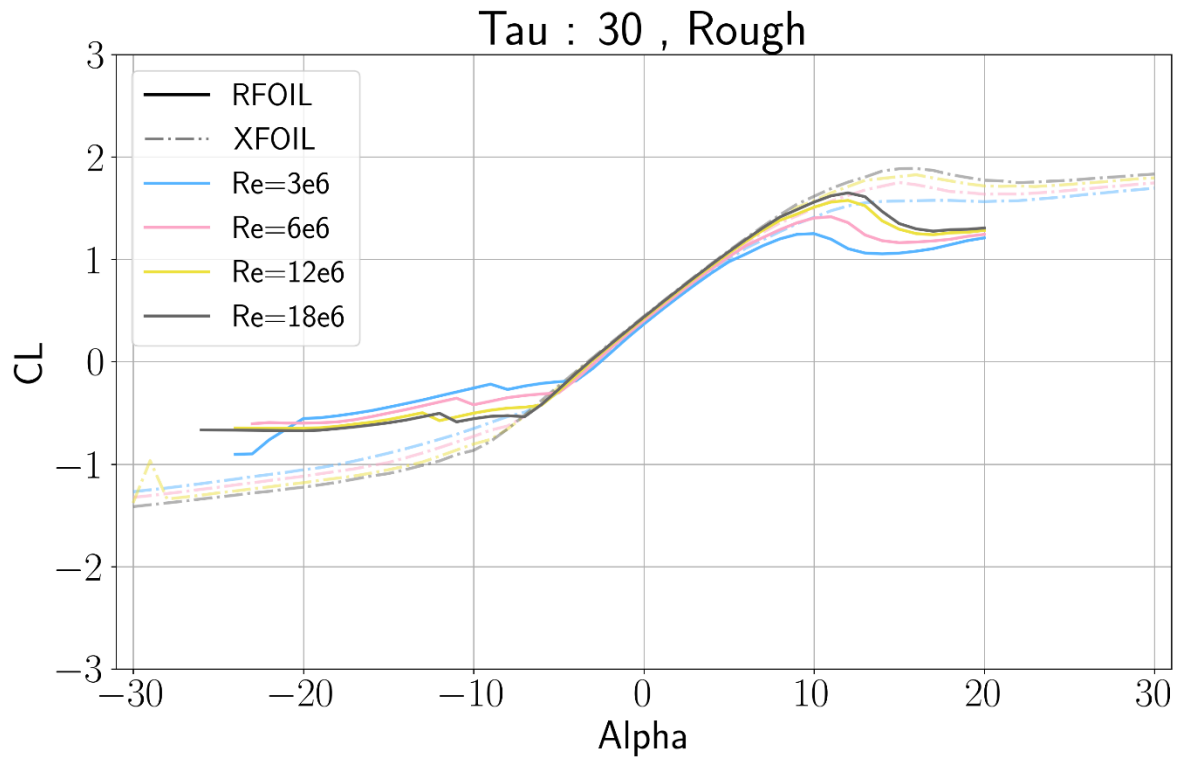
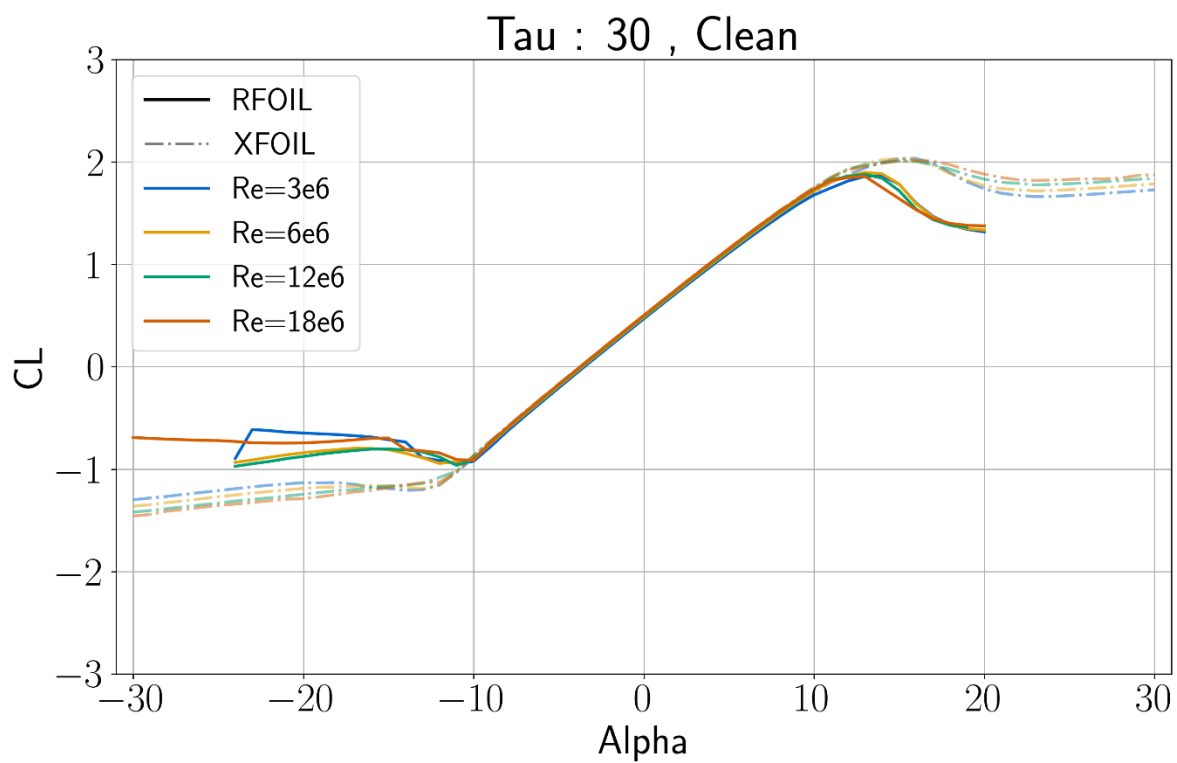


Figure 2-8. CL vs. Alpha, Clean and Rough, OSO-30-WT1

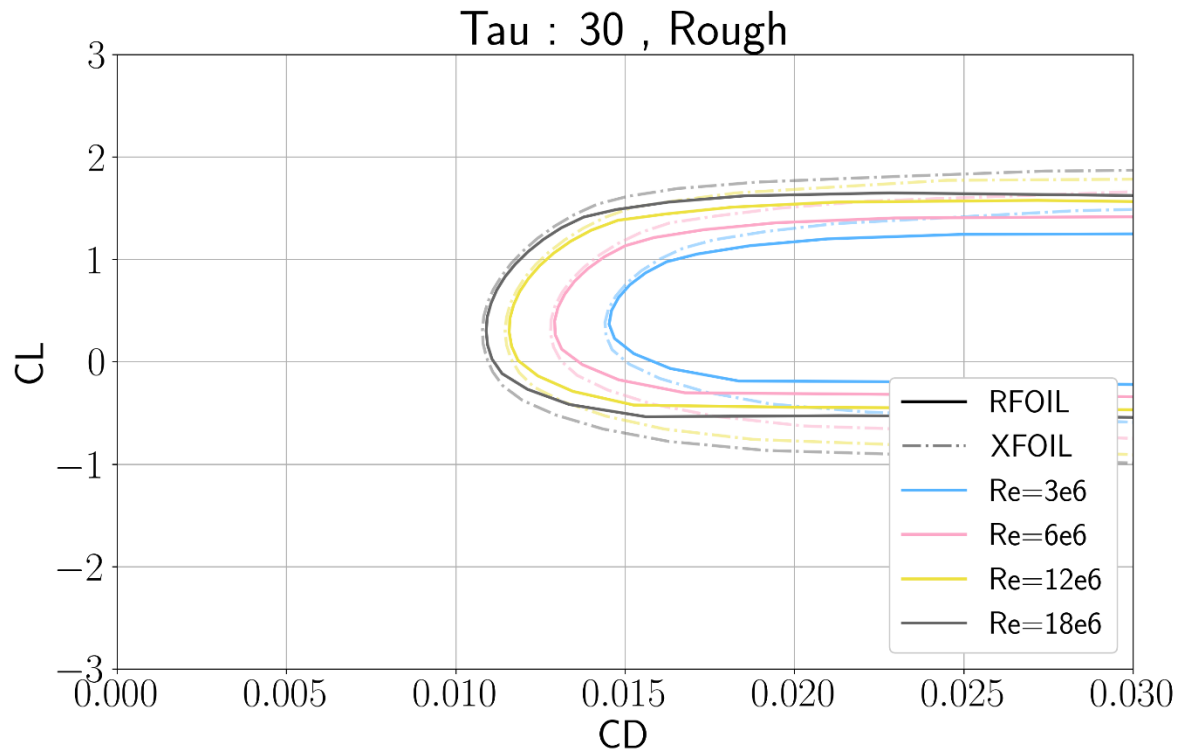
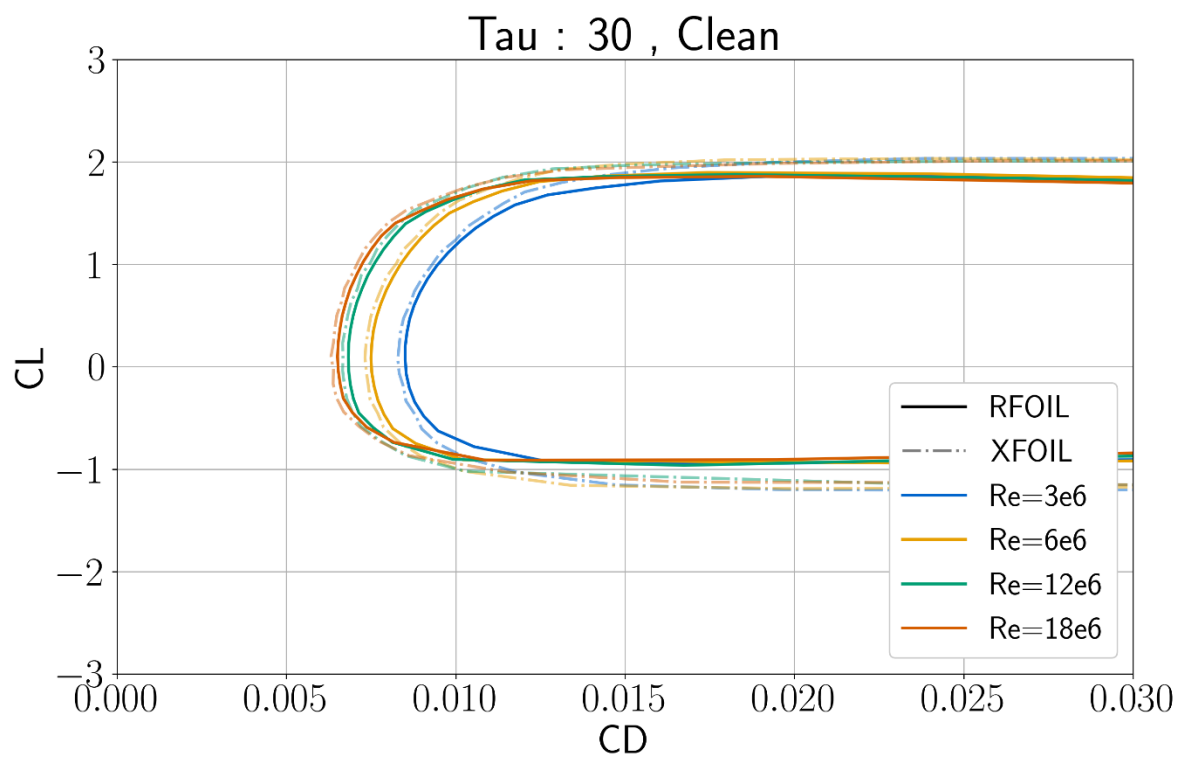


Figure 2-9. CL vs. CD, Clean and Rough, OSO-30-WT1

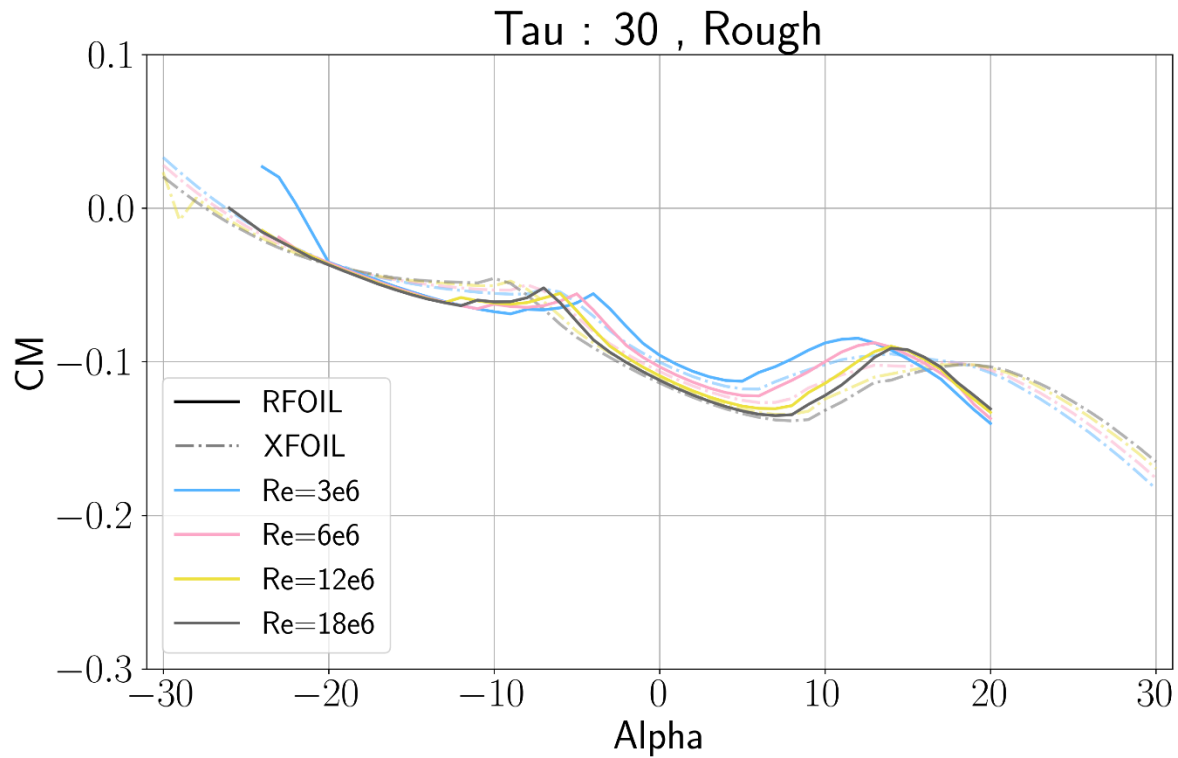
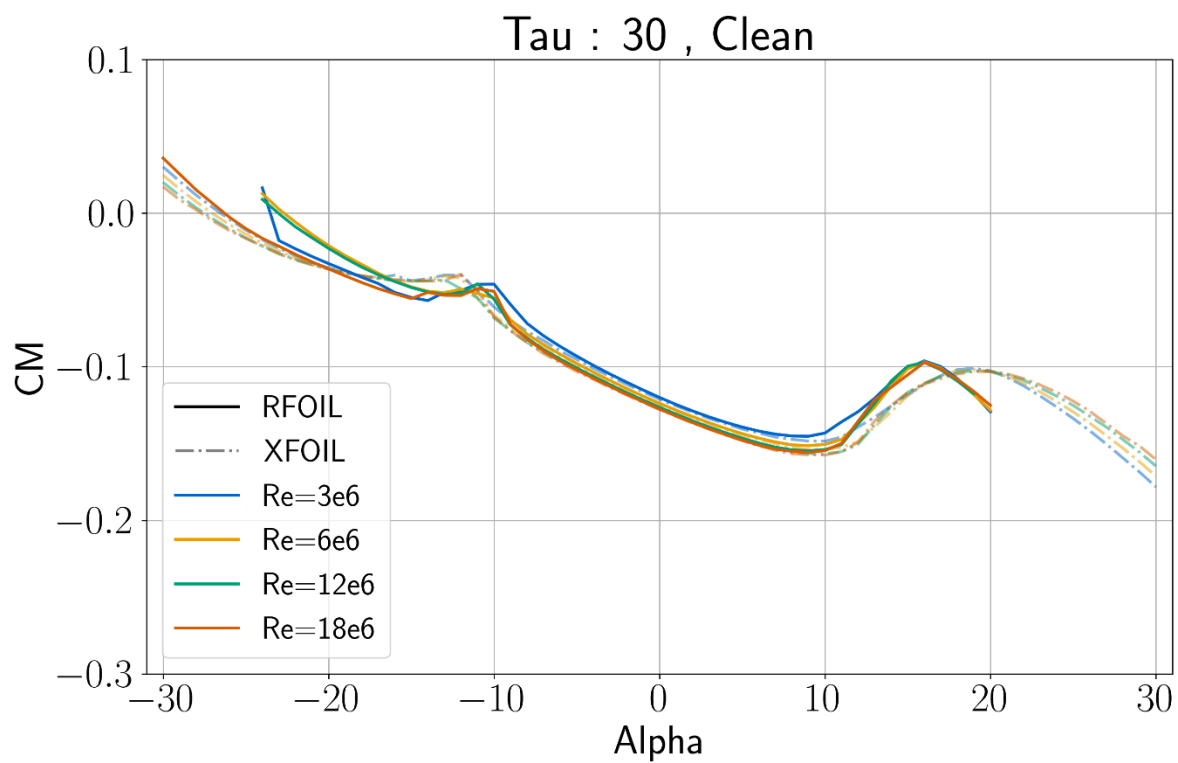


Figure 2-10. CM vs. Alpha, Clean and Rough, OSO-30-WT1

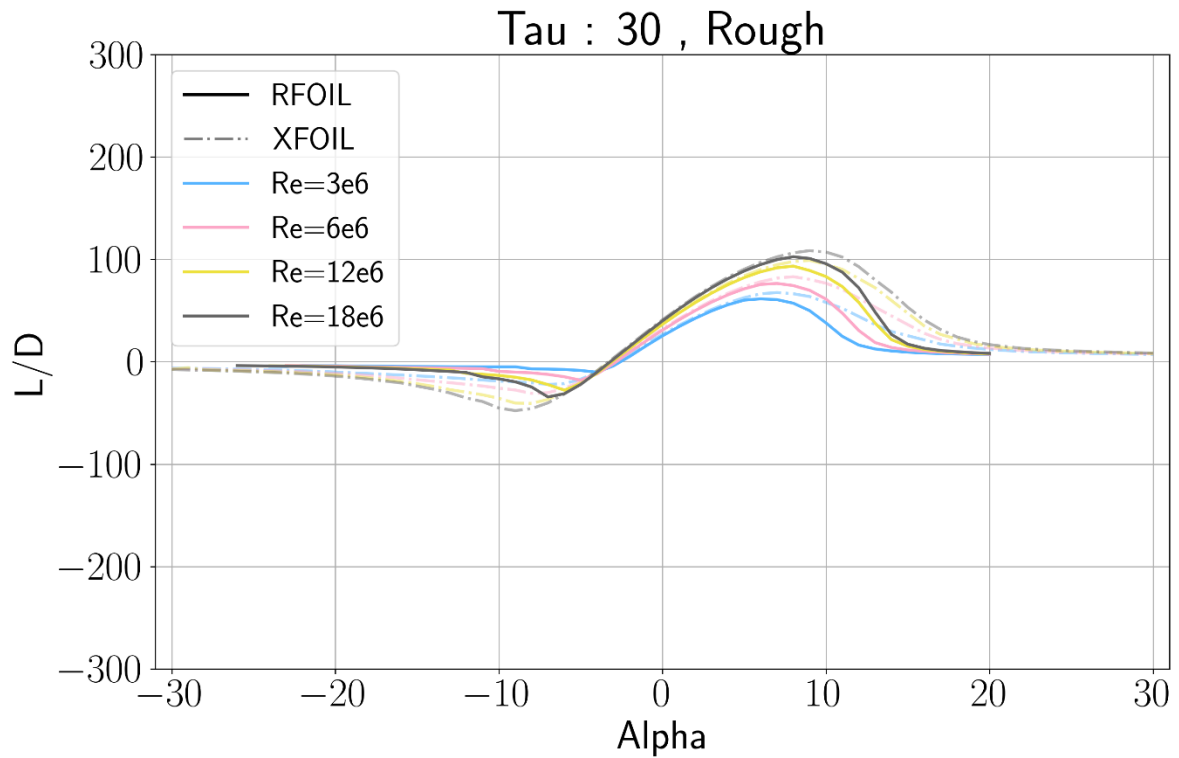
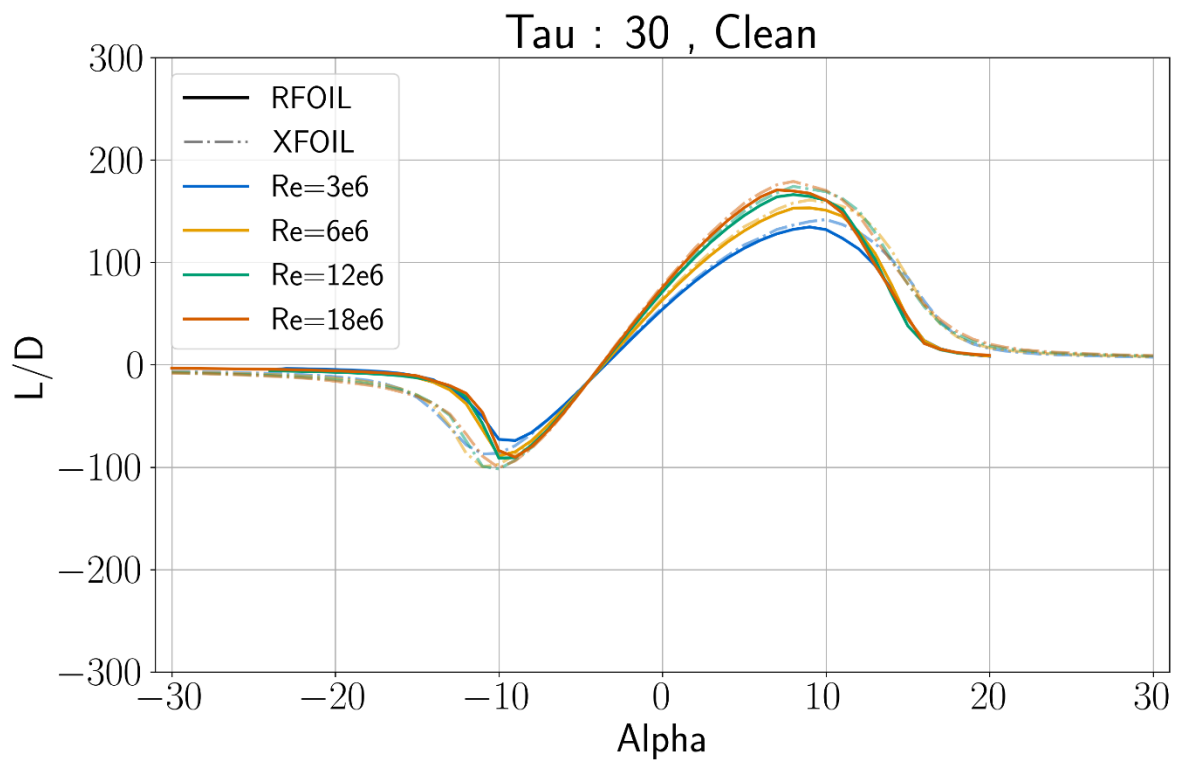


Figure 2-11. L/D vs. Alpha, Clean and Rough, OSO-30-WT1

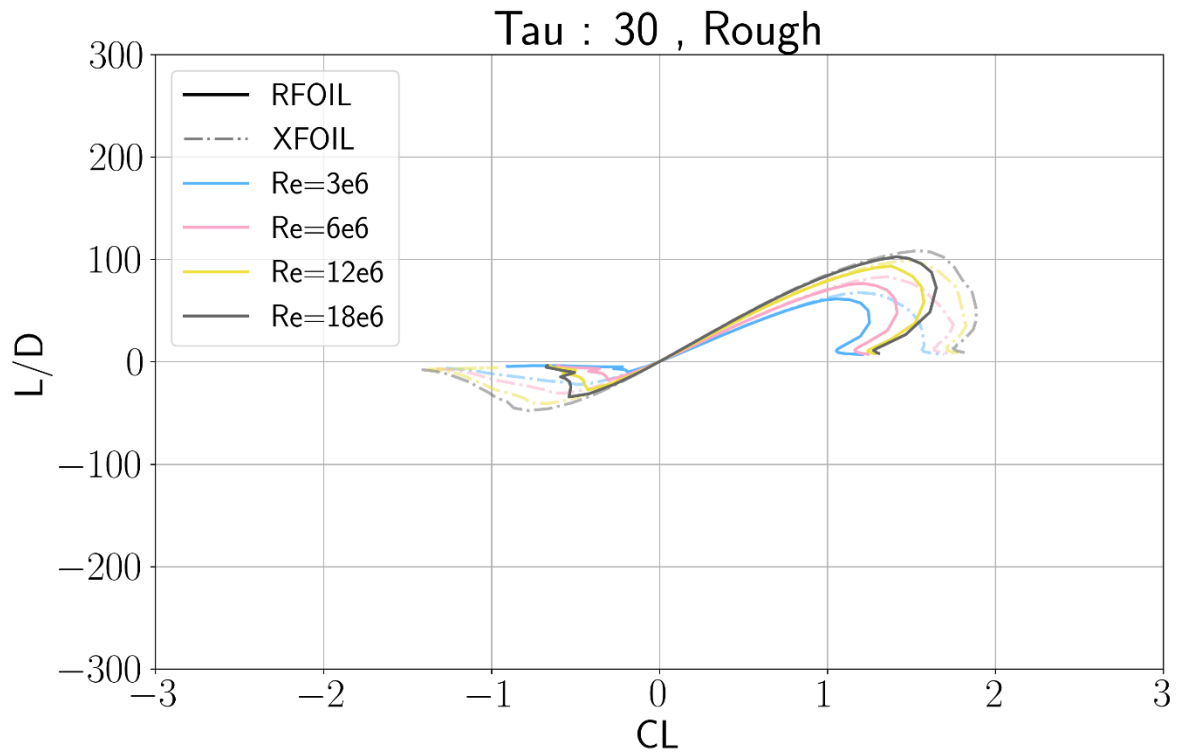
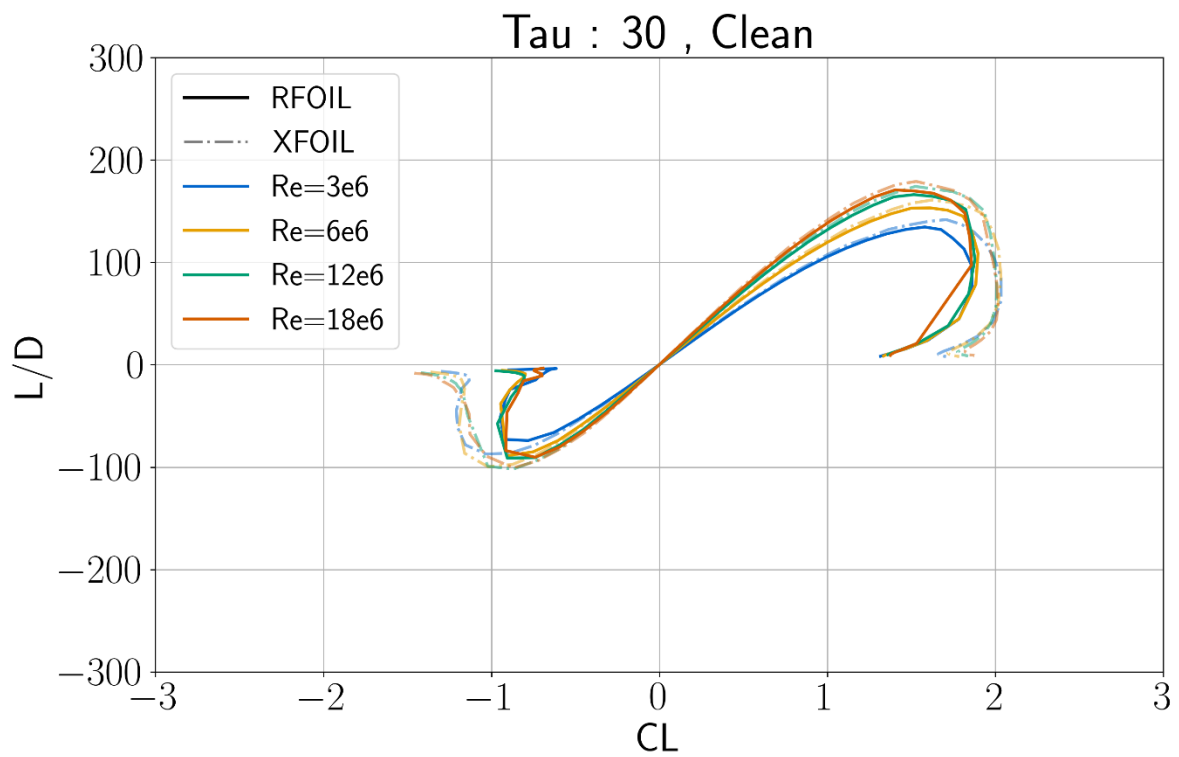


Figure 2-12. L/D vs. CL, Clean and Rough, OSO-30-WT1

REFERENCES

- [1] Zahle, F., Barlas, A., Loenbaek, K., Bortolotti, P., Zalkind, D., Wang, L., Labuschagne, C., Sethuraman, L., and Barter, G., “Definition of the IEA Wind 22-Megawatt Offshore Reference Wind Turbine,” Technical University of Denmark, 2024.
<https://doi.org/10.11581/dtu.00000317>.
- [2] Cody J. Karcher, David C. Maniaci, Chris Kelley, Alan Hsieh, Nathaniel deVelder and Anurag Gupta. "Design of a Preliminary Family of Airfoils for High Reynolds Number Wind Turbine Applications," AIAA 2025-0840. AIAA SCITECH 2025 Forum. January 2025

APPENDIX A. AIRFOIL COORDINATES

A.1. OSO-21-WT1 Coordinates

Table 3-1. A.1. OSO-21-WT1 Coordinates

1.0000000	0.0013100	0.2873058	0.1351977	0.0001259	-0.0025697	0.3099210	-0.0745518
0.9841340	0.0060754	0.2762660	0.1349087	0.0005035	-0.0051356	0.3214906	-0.0742716
0.9682721	0.0106047	0.2654083	0.1344209	0.0011327	-0.0076936	0.3332310	-0.0738902
0.9524181	0.0149262	0.2547356	0.1337342	0.0020133	-0.0102396	0.3451393	-0.0734036
0.9365761	0.0190663	0.2442504	0.1328493	0.0031452	-0.0127697	0.3572124	-0.0728077
0.9207500	0.0230493	0.2339556	0.1317675	0.0045281	-0.0152800	0.3694473	-0.0720984
0.9049440	0.0268976	0.2238535	0.1304911	0.0061615	-0.0177667	0.3818410	-0.0712717
0.8891618	0.0306313	0.2139469	0.1290232	0.0080452	-0.0202261	0.3943903	-0.0703236
0.8734075	0.0342686	0.2042382	0.1273677	0.0101786	-0.0226546	0.4070921	-0.0692504
0.8576852	0.0378258	0.1947297	0.1255293	0.0125611	-0.0250490	0.4199431	-0.0680487
0.8419986	0.0413169	0.1854240	0.1235135	0.0151923	-0.0274060	0.4329401	-0.0667154
0.8263518	0.0447544	0.1763234	0.1213267	0.0180713	-0.0297226	0.4460799	-0.0652476
0.8107488	0.0481488	0.1674301	0.1189759	0.0211976	-0.0319961	0.4593592	-0.0636432
0.7951933	0.0515087	0.1587465	0.1164691	0.0245702	-0.0342237	0.4727745	-0.0619005
0.7796895	0.0548412	0.1502746	0.1138147	0.0281884	-0.0364032	0.4863226	-0.0600187
0.7642411	0.0581517	0.1420166	0.1110219	0.0320513	-0.0385324	0.5000000	-0.0579974
0.7488520	0.0614441	0.1339746	0.1081005	0.0361578	-0.0406093	0.5138033	-0.0558375
0.7335262	0.0647210	0.1261506	0.1050606	0.0405070	-0.0426322	0.5277289	-0.0535405
0.7182674	0.0679833	0.1185466	0.1019130	0.0450978	-0.0445995	0.5417735	-0.0511093
0.7030796	0.0712312	0.1111646	0.0986687	0.0499289	-0.0465099	0.5559334	-0.0485478
0.6879666	0.0744632	0.1040062	0.0953388	0.0549992	-0.0483623	0.5702051	-0.0458612
0.6729320	0.0776772	0.0970735	0.0919350	0.0603074	-0.0501559	0.5845850	-0.0430563
0.6579799	0.0808700	0.0903680	0.0884686	0.0658521	-0.0518897	0.5990695	-0.0401411
0.6431138	0.0840375	0.0838915	0.0849512	0.0716321	-0.0535634	0.6136549	-0.0371254
0.6283375	0.0871749	0.0776457	0.0813940	0.0776457	-0.0551763	0.6283375	-0.0340208
0.6136549	0.0902767	0.0716321	0.0778082	0.0838915	-0.0567281	0.6431138	-0.0308405
0.5990695	0.0933370	0.0658521	0.0742044	0.0903680	-0.0582188	0.6579799	-0.0275998
0.5845850	0.0963492	0.0603074	0.0705930	0.0970735	-0.0596480	0.6729320	-0.0243160
0.5702051	0.0993064	0.0549992	0.0669838	0.1040062	-0.0610158	0.6879666	-0.0210086
0.5559334	0.1022012	0.0499289	0.0633858	0.1111646	-0.0623221	0.7030796	-0.0176990
0.5417735	0.1050261	0.0450978	0.0598075	0.1185466	-0.0635668	0.7182674	-0.0144111
0.5277289	0.1077734	0.0405070	0.0562566	0.1261506	-0.0647500	0.7335262	-0.0111714
0.5138033	0.1104350	0.0361578	0.0527396	0.1339746	-0.0658715	0.7488520	-0.0080083
0.5000000	0.1130032	0.0320513	0.0492626	0.1420166	-0.0669311	0.7642411	-0.0049532
0.4863226	0.1154697	0.0281884	0.0458304	0.1502746	-0.0679287	0.7796895	-0.0020398
0.4727745	0.1178266	0.0245702	0.0424468	0.1587465	-0.0688638	0.7951933	0.0006957
0.4593592	0.1200661	0.0211976	0.0391147	0.1674301	-0.0697359	0.8107488	0.0032140
0.4460799	0.1221802	0.0180713	0.0358359	0.1763234	-0.0705444	0.8263518	0.0054737
0.4329401	0.1241613	0.0151923	0.0326112	0.1854240	-0.0712883	0.8419986	0.0074305
0.4199431	0.1260021	0.0125611	0.0294402	0.1947297	-0.0719666	0.8576852	0.0090371
0.4070921	0.1276953	0.0101786	0.0263219	0.2042382	-0.0725780	0.8734075	0.0102441
0.3943903	0.1292340	0.0080452	0.0232539	0.2139469	-0.0731210	0.8891618	0.0109990
0.3818410	0.1306117	0.0061615	0.0202332	0.2238535	-0.0735938	0.9049440	0.0112469
0.3694473	0.1318223	0.0045281	0.0172558	0.2339556	-0.0739944	0.9207500	0.0109301
0.3572124	0.1328600	0.0031452	0.0143172	0.2442504	-0.0743204	0.9365761	0.0099886
0.3451393	0.1337195	0.0020133	0.0114119	0.2547356	-0.0745693	0.9524181	0.0083599
0.3332310	0.1343961	0.0011327	0.0085341	0.2654083	-0.0747384	0.9682721	0.0059791
0.3214906	0.1348855	0.0005035	0.0056773	0.2762660	-0.0748246	0.9841340	0.0027789
0.3099210	0.1351842	0.0001259	0.0028350	0.2873058	-0.0748245	1.0000000	-0.0013100
0.2985251	0.1352890	0.0000000	0.0000000	0.2985251	-0.0747348		

A.2. OSO-30-WT1 Coordinates

Table 3-2. A.2. OSO-30-WT1 Coordinates

1.0000000	0.0091400	0.2873058	0.1553606	0.0001259	-0.0036077	0.3099210	-0.1441964
0.9841340	0.0148232	0.2762660	0.1548064	0.0005035	-0.0072175	0.3214906	-0.1439459
0.9682721	0.0201982	0.2654083	0.1540472	0.0011327	-0.0108291	0.3332310	-0.1434553
0.9524181	0.0253076	0.2547356	0.1530851	0.0020133	-0.0144422	0.3451393	-0.1427218
0.9365761	0.0301887	0.2442504	0.1519231	0.0031452	-0.0180565	0.3572124	-0.1417435
0.9207500	0.0348737	0.2339556	0.1505647	0.0045281	-0.0216717	0.3694473	-0.1405192
0.9049440	0.0393908	0.2238535	0.1490141	0.0061615	-0.0252874	0.3818410	-0.1390491
0.8891618	0.0437639	0.2139469	0.1472763	0.0080452	-0.0289032	0.3943903	-0.1373340
0.8734075	0.0480141	0.2042382	0.1453567	0.0101786	-0.0325186	0.4070921	-0.1353758
0.8576852	0.0521592	0.1947297	0.1432615	0.0125611	-0.0361331	0.4199431	-0.1331773
0.8419986	0.0562144	0.1854240	0.1409972	0.0151923	-0.0397461	0.4329401	-0.1307424
0.8263518	0.0601928	0.1763234	0.1385709	0.0180713	-0.0433568	0.4460799	-0.1280758
0.8107488	0.0641050	0.1674301	0.1359900	0.0211976	-0.0469643	0.4593592	-0.1251832
0.7951933	0.0679601	0.1587465	0.1332625	0.0245702	-0.0505676	0.4727745	-0.1220713
0.7796895	0.0717652	0.1502746	0.1303964	0.0281884	-0.0541655	0.4863226	-0.1187474
0.7642411	0.0755260	0.1420166	0.1274003	0.0320513	-0.0577567	0.5000000	-0.1152201
0.7488520	0.0792466	0.1339746	0.1242826	0.0361578	-0.0613395	0.5138033	-0.1114986
0.7335262	0.0829299	0.1261506	0.1210523	0.0405070	-0.0649121	0.5277289	-0.1075931
0.7182674	0.0865774	0.1185466	0.1177182	0.0450978	-0.0684724	0.5417735	-0.1035145
0.7030796	0.0901895	0.1111646	0.1142891	0.0499289	-0.0720179	0.5559334	-0.0992748
0.6879666	0.0937654	0.1040062	0.1107740	0.0549992	-0.0755460	0.5702051	-0.0948869
0.6729320	0.0973033	0.0970735	0.1071816	0.0603074	-0.0790534	0.5845850	-0.0903646
0.6579799	0.1008005	0.0903680	0.1035205	0.0658521	-0.0825369	0.5990695	-0.0857229
0.6431138	0.1042534	0.0838915	0.0997994	0.0716321	-0.0859925	0.6136549	-0.0809778
0.6283375	0.1076574	0.0776457	0.0960263	0.0776457	-0.0894159	0.6283375	-0.0761463
0.6136549	0.1110073	0.0716321	0.0922092	0.0838915	-0.0928025	0.6431138	-0.0712472
0.5990695	0.1142970	0.0658521	0.0883558	0.0903680	-0.0961472	0.6579799	-0.0663002
0.5845850	0.1175200	0.0603074	0.0844733	0.0970735	-0.0994443	0.6729320	-0.0613268
0.5702051	0.1206690	0.0549992	0.0805684	0.1040062	-0.1026878	0.6879666	-0.0563502
0.5559334	0.1237366	0.0499289	0.0766476	0.1111646	-0.1058714	0.7030796	-0.0513952
0.5417735	0.1267146	0.0450978	0.0727167	0.1185466	-0.1089880	0.7182674	-0.0464888
0.5277289	0.1295949	0.0405070	0.0687811	0.1261506	-0.1120303	0.7335262	-0.0416598
0.5138033	0.1323688	0.0361578	0.0648457	0.1339746	-0.1149905	0.7488520	-0.0369395
0.5000000	0.1350277	0.0320513	0.0609146	0.1420166	-0.1178607	0.7642411	-0.0323611
0.4863226	0.1375631	0.0281884	0.0569917	0.1502746	-0.1206323	0.7796895	-0.0279602
0.4727745	0.1399662	0.0245702	0.0530800	0.1587465	-0.1232965	0.7951933	-0.0237750
0.4593592	0.1422287	0.0211976	0.0491822	0.1674301	-0.1258444	0.8107488	-0.0198456
0.4460799	0.1443424	0.0180713	0.0453003	0.1763234	-0.1282668	0.8263518	-0.0162144
0.4329401	0.1462992	0.0151923	0.0414356	0.1854240	-0.1305542	0.8419986	-0.0129260
0.4199431	0.1480917	0.0125611	0.0375892	0.1947297	-0.1326974	0.8576852	-0.0100262
0.4070921	0.1497127	0.0101786	0.0337614	0.2042382	-0.1346868	0.8734075	-0.0075626
0.3943903	0.1511556	0.0080452	0.0299520	0.2139469	-0.1365131	0.8891618	-0.0055834
0.3818410	0.1524146	0.0061615	0.0261607	0.2238535	-0.1381671	0.9049440	-0.0041369
0.3694473	0.1534840	0.0045281	0.0223863	0.2339556	-0.1396397	0.9207500	-0.0032708
0.3572124	0.1543593	0.0031452	0.0186275	0.2442504	-0.1409223	0.9365761	-0.0030314
0.3451393	0.1550364	0.0020133	0.0148827	0.2547356	-0.1420065	0.9524181	-0.0034621
0.3332310	0.1555120	0.0011327	0.0111498	0.2654083	-0.1428845	0.9682721	-0.0046023
0.3214906	0.1557836	0.0005035	0.0074267	0.2762660	-0.1435489	0.9841340	-0.0064860
0.3099210	0.1558494	0.0001259	0.0037109	0.2873058	-0.1439929	1.0000000	-0.0091400
0.2985251	0.1557085	0.0000000	0.0000000	0.2985251	-0.1442106		