

**Environmental Geophysics at Kings Creek
Disposal Site and 30th Street Landfill,
Aberdeen Proving Ground, Maryland**

OSTI
APR 03 1995
RECEIVED

**Energy Systems Division
Argonne National Laboratory**



Operated by The University of Chicago,
under Contract W-31-109-Eng-38, for the

United States Department of Energy

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

Argonne National Laboratory

Argonne National Laboratory, with facilities in the states of Illinois and Idaho, is owned by the United States Government, and operated by the University of Chicago under the provisions of a contract with the Department of Energy.

This technical memo is a product of Argonne's Energy Systems (ES) Division. For information on the division's scientific and engineering activities, contact:

Director, Energy Systems Division
Argonne National Laboratory
Argonne, Illinois 60439-4815
Telephone (708) 252-3724

Presented in this technical memo are preliminary results of ongoing work or work that is more limited in scope and depth than that described in formal reports issued by the ES Division.

Publishing support services were provided by Argonne's Information and Publishing Division.

Disclaimer

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Reproduced directly from the best available copy.

Available to DOE and DOE contractors from the Office of Scientific and Technical Information, P.O. Box 62, Oak Ridge, TN 37831; prices available from (615) 576-8401.

Available to the public from the National Technical Information Service, U.S. Department of Commerce, 5285 Port Royal Road, Springfield, VA 22161.

DISCLAIMER

Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.

Environmental Geophysics at Kings Creek Disposal Site and 30th Street Landfill, Aberdeen Proving Ground, Maryland

by B.E. Davies, S.F. Miller, L.D. McGinnis, C.R. Daudt, M.D. Thompson, J.E. Stefanov, M.A. Benson, and C.A. Padar

Center for Environmental Restoration Systems, Energy Systems Division, Argonne National Laboratory, 9700 South Cass Avenue, Argonne, Illinois 60439

Published as

*Environmental Geophysics at
Aberdeen Proving Ground, Maryland:
Kings Creek Disposal Site and 30th Street Landfill*

for sponsor's use only

January 1995

MASTER
DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

Dlc

Work sponsored by United States Department of Defense, United States Army, Aberdeen Proving Ground, Maryland



This report is printed on recycled paper,
with the exception of color reproductions.

Preface

This report provides administrative and technical staff, responsible for environmental planning and remediation at Aberdeen Proving Ground, with the final results and conclusions drawn from geophysical studies begun in April 1994. Three technologies, not listed in the work plan, were added to the study to improve diagnostic interpretations, and one technology was removed because it was considered redundant. The technologies added were downhole induction logging and downhole gamma logging, which were used to interpret subsurface lithologies, and downhole seismic velocity measurements, used to assist in the interpretation of seismic reflection data. Resistivity sounding was deleted from the study. Staff at Aberdeen Proving Ground, Directorate of Safety, Health, and Environment, and Argonne National Laboratory guided the work scope and its objectives.

Contents

Abstract.....	1
1 Introduction.....	1
1.1 Physiographic Setting and Site Survey.....	4
1.2 Geology and Hydrogeology.....	5
1.3 Instrumentation and Software.....	8
2 Magnetic Surveys.....	11
2.1 Continuous Profiling Magnetometry.....	11
2.1.1 Area 1.....	20
2.1.2 Area 2.....	23
2.1.3 Area 3.....	23
2.1.4 Area 4.....	23
2.2 Magnetic Gradiometer Survey.....	24
3 Electrical Conductivity Survey.....	28
3.1 Area 1.....	28
3.2 Area 2.....	38
3.3 Area 3.....	38
3.4 Area 4.....	39
4 Geophysical Well Logging.....	42
5 Ground-Penetrating Radar Surveys.....	43
5.1 Offshore GPR Surveys.....	43
5.2 Onshore GPR Surveys.....	44
6 Seismic Surveys.....	60
6.1 Seismic Refraction Surveys.....	60
6.2 Downhole Seismic Velocity Measurements.....	64
6.3 Seismic Reflection Surveys.....	65
7 Discussion.....	71
7.1 Areal Extent of Kings Creek Disposal Site and 30th Street Landfill.....	71
7.2 Hydrogeologic Framework.....	72
7.3 Subsurface Paleochannel Locations.....	73
8 Summary and Conclusions.....	75
9 References.....	76
Appendix A: Soil Boring Logs.....	79
Appendix B: Gamma and Induction Logs.....	109

Tables

1	Location and Description of Magnetic Anomalies Detected in the Kings Creek Study Area.....	21
2	Seismic Refraction Profiles near the Kings Creek Study Area.....	61
3	Seismic Reflection Profiles near the Kings Creek Study Area.....	66

Figures

1	Kings Creek Study Area in the Aberdeen Proving Ground, Edgewood Area.....	2
2	Topography and Site Features of the Bush River Peninsula	3
3	Geophysical Survey Grid, Kings Creek Study Area	5
4	Geologic Cross Section of the Bush River Peninsula.....	7
5	Kings Creek Study Area Subdivisions and Magnetic Survey Profile Locations.....	11
6	Kings Creek Study Area Total Field Magnetism Map	12
7	Area 1, Total Field Magnetism Map	13
8	Area 2, Total Field Magnetism Map	15
9	Area 3, Total Field Magnetism Map	17
10	Area 4, Total Field Magnetism Map	19
11	Total Field Magnetism Map Overlain by Magnetic Gradiometer Anomalies, North of Former Kings Creek Disposal Site.....	25
12	Total Field Magnetism Map Overlain by Magnetic Gradiometer Anomalies, East of 30th Street Landfill	27
13	Kings Creek Study Area, EM-31 Electromagnetics Map.....	29
14	Area 1, EM-31 Electromagnetics Map	31
15	A: Area 2, EM-31 Electromagnetics Map B: Area 2, EM-31 Overlain by Magnetic Contours	33
16	Area 3, EM-31 Electromagnetics Map	35
17	Area 4, EM-31 Electromagnetics Map	37

Figures (Cont.)

18	Location of EM-31 Offshore Profiles	39
19	Kings Creek Offshore EM-31 Electromagnetics Map	40
20	Monitor Well Location Map, Bush River Peninsula	41
21	Ground-Penetrating Radar Profile Locations	44
22	A: GPR Profile #16 B: GPR Profile #16 with Interpretation	46
23	A: GPR Profile #12 B: GPR Profile #12 with Interpretation	47
24	A: GPR Profile #13 B: GPR Profile #13 with Interpretation	49
25	A: GPR Profile #15 B: GPR Profile #15 with Interpretation	51
26	A: GPR Profile #14 B: GPR Profile #14 with Interpretation	53
27	A: GPR Profile #6 B: GPR Profile #6 with Interpretation	55
28	GPR Profile #8	57
29	A: GPR Profile #9 B: GPR Profile #9 with Interpretation	59
30	Seismic Profile Locations	61
31	First Arrival Time versus Distance Data from Seismic Refraction Lines BRP-2 (A) and BRP-3 (B)	62
32	First Arrival Time versus Distance Data from Seismic Refraction Line BRP-1	63
33	Velocity-Depth Model Obtained by Inverting Seismic Refraction Data and Borehole Seismic Data	64
34	Seismic Reflection Profile for Line BRP-4	67
35	Seismic Reflection Profile for Line BRP-5	68
36	Seismic Reflection Profile for Line BRP-6	70
37	Approximate Paleochannel Locations Inferred from GPR Data	73

Environmental Geophysics at Kings Creek Disposal Site and 30th Street Landfill, Aberdeen Proving Ground, Maryland

by

B.E. Davies, S.F. Miller, L.D. McGinnis, C.R. Daudt, M.D. Thompson,
J.E. Stefanov, M.A. Benson, and C.A. Padar

Abstract

Geophysical studies on the Bush River Peninsula in the Edgewood Area of Aberdeen Proving Ground, Maryland, delineate landfill areas and provide diagnostic signatures of the hydrogeologic framework and possible contaminant pathways. These studies indicate that, during the Pleistocene Epoch, alternating stands of high and low sea levels resulted in a complex pattern of shallow channel-fill deposits in the Kings Creek area. Ground-penetrating radar studies reveal a paleochannel greater than 50 ft deep, with a thalweg trending offshore in a southwest direction into Kings Creek. Onshore, the ground-penetrating radar data indicate a 35-ft-deep branch to the main channel, trending to the north-northwest directly beneath the 30th Street Landfill. Other branches are suspected to meet the offshore paleochannel in the wetlands south and east of the 30th Street Landfill. This paleochannel depositional system is environmentally significant because it may control the shallow groundwater flow regime beneath the site. Electromagnetic surveys have delineated the pre-fill lowland area currently occupied by the 30th Street Landfill. Magnetic and conductive anomalies outline surficial and buried debris throughout the study area. On the basis of geophysical data, large-scale dumping has not occurred north of the Kings Creek Disposal Site or east of the 30th Street Landfill.

1 Introduction

An environmental geophysical study was conducted north of Kings Creek at Aberdeen Proving Ground (APG), Edgewood Area (Figure 1). The study area includes two solid waste management units (SWMUs) identified in the *RCRA Facility Assessment Report, Edgewood Area, Aberdeen Proving Ground, Maryland* (Nemeth 1989). The two SWMUs, referred to as the Kings Creek Disposal Site and the 30th Street Landfill, are located outside the security fence within Cluster 15 (Figure 2).

Open burning of chemical munitions reportedly occurred at the Kings Creek Disposal Site during the 1920s and 1930s. Drummed wastes were also stored on the surface in this area. It is not known whether chemical munitions or wastes were buried at the disposal site.

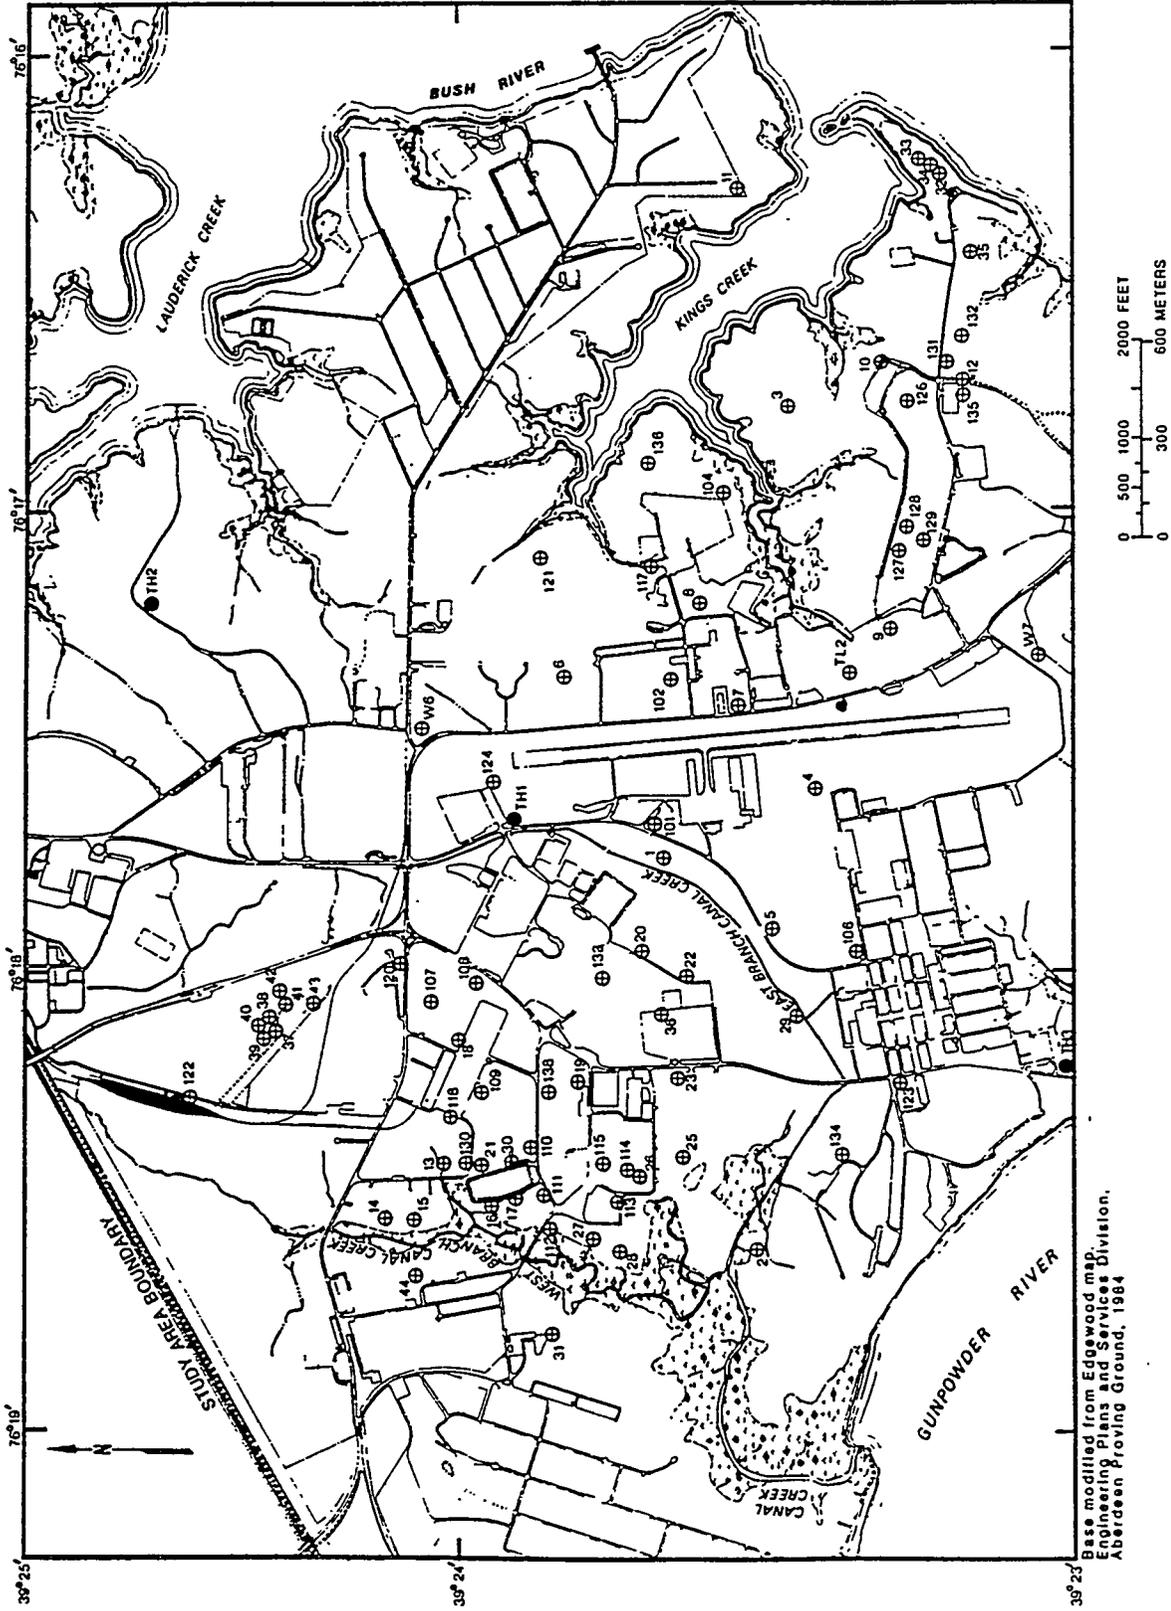


FIGURE 1 Kings Creek Study Area in the Aberdeen Proving Ground, Edgewood Area

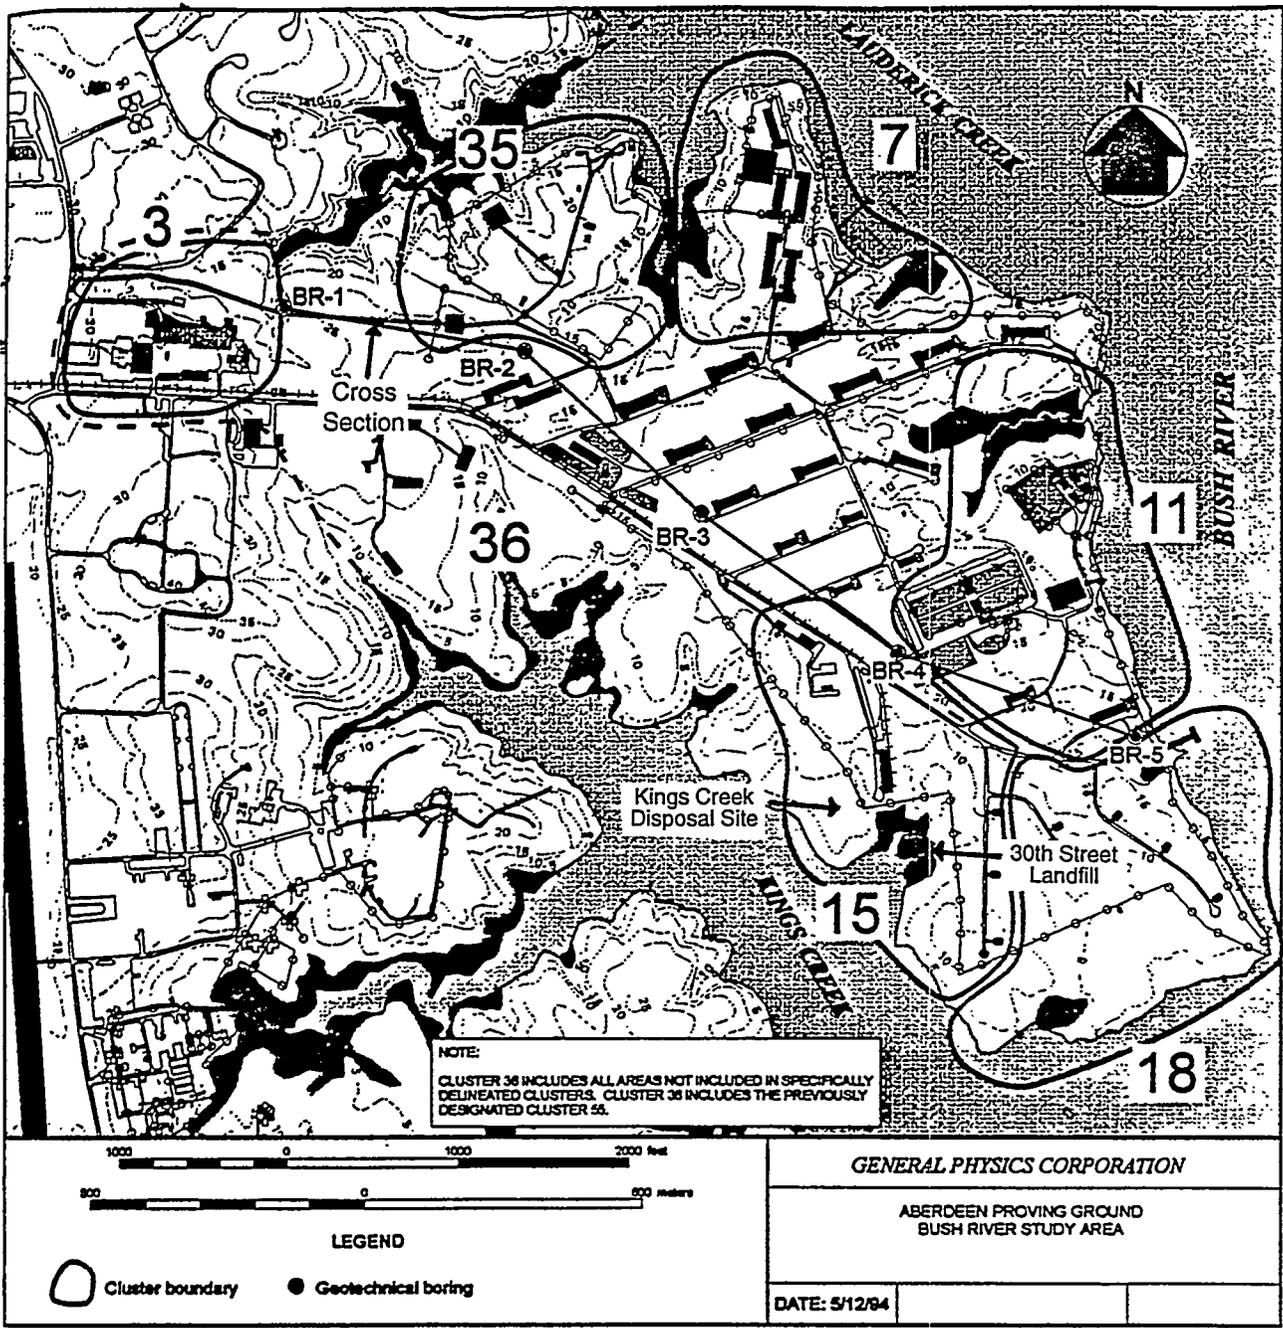


FIGURE 2 Topography and Site Features of the Bush River Peninsula (adapted from U.S. Army Corps of Engineers 1994)

The 30th Street Landfill is located east of and adjacent to the Kings Creek Disposal Site, in a former wetland. Dumping occurred at the landfill in the 1960s and probably into the early 1970s. The area is currently covered with vegetation, and some debris is visible on the surface. Buried munitions were discovered at the landfill during the summer of 1994, but no records of munitions disposal in this area exist (Nemeth 1989).

The objectives of the geophysical investigation (as outlined in the workplan) are as follows:

1. Define the areal extent of the affected sites,
2. Characterize the hydrogeologic framework beneath the sites to provide information to support the current site monitor well installation program, and
3. Provide information on the geologic integrity and continuity of strata underlying the embayment and wetlands adjacent to the sites.

Field activities were conducted during the spring and summer of 1994. Geophysical techniques used during this study to meet the objectives listed above included seismic reflection and refraction, downhole seismic induction and gamma well logging, magnetics, electromagnetics, and ground-penetrating radar (GPR). Magnetic, electromagnetic, and GPR surveys were performed to define the approximate areal extent of solid (and potentially liquid) wastes.

1.1 Physiographic Setting and Site Survey

The Kings Creek area lies within the Atlantic Coastal Plain physiographic province of Maryland. The study area is located in the south-central portion of the Bush River Peninsula, which is bounded by Lauderick Creek to the north, Bush River to the east, and Kings Creek to the south (Figure 2). The peninsula is a remnant of subareal erosion that occurred during a low-sea-level stand followed by a sea-level rise and estuarine encroachment into Kings Creek and Lauderick Creek, which are tributaries of the Bush River. This river is one of the major tidal estuarine channels on the western shore of Chesapeake Bay. Elevations of the Bush River Peninsula range from greater than 20 ft above mean sea level (msl) in the central portion of the peninsula to sea level at the shoreline (Figure 2). The elevation of the study area ranges from sea level to approximately 14 ft above msl at the northernmost survey point. The average elevation of the site is 5 to 6 ft above msl.

The area surveyed covers approximately 11 acres surrounding a small embayment on the north shore of Kings Creek. The northern and eastern portions of the site are covered by trees and surface obstructions (fallen trees, vines, and brush). The Kings Creek Disposal Site is partially wooded and contains numerous fallen trees. The 30th Street Landfill is covered with low grassy vegetation and is surrounded to the south and southeast by phragmite and cattail marsh.

Geophysical survey coordinate 00N/00E corresponds to control point CP-12 of a survey performed by Gilmore and Associates, Inc., in October 1992 (Figure 3). CP-12 is located at 620823.72 north, 1517457.09 east in the Maryland State Plane Coordinate System. A 50-ft grid was established, using wooden survey stakes, to guide the geophysical surveys (Figure 3). The grid was laid out by using 300-ft surveyor's tapes and a Brunton compass. Geophysical profiles in the eastern section of the survey area are skewed slightly from those in the main survey area to better fit this irregularly shaped section.

1.2 Geology and Hydrogeology

The Precambrian crystalline basement platform lies approximately 450 ft beneath the land surface of the Bush River Peninsula. Basement lithologies are similar to those found at the surface in the Piedmont Province, which is located northwest of the fall line (Oliveros and Vroblesky 1989). The crystalline basement surface dips to the southeast at an angle of less than one degree

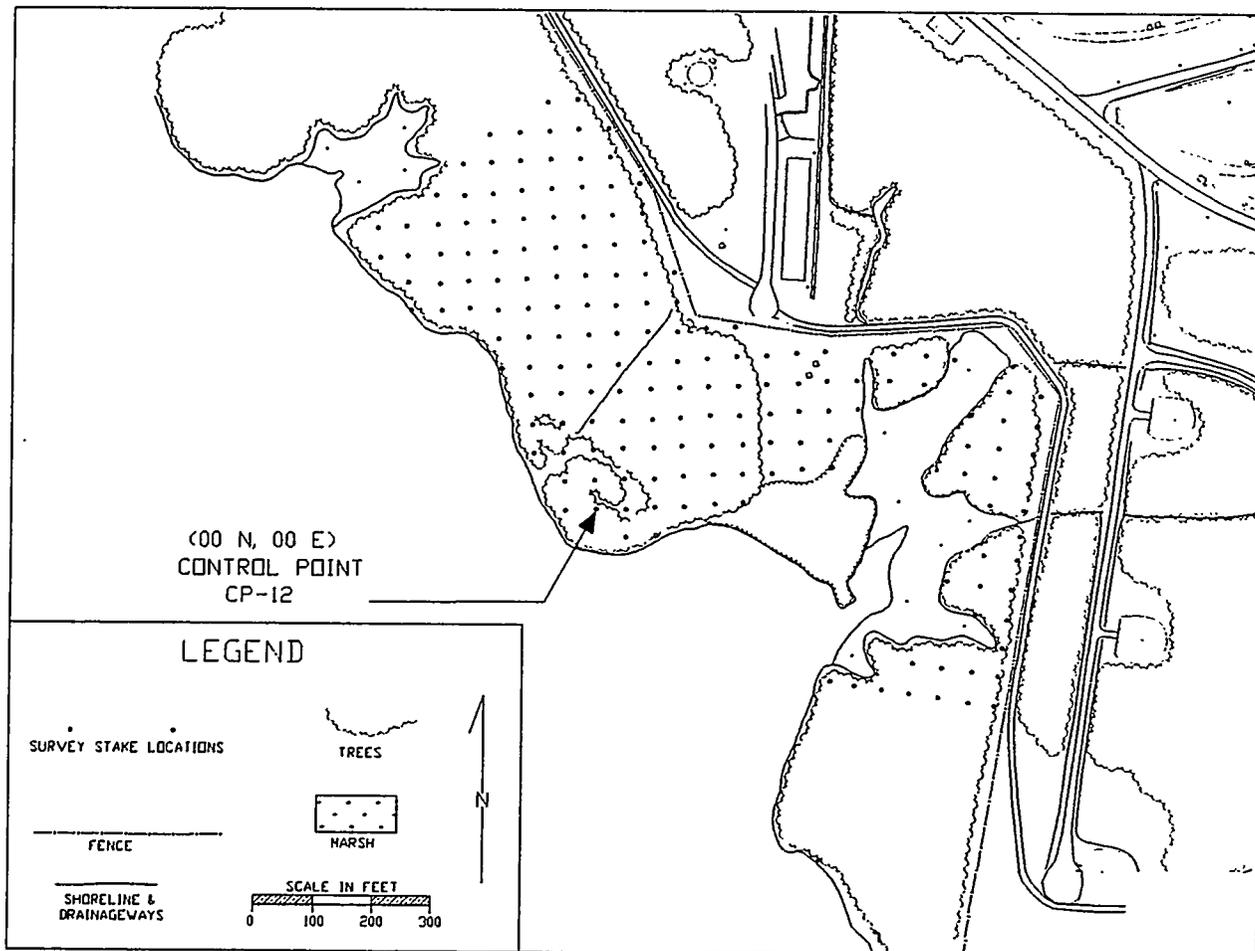


FIGURE 3 Geophysical Survey Grid, Kings Creek Study Area

(Bennett and Meyer 1952; Dingman et al. 1956; Southwick, Owens, and Edwards 1969). Previous geophysical studies at Beach Point, approximately 3,000 ft south, revealed the Precambrian basement approximately 560 ft beneath the land surface (McGinnis et al. 1994a). In areas east of the fall line, including all of the areas discussed in this report, unconsolidated Atlantic Coastal Plain sediments overlie Piedmont basement rocks.

Atlantic Coastal Plain sediments beneath the Edgewood area of APG were deposited during the Cretaceous Period and the Pleistocene Epoch (Oliveros and Vroblesky 1989; Thurmond 1993). A thin layer of Holocene estuarine sediments covers the wetland areas at APG. Most of the unconsolidated sediments, which comprise the Potomac Group, were deposited during the Cretaceous Period. The Potomac Group units are continentally derived and represent several depositional systems: mostly fluvial, channel, and overbank or levee deposits. Cretaceous deposits in the area generally consist of interbedded clays and fine- to medium-grained quartz-sands. These Cretaceous sediments likely belong to the Patapsco Formation of the Potomac Group.

The Pleistocene Talbot Formation, which rests unconformably on the Potomac Group, contains minor amounts of Quaternary alluvium (Oliveros and Vroblesky 1989). The gravelly sand, sand, and silty clay deposits are marginal marine in origin and consist primarily of fluvial and estuarine deposits (Southwick, Owens, and Edwards 1969). During the Pleistocene Epoch, the sea level fluctuated and channels were cut into the Cretaceous sediments. The Talbot Formation is commonly found as paleochannel-fill complexes deposited during subsequent rises in sea level (Kehrin et al. 1988). Beneath the Bush River Peninsula, the Talbot Formation is thickest in these paleochannel-fill complexes.

Figure 4 presents a hydrogeologic cross section running northwest to southeast along the Bush River Peninsula (adapted from Thurmond 1993). The location of the cross section is shown in Figure 2. The sediments beneath the Bush River Peninsula are a complex mix of interfingering clays, silts, sands, and gravels. Lorah and Vroblesky (1989) describe a similar section as follows: "Hydrogeologic units were defined partly on the basis of hydrogeologic characteristics of the units; therefore, the boundaries between the hydrogeologic units do not necessarily correspond with the contacts between geologic units." The surficial aquifer sediments are primarily composed of the Talbot Formation and appear to pinch out in the northwestern end of the cross section (Figure 4).

The Pleistocene disconformity is developed on the clay aquitard, which is a member of the Potomac Group sediments. The disconformity, where the base of the Pleistocene sediments is also clayey, is not readily discernible in drill core or geophysical logs. In the discussions to follow, the term "base of the surficial aquifer" refers to the contact between the sandy sediments and the underlying clay, regardless of the relative ages of the two units.

On the basis of observations at the Kings Creek study area and studies conducted in other portions of the Edgewood Area, including Beach Point (McGinnis et al. 1994a) and Canal Creek (Lorah and Vroblesky 1989 and McGinnis et al. 1994b), it is evident that a well-integrated

Pleistocene tributary system was deeply incised into the Potomac Group sediments as a result of successive lowering of the sea level. The tributary system provides the framework for shallow groundwater flow and for potential recharge into the Potomac Group aquifers. Mapping the configuration of this system is one of the objectives of the geophysical studies conducted at the Kings Creek Disposal Area/30th Street Landfill.

1.3 Instrumentation and Software

Instruments used to collect geophysical data at the site included the following:

- Magnetic gradiometer,
- Cesium vapor magnetometer,
- Electrical conductivity instrument,
- Induction probe and logging unit,
- Natural gamma probe and logging unit,
- SIR-2 and SIR-3 ground-penetrating radar,
- Engineering seismographs,
- Elastic wave generator, and
- Geophones.

The following paragraphs describe each of these instruments and the software used to reduce the electromagnetic data, process the magnetic data, process the seismic reflection and refraction data, and produce contour maps.

The Model Mac-51B, a magnetic gradiometer and cable locator manufactured by Schonstedt, Inc., is a dual-mode instrument designed to detect shallow buried iron and steel objects and trace underground cables and pipes. The system consists of a transmitter and a dual-function receiver designed to detect anomalous magnetic gradients. The magnetic gradiometer was used during this study to (1) clear survey areas prior to driving the wooden stake grid markers and geophones and (2) perform magnetic surveys.

Total field magnetic data were acquired by using the Model G-822L cesium vapor magnetometer manufactured by EG&G Geometrics. The magnetometer is a continuous-recording (10 readings per second), total-field, microprocessor-based instrument capable of resolution of anomalies to one nanotesla (1 nT).

Electrical conductivity measurements were made with a Model EM-31, an electromagnetic instrument manufactured by Geonics Limited that provides mean values of conductivity, in millisiemens per meter (mS/m), for soils ranging from 0 to approximately 18 ft in depth. Apparent conductivities measured by the EM-31 are weighted mean values measured over the entire depth range, with greater weights applied to shallower depths.

Initial reduction of the electromagnetic and total field magnetic data was completed using DAT 31 software provided by Geonics. The United States Geological Survey (USGS) minimum curvature gridding program MINC (Cordell et al. 1992) was used to plot the data on a grid. Color contour maps presenting the electromagnetic and total field magnetic data were produced by using software developed by Argonne National Laboratory (ANL).

Two geophysical well logging techniques, induction and gamma logging, were employed at selected wells on the Bush River Peninsula. An EM-39 induction probe, manufactured by Geonics Limited and adapted to an MGX model logging unit manufactured by Mount Sopris Instrument Company, was used to produce conductivity logs. A Mount Sopris Instrument Company Model HLP-2375/S was used with the MGX model logging unit to produce gamma logs.

GPR surveying was accomplished by using Geophysical Survey Systems, Inc. (GSSI), models SIR-3 and SIR-2. The SIR-3 was equipped with a Model 38 video display and digital audio tape (DAT) recorder; data were recorded on DAT and downloaded to a personal computer in the field office. Data from the SIR-2 system were downloaded directly to the personal computer. Continuous profiling was performed by using both the 100- and 300-megahertz (MHz)-frequency antennas in the bistatic mode. The control/video display was mounted directly on an all-terrain vehicle, which was used to pull the different antenna arrays through the onshore survey area. For offshore GPR profiles, the antennas rested directly on the bottom of an inflated rubber raft that was towed by a small aluminum bass boat across the survey areas. An IBM-compatible processing computer was located in a field office to download and check the radar profiles and to allow preliminary data processing in the field. Radan III computer software written by GSSI was used for processing the GPR data.

A 24-channel engineering seismograph (EG&G model ES-2401) was employed to determine the depths and seismic velocities of the sediments underlying the Kings Creek study area. Seismic refraction data of the entire sedimentary section were obtained using a trailer-mounted elastic wave generator (EWG) manufactured by Bison Instruments, Inc., for a source and geophones with a natural frequency of 16 hertz (Hz) for receivers. Shallow and deep high-resolution reflection data were obtained by using the EWG and a 16-pound sledgehammer for sources and geophones with a natural frequency of 60 Hz for receivers. The different geophones

were manufactured by Mark, Inc. Multiple EWG hits or hammer hits were stacked as needed to increase the signal-to-noise ratio. Full 24-channel reflection data were obtained using a Model RLS-120 roll-along switch with common-depth-point (CDP) cables, manufactured by Input/Output, Inc.

Two shallow seismic refraction lines and downhole seismic data collection techniques were used to further characterize the seismic velocities of the sediments underlying the Bush River Peninsula. A Bison Instruments Model 5012, 12-channel engineering seismograph was utilized to collect these data; a 12-pound sledgehammer served as a sound source. Surveyors used 60-Hz geophones manufactured by Mark, Inc., to collect data from the two shallow refraction lines and a Mark L-10, 8-Hz, three-component geophone to obtain the downhole seismic data.

EAVESDROPPER reflection software, developed by the Kansas Geological Survey (1993), was employed for reflection data processing. The seismic refraction data were processed by using SIPT2 refraction programs, developed by RIMROCK Geophysics, Inc. (1992).

2 Magnetic Surveys

The objectives of the gradiometer and total field magnetic surveys performed at the Kings Creek site were to (1) delineate the boundaries of fill areas containing ferromagnetic debris, and (2) avoid shallow magnetic debris (unexploded ordinance) during the placement of the geophones and survey stakes. The results of these surveys are presented below.

2.1 Continuous Profiling Magnetometry

The study area was divided into four sections (Area 1 through Area 4) to obtain total field magnetometry data. Figure 5 shows the magnetic profile locations and indicates the boundaries of the four subdivisions of the study area. Magnetic maps of the entire study area and the four sections are presented in Figures 6 through 10.


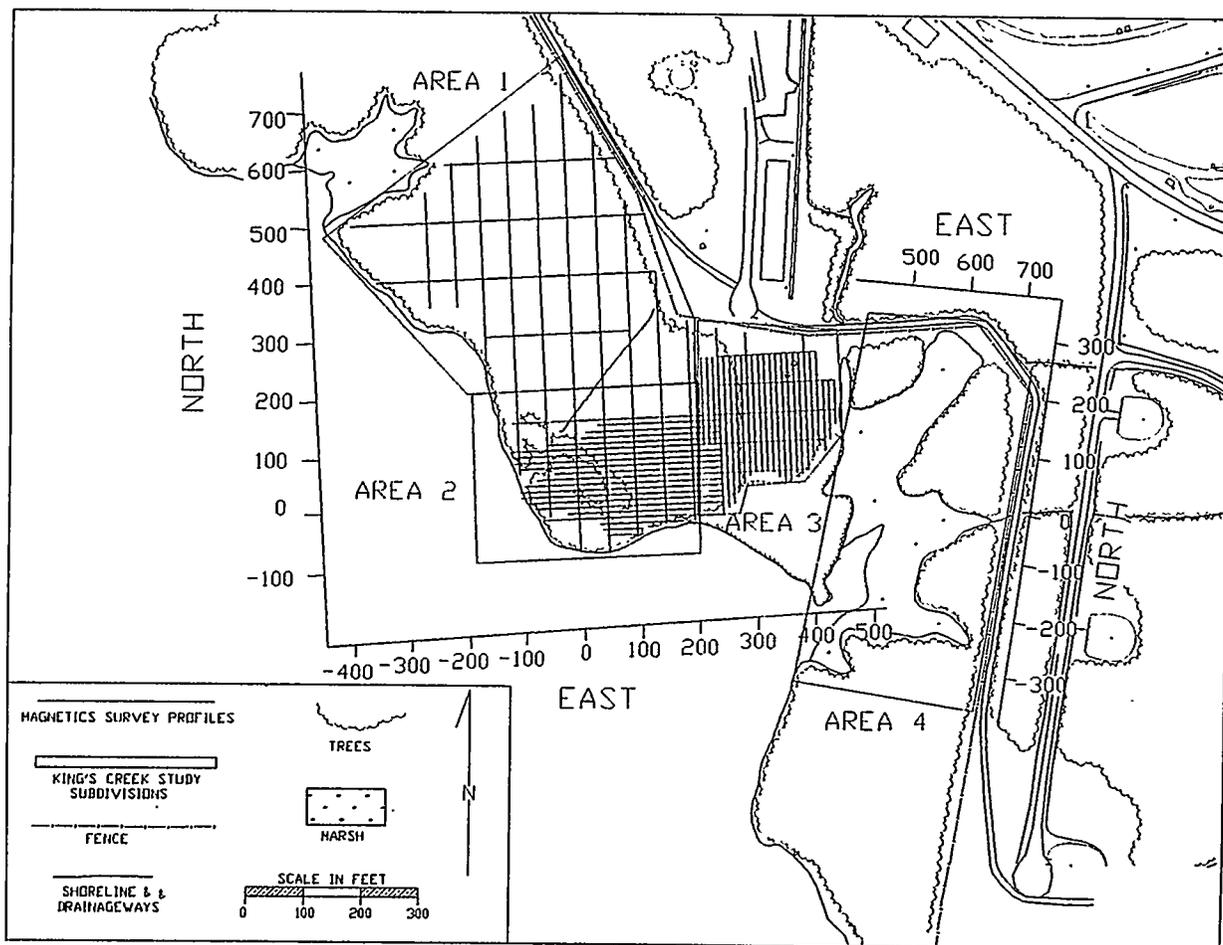



FIGURE 5 Kings Creek Study Area Subdivisions (Areas 1 through 4) and Magnetic Survey Profile Locations

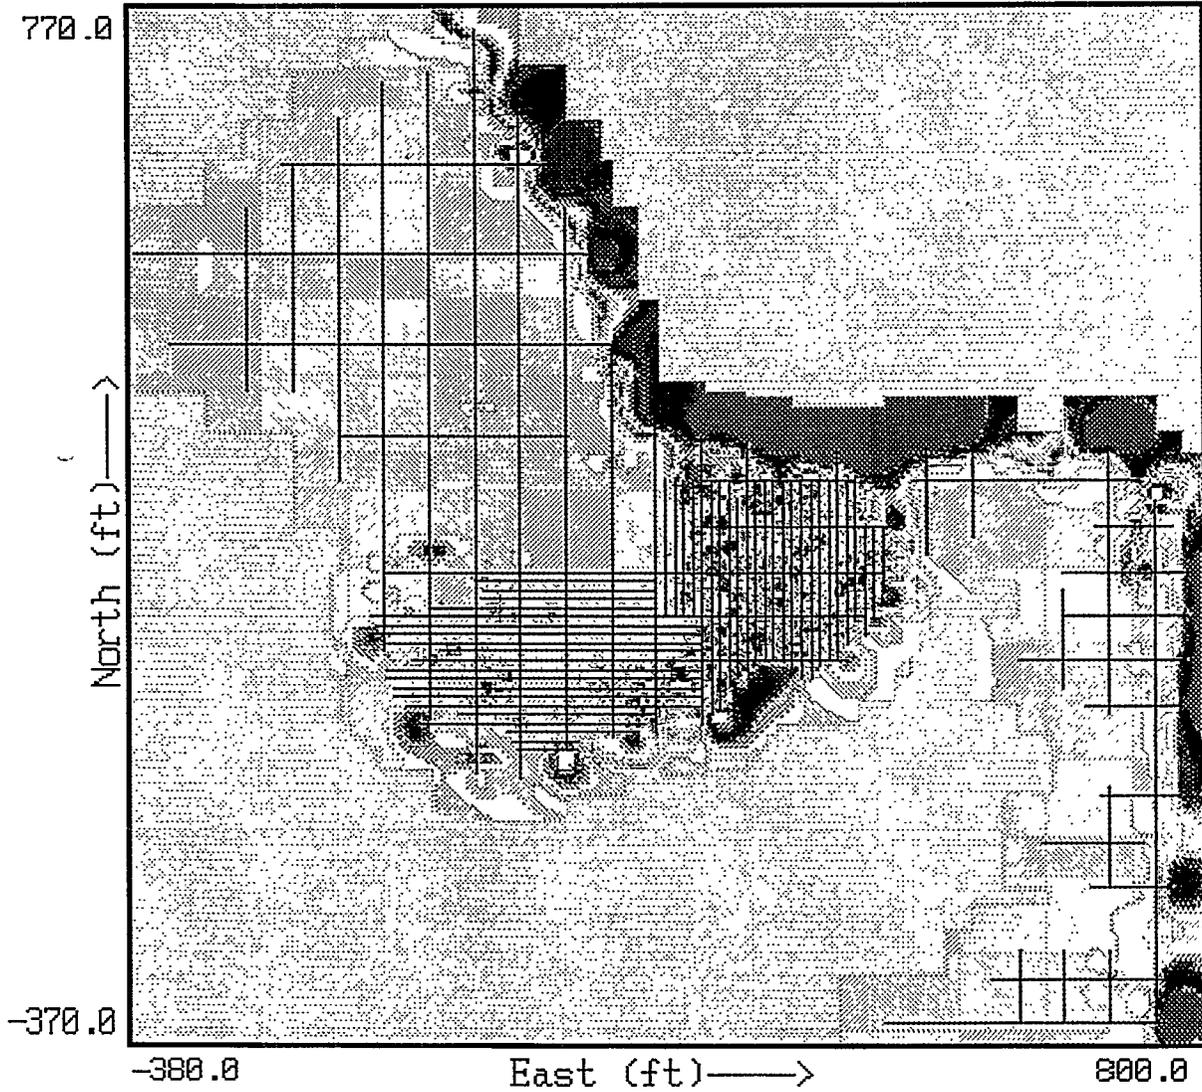

Kings Creek: Magnetics (nT)



FIGURE 6 Kings Creek Study Area Total Field Magnetics Map

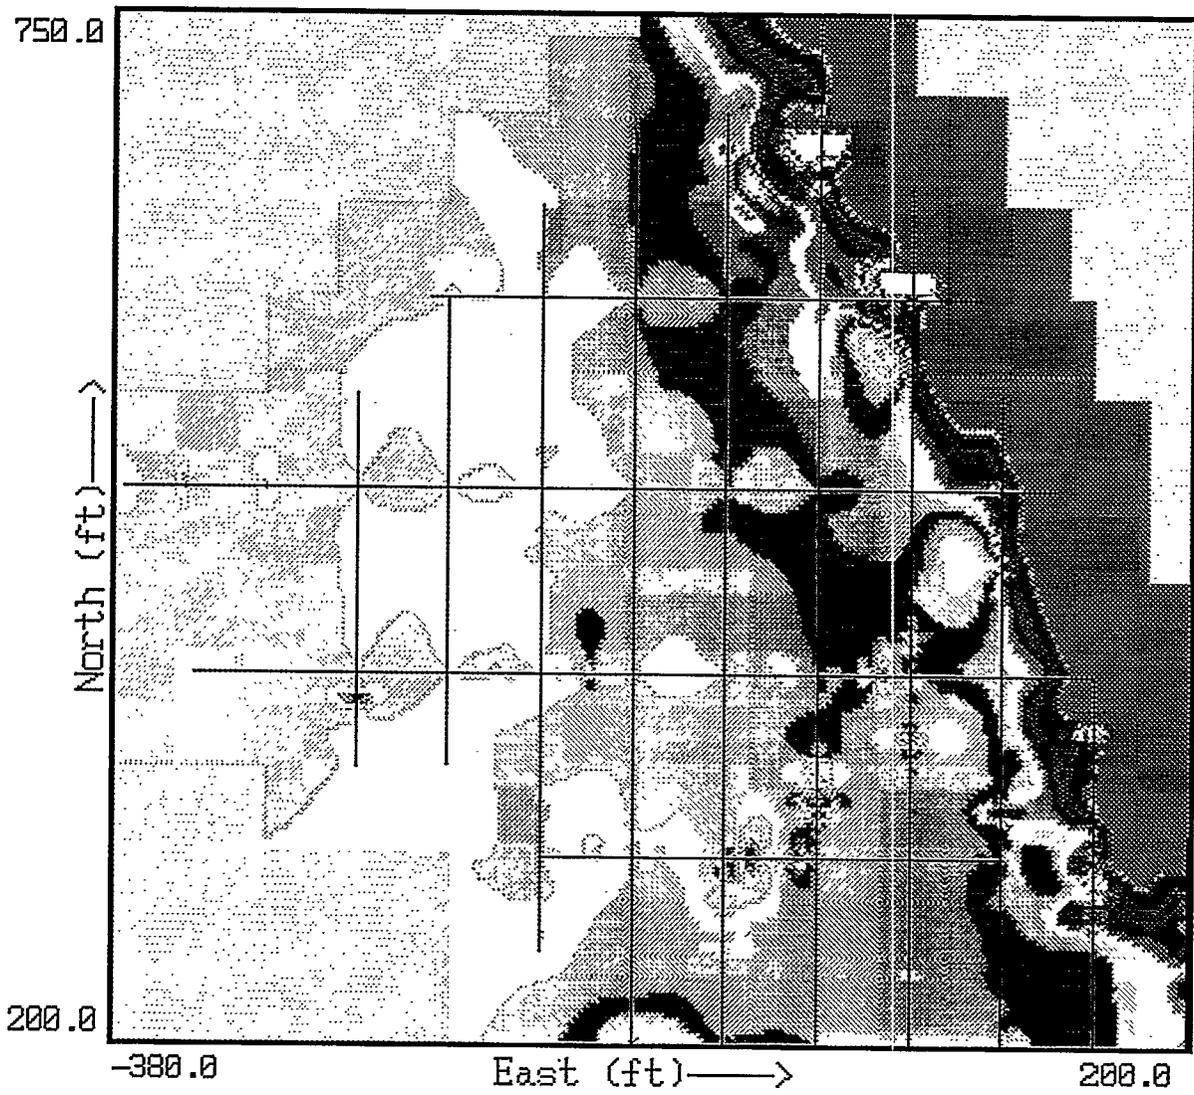

Kings Creek: Area 1 Magnetics (nT)


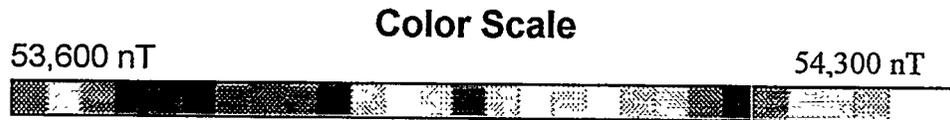


FIGURE 7 Area 1, Total Field Magnetics Map

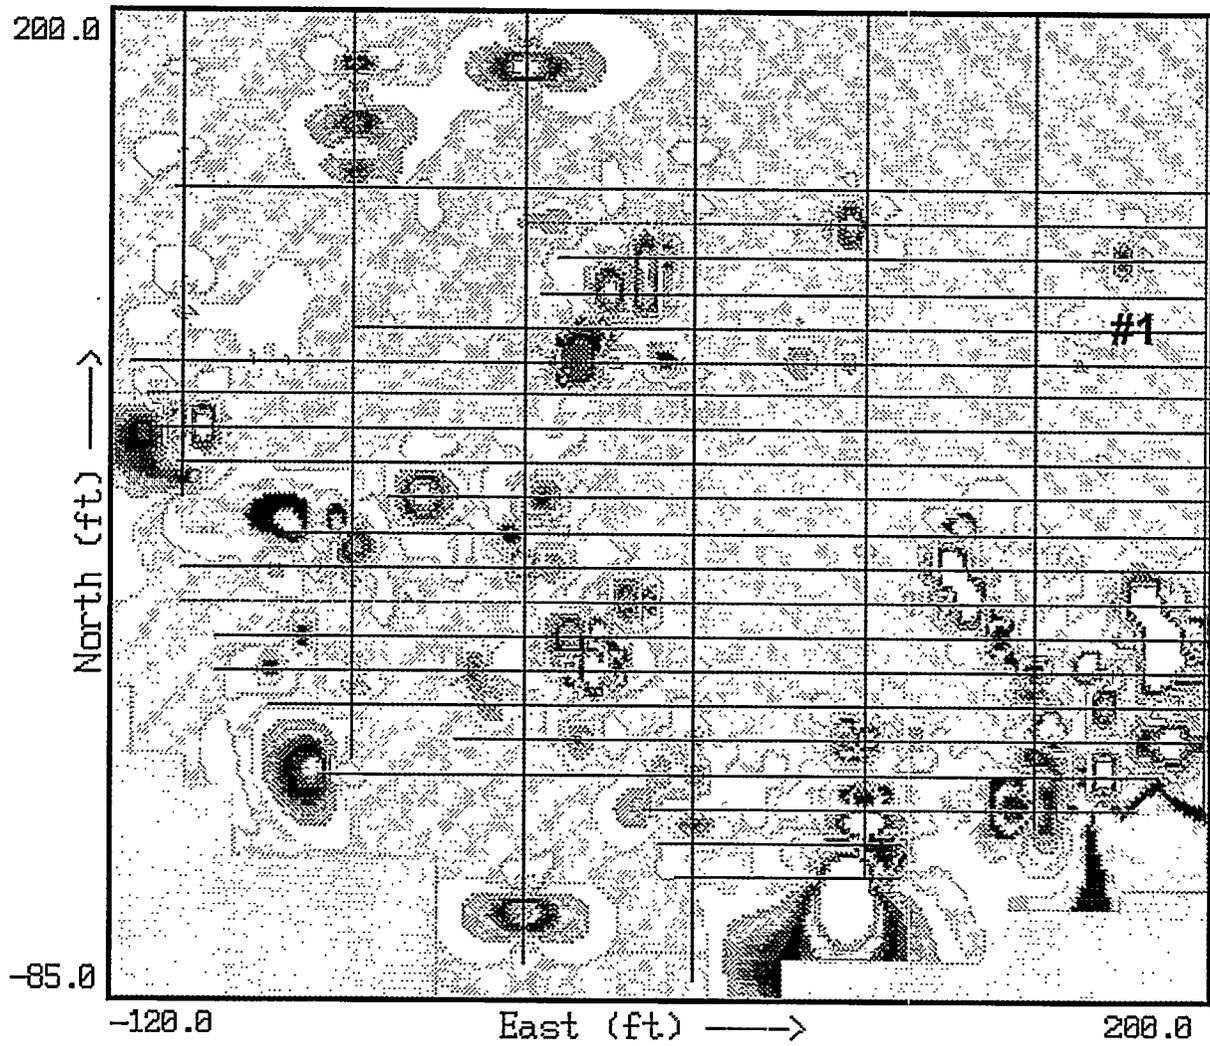

Kings Creek: Area 2 Magnetics (nT)

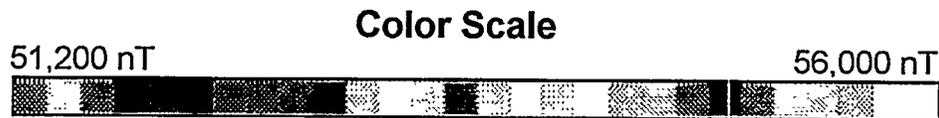


FIGURE 8 Area 2, Total Field Magnetics Map

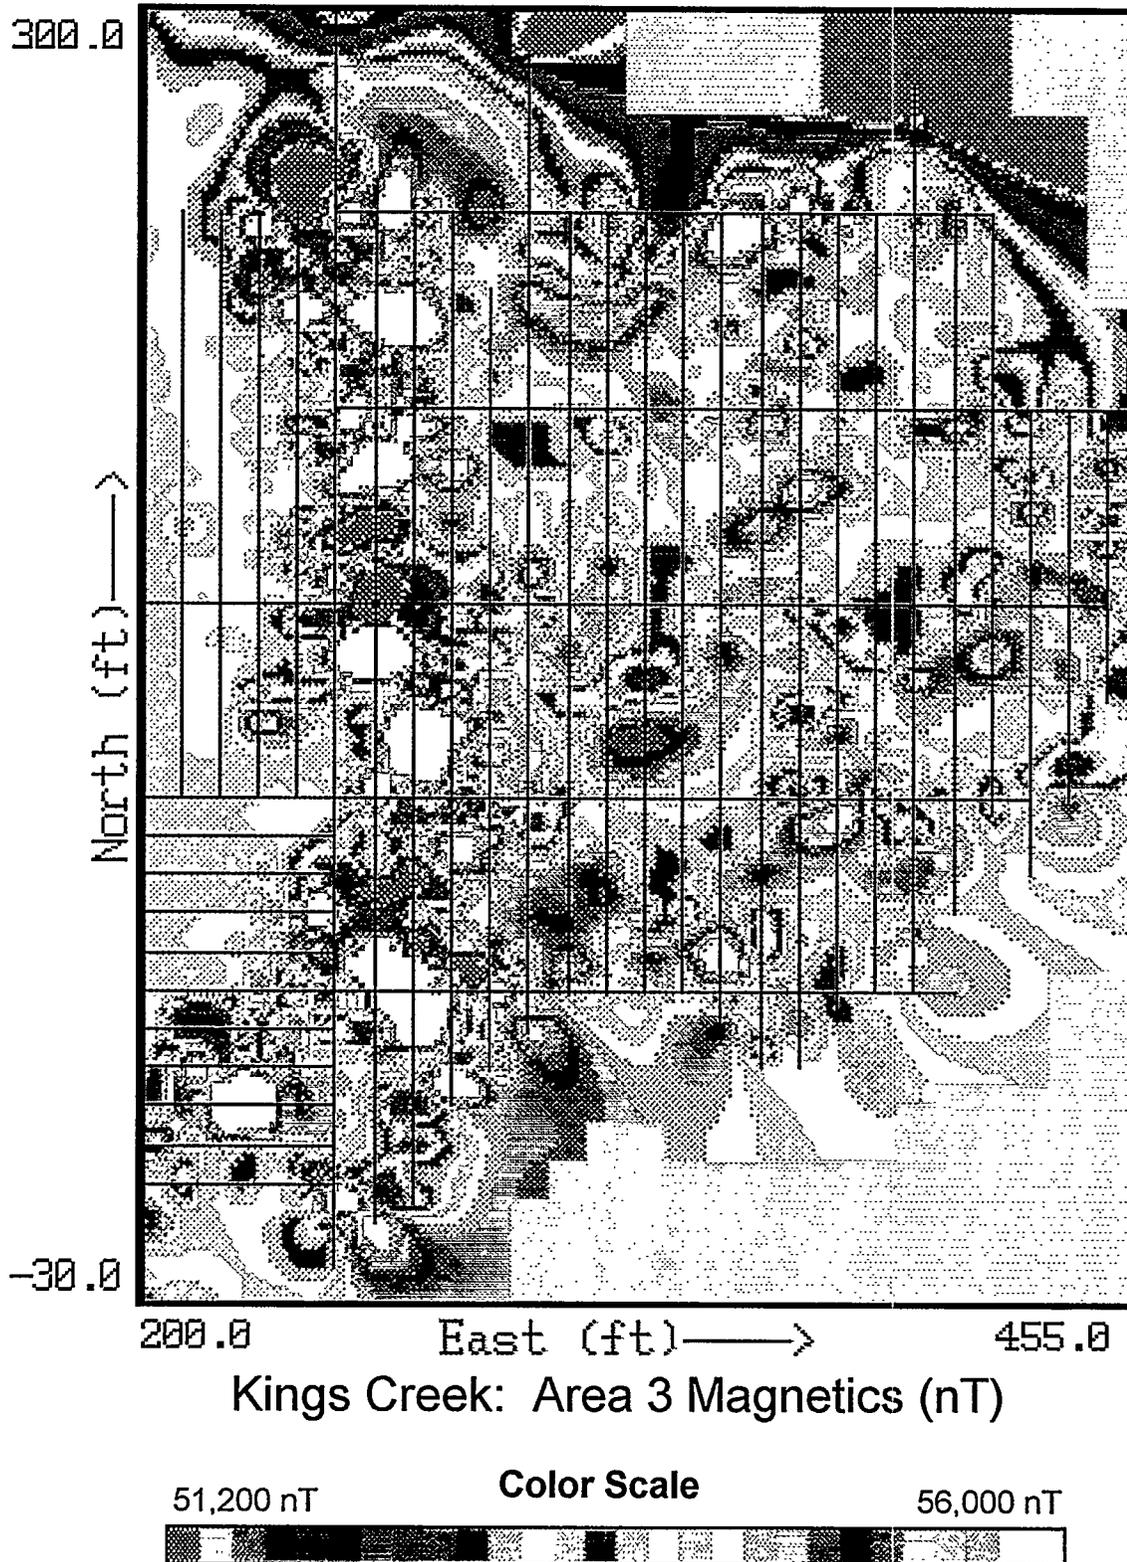


FIGURE 9 Area 3, Total Field Magnetics Map

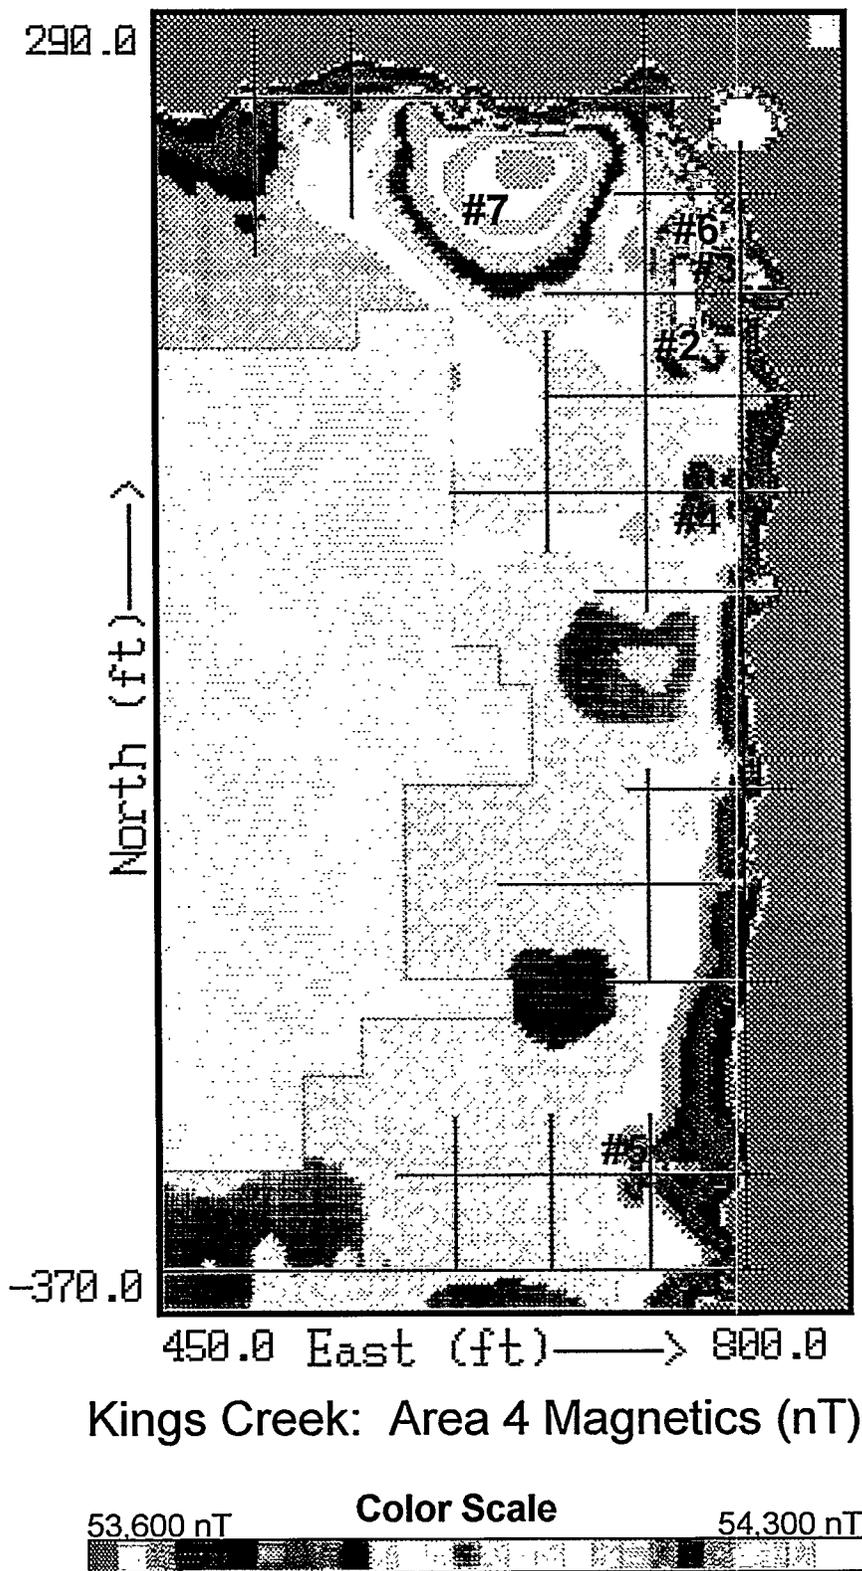


FIGURE 10 Area 4, Total Field Magnetics Map

Initially, the Kings Creek study area was surveyed along north-south traverses spaced 50 ft apart. East-west tie line traverses were collected at approximate 100-ft intervals where allowed by the vegetation cover. In-field analysis of the preliminary data indicated that Areas 2 and 3 (Figures 8 and 9) contained anomalies that required more detailed examination. Additional surveys were conducted in these two areas (the Kings Creek Disposal Site and the 30th Street Landfill) with profiles spaced 10 ft apart to further delineate the boundaries of the anomalies. Gradiometer surveys were performed between the total field survey profiles in Areas 1 and 4 to determine whether smaller clusters or point source ferrous features were inadvertently missed during the total field magnetic survey (see Section 2.2).

Errors introduced into the magnetic data due to uncorrected diurnal variations and insufficient response speed to changing signals were small compared with the amplitudes of the anomalies detected. Therefore, the anomalies displayed on the magnetic maps are qualitatively significant. Some error, however, can be introduced through inadvertent changes in instrument position or attitude relative to the ground surface. Moving around obstacles or changing walking pace may also produce some positioning error. Marks were placed on the data at 50-ft intervals and at the beginning and end of each survey line. Digital and graphic data readouts are included with the data logging computer. If significant errors were noted while conducting the survey, the profile was redone. Careful control of data acquisition and processing procedures kept errors to a minimum.

Magnetic anomalies detected in the survey area can, in many cases, be explained by ferrous objects on the surface; however, others remain unexplained. Anomalies were observed throughout the Edgewood area where amphibolite was used as road fill. Table 1 lists 71 magnetic anomalies (by area), their coordinates (at the center of each anomaly), and a brief description of each. If the anomaly encompassed a large area, a coordinate range is listed. Anomalies associated with the roadway and security fence systems, bounding the areas to the east and north, are not listed.

2.1.1 Area 1

Area 1 is a wooded location north of the Kings Creek Disposal Site (Figure 5). This area was surveyed to identify the northern boundary of the disposal site and determine whether this section was used as an undocumented burial site. Figure 7 presents the total field magnetic data for Area 1. The color contour interval for Figure 7 is reduced by a factor of seven from that presented in the map of the entire study area (Figure 6). This reduction results in smaller-magnitude anomalies appearing as a greater color contrast.

As listed in Table 1, the majority of the magnetic anomalies detected in Area 1 are caused by metallic debris visible at the surface. Other anomalies scattered throughout Area 1 are caused by unknown, buried sources.

TABLE 1 Location and Description of Magnetic Anomalies Detected in the Kings Creek Study Area

Area	Coordinates		Anomaly Description
	North	East	
1	690	0	Steam heat radiator and other metallic debris
	610	50	Cyclone fencing
	370	150	Gravel fill and metal culvert
	330	0	Source unknown
	300	-35	Source unknown
	385	-250	Metal canister
	500	-300 + -390	Two anomalies, source unknown
	270	150	Metal canister
	50	-345	Steel cable
	400	-125	Metal pipe
	300	-5	Source unknown
	400	30	Metal fragments
	420	50	Metal fragments
	365	50	Metal gas canister
	295	150	Source unknown
	2	180	0
150 to 190		-50	Burn pit and push-out with metal fragments
110 to 120		-100	Burn pit push-out
80		-90	Mound with metal drum fragments
75 to 80		-110	Round metal objects (fuses?)
50		-70	Source unknown, push-out area
10 to 50		-80 to -50	NE/SW-trending area of buried metal cylinders with tops at surface
60		-30	Mound of rusted cylinder and drum parts
50		-70	Source unknown, push-out area
60		5	Metal fragments, push-out area
45		0	Source unknown, push-out area
30		30 + 40	Two anomalies, source unknown, push-out area
10 to 20		15 to 30	Source unknown, mound with pine trees surrounded by non-vegetated area
-35 to -10		20 to 50	Area covered with rusted metal fragments
-5 to 15		-20 to -10	Area covered with rusted metal fragments
-20		-60	Metal on surface
-60		0	Source unknown
-50		90	Source unknown, shoreline
-35		100	Source unknown
-10		90 + 100	Two anomalies, metal debris, push-out
25 to 45		125 to 135	Pin flags and push-out mound
-30		140	Metal debris
0	150	Metal cylinder	
0	170	Metal debris	
-20	170	Source unknown, near shoreline	
-10	190	Source unknown, near shoreline	

TABLE 1 (Cont.)

Area	Coordinates		Anomaly Description
	North	East	
	5 to 40	180 to 190	Two railroad rails, possibly other buried material
	110	170	Source(s) unknown, location of GPR anomaly
	130	175	Source unknown
	140	95	Source unknown
	100	80 + 95	Two anomalies, source unknown
	100	40	Source unknown, push-out
	100	20	Metal debris
	115 to 135	20 to 40	Source unknown, push-out area
	140	0 to 15	Source unknown, push-out area
3	40	215	Source unknown
	10 to 30	220 to 240	Metal debris, probable buried fill
	0	250	Metal debris
	-10	260	Source unknown, shoreline
	40	300	Source unknown, edge of phragmites
	120	230	Source unknown, small mound
	180	210	Metal debris, small mound
	165	445	Metal debris at edge of survey
	250	350	Gravel pile
	250	335	Argonne trailer
	0 to 250	240 to 280	Linear anomalous area with some metal debris visible, approximate western edge of landfill
	50 to 250	280 to 450	Anomalous probable fill area, no visible metal, may extend farther south into phragmites
4	-300	700	Source unknown
	50	740	Metal fencing
	150	725	Metal fencing
	150	740	Metal fencing
	200	730	Source unknown

2.1.2 Area 2

Area 2 is a partially wooded location containing the former Kings Creek Disposal Site and associated push-out mounds of soil and debris. Stressed vegetation and bare ground are associated with previous activities at the site. The majority of this section was surveyed on a 10-ft grid spacing.

Figure 8 presents the total field magnetic data for Area 2. The southwestern portion of the area contains surficial metallic debris, including dismantled cylinders, fuses, and rusted metal chips. The southeastern portion of Area 2 contains surficial and buried metal objects and is probably the boundary of the 30th Street Landfill. Table 1 reveals that isolated anomalies, caused by unknown buried objects, are located throughout Area 2. One unknown anomaly, located at 110N/170E of the survey grid (#1, Figure 8), corresponds to the location of an anomaly detected during the GPR survey and may represent a small buried tank or drum.

2.1.3 Area 3

Area 3 (30th Street Landfill) is an open, brushy area bounded by low-lying cattail and phragmite wetlands to the east and south. The treeline to the west (approximately 250E on the survey grid) is the approximate boundary of the landfill. This section was surveyed on a 10-ft grid spacing.

The majority of Area 3 is magnetically anomalous (Figure 9). The eastern boundary of this section, with 3–4 ft of relief above sea level, likely represents the eastern edge of landfilling. Filling probably extended farther south into an area where heavy phragmite cover prevented surveying. The central portion of the landfill is covered with soil and vegetation. Some metallic objects are visible along the eastern boundary and, especially, the western boundary of Area 3, where cover soil has been removed or collapsed into cavities, creating holes 2–3 ft deep. Table 1 provides a description of the anomalies detected in Area 3.

2.1.4 Area 4

Area 4 is east of the 30th Street Landfill, separated from the landfill by wetland. This heavily vegetated section is divided by three arms of the wetland extending toward the east (Figure 5). Area 4 was surveyed on a grid spacing of 50 ft to determine whether additional landfilling occurred at this location. The grid orientation of Area 4 is slightly different from that in the other three sections to account for the section's irregular shape (see Figure 5). A magnetic map of Area 4 is presented in Figure 10; magnetic anomalies are listed in Table 1. The contour interval for Figure 10 is reduced in comparison to Figures 6, 8, and 9, resulting in smaller-magnitude anomalies appearing with a greater color change.


Five anomalies were detected during the total field magnetic survey in Area 4. Partially buried fencing (located at 150N/725E, 150N/740E, and 50N/740E) resulted in three anomalies (#2, #3, and #4, respectively, Figure 10). Two anomalies of unknown source at -300N/700E and 200N/730E (#5 and #6, respectively, Figure 10) may also be associated with fencing material. The color contour change in the north-central portion of Area 4 (#7, Figure 10) is an artifact of the contouring program. As indicated by the profile lines, no data were collected in this area, which is marsh.

2.2 Magnetic Gradiometer Survey

A magnetic gradiometer was used during the study to clear areas prior to placement of survey stakes and geophones. The gradiometer was also used between survey profiles in areas surveyed on a 50-ft grid spacing (primarily Areas 1 and 4). Fine-grid (10-ft) total field magnetic surveys were not conducted in Areas 1 and 4 because of the heavy vegetation cover and the relative lack of magnetic features detected during the 50-ft grid surveys. The instrument used for the magnetic gradiometer survey produces an audible signal that changes pitch over anomalous areas. The locations of anomalies detected during the gradiometer survey are overlaid onto magnetic maps in Figures 11 and 12.

Numerous small magnetic anomalies are scattered throughout the section north of the former Kings Creek Disposal Site. The black outlines on Figure 11 represent areas where the density of anomalies was too high for individual identification. Metallic debris, including fencing and construction debris as well as amphibolite gravel, is visible near the fenceline to the east. The larger features to the southwest are associated with metallic debris pushed out of the former burn pits. The origin of the northeast-to-southwest-trending anomalous area is unknown, but the feature may represent a former road leading to the Kings Creek Disposal Site.

Area 4 also contains numerous small magnetic anomalies (Figure 12). The majority of the anomalies are located near the current fenceline and represent old fencing material. The origin of other scattered anomalies, located away from the fenceline, is unknown.

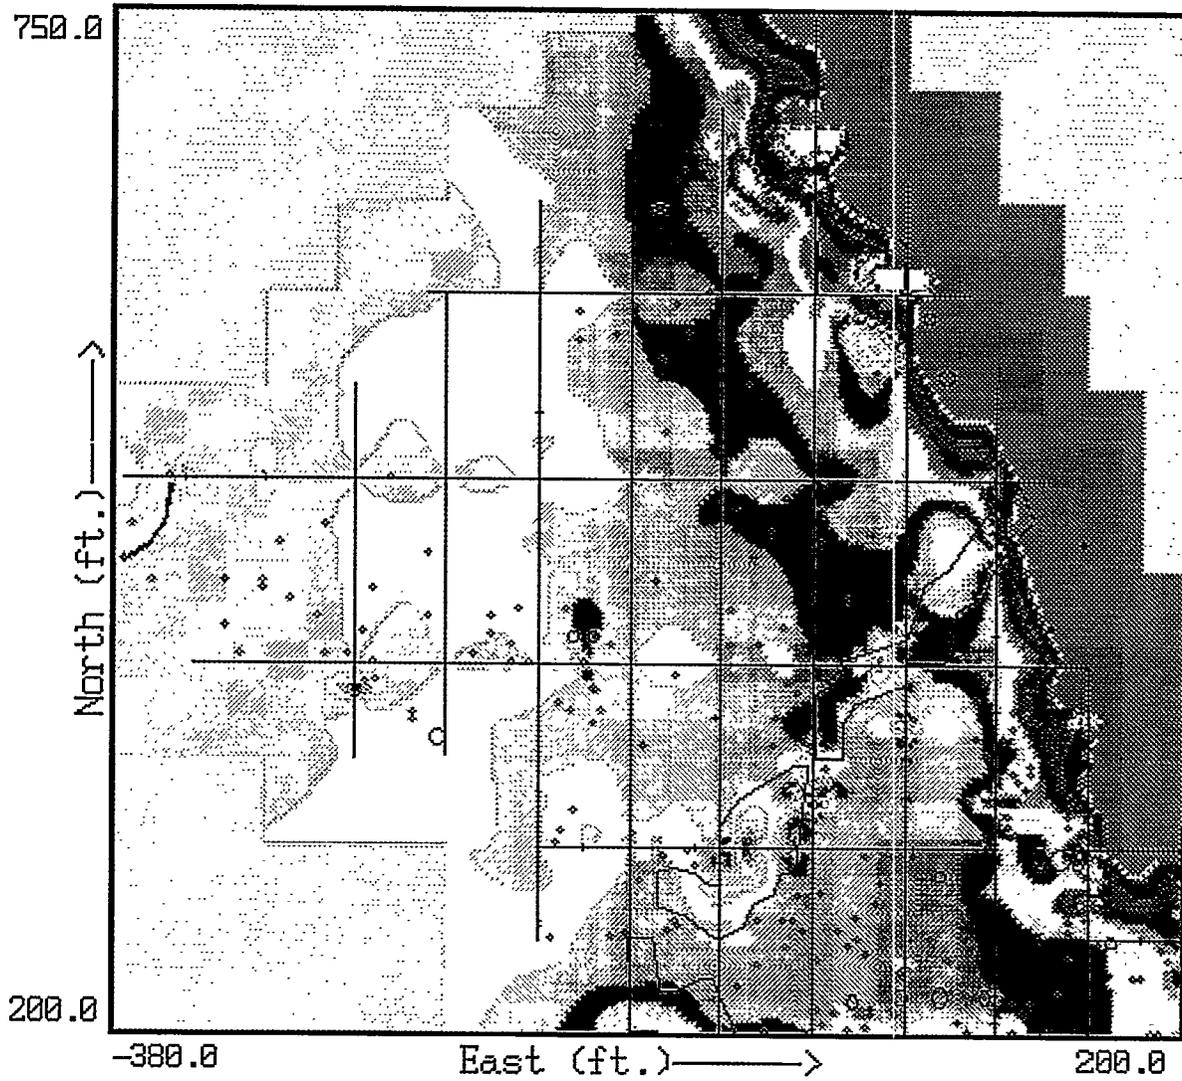

Magnetic (nT) Overlain by Schonstedt


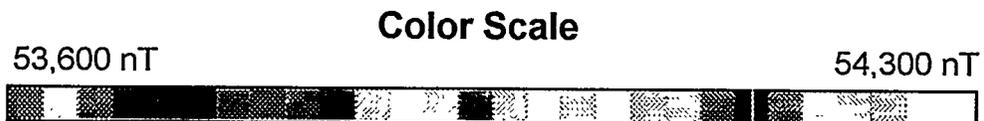


FIGURE 11 Total Field Magnetics Map Overlain by Magnetic Gradiometer Anomalies, North of Former Kings Creek Disposal Site

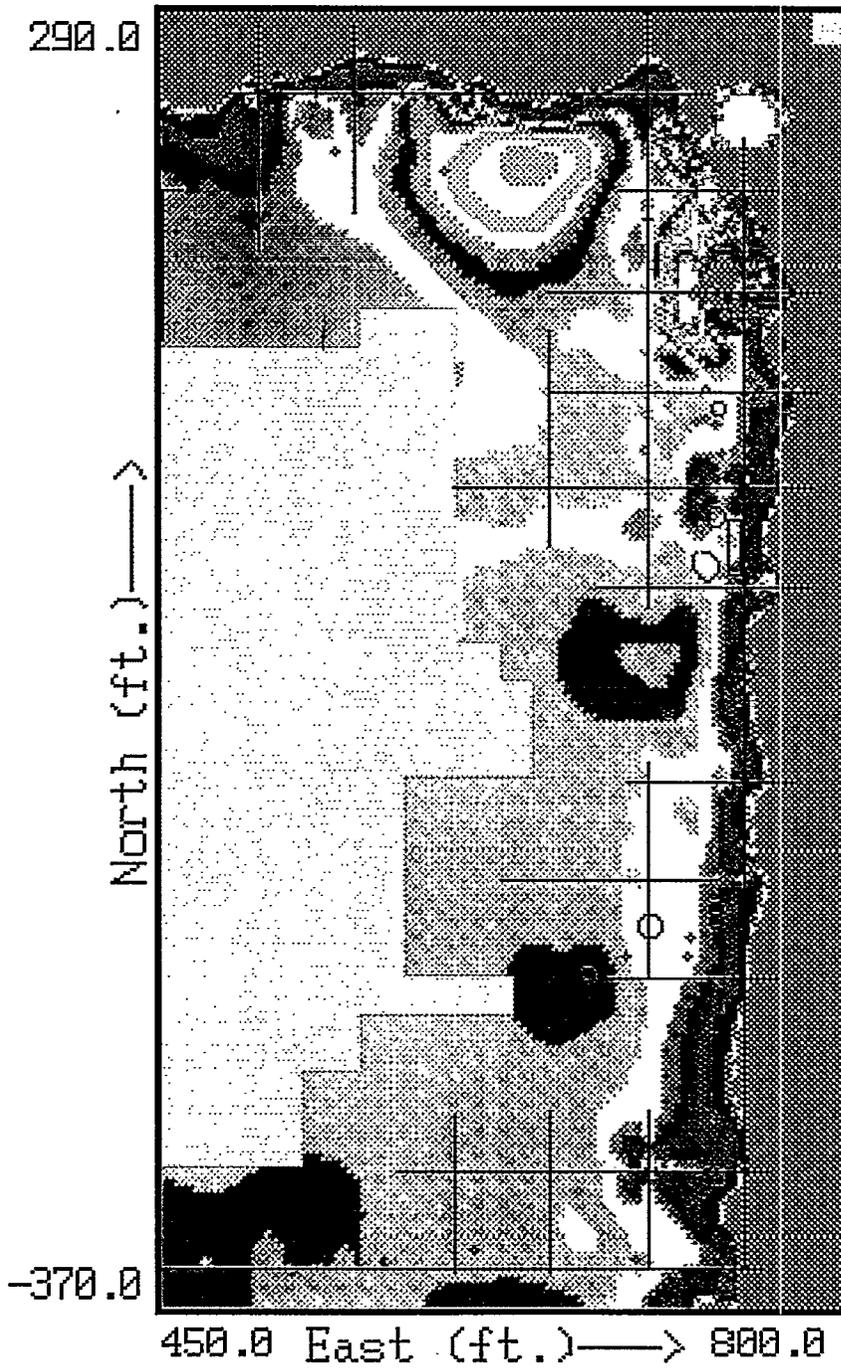

Magnetics (nT) Overlay by Schonstedt



FIGURE 12 Total Field Magnetics Map Overlay by Magnetic Gradiometer Anomalies, East of 30th Street Landfill

3 Electrical Conductivity Survey

Horizontal conductivity measurements were obtained by using a Geonics EM-31, an electromagnetic induction instrument that provides mean values of apparent conductivity in the subsurface. Data were collected on 50-ft and 10-ft transects similar to those used for the total field magnetic survey (Figure 5). Data were acquired every 0.5 s, resulting in data points spaced 1.0–1.5 ft apart, depending on traverse rate. Fiducial marks were placed every 50 ft to correctly position the data within each profile. Figure 13 is a color contour map of the conductivity values of the entire study area.


The EM-31 instrument measures the apparent subsurface conductivity from just beneath the land surface to a depth of approximately 18 ft. Factors affecting subsurface conductivity include the following: depth to groundwater, chemical composition of groundwater, presence of clay minerals, type of clay minerals, presence of metals, and presence of amphibolitic roadfill. The EM-31 data were interpreted in conjunction with the magnetic, GPR, topographic, and boring data for the Kings Creek study area. These other data were used to help identify the potentially conflicting factors affecting the measured apparent conductivity.

The EM-31 survey area was divided into the same four sections used for the magnetic data survey (Figures 14 through 17). Apparent conductivities shown on the maps range from approximately -60 to 380 mS/m; the greatest conductivity ranges were observed near the 30th Street Landfill and near large surficial metallic objects (fences and debris). Although metals are good conductors, their shape and orientation in relation to the EM-31 instrument can result in an electromagnetic field in which the apparent conductivity, as read by the EM-31, is negative. Negative conductivities are an artifact of crossing high-conductivity gradients with the EM-31 boom. When crossed at right angles by the EM-31, an elongated piece of metal (such as a buried pipe) will produce three banded anomaly lineaments. The lineaments will consist of a central minimum bounded by two maxima (Geonics Limited 1992). This EM-31 signature for buried pipes has previously been observed at Beach Point in APG (see McGinnis et al. 1994a). The EM-31 contour interval in the figures representing Areas 1 and 4 (Figures 14 and 17) has been reduced from that presented in Figure 13, which represents the entire study area, to illustrate the more subtle conductivity changes in these less disturbed areas.

EM-31 measurements were also collected during an offshore geophysical survey performed by ANL. The surveyed area included the near shore adjacent to the Kings Creek study area. A portion of the offshore EM-31 survey data is discussed in conjunction with the onshore data from Area 3.

3.1 Area 1

Conductivity values for Area 1 are shown in Figure 14. Two low-conductivity anomalies, located in the northern portion of Area 1 at approximately 690N/00E and 650N/30E (#8 and #9, respectively, Figure 14), are associated with metallic debris. A conductivity high was found at

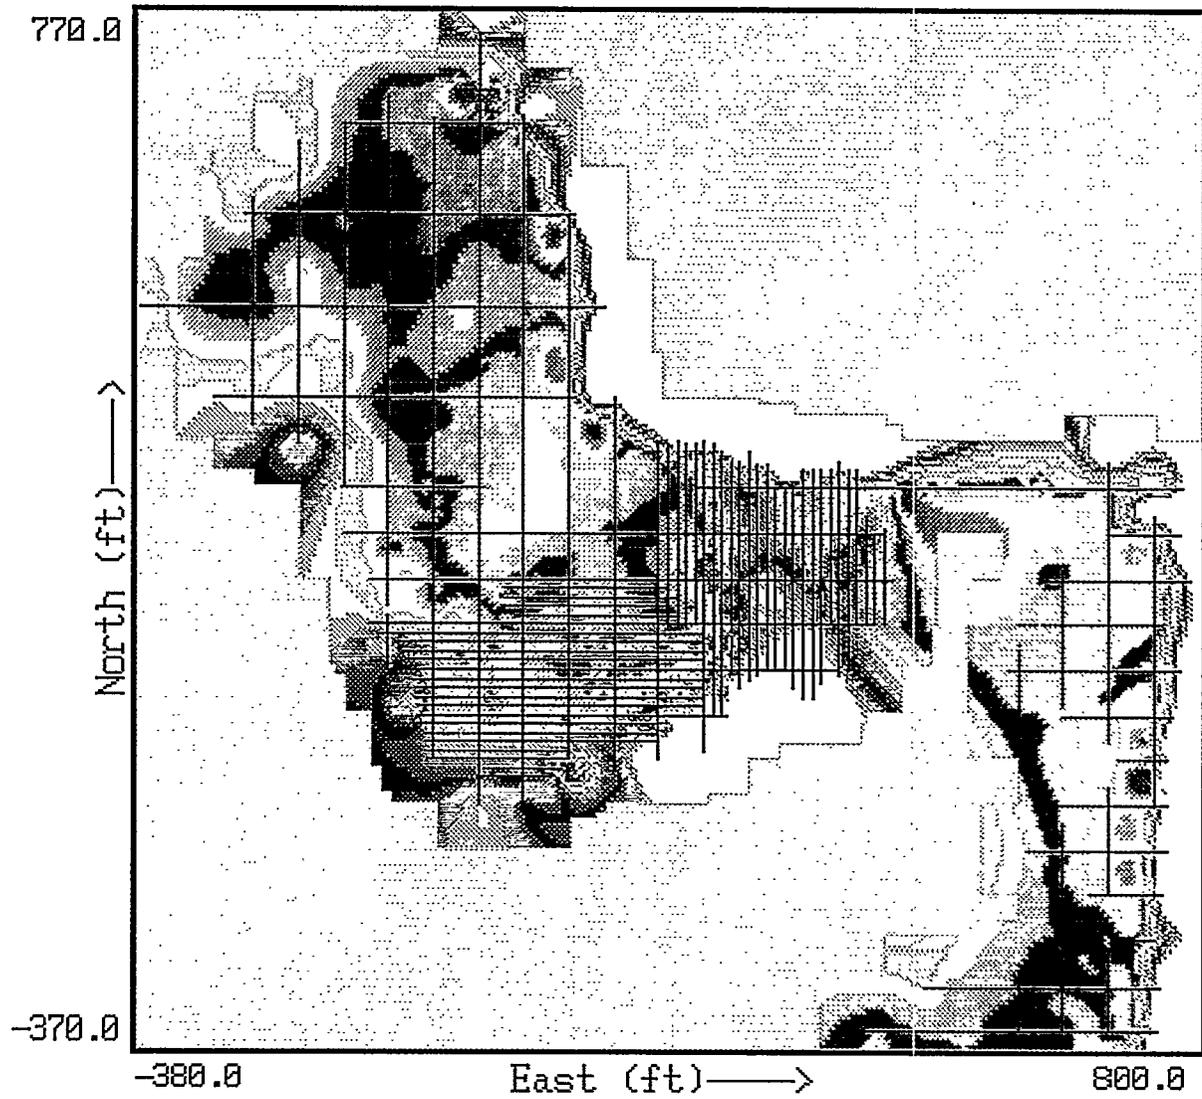

Kings Creek: EM-31 (mS/m)


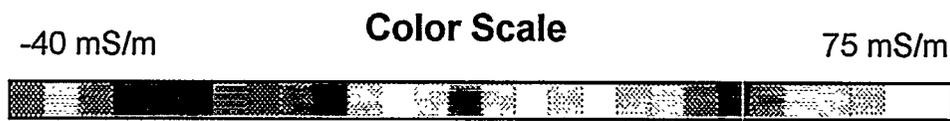



FIGURE 13 Kings Creek Study Area, EM-31 Electromagnetics Map

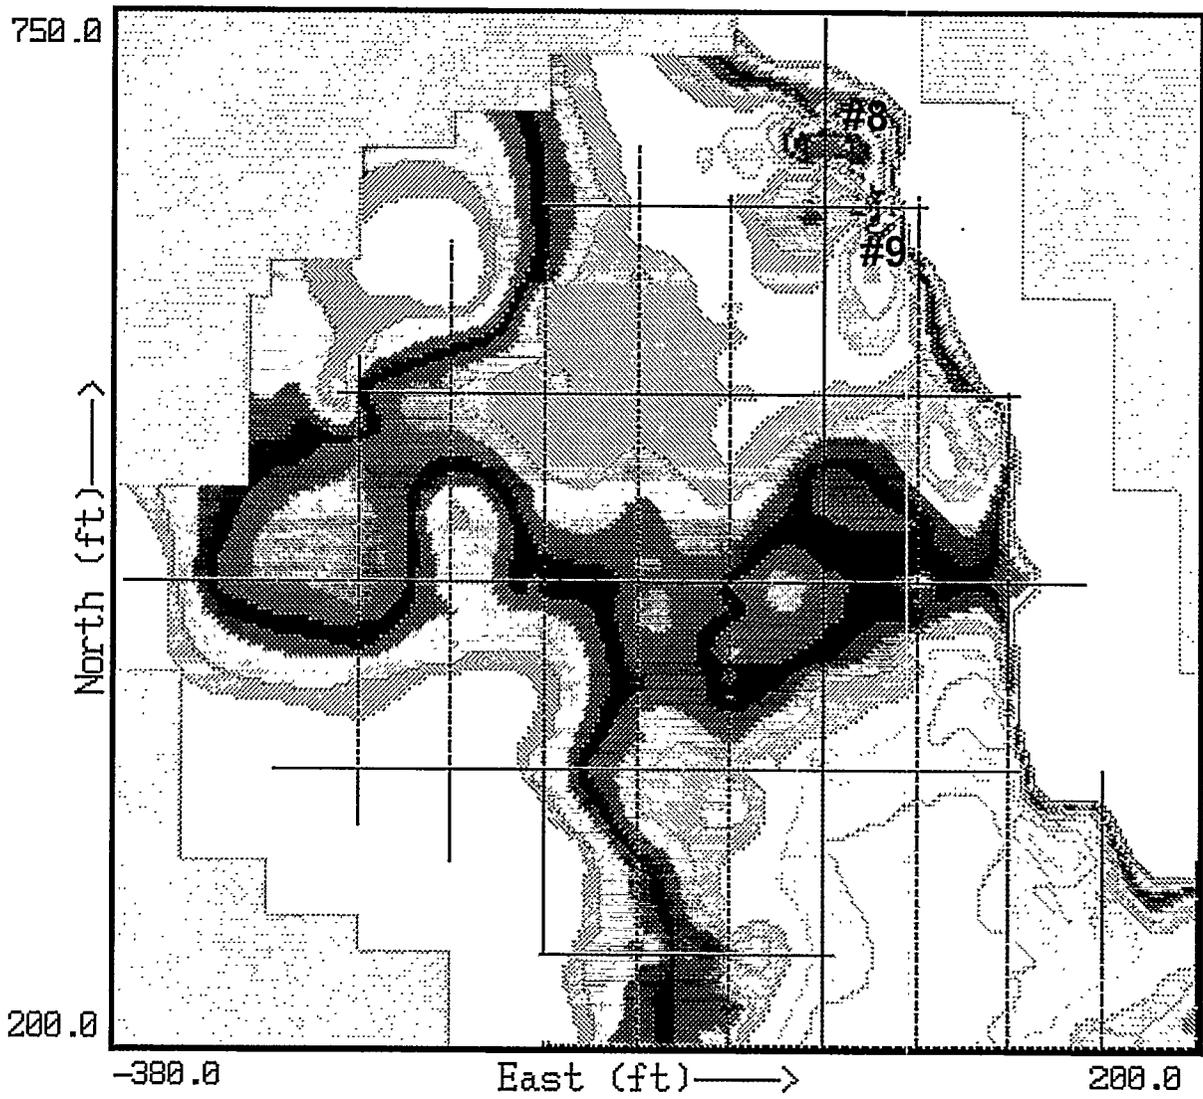


Kings Creek: Area 1 EM-31 (mS/m)



FIGURE 14 Area 1, EM-31 Electromagnetics Map

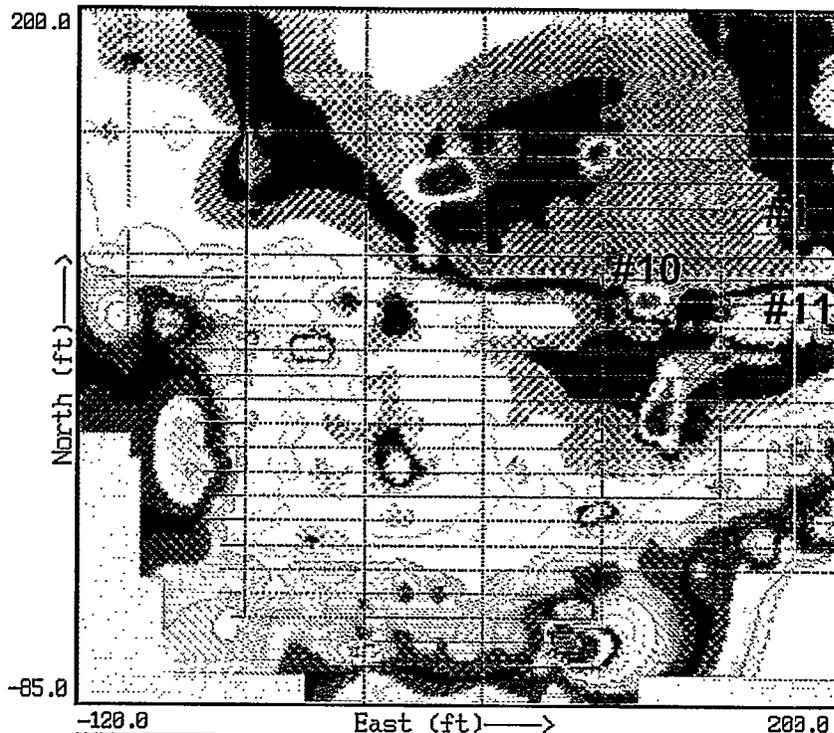

A

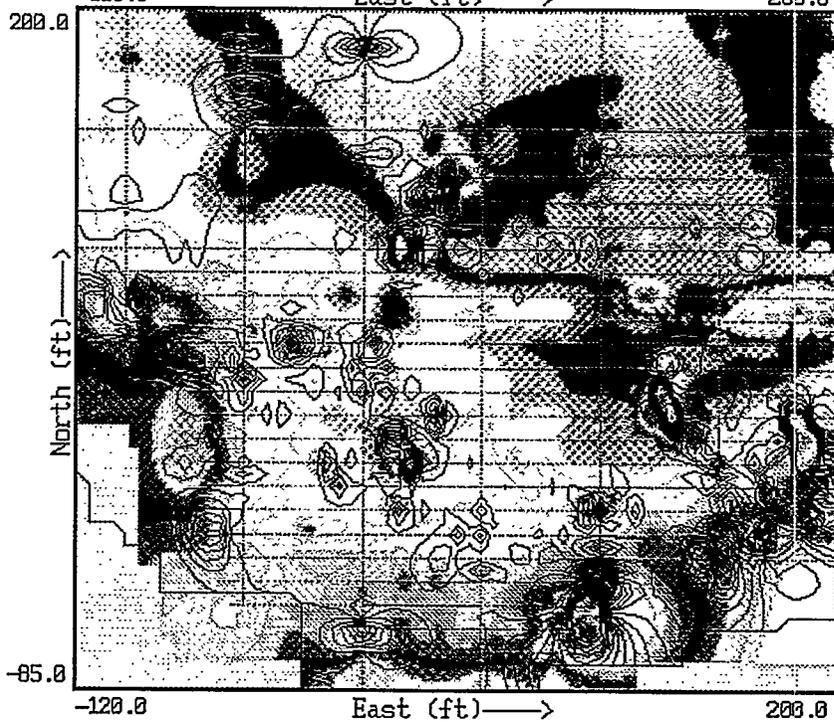


B

Kings Creek: Area 2 EM-31 (mS/m)




FIGURE 15 A: Area 2, EM-31 Electromagnetics Map; B: Area 2, EM-31 Overlain by Magnetic Contours

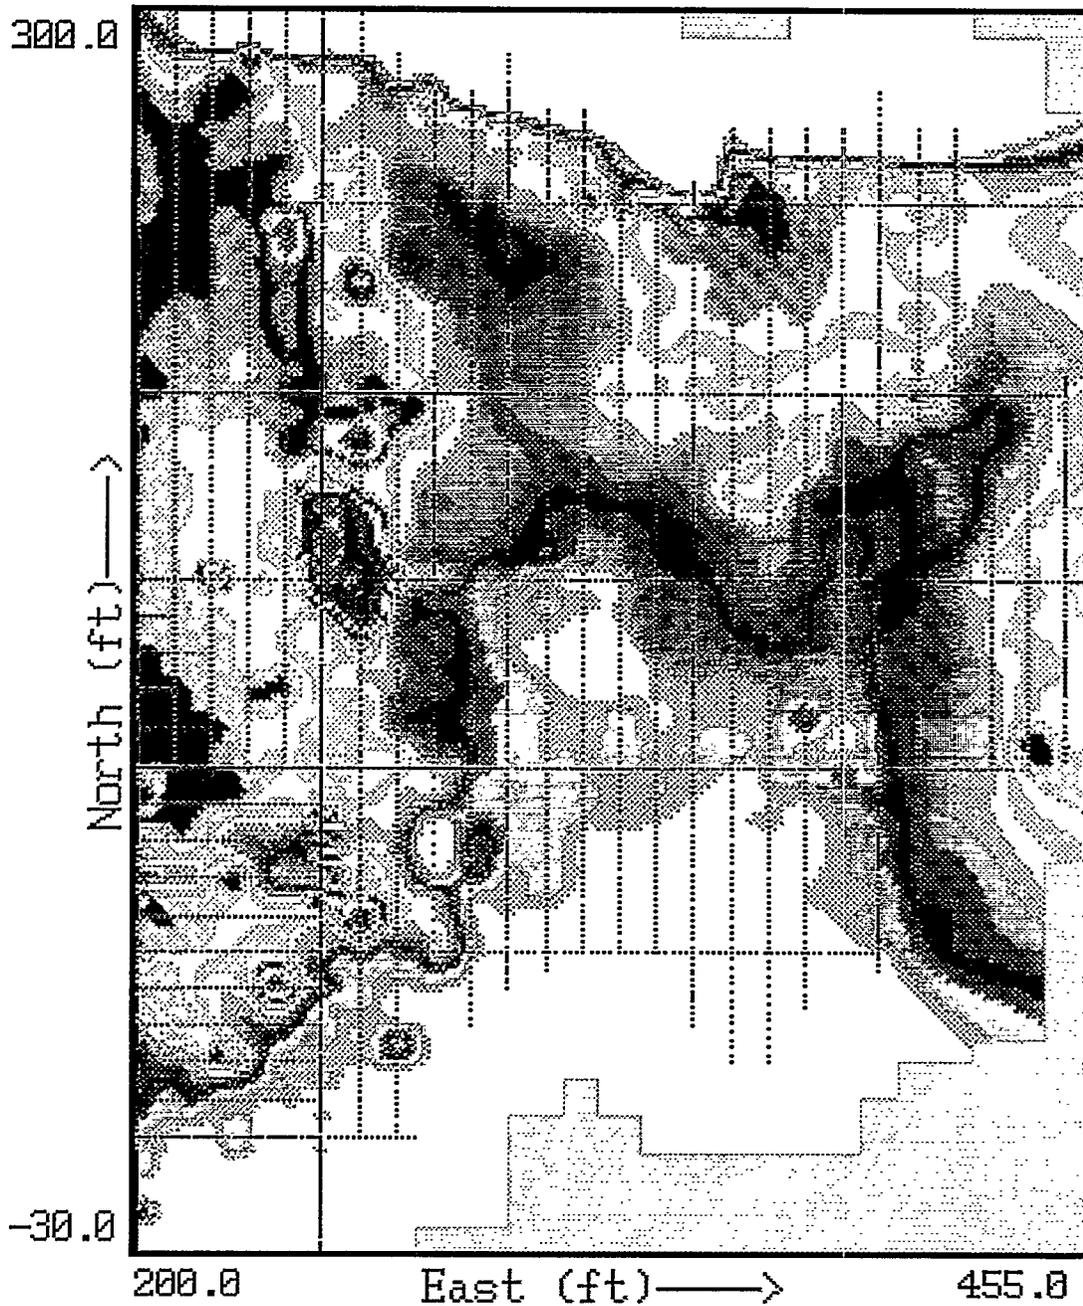

Kings Creek: Area 3 EM-31 (mS/m)



FIGURE 16 Area 3, EM-31 Electromagnetics Map

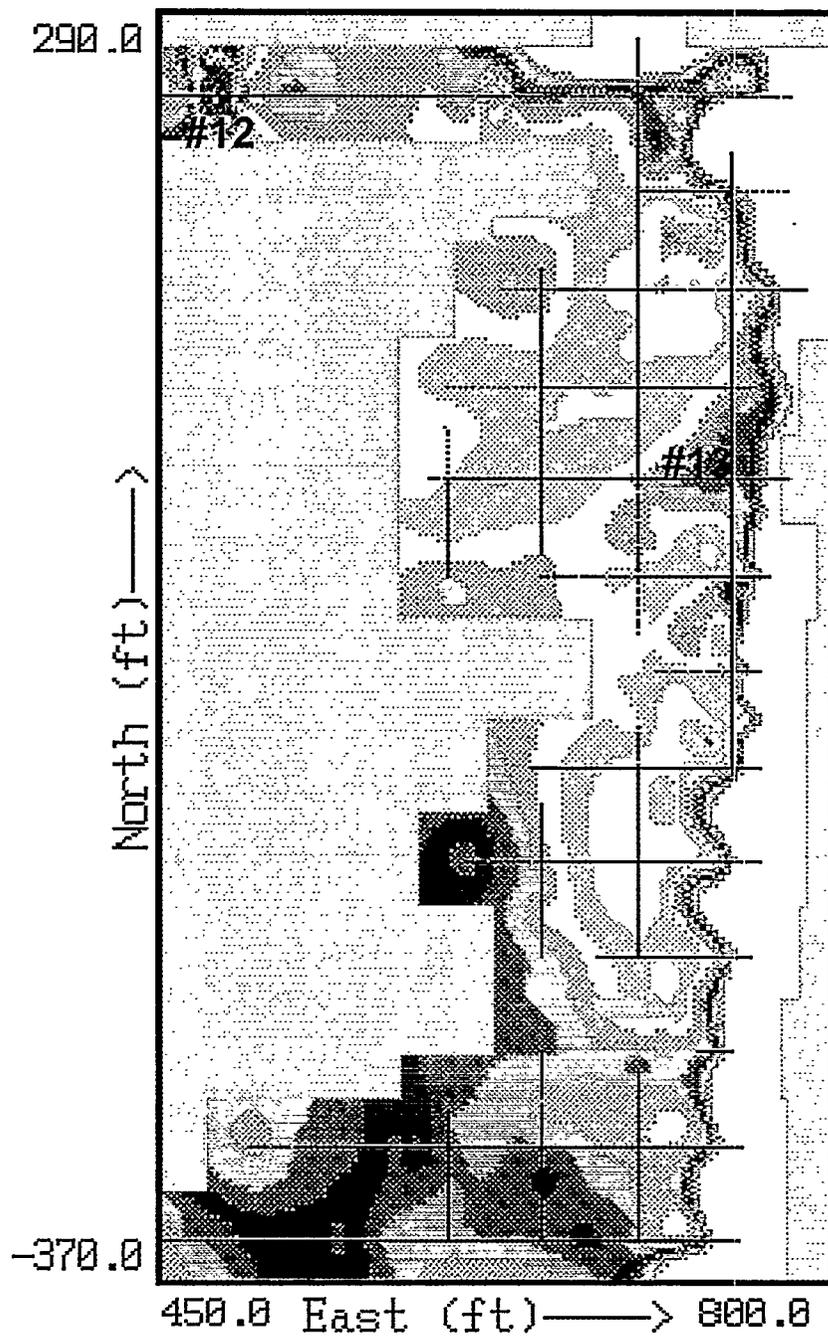

Kings Creek: Area 4 EM-31 (mS/m)

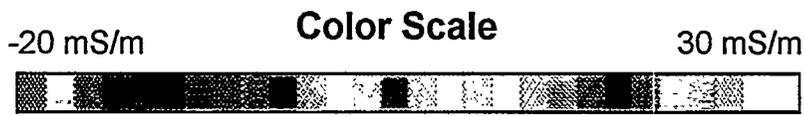


FIGURE 17 Area 4, EM-31 Electromagnetics Map

the fenceline along the eastern boundary of Area 1. Metallic objects can provide either a high or low conductivity anomaly depending upon their size, shape, and orientation. Other highs along the northwest, west, and southwest edges of the section are likely caused by the surface water in Kings Creek.

The northeast/southwest-trending, relatively higher-conductivity feature detected in the central portion of Area 1 is likely caused by the site topography (Figure 2). Generally, the depth to the water table in lower topographic areas will be shallower, resulting in a higher average conductivity for the relatively shallow depths measured by the EM-31 (i.e., the upper 18 ft). Lithology may also be a factor; if more clays are present in the shallow subsurface, slightly higher conductivities will result.

3.2 Area 2

Conductivity values for Area 2, the approximate location of the former Kings Creek Disposal Site, are shown in Figure 15A. The figure shows several isolated areas of low conductivity, indicated by the colder colors. Most of these low-conductivity zones correspond to buried or surficial magnetic anomalies. Figure 15B shows the EM-31 conductivity contours (in color) overlain by the black line magnetic contours. Two low-conductivity anomalies detected by the EM-31 at 80N/120E and 70N/180E (#10 and #11, respectively, Figure 15A) do not correspond to magnetic anomalies. This finding may result from a positioning error during the magnetic survey caused by the thick vegetative undergrowth in these areas. Another low-conductivity anomaly, located at 110N/170E (#1, Figure 15A), was detected during both the magnetic and GPR surveys.

In general, no features indicative of lithologic change or buried paleochannels are revealed by the EM-31 data for Area 2. Conductivities gradually increase toward Kings Creek, which would be expected based on the presence of surface water and metallic debris at some locations (Figures 15A and 15B). No large-scale buried features were detected by the EM-31 survey in the former Kings Creek Disposal Site.

3.3 Area 3

Conductivity values for Area 3, the approximate area of the 30th Street Landfill, are shown in Figure 16A. The complex patterns of EM-31 anomalies, located along the western and southwestern boundaries of the 30th Street Landfill, likely represent buried and surficial metallic debris.

The conductivity feature of most interest in Area 3 is the centrally located zone of relatively higher conductivity. This feature is believed to represent the site of a former estuary that was later used as a landfill. The EM-31 data correspond to the location of the former estuary, with upstream

lobes extending toward the northwest and northeast. Additional evidence of a deeper paleochannel at this location, both onshore and offshore, is presented with the discussion of the GPR surveys in Section 5.

EM-31 data were also collected in the offshore portion of the embayment adjacent to Area 3. The location of this portion of the offshore survey is shown in Figure 18. The electromagnetic data reveal relatively higher conductivities 200 ft into Kings Creek (Figure 19). These higher conductivities indicate the presence of clayey estuarine sediments and groundwater with relatively higher conductivity. A more detailed evaluation of the offshore geophysical study will be presented in a separate report.

3.4 Area 4

Conductivity values for Area 4, east of the landfill/disposal areas, are shown in Figure 17. One low-conductivity anomaly, located at 250N/490E (#12, Figure 17), represents a steel culvert beneath the roadway. As described in the beginning of this section, the shape and orientation of

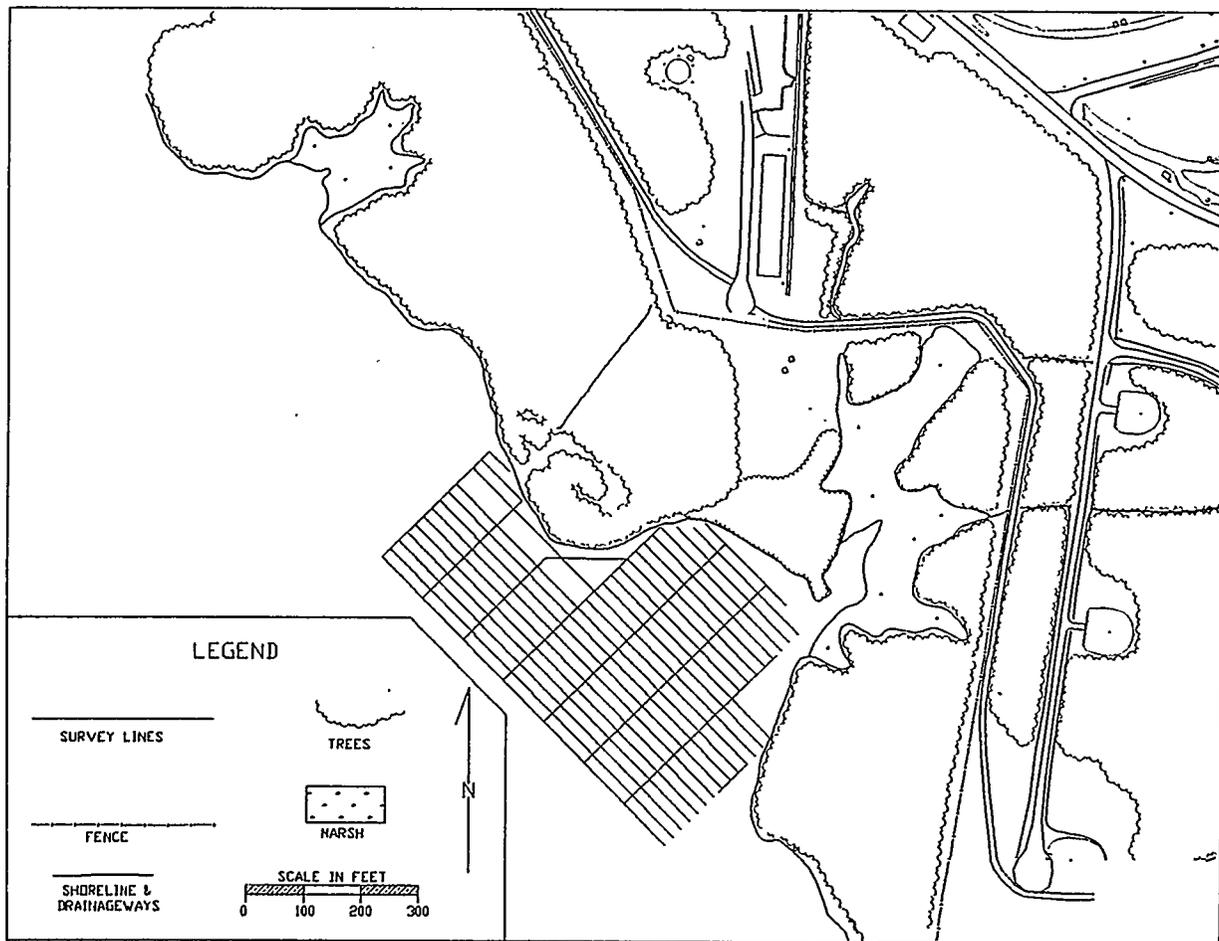


FIGURE 18 Location of EM-31 Offshore Profiles

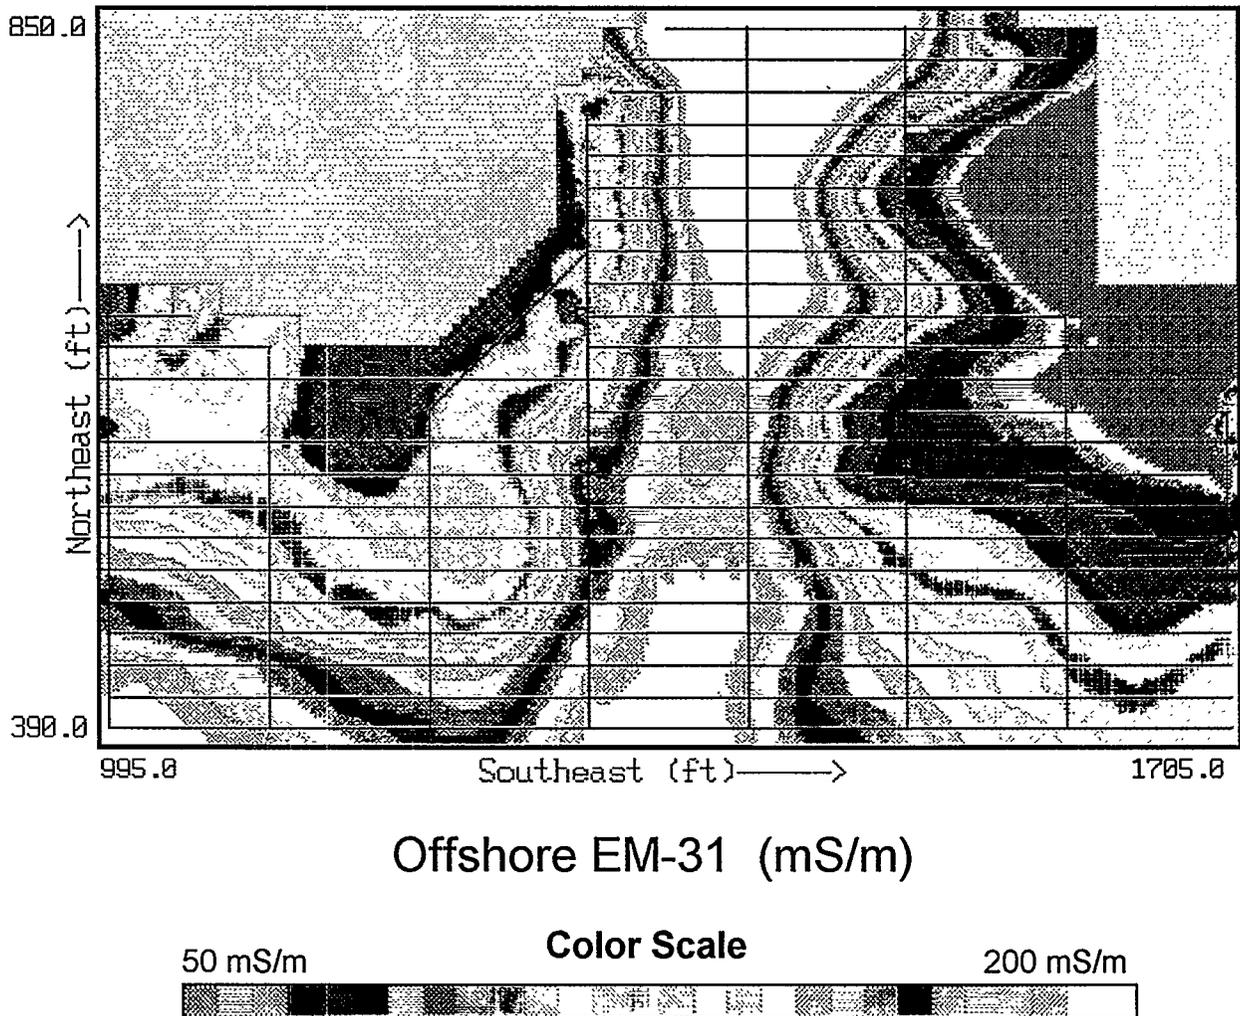


FIGURE 19 Kings Creek Offshore EM-31 Electromagnetics Map

the metal culvert can produce an apparent conductivity low. High-conductivity anomalies, caused by the fence line and the amphibolite roadfill material, were found in the northern portion and along the eastern edge of Area 4. Also, partially buried fencing material, located at approximately 50N/730E (#13, Figure 17), may create the conductivity high extending westward at this location.

The data presented in Figure 17 were plotted using a smaller contour interval than that used for Areas 2 and 3 to highlight the more subtle conductivity changes in this relatively quiet area. Slightly higher conductivities in the southern portion of Area 4 likely represent a greater clay content in the upper 18 ft of sediment. A recently installed soil boring (WBR-27) in this area (approximate location shown in Figure 20) exhibited predominantly clayey sediments to 19 ft below surface, with a sand zone between 9.0 and 13.6 ft. Farther north in Area 4, conductivities were lower because of greater amounts of sand in the subsurface. The lithology found in recently installed soil boring WBR-23 (Figure 20) was predominantly sands and silty sands to

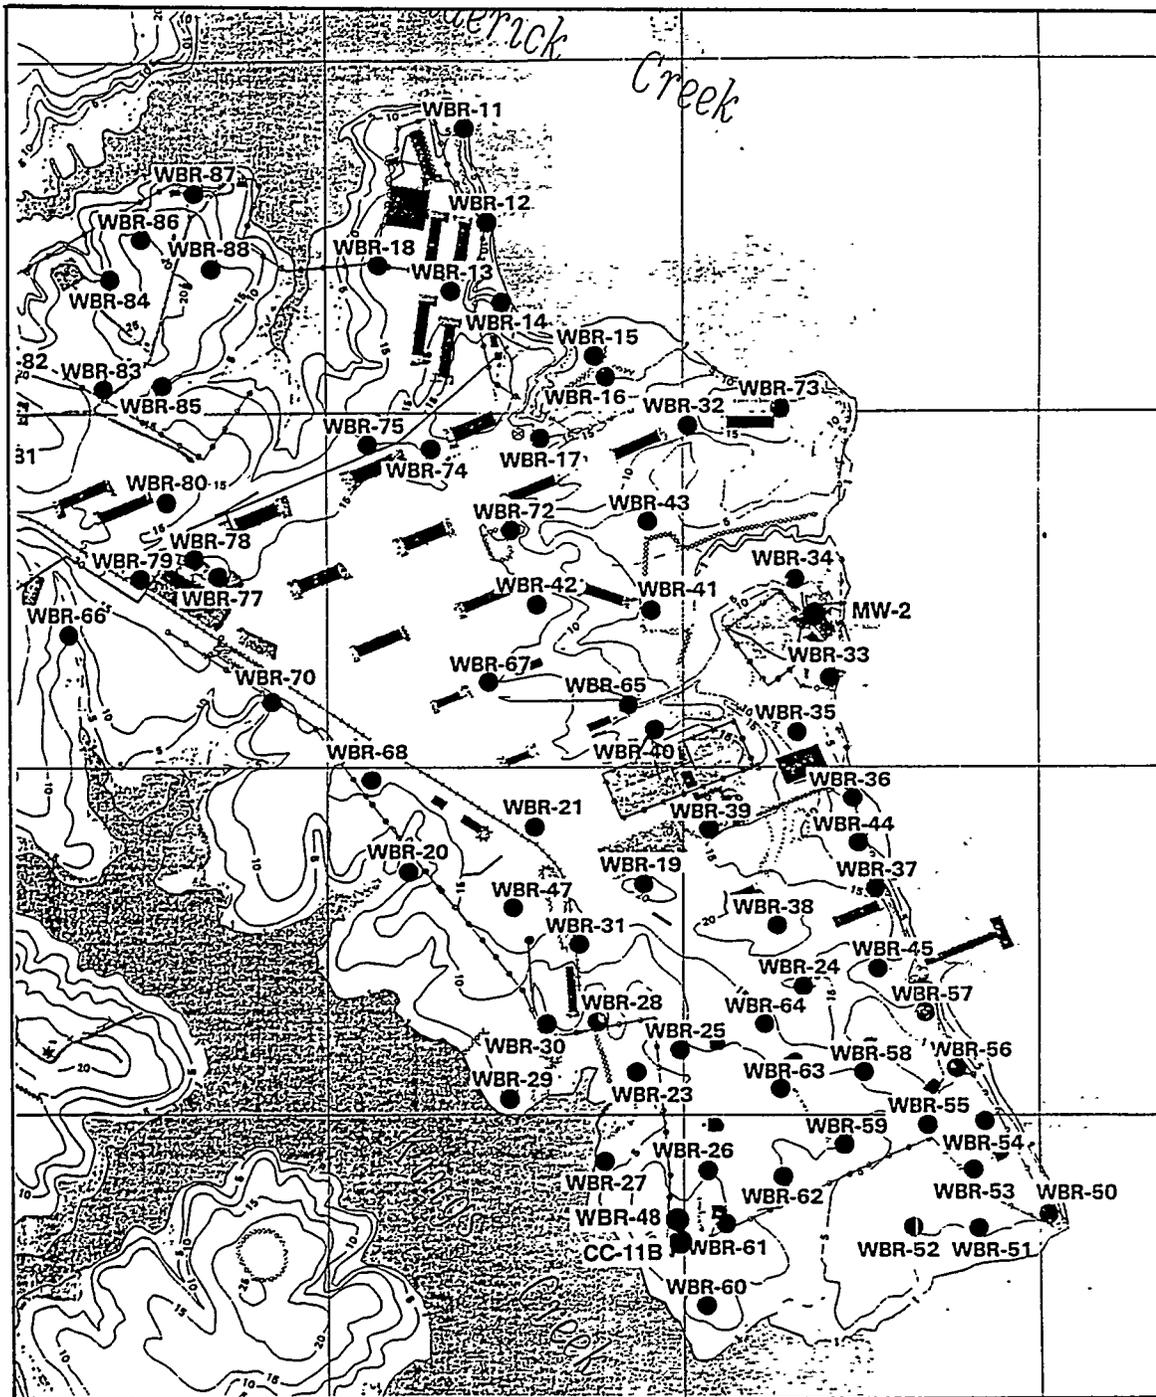


FIGURE 20 Monitor Well Location Map, Bush River Peninsula (adapted from U.S. Army Corps of Engineers 1994)

approximately 41 ft below land surface. Conductivity, soil boring, and GPR data (see Sections 4 and 5) indicate that a paleochannel, trending east-west, is present at this location. Boring logs are included as Appendix A.

4 Geophysical Well Logging

Downhole natural gamma and electromagnetic induction (conductivity/resistivity) well logging were performed on eight monitor wells installed in 1994 (WBR-19, WBR-20, WBR-23, WBR-35, WBR-38, WBR-42, WBR-43, and WBR-47) and two previously installed site monitor wells (CC-11B and MW-2) on the Bush River Peninsula (Figure 20). The natural gamma and conductivity/resistivity well logs are presented in Appendix B. Four of the logged wells (WBR-19, WBR-20, WBR-23 and WBR-47) are located in the vicinity of the Kings Creek study area. Following the Kings Creek geophysical surveys, monitor well WBR-48 was installed adjacent to monitor well CC-11B. Boring logs for these five wells are included in Appendix A. In addition to the natural gamma and electromagnetic induction downhole geophysical techniques, downhole seismic logging was performed on monitor well CC-11B; the results of the downhole seismic logging are presented in Section 6.2.

Prior to the insertion of the downhole well logging equipment, the headspace of the monitor well was checked with a photoionization detector and a Geiger-Mueller counter. The downhole probes and cable were decontaminated following logging at each well by washing with a nonphosphate detergent and double rinsing with distilled water. Paper towels used to wipe the probe and cables were also surveyed by using the Geiger-Mueller counter.

A logging speed of 10 ft per minute was employed with each method. Data were collected going both up and down the wells to check for repeatability. All data were stored on the field computer used to operate the logging programs.

The natural gamma logging technique measures naturally occurring gamma radiation in the subsurface. In general, higher gamma activity is found within clayey sediments than within sands. Electromagnetic induction data indicate the subsurface conductivity, which is primarily a function of the pore water chemistry below the water table. Natural gamma, conductivity, and resistivity (which is the inverse of conductivity) logs are presented in Appendix B. Soil boring logs for monitor wells WBR-19, WBR-20, WBR-23 and WBR-47, located near the Kings Creek study area (Figure 20), were available to compare the downhole geophysical data with the actual lithology found in these boreholes. A column presenting the lithology, as obtained from the soil boring logs, has been added to the natural gamma and conductivity/resistivity logs for these four wells (Appendix B). A column presenting the lithology obtained from the soil boring log for monitor well WBR-48 (recently installed adjacent to monitor well CC-11B) has been added to the natural gamma and conductivity/resistivity logs for monitor well CC-11B. A good correlation between the geophysical logs and the soil boring logs for these four wells is evident.

5 Ground-Penetrating Radar Surveys

The primary objective of the GPR surveys was to provide a better understanding of the shallow stratigraphy in and around the King's Creek Disposal Site and the 30th Street Landfill. GPR was also used to help locate buried anthropogenic anomalies. Because of the dense vegetation within most of the study area, GPR surveying was limited. Profiles were collected along the fence line, paths, and abandoned roads in the woods, and in an open grassy area near the survey center. GPR profiling was also performed offshore from the study area. The GPR profile locations are shown in Figure 21.

Both the 100- and 300-MHz antennas, in a bistatic configuration, were used along the GPR profiles. The antennas were separated by a fixed distance of 4.5 ft. Onshore profiles were collected in a continuous mode using an all-terrain vehicle to tow the antennas. The offshore data were collected by using a small bass boat as the towing vehicle; the antennas were placed on the bottom of an inflatable rubber raft towed behind the boat. Range settings between 100 and 600 nanoseconds (ns) were used to collect the GPR profiles. The profiles collected with the 300-MHz antennas at a range setting of 300 ns provided the best data in most onshore locations. The 100-MHz antennas were more effective over water, with a range of 500 ns. All of the profiles shown have been computer-processed with a boxcar filter. Adjustments in the gains have been made for some of the profiles to help remove high-frequency noise and enhance structure at depth. The approximate depth given for the profiles is based on a two-way travel time of 9 ns/ft for the soils and 18 ns/ft for the offshore water column. The two-way travel times for the soils and water are estimates based on velocities given by the manufacturer (GSSI 1987). GSSI estimates the two-way travel time for "average soil" at between 7 and 9 ns/ft. The slower velocity of 9 ns/ft was used because of the shallow water table and saturated soils.

5.1 Offshore GPR Surveys

Figures 22A and 22B illustrate a GPR profile collected approximately 30-40 ft offshore from the Kings Creek study area. The location of this profile is shown in Figure 21 (profile #16). The profile was collected by using the 100-MHz bistatic configuration with an antenna separation of 4 ft and a range setting of 500 ns. Figure 22A is shown without the interpretation; Figure 22B shows the interpreted structures. This profile reveals southeast- and northwest-dipping structures that are likely the sides of a paleochannel. The paleochannel measures over 500 ft wide and the thalweg extends below the depth of penetration. The depth of penetration is inferred to be approximately 45 ft below the creek bottom. The water depth is between 2-3 ft. The upper 10 ft of sediment is composed of very soft silts and clays. The loss of signal over the middle portion of this paleochannel suggests that the channel may be filled with more clayey, saturated sediments that are difficult to penetrate with GPR. The profile also shows what may be old terraces on each side of the channel. The GPR data collected offshore will be presented in a future report.

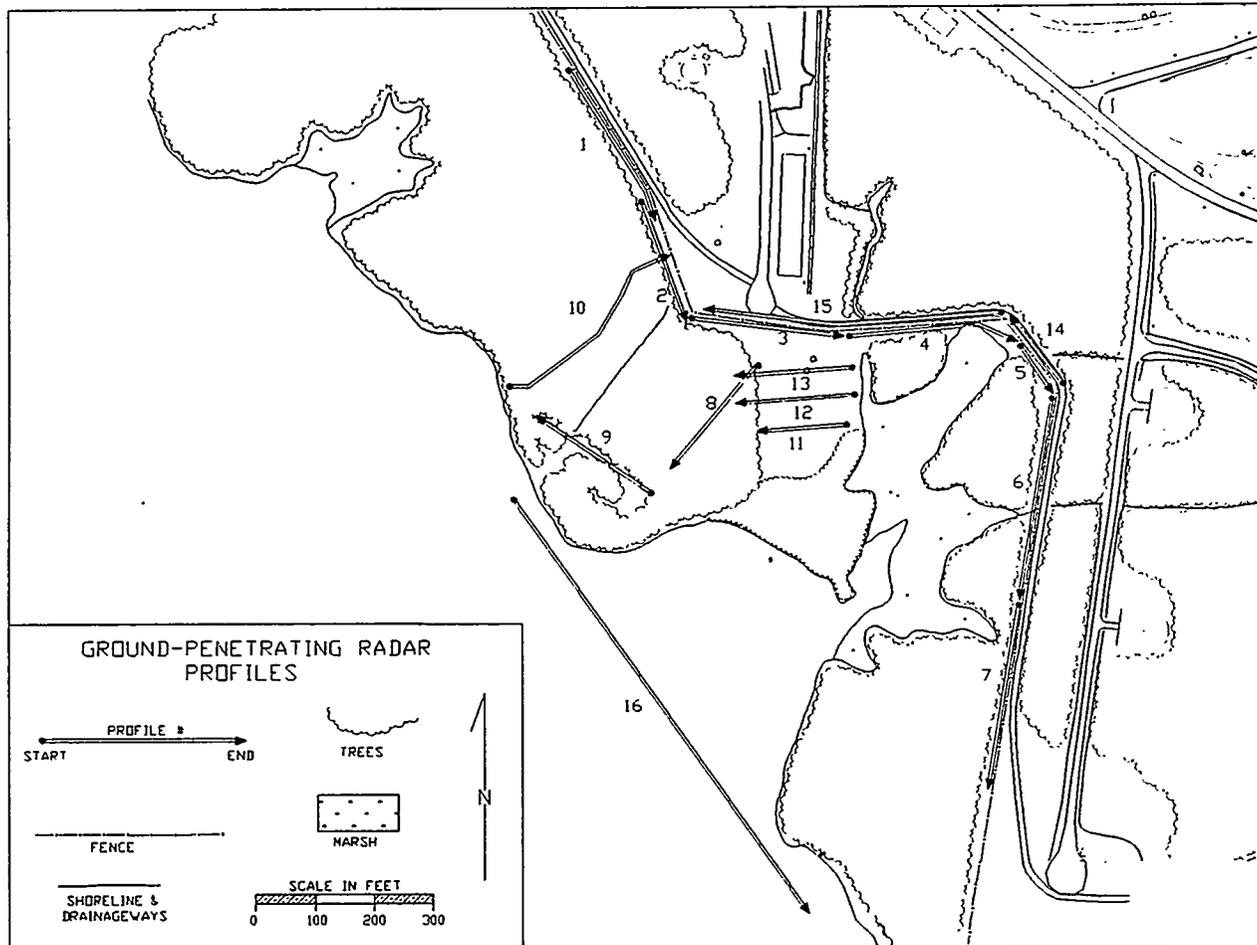


FIGURE 21 Ground-Penetrating Radar Profile Locations

5.2 Onshore GPR Surveys

The onshore GPR data also reveal dipping structures that may be associated with paleochannels. Figures 23A and 23B show a portion of what may be a paleochannel beneath the former location of the 30th Street Landfill. The profile shown in Figures 23A and 23B was collected from east to west along the 150N grid line. The location of this profile is shown in Figure 21 (profile #12). The east-dipping structure may be the west side of a paleochannel. This profile also shows some buried debris approximately 6-7 ft below the ground surface from 400E to 380E. Near-surface debris can be seen over the last 25 ft of the profile.

Figures 24A and 24B, which illustrate a profile collected from east to west along grid line 200N (profile #13 on Figure 21), show both sides of a paleochannel with the thalweg at approximately 350E. The bottom of the channel is approximately 35 ft below the ground surface. This profile also shows an undulating surface between 5 and 15 ft below the ground surface, which likely represents two shallow paleochannels superimposed over the deeper, older paleochannel. On the basis of the current water depth in Kings Creek, which is 5 ft or less, this undulating reflector cannot represent pre-fill topography. The paleochannel system developed in

the Kings Creek estuary during the Pleistocene Epoch was subsequently filled with Holocene sediments. Some buried debris, located within the upper few feet, is also evident in the profile.

The GPR profile presented in Figures 25A and 25B (profile #15 on Figure 21) also shows two possible paleochannels. This profile was collected from east to west inside the security fence with the 100-MHz bistatic antenna configuration at a range setting of 400 ns. During collection of this profile, there was likely an intermittent loose antenna connection that appears as a strong flat ring down the entire profile or as sharp breaks in the signal. The paleochannel on the east end measures approximately 175 ft wide, with the thalweg at a depth of approximately 22 ft below ground surface. The deeper channel on the west end is over 250 ft wide and roughly 33 ft deep. Channel fill materials can also be seen on this profile as flat-lying reflectors.

Profile #14 (Figures 26A and 26B) was collected from southeast to northwest inside the security fence with the 100-MHz bistatic antenna at a range setting of 400 ns. The northwest end of profile #14 joins the east end of profile #15 (Figure 21). A west-dipping structure in the northwestern portion of this short profile likely represents a continuation of the shallow paleochannel structures visible on the east side of profile #15 (Figures 25A and 25B).

Figures 27A and 27B show another paleochannel that is much smaller and shallower than the other subsurface features detected using GPR methods. This profile (profile #6 in Figure 21) was collected along the eastern edge of the survey area. The paleochannel corresponds to an existing drainageway at grid coordinates -30N/770E. The thalweg of this channel is approximately 7 ft below the ground surface and the channel width is roughly 30 ft. On the basis of well log data and, potentially, EM-31 electromagnetic data (Figure 17), another paleochannel is suspected at approximately 100N along this profile. Poor signal penetration is the result of ground surface conditions in this area.

Some anthropogenic anomalies are shown in Figure 28. This figure shows the last 75 ft of profile #8 (Figure 21) within the former Kings Creek Disposal Site. The anomaly centered at grid coordinates 110N/170E is most likely a cylindrical object, based on its hyperbolic shape. The object is buried about 1 ft below the ground surface. The debris shown at the end of the profile is also buried in the upper 1 ft of the subsurface.

The profile presented in Figures 29A and 29B was collected roughly parallel to the shoreline from southeast to northwest across the area, which is void of vegetation. The location of this profile is shown in Figure 21 as profile #9. A small, shallow paleochannel is apparent at the beginning of the profile. The former burn pit is also evident. The burn pit measures roughly 25 ft across. The depth to the bottom of the pit is difficult to identify because of the ringing reflectors, but is probably less than 3 ft, which is the approximate depth to the water table inferred from the site topography.

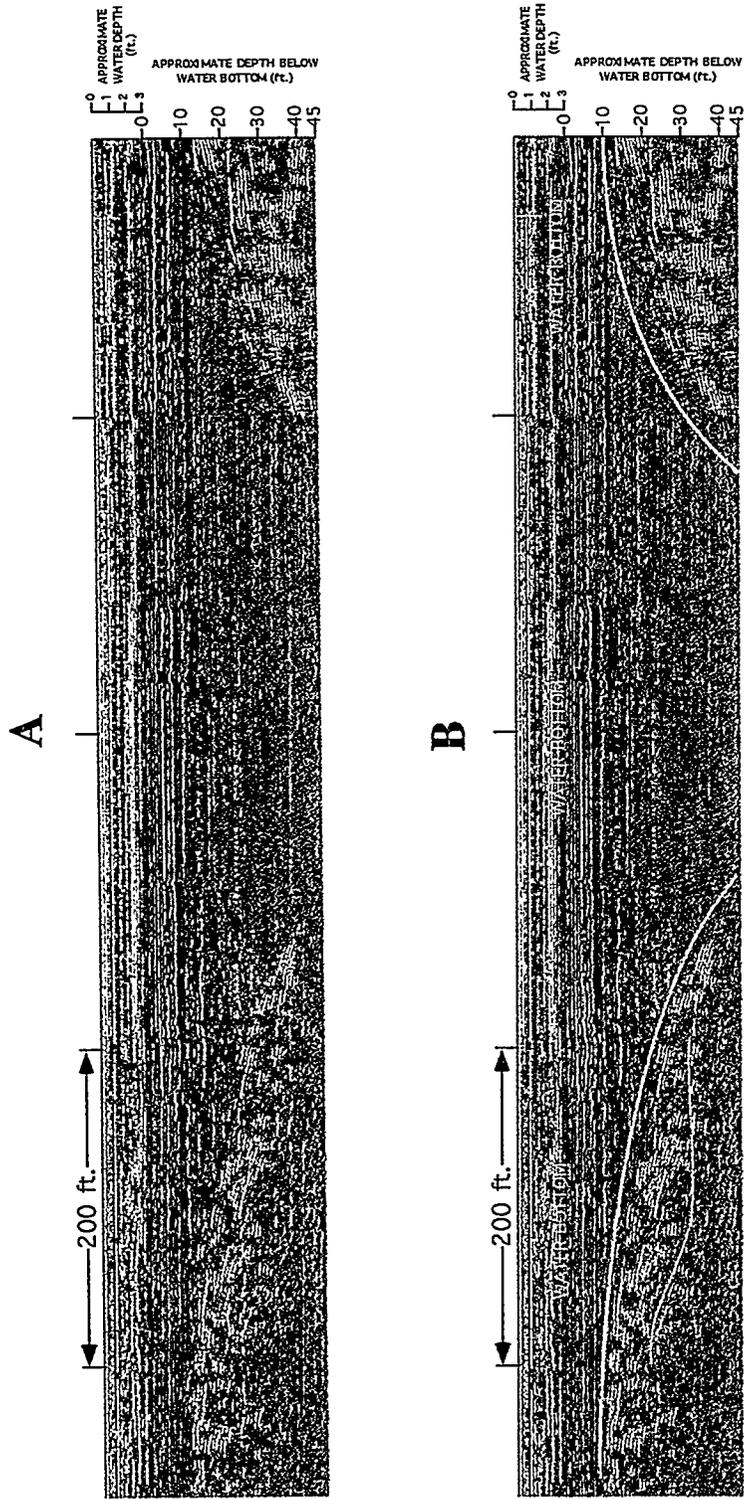


FIGURE 22 A: GPR Profile #16 (Offshore); B: GPR Profile #16 with Interpretation

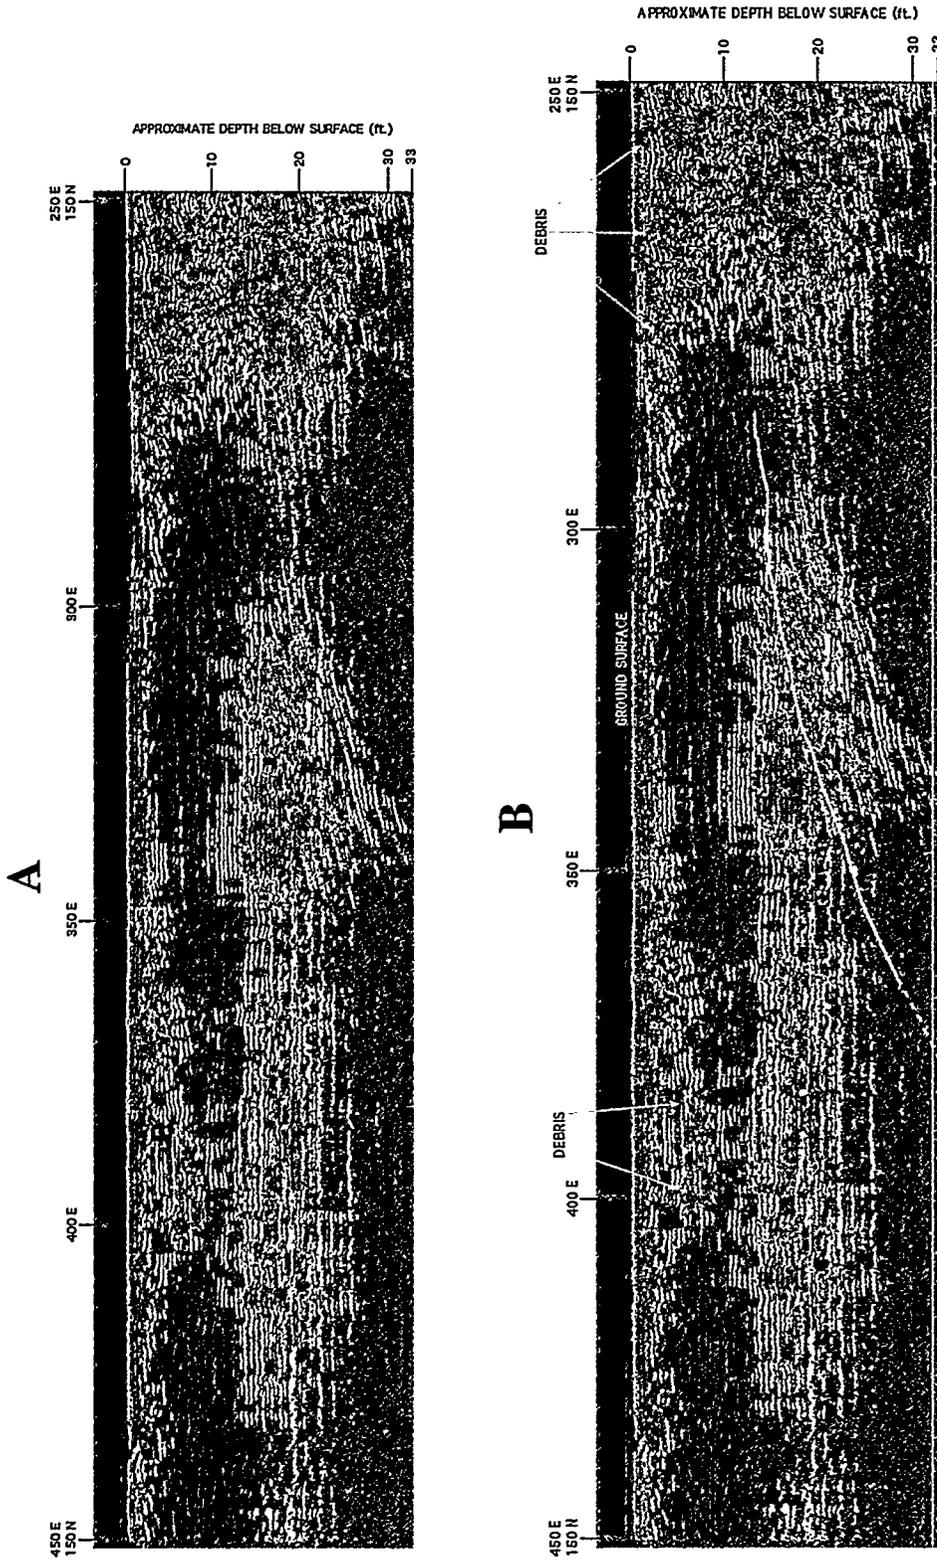


FIGURE 23 A: GPR Profile #12; B: GPR Profile #12 with Interpretation

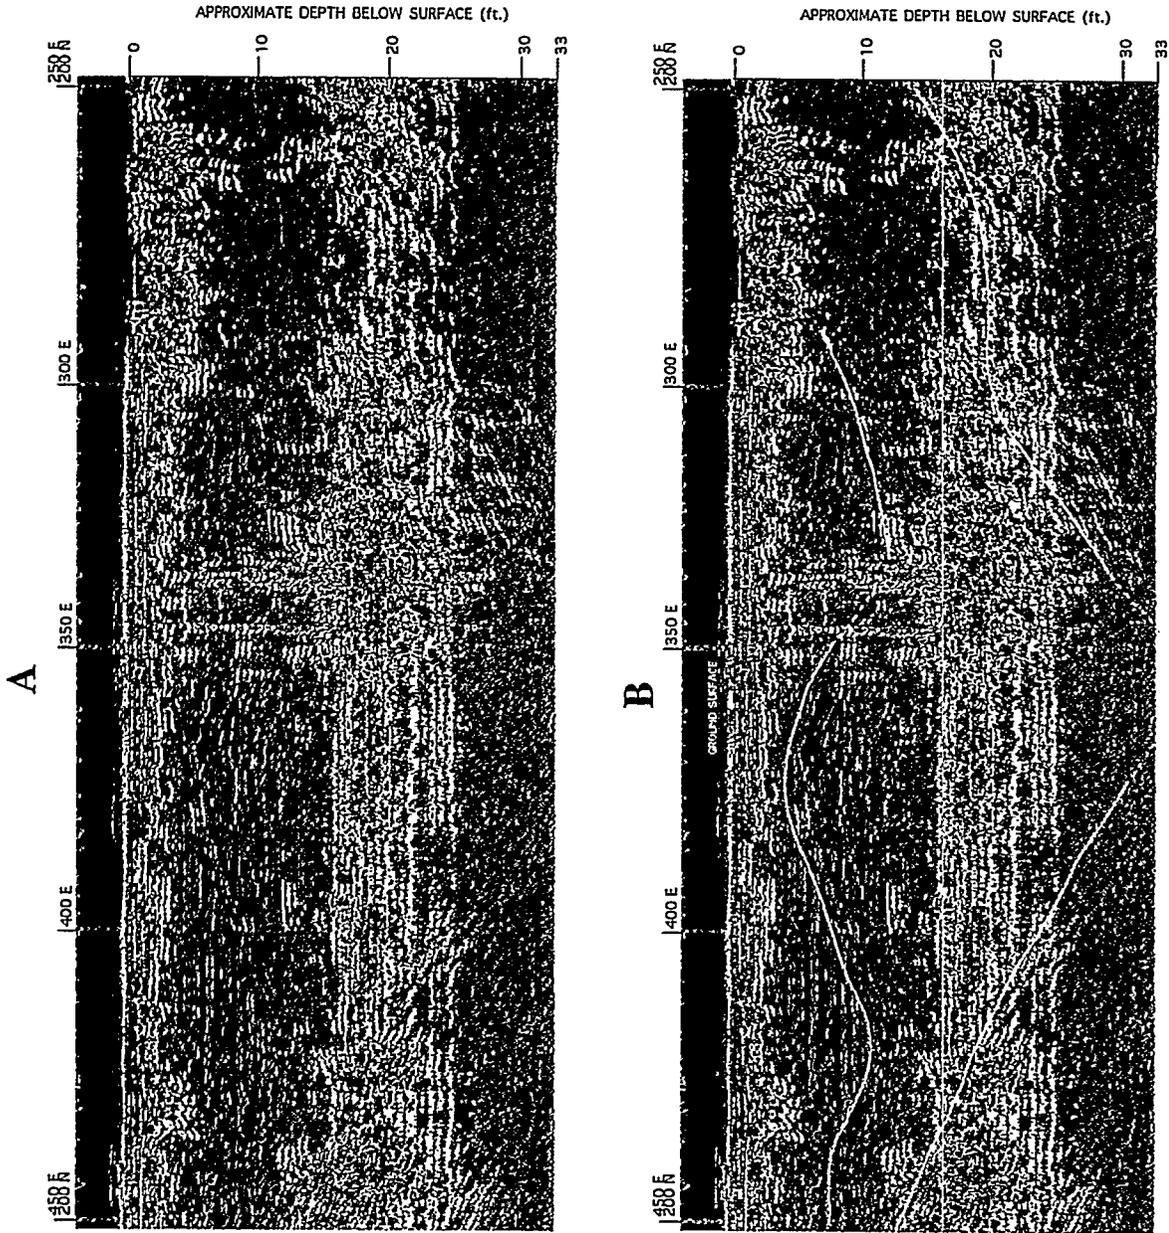


FIGURE 24 A: GPR Profile #13; B: GPR Profile #13 with Interpretation

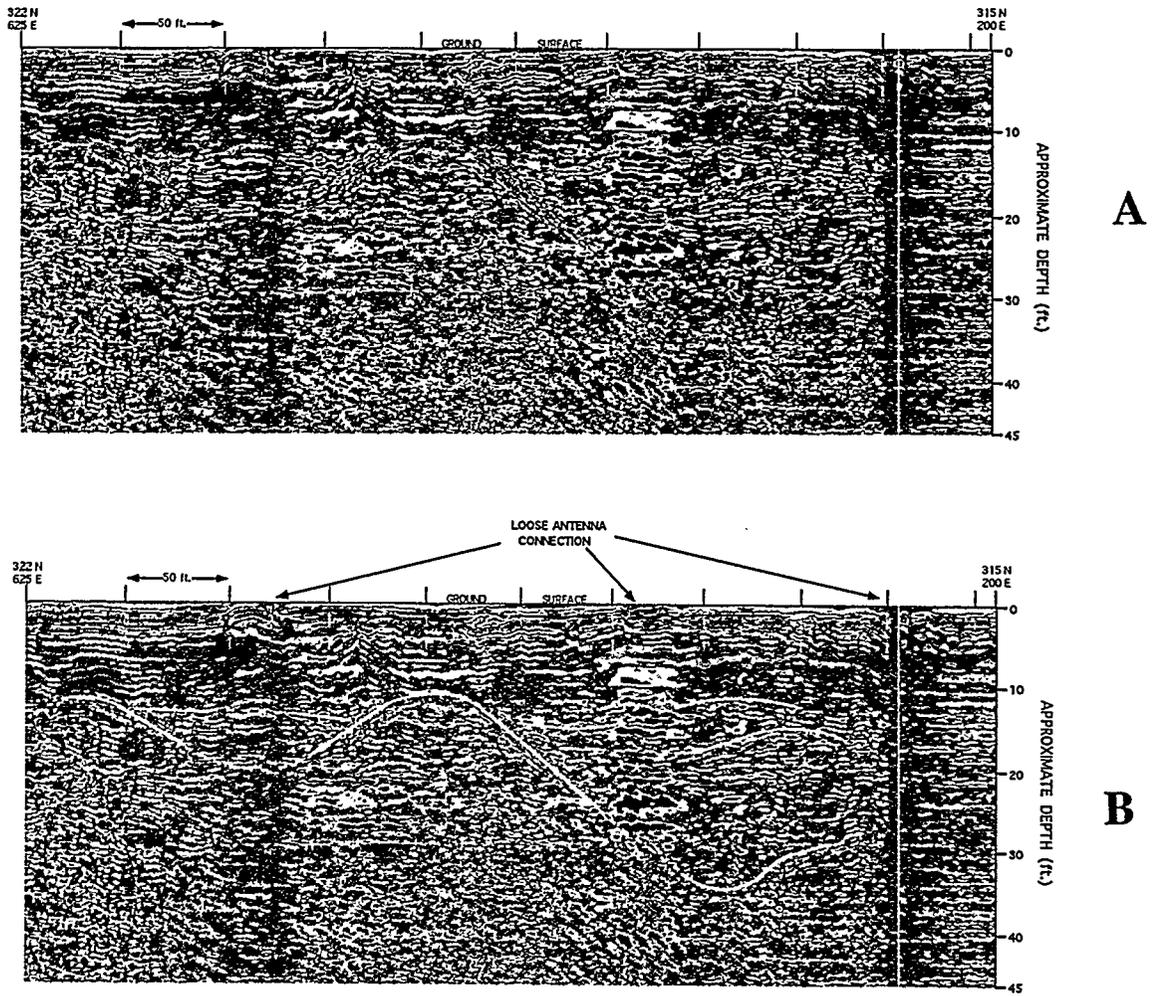


FIGURE 25 A: GPR Profile #15; B: GPR Profile #15 with Interpretation

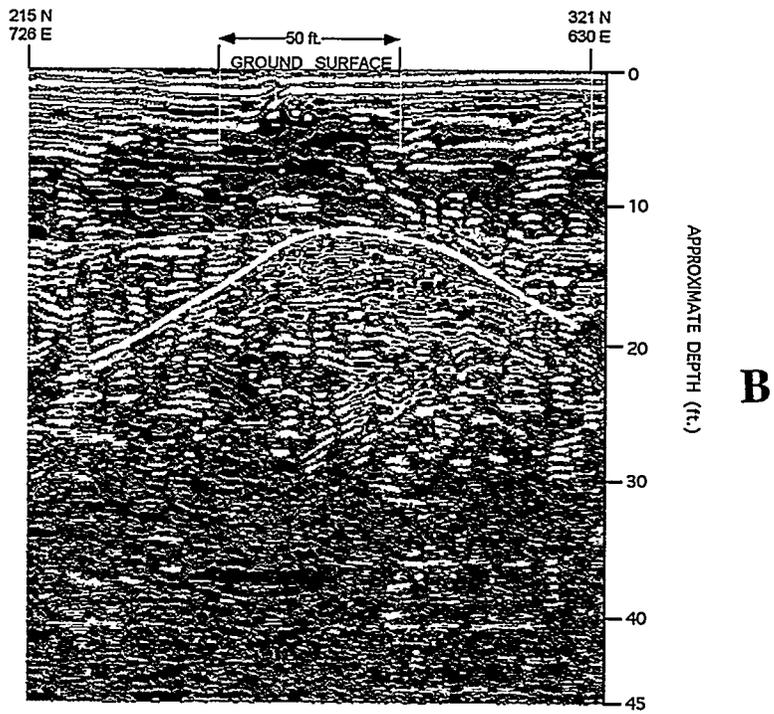
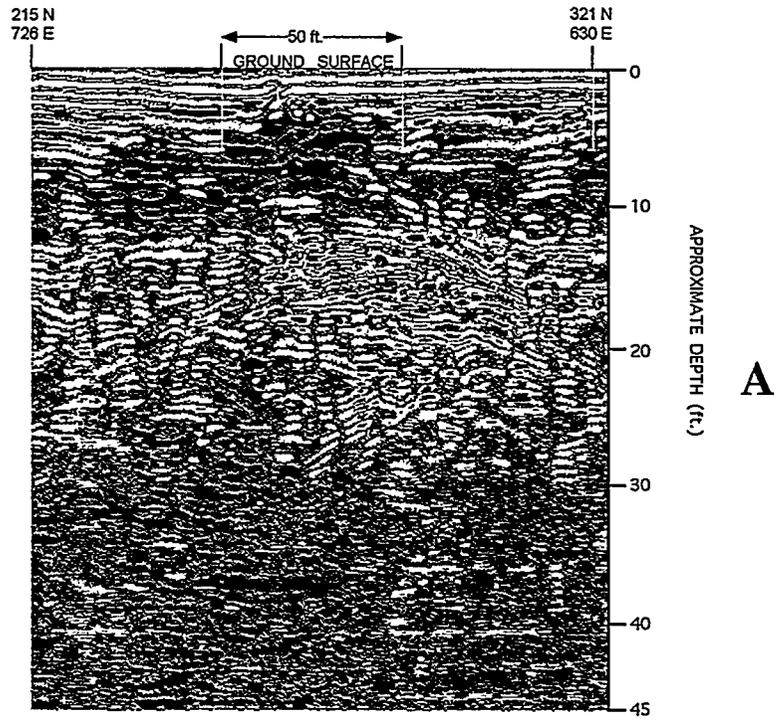


FIGURE 26 A: GPR Profile #14; B: GPR Profile #14 with Interpretation

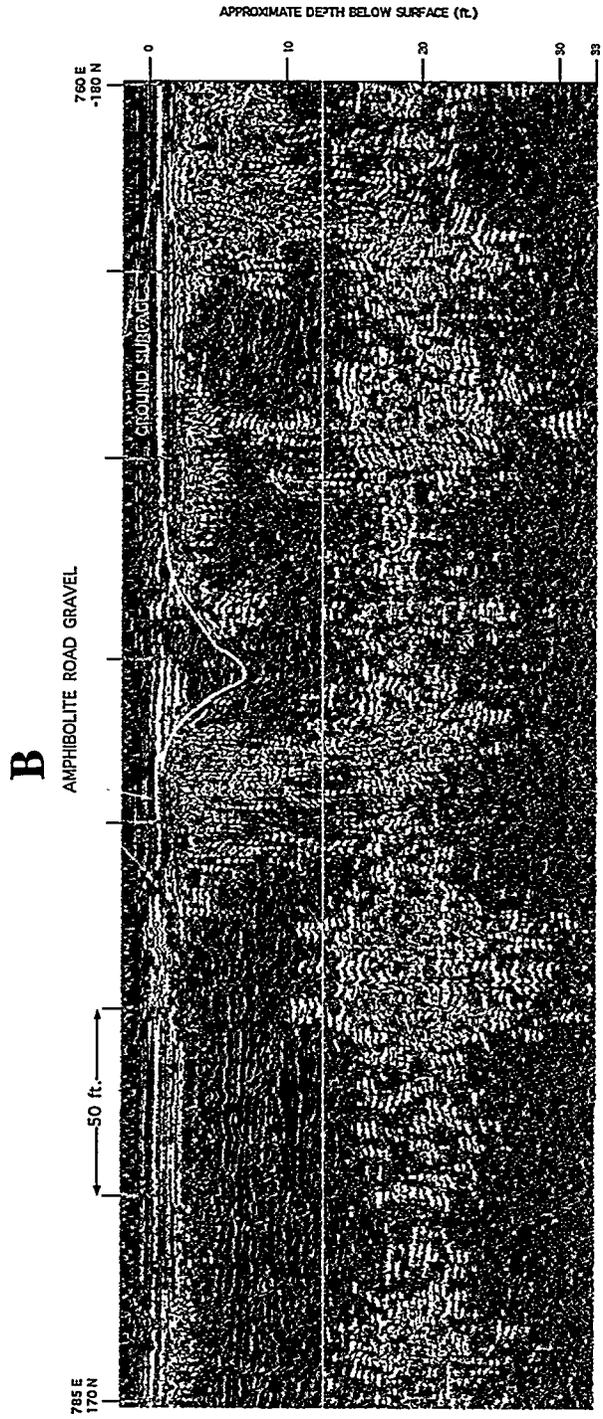
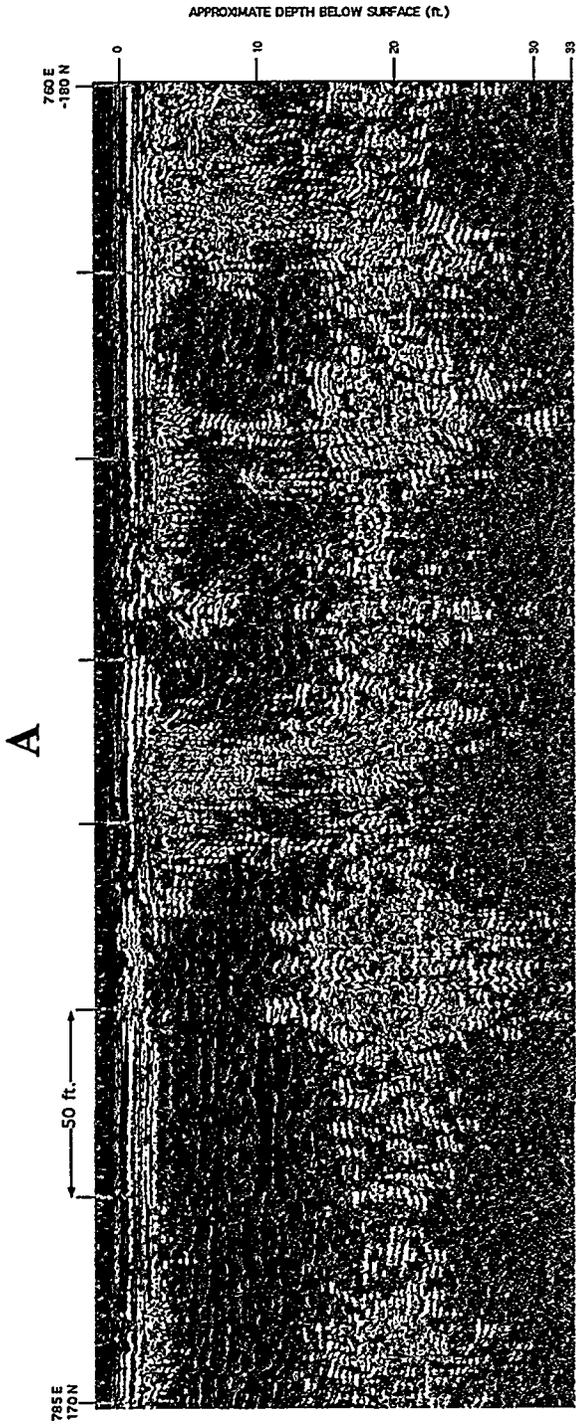


FIGURE 27 A: GPR Profile #6; B: GPR Profile #6 with Interpretation

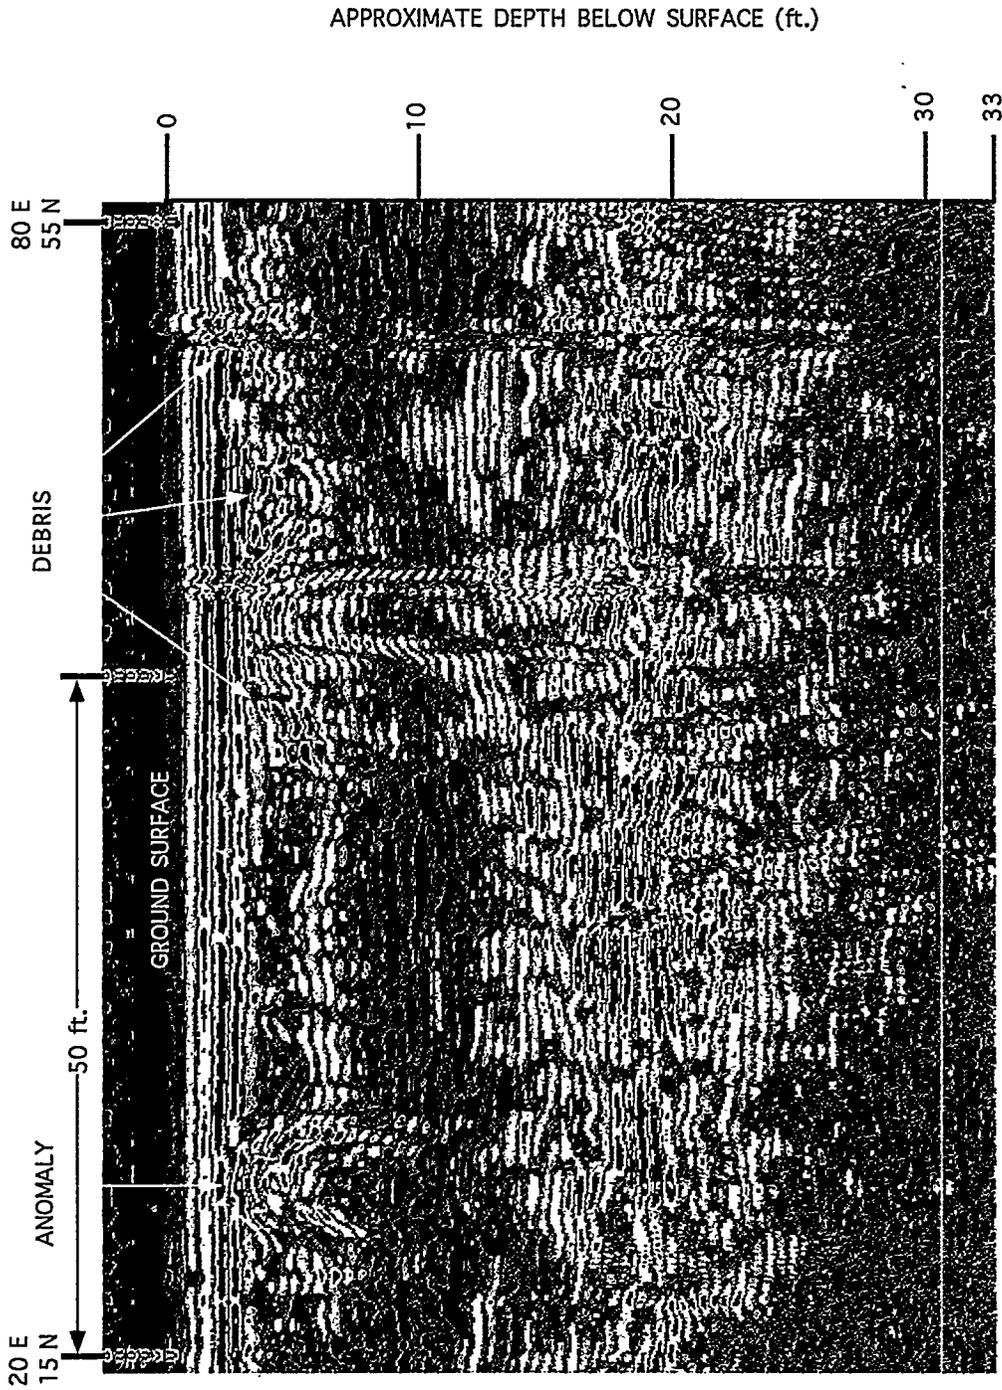


FIGURE 28 GPR Profile #8

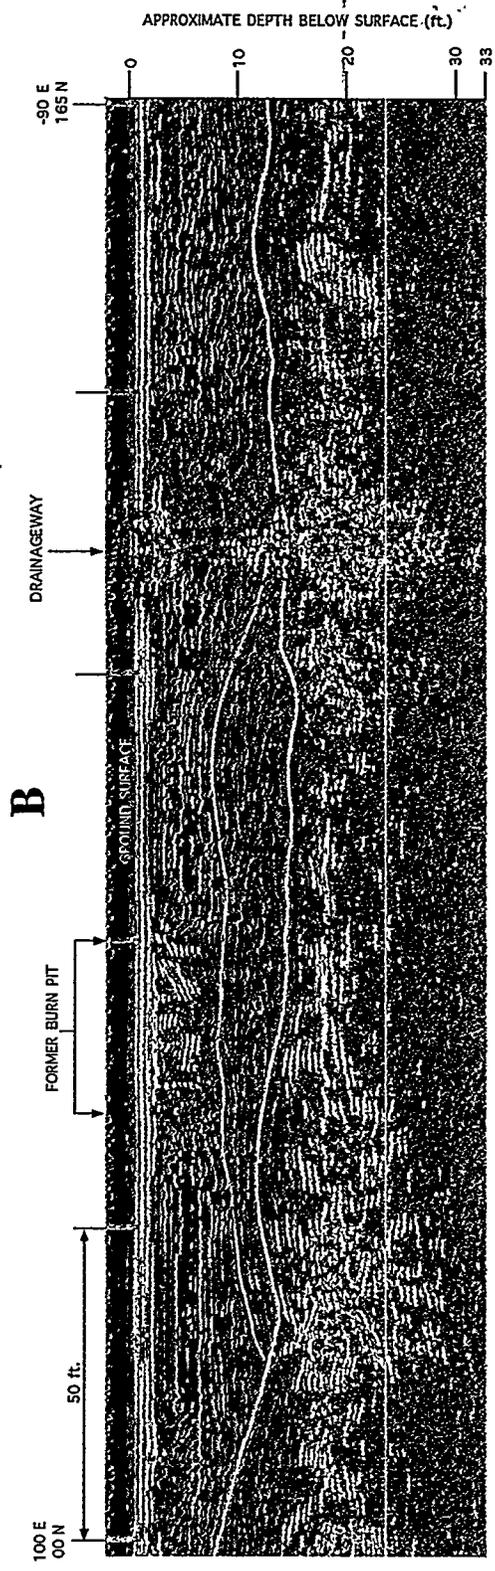
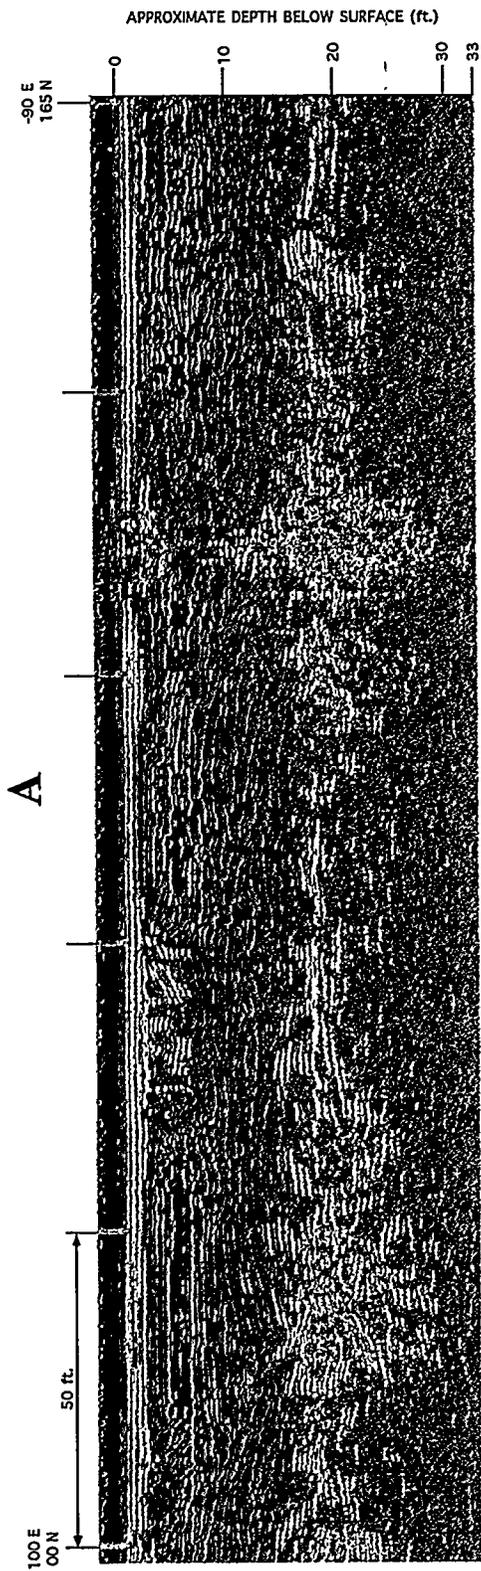


FIGURE 29 A: GPR Profile #9; B: GPR Profile #9 with Interpretation

6 Seismic Surveys

Three seismic refraction and three seismic reflection profiles were recorded in the Kings Creek study area. The seismic surveys were conducted to provide geophysical information on lithologic units below the depth ranges reached by electromagnetic and GPR methods. Also, surface-to-borehole average velocity measurements were conducted at monitor well CC-11B to provide additional depth control for the seismic models. The locations of all seismic profiles, including refraction, reflection, and borehole surveys, are shown in Figure 30.

6.1 Seismic Refraction Surveys

One deep and two shallow refraction profiles were conducted to provide seismic velocity and depth information for strata from the ground surface to crystalline bedrock. Refraction survey parameters are summarized in Table 2. The deep refraction profile, line BRP-1, was used to obtain layer-velocity information to depths below 400 ft; the shallow refraction profiles, BRP-2 and BRP-3, were conducted to provide seismic velocity information for the near-surface sediment.

Conversion of the time-distance data into a velocity-depth model was performed using the SIPT2 processing software developed by RIMROCK Geophysics, Inc. (1992). Average velocities obtained from a borehole check-shot were also used to help constrain this model.

Refraction data are useful for determining interval velocities for stratigraphic and nonstratigraphic units when the velocity increases with depth. Lithologic units that have similar or lower velocities than overlying units do not refract energy back to the surface, and thus, are not detected by the refraction method. In addition, thin, high-speed layers may not be detected if their thickness is less than the wavelength of the seismic energy for that particular refraction survey. This limiting thickness is generally on the order of "tens of feet" for seismic refraction prospecting. In short, the velocity-depth model derived only from seismic refraction analysis may be incomplete. Velocity information for layers transparent to the refraction data is provided by a borehole check-shot (discussed in Section 6.2).

Interpretation of shallow refraction lines BRP-2 and BRP-3 results in a two-layer model consisting of unsaturated sediment above the water table and saturated sediment below (Figures 31A and 31B). A velocity of 1,154 ft/s was computed for Layer 1; a velocity of 5,761 ft/s was determined for the saturated sediment (Layer 2). The shallow refraction data also show that lateral velocity variations exist in the Layer 1 material. These variations probably arise from differences in saturation, compaction, and composition of these sediments. The shallow seismic data demonstrate that (1) lateral variations in seismic velocity are significant near the surface, and (2) static corrections in seismic reflection data are to be expected. A depth of 8-13 ft and a seismic velocity of 5,761 ft/s were computed for Layer 2, which is interpreted to comprise saturated sediments at or below the water table.

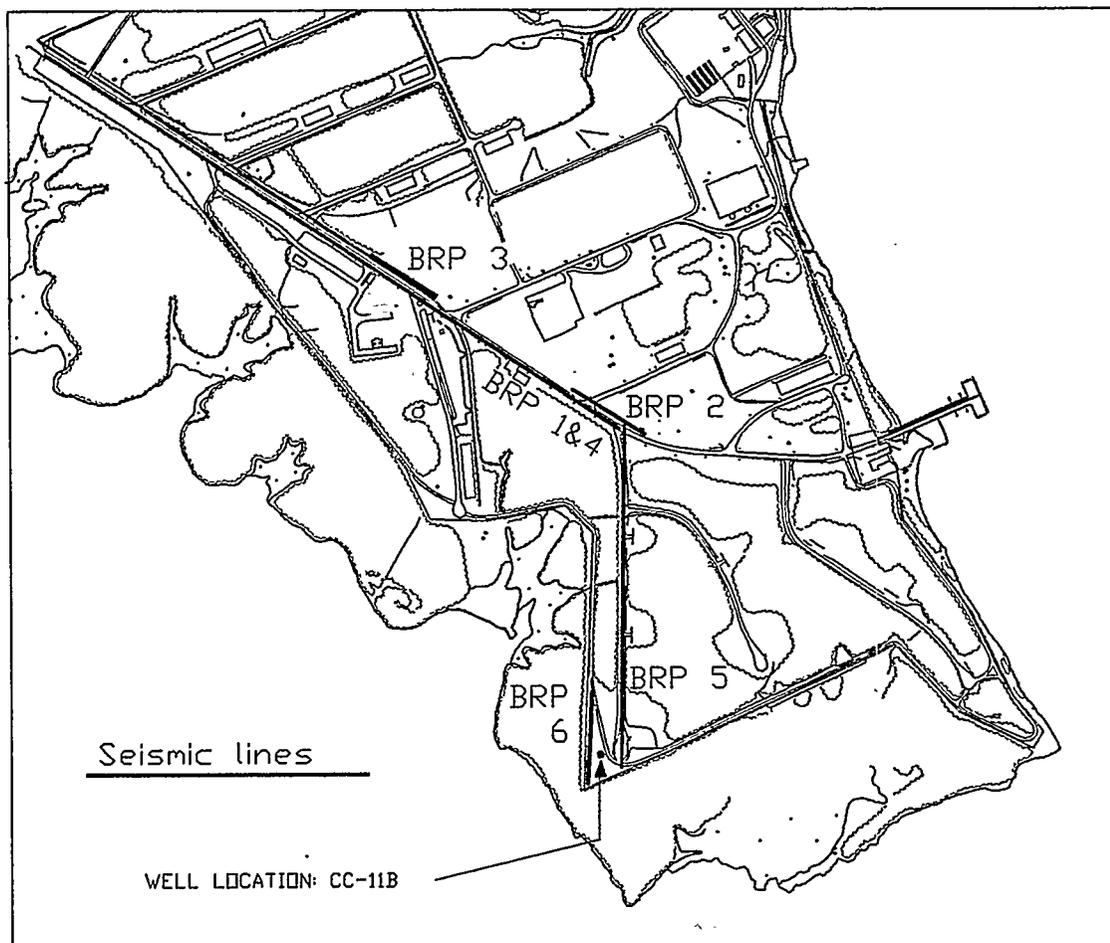


FIGURE 30 Seismic Profile Locations

TABLE 2 Seismic Refraction Profiles near the Kings Creek Study Area

Parameters	Line Identification Number		
	BRP-1	BRP-2	BRP-3
Seismic source	EWG	Hammer	Hammer
Geophone interval (ft)	30	5	5
Geophones per spread	23	12	12
Number of spreads	3	1	1
Total length of spreads (ft)	2,040	55	55
Number of shots	18	9	9
Maximum shot-to-geophone distance (ft)	2,650	210	185

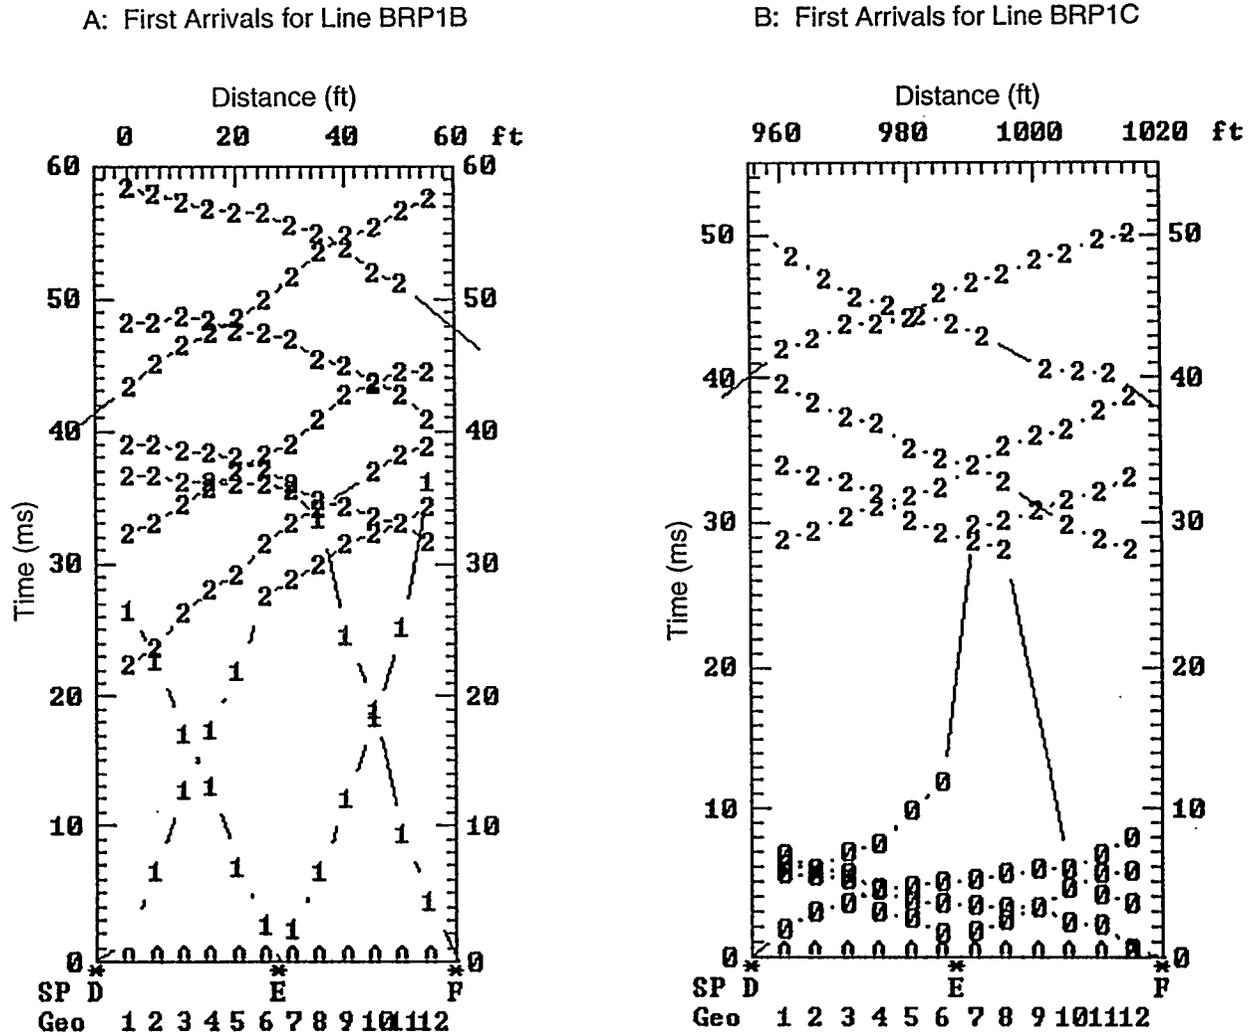


FIGURE 31 First Arrival Time versus Distance Data from Seismic Refraction Lines BRP-2 (A) and BRP-3 (B)

The deepest and highest-velocity layer, identified as Layer 3 on the time-distance plot for seismic refraction profile BRP-1 (Figure 32), has a seismic velocity of 16,790 ft/s. Layer 3, at a depth ranging between 420 and 440 ft, represents Precambrian crystalline rock that underlies Cretaceous sediment.

Figure 33 shows the relationship between seismic velocity and depth, based on both refraction and borehole data. The interval velocity curve derived from refraction data is based on the inversion of both shallow and deep refraction time picks. The figure also illustrates a curve for average velocity versus depth, showing the weighted average of all interval velocities between the surface and the corresponding depth. The average-velocity-versus-depth information is used to generate a depth scale for seismic reflection data. Interval velocities from both refraction and borehole techniques were used in the average velocity calculations.

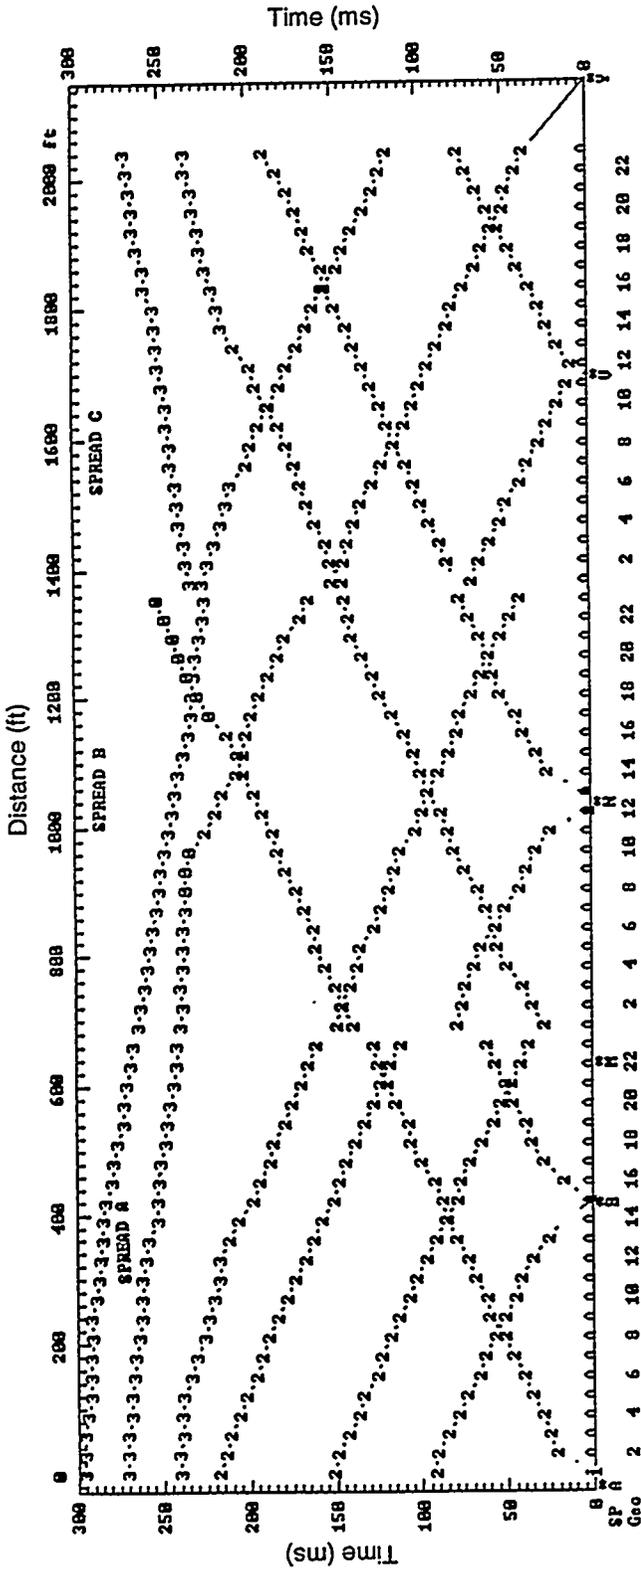


FIGURE 32 First Arrival Time versus Distance Data from Seismic Refraction Line BRP-1

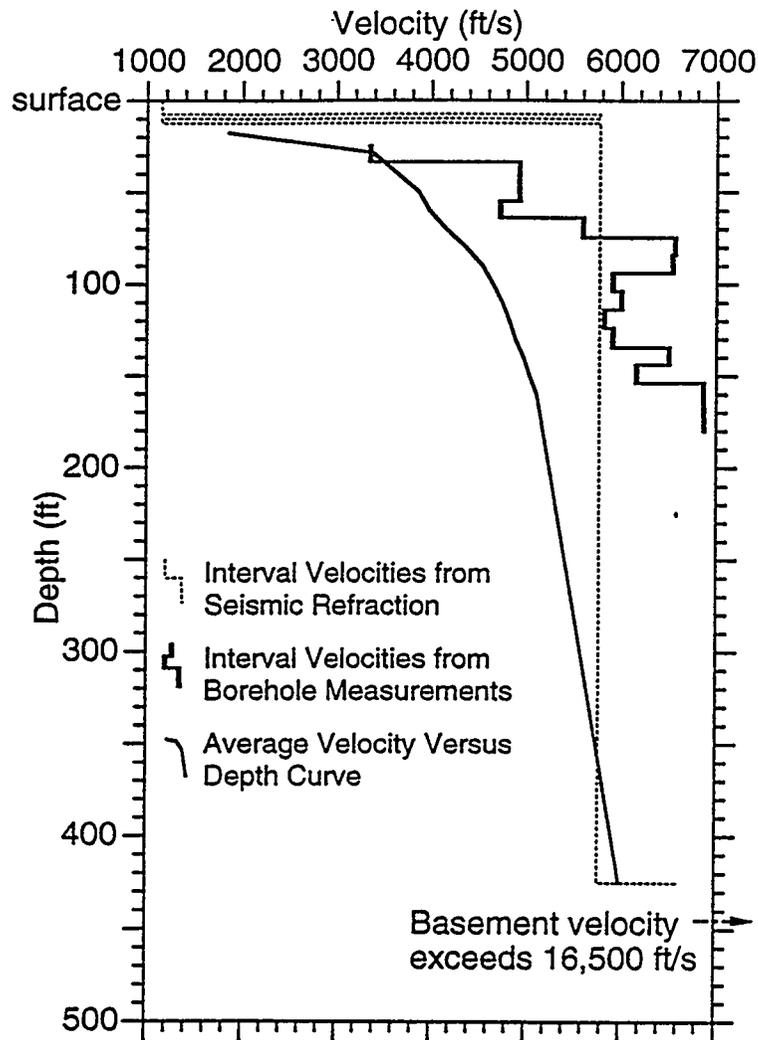


FIGURE 33 Velocity-Depth Model Obtained by Inverting Seismic Refraction Data and Borehole Seismic Data

The velocity-depth model in Figure 33 does not account for lateral velocity variations over the Bush River Peninsula, but is useful in obtaining approximate depth calculations for reflectors in the seismic reflection data presented in Section 6.3. The depth estimates, however, must be used cautiously. The depth of the low-velocity layer near the surface, which was set at 4.0 ft in the model, is known to vary from 0 to at least 10 ft based on the two shallow refraction profiles. The lateral velocity variations near the surface can cause an error of several percentage points in the depth estimation.

6.2 Downhole Seismic Velocity Measurements

Surface-to-borehole average velocity measurements were conducted at monitor well CC-11B (Figure 30). The survey was conducted by lowering a down-hole geophone to a known

depth and recording the travel time for signals produced from a sledgehammer source located at various distances from the borehole. Sets of measurements were collected with the geophone at 10-ft intervals within the monitor well, starting at 160 ft below the top of casing and proceeding to 50 ft below the top of casing (which was 3.0 ft above land surface). An additional set of measurements was taken with the geophone at 29 ft below the top of casing. Shallower measurements were not recorded because of poor signal quality near the surface. Horizontal source offset distances of 25, 50, 75, and 100 ft northwest of monitor well CC-11B were used for each set of measurements.

Average velocities were obtained by dividing the slant distance between each source-location/receiver-location pair by the travel time. Interval velocities were calculated by using differences in both slant distance and travel time between the current reading and the reading at the adjacent shallower depth. Velocity calculations were repeated for each horizontal offset and compared. Using slant distance in the velocity calculations caused some systematic error, which resulted in artificially high velocity calculations. The error, which was greater at greater offsets, resulted from refracted first arrivals. In creating the velocity-depth model, preference was given to shorter offsets to minimize this error. Lateral variations were assumed to be relatively minor compared with vertical variations in the velocity calculations.

The relationship between seismic velocity and depth based on both refraction and borehole data is shown in Figure 33. Velocity information obtained from the borehole survey is more detailed than data from the refraction surveys. Unlike the refraction method, the borehole technique is not adversely affected by low-velocity layers and can detect thin layers of relatively low velocity.

The interval velocity model presented in Figure 33 (based on borehole measurements) shows an increase in velocity between about 60 and 70 ft, followed by a decrease at approximately 90 ft, and another increase at about 130-150 ft. The gamma and conductivity logs for borehole CC-11B both show relatively higher readings for the 50- to 120-ft depth range (see Appendix B). Following the downhole geophysical measurements conducted on monitor well CC-11B, monitor well WBR-48 was installed to a depth of 133 ft below surface adjacent to well CC-11B. The boring log for well WBR-48 is included in Appendix A; the lithology for this well is plotted on the gamma and conductivity/resistivity logs for well CC-11B. A high clay content was observed between 47.5 and 101 ft, which closely corresponds to the geophysical logs and generally agrees with the seismic velocity model.

6.3 Seismic Reflection Surveys

Three seismic reflection profiles, two deep and one shallow, were conducted to record variations in stratigraphy for strata from the ground surface to the crystalline basement in the vicinity of the Kings Creek study area. Survey parameters are summarized in Table 3. The profile locations are shown in Figure 30.

TABLE 3 Seismic Reflection Profiles near the Kings Creek Study Area

Parameters	Line Identification Number		
	BRP-4	BRP-5	BRP-6
Type	Deep	Deep	Shallow
Seismic source	EWG	EWG	Hammer
Offset (ft)	90	90	18
Geophone interval (ft)	6	6	3
Number of shots	428	202	77
Number of 24-channel spreads	408	192	72
Total length of survey (ft)	2,442	1,146	213

Two deep reflection lines (BRP-4 and BRP-5) are located adjacent to the north and the east sides of the Kings Creek study area, respectively (Figure 30). Processed seismic sections for lines BRP-4 and BRP-5 are shown in Figures 34 and 35. The deep seismic reflection data were processed using EAVESDROPPER software developed at the Kansas Geological Survey (1993). Processing steps included trace editing and muting, bandpass filtering, velocity analysis, and CDP sorting and stacking. Seismic arrivals prior to 65 milliseconds (ms) were muted to remove first-arrival refracted energy from the seismic data.

Figures 34 and 35 show stacked seismic sections extending from north (left) to south (right). The north extent of line BRP-5 (left edge of Figure 35) begins approximately where the south extent of line BRP-4 ends (right edge of Figure 34). The stick diagrams at the bottom of both figures show the major reflections.

The crystalline bedrock is observed in both lines at a depth of approximately 450 ft in the north (Figure 34) and dipping to nearly 550 ft in the south (Figure 35). The estimated basement depth reported in the literature for the APG area ranges from 350 ft (Southwick, Owens, and Edwards 1969) to 800 ft (Otton and Mandle 1984). The bedrock depth interpreted from seismic data reported for the Beach Point Peninsula, located a few thousand feet south of the Bush River Peninsula (Figure 1), is about 560 ft (McGinnis et al. 1994a). The crystalline basement generally dips to the southeast at an angle of less than one degree in the vicinity of APG (Bennett and Meyer 1952; Dingman et al. 1956; Southwick, Owens, and Edwards 1969).

Another less prominent but relatively continuous reflector is observed at a depth of about 275 ft dipping gradually to the south in both Figures 34 and 35. The source of the reflector is below any deep boreholes at the Bush River Peninsula and the reflector has not been observed in other geophysical data sets. The continuous nature of the reflector suggests that the feature might be an important hydrogeological boundary.

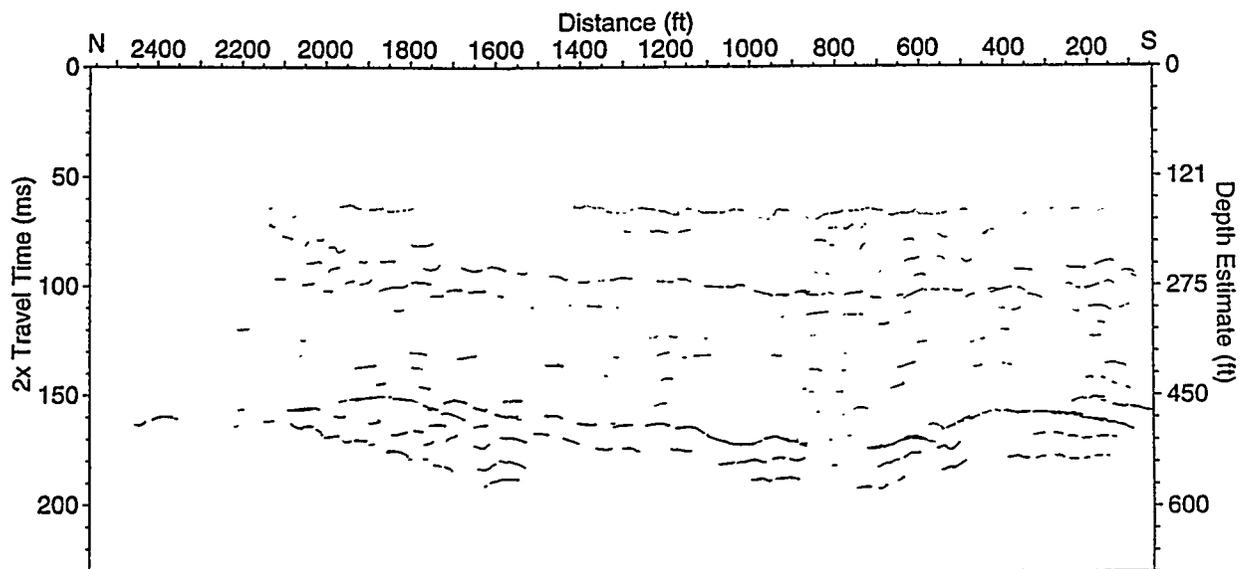
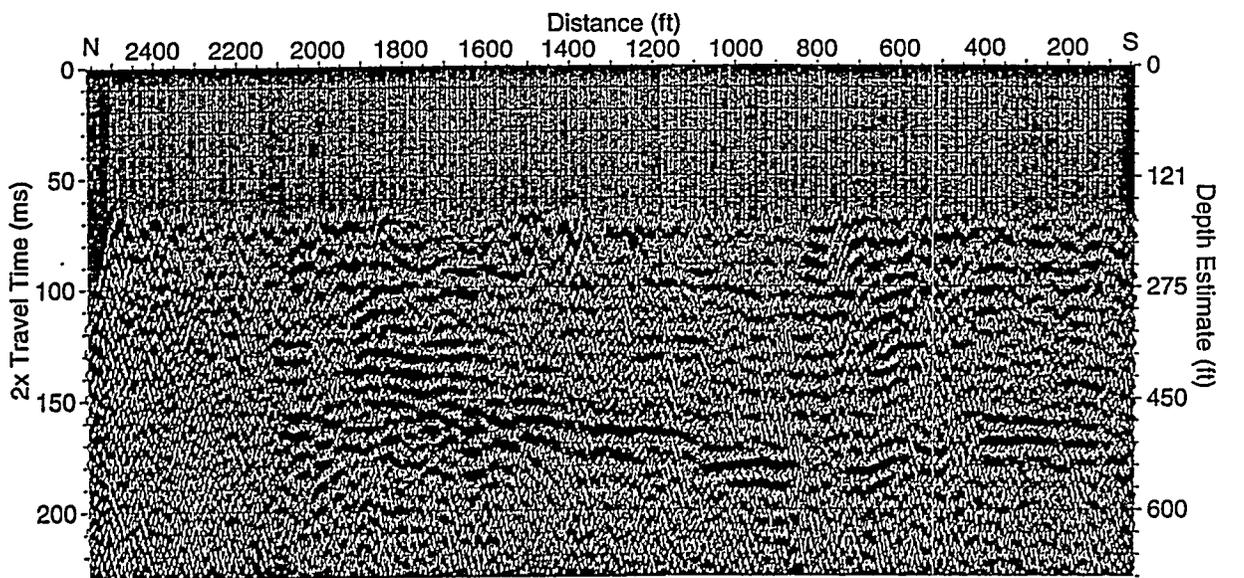


FIGURE 34 Seismic Reflection Profile for Line BRP-4

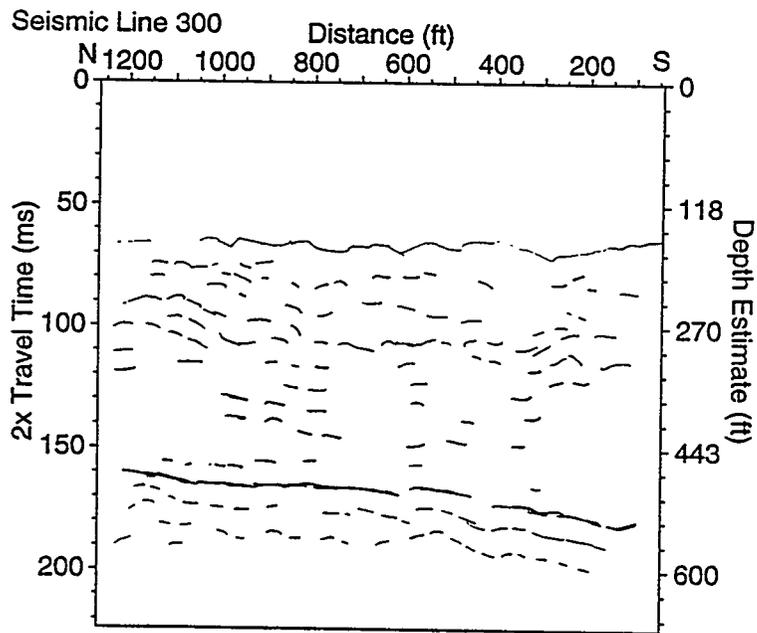
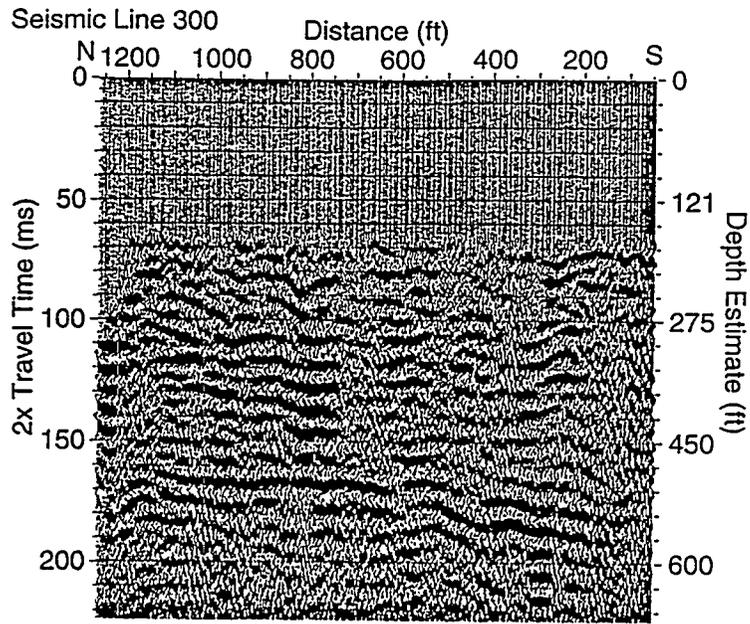


FIGURE 35 Seismic Reflection Profile for Line BRP-5

One shallow reflection line, BRP-6, is located south of the Kings Creek study area, adjacent to monitor well CC-11B (Figure 30). A processed seismic section for line BRP-6 is presented in Figure 36. Processing steps for line BRP-6 were similar to those used for lines BRP-4 and BRP-5, except that the first-arrival mute was applied to signals prior to about 20 ms (versus 65 ms for the deeper reflection lines). The seismic section in Figure 36 extends from north (left) to south (right) and shows reflectors for depths as shallow as 35 ft. The distance scale is in feet from monitor well CC-11B. The stick diagram at the bottom shows the major reflections as interpreted from the seismic section.

A continuous reflector is observed at a depth of approximately 40-50 ft. The geophysical well logs for monitor well CC-11B show a layer of increased gamma and conductivity values beginning at about 48 ft and extending to about 120 ft, typical for clay-rich sediments. The reflector in the shallow reflection line (Figure 36) may correspond to the top of the confining layer at the base of the surficial aquifer (Figure 4). No seismic reflection from the bottom of the clay-rich layer was observed because of static noise and signal reverberation in the seismic section.

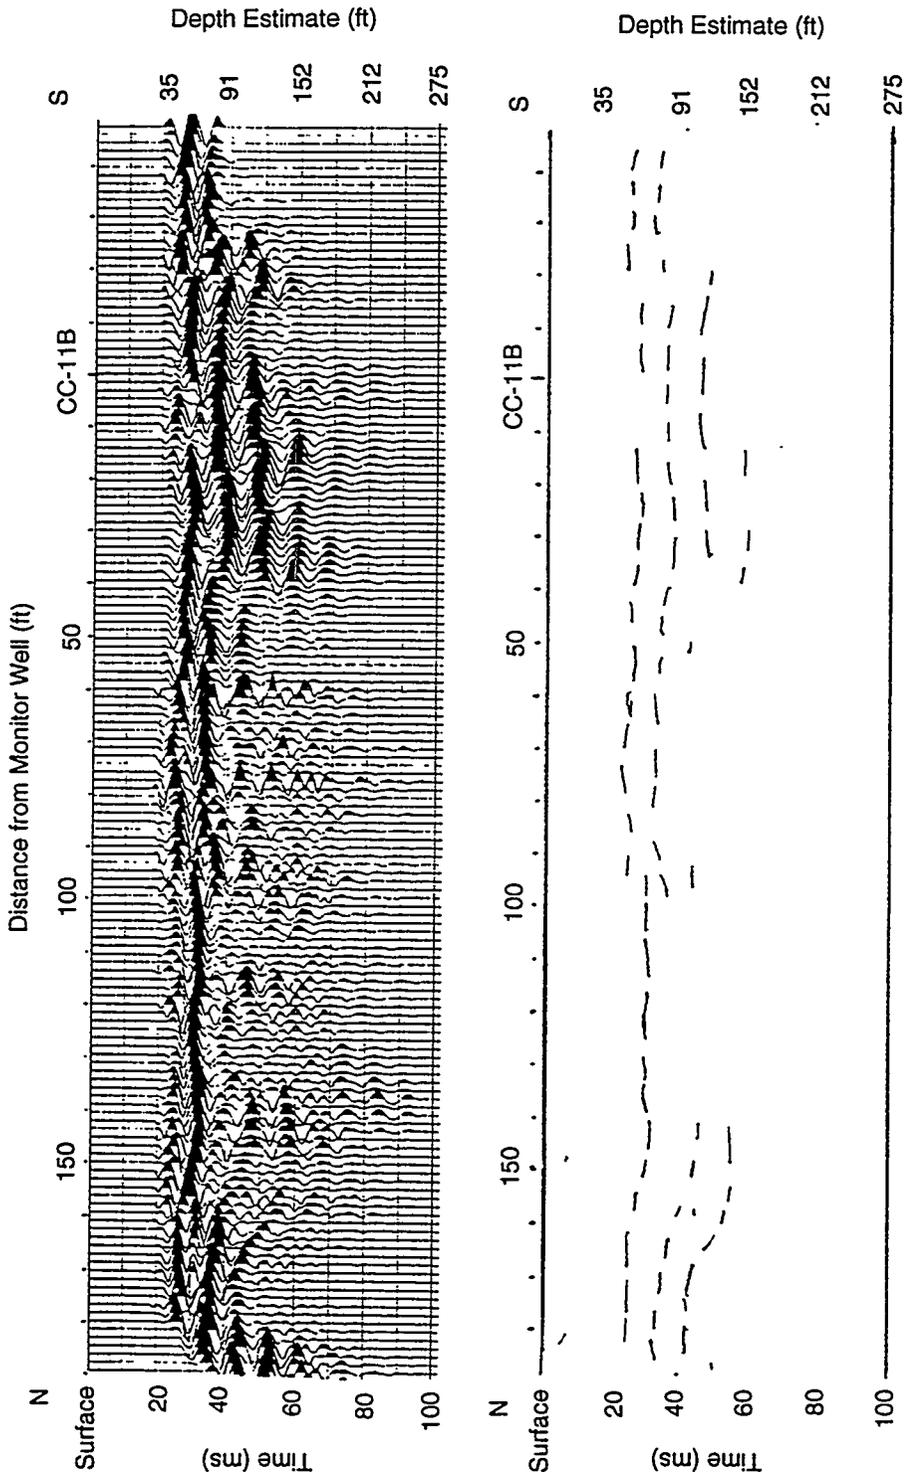


FIGURE 36 Seismic Reflection Profile for Line BRP-6

7 Discussion

7.1 Areal Extent of Kings Creek Disposal Site and 30th Street Landfill

Geophysical technologies, including magnetics, seismic reflection and refraction, borehole geophysics, electromagnetics, and GPR, have been utilized in the environmental investigation of the Kings Creek study area. These geophysical techniques, combined with visual observations, have helped define the areal extent of the former Kings Creek Disposal Site and the 30th Street Landfill.

Total field magnetics data and magnetic gradiometer surveys north of the former burn pits at the Kings Creek Disposal Site (Figure 11) indicate that metal debris is scattered throughout the area surveyed. A linear trend of magnetic anomalies is present running southwest from the north-south-trending fence line toward the former burn pits. The origin of this feature is unknown, but the trend may indicate remnants of a previous site access road. These anomalous zones are not believed to be large-scale (i.e., tens of feet) waste burial areas, although smaller, isolated areas of buried wastes and/or munitions cannot be ruled out.

Variations in EM-31 conductivity data for the former Kings Creek Disposal Site, including the surveyed area to the north, are produced by changes in the near-surface geology and metal debris. On the basis of the spatial association of geophysical anomalies, the extent of the former Kings Creek Disposal Site is likely confined to the areas of currently disturbed or absent vegetation and the associated berms formed by pushed-out materials from the burn pits.

Limited GPR data were obtained from the former Kings Creek Disposal Site because of the heavy vegetation covering much of the area. One anomalous feature, detected by the GPR, magnetic, and electromagnetic surveys, is located at approximately 110N/170E (#1, Figures 8 and 15A) of the survey grid. This feature, illustrated in Figure 28, may represent a buried drum or small tank. Further characterization of this subsurface feature is recommended.

The total field magnetic survey was used to map the areal extent of the 30th Street Landfill. The western extent of the main landfill body is defined by the 240E north-south grid line (Figure 9). The majority of the discontinuous magnetic anomalies west of the 240E line can be explained by surficial debris, but further characterization may be necessary because buried ferrous objects may also be present at these locations. The landfill is believed to be confined by the security fence to the north, but the fence overwhelms any other magnetic and electromagnetic signals, making it impossible to pinpoint the exact northern boundary. The eastern boundary of the landfill corresponds to the western limits of the present wetland. No indication of landfilling was found farther to the east (Figures 10, 12, and 17). The limits of landfilling to the south, into the current wetland, are not known. Geophysical surveys have not been conducted farther south because of the thick phragmite cover present at this location. However, geophysical surveys performed offshore from the wetland during late summer 1994 indicate that metallic debris is present near the shoreline.

The 30th Street Landfill is located in a former wetland. GPR data indicate that the western boundary of the landfill is also the location of the western edge of a paleochannel. On the basis of GPR data (profiles #12 and #13, Figures 23 and 24), the total depth of fill at the 30th Street Landfill is approximately 8-10 ft. The EM-31 data presented in Figure 16A show the location of the pre-landfill wetland as a conductive high resulting from Holocene and Pleistocene clayey sediments and fill material. Offshore electromagnetic surveys have indicated that a more conductive subsurface zone is present at the location of a paleochannel that extends into Kings Creek from the 30th Street Landfill (Figure 18). The origin of this more conductive material offshore is clayey sediments deposited in the paleochannel at depths measurable with the EM-31 (upper 18 ft).

7.2 Hydrogeologic Framework

Well logs of recently installed monitor wells provide the basic subsurface geologic control for the remedial investigation/feasibility study currently being conducted in the Bush River Peninsula area (see Figure 20 and Appendix A). Geophysical methods (including GPR, EM-31, seismic reflection and refraction, and downhole gamma and induction logging) complement the basic area-wide studies conducted to define the geologic and hydrogeologic framework beneath the study area.

GPR imaging provides a detailed display of reflectors to depths up to 45 ft. The reflectors represent contacts separating recently deposited channel-fill complexes from underlying sediments. These contacts also constitute irregularities in the base of the surficial aquifer. The channel-fill complexes in the APG area are the result of multiple erosion/deposition events that occurred during the successive low sea-level stands and subsequent marine transgressions of the Pleistocene Epoch. The GPR profile presented in Figure 24 is a good example of two superimposed erosion/deposition events beneath the 30th Street Landfill. At this location, two more recent, shallow channel features are superimposed on an older, deeper paleochannel.

Seismic imaging, in conjunction with downhole logging, shows details of the shallow and deep facies beneath the study area. The top of the confining layer (at the base of the surficial aquifer) appears as a continuous reflector at a mean depth of 45 ft below land surface (Figure 36). Downhole gamma and conductivity logs of monitor well CC-11B suggest that this confining layer extends to a depth of approximately 120 ft below land surface. Reflectors dipping eastward at approximately 275 ft below the surface (Figure 34) mark undifferentiated depositional sequences of Cretaceous, Atlantic Coastal Plain strata. The top and bottom of the upper confined aquifer cannot be defined on the basis of reflection data alone. The eastern-dipping Cretaceous strata rest on a crystalline bedrock ranging in depth from 450 ft north of the Kings Creek study area (Figure 34) to nearly 550 ft in the south (Figure 35).

7.3 Subsurface Paleochannel Locations

It is important to define the paleochannel locations because their basal sediments often consist of materials of greater hydraulic conductivity (sands and gravels) that form the base of the surficial aquifer. The current drainageway and wetland locations in the Bush River Peninsula are good indicators of the locations of Pleistocene drainage systems. The Pleistocene paleochannels can be deeply incised into the underlying Cretaceous sediments; depths to the base of these features have been found to be at least 50 ft below sea level offshore (Figure 22) and greater than 35 ft below land surface onshore (monitor well WBR-23, Appendix A).

Preliminary subsurface data collected during the geophysical studies at Kings Creek were used to help select the locations of the recently installed site monitor wells. On the basis of the boring logs for these wells and the electromagnetic and GPR subsurface data collected, the approximate locations of major paleochannel features have been mapped and are presented in Figure 37. As the figure shows, a major paleochannel extends into Kings Creek from the wetland adjacent to, and including, the 30th Street Landfill. Multiple branches of the channel to the west,

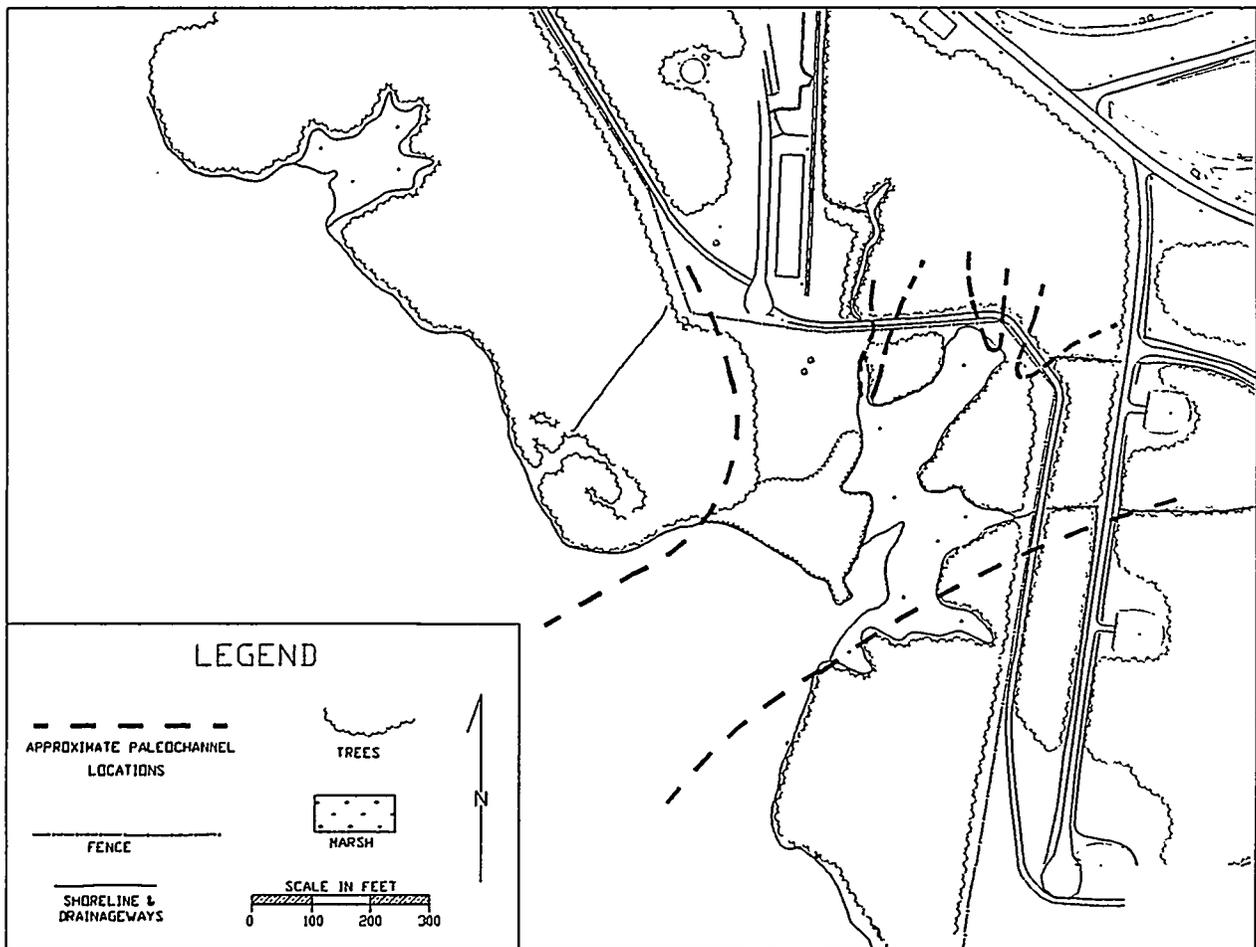


FIGURE 37 Approximate Paleochannel Locations Inferred from GPR Data

east, and north appear to meet at this wetland location. The west channel branch extends through the 30th Street Landfill at a depth of 25 to 30 ft below sea level. This branch is visible on GPR profiles #12, #13, and the western (right) side of #15 (Figures 23 through 25). Additional, shallower features (8–10 ft below ground surface), which likely represent later erosional features, are superimposed on the deeper feature in profile #13 (Figure 24). The shallower features correspond to two EM-31 conductivity highs extending northward in the 30th Street Landfill (Figure 16B).

Another paleochannel extends eastward from the wetland area. The channel boundaries at this location are less precise because of the lack of good GPR reflectors in the eastern section of the study area. This paleochannel is defined largely from logs for monitor wells WBR-23 and WBR-25 (Appendix A).

Two shallow (approximately 20 ft below ground surface) paleochannel branches extend toward the north. These branches are defined by GPR profiles #14 (Figure 26) and #15 (Figure 25) along the security fenceline north of the 30th Street Landfill (Figure 21). GPR data at these locations indicate two shallow channel features that may be superimposed over a deeper channel body, similar to those observed in the western branch. Review of the boring log for monitor well WBR-19 (Appendix A) indicates that paleochannel-type sediments are present at this location (Figure 20). Additional data collection is necessary to confirm the continuity of channel locations farther north.

Mapping the location of these potential hydraulically conductive zones is very important in understanding the hydrology of the surficial aquifer and the potential for interconnection between the surficial aquifer and the underlying upper confined aquifer (referred to as the Canal Creek aquifer on Figure 4). Five soil borings (BR-1 through BR-5, Figure 2) and recently installed monitor well WBR-48 provide depth information for the top of the Cretaceous upper confined aquifer. Monitor well WBR-48 is the closest control point to the Kings Creek study area. The top of the upper confined aquifer at the location of WBR-48 is approximately 100 ft below land surface (approximately 90 ft below sea level). Both sides of the offshore paleochannel are visible on GPR profile #16 (Figure 22), but the total depth of the thalweg has not been determined due to signal loss below a depth of approximately 50 ft below sea level. Extrapolating the slope of the two channel sides gives the depth of the thalweg at approximately 80 ft below sea level.

8 Summary and Conclusions

During the 1920s and 1930s, chemical munitions and wastes were reportedly burned at the former Kings Creek Disposal Site. Active landfilling reportedly occurred at the 30th Street Landfill in the 1960s and, probably, early 1970s (Nemeth 1989), and buried munitions have been discovered at the landfill, although no records of munitions disposal at this site are available.

A series of geophysical surveys, supported by a site drilling program, was undertaken to define the hydrogeologic framework and potential contaminant migration pathways beneath the study area. The areal extent of metallic wastes was mapped by using magnetic and electromagnetic methods. The following specific conclusions have been drawn based on the results of the surveys:

1. The areal extent of the 30th Street Landfill has largely been defined. No evidence was found of any landfilling to the east, across the wetland from the landfill.
2. No large-scale disposal by burial appears to be associated with the former Kings Creek Disposal Site, but small-scale waste burial cannot be ruled out. Magnetic anomaly maps prepared for the entire study area reveal an unknown subsurface anomaly at 110N/170E on the site grid that may represent a buried drum or small tank.
3. The general hydrogeologic framework beneath the Kings Creek study area has been defined. A Pleistocene channel-fill complex greater than 50 ft in depth runs beneath the 30th Street Landfill and into Kings Creek.
4. Seismic profiling revealed Cretaceous sediment ranging in thickness up to 500 ft. Gentle easterly dips in the sediment conform to published descriptions of the Cretaceous structure.
5. The Precambrian-age crystalline bedrock lies at a depth of 450–550 ft beneath the Bush River Peninsula.
6. Contaminant pathways from the 30th Street Landfill along the base of the surficial aquifer may be outlined by a conductive subsurface feature extending offshore into Kings Creek. This potential pathway corresponds to the location of a Pleistocene paleochannel outlined by GPR methods (see Conclusion 3). It is not known whether the offshore-trending paleochannel breaches the upper confined aquifer. Soil borings would be necessary to further characterize the subsurface hydrogeology.

9 References

Bennett, R.R., and R.R. Meyer, 1952, *Geology and Ground-Water Resources of the Baltimore Area*, Bulletin 4, Maryland Department of Geology, Mines, and Water Resources.

Cordell, L., et al., 1992, *Potential Field Geophysical Software: Version 2*, U.S. Geological Survey Open-File Report 92-18.

Dingman, R.J., et al., 1956, *The Water Resources of Baltimore and Harford Counties*, Bulletin 17, Maryland Department of Geology, Mines, and Water Resources.

Geonics Limited, 1992, *EM-31 Operating Manual (for Models with Two Digital Meters)*, Mississauga, Ontario, Canada.

Geophysical Survey Systems, Inc., 1987, *Operations Manual for Subsurface Interface Radar (SIR System-3)*.

Kansas Geological Survey, 1993, *EAVESDROPPER Seismic Reflection Processing Software*, Version 3.0, 1930 Constant Ave., Campus West, Lawrence, Kansas.

Kehrin, R.T., et al., 1988, *The Surficial Sediments of the Chesapeake Bay, Maryland — Physical Characteristics and Sediment Budget*, Report No. 48, Maryland Geological Survey.

Lorah, M.M., and D.A. Vroblesky, 1989, *Inorganic and Organic Ground-Water Chemistry in the Canal Creek Area of Aberdeen Proving Ground, Maryland*, Water Resources Investigations Report 89-4022, U.S. Geological Survey.

McGinnis, L.D., et al., 1994a, *Environmental Geophysics at Beach Point, Aberdeen Proving Ground, Maryland*, ANL/ESD-23, Argonne National Laboratory, Argonne, Ill.

McGinnis, L.D., et al., 1994b, *Environmental Geophysics of the Pilot Plant on the West Branch of Canal Creek, Aberdeen Proving Ground, Maryland*, ANL/ESD/TM-74, Argonne National Laboratory, Argonne, Ill.

Nemeth, G., 1989, *RCRA Facility Assessment Report, Edgewood Area, Aberdeen Proving Ground, Maryland*, prepared by U.S. Army Environmental Hygiene Agency for Aberdeen Proving Ground, Test and Evaluation Command, U.S. Army Material Command.

Oliveros, J.P., and D.A. Vroblesky, 1989, *Hydrogeology of the Canal Creek Area, Aberdeen Proving Ground, Maryland*, Water Resources Investigations Report 89-4021, U.S. Geological Survey.

Otton, E.G., and R.J. Mandle, 1984, *Hydrogeology of the Upper Chesapeake Bay Area, Maryland, with Emphasis on Aquifers in the Potomac Group*, Report No. 39, Maryland Geological Survey.

RIMROCK Geophysics, Inc., 1992, SIPT2 Refraction Processing Software, Version 3.2, Boulder, Colo.

Southwick, D.L., J.P. Owens, and J. Edwards, Jr., 1969, *The Geology of Harford County, Maryland*, Maryland Geological Survey.

Thurmond, V., 1993, *North-South Stratigraphic Cross-Section of the Bush River Area*, U.S. Army Corps of Engineers — Baltimore District, Internal Document.

U.S. Army Corps of Engineers, Baltimore District, 1994, *Detailed RI Work Plan for Cluster 15, Edgewood Area, Aberdeen Proving Ground, Maryland*.

Appendix A:
Soil Boring Logs

Hold No. WAK-19

DRILLING LOG		DIVISION CENAB-EN-66	INSTALLATION EDGEWOOD	SHEET 1 OF 3 SHEETS
1. PROJECT RT/S EDGEWOOD		10. SIZE AND TYPE OF BIT 3 3/4" x 8 1/2" CUTTING EDGE		
2. LOCATION (Coordinates or Station) CLUSTER 15		11. DATUM FOR ELEVATION SHOWN (TBM or LSL)		
3. DRILLING AGENCY COE-MOBILE		12. MANUFACTURER'S DESIGNATION OF DRILL CME 75		
4. HOLE NO. (As shown on drawing title and title number) WBR-19		13. TOTAL NO. OF OVER-BURDEN SAMPLES TAKEN		UNDISTURBED 1
5. NAME OF DRILLER J. BUTTS		14. TOTAL NUMBER CORE BOXES		
6. DIRECTION OF HOLE <input checked="" type="checkbox"/> VERTICAL <input type="checkbox"/> INCLINED _____ DEG. FROM VERT.		15. ELEVATION GROUND WATER		
7. THICKNESS OF OVERBURDEN		16. DATE HOLE		STARTED 8/30/94
8. DEPTH DRILLED INTO ROCK		17. ELEVATION TOP OF HOLE		COMPLETED 9/1/94
9. TOTAL DEPTH OF HOLE 47.5'		18. TOTAL CORE RECOVERY FOR BORING 73.7 %		19. SIGNATURE OF INSPECTOR

ELEVATION a	DEPTH b	LEGEND c	CLASSIFICATION OF MATERIALS (Description) d	% CORE RECOVERY e	BOX OR SAMPLE NO. f	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant) g
	0.0	CL-ML	SANDY SILTY CLAY, SAND FINE GR, SUBANG, VY STIFF TO 3.4', THEN MED STIFF - SOFT, SOME GRAY AT VERY TOP YELLOWISH BROWN TO 2.7' [10YR 5/6] THEN LT GRAY [2.5-4.7/2] w/ BROWNISH YELLOW [10YR 6/8] STREAKS & MOTTLING, RUSTY METALLIC DEBRIS SCATTERED THROUGHOUT, LESS THAN 2 CM IN SIZE	5.1/5.0	S-1	3/4" DRIVE SPUDW 8/30/94 DTW - 9' IN 30' HOLE; MAY BE BT TRAP DTW; MAY BE PAVED UP 8/31/94 HOLE COLLAPSED TO 7.9' 9/1/94 @ 0835 DTW - 12' THRU AUGERS FROM 60000 (BELIEVE THIS IS TRUE WATER LEVEL) DTW - 14.61' FROM TOL P1400 (~ ON COMPLETION)
	5.0	CL-ML	SAME SANDY SILTY CLAY AS FROM 2.7'-5.0', SOFT, MOIST			9/2/94 @ 1345 DTW - 14.34' FROM TOP (24 HRS)
		ML	GRADES OVER UPPER D.G. INTO SANDY SILT, SAND FINE GR, SUBANG, WELL SORTED, MOIST, LT YELLOWISH BROWN [10YR 6/9], HVY MINS COMMON	2.9/5.0	S-2	
	10.0	ML	SANDY SILT, SAND FINE GR, SUBANG, WELL SORTED, HVY MINS COMMON, LT GRAY [10YR 7/8], MOIST (10.0-10.5)			
		SP	SAND, FINE-MED GR, REGULARLY SORTED, SUBANG, TL HVY MINS, WGT, BROWN YELLOW TO 12.0, THEN LT GRAY [10YR 6/8], THEN 10YR 7/2	2.5/5.0	S-3	
	15.0	SP	SANDY SAND AS ABOVE, BROWN YELLOW [10YR 6/8] AND LT GRAY [10YR 7/2], SAT, OCC. 1-2 CM SUBANG GRAVEL	2.6/5.0	S-4	H ₂ O ENCOUNTERED

DRILLING LOG (Cont Sheet)		ELEVATION TOP OF HOLE		Hole No. <u>WBR-19</u>		
PROJECT <u>RI/FS</u>		INSTALLATION <u>EDGEWOOD</u>		SHEET <u>2</u> OF 3 SHEETS		
ELEVATION a	DEPTH b	LEGEND c	CLASSIFICATION OF MATERIALS (Description) d	% CORE RECOVERY e	BOX OR SAMPLE NO. f	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant) g
	20.0	SW	SAND, FINE-GR. GR. SUBRANDED, POORLY SORTED, OCC. SUBRANDED GRAVEL UP TO 1" IN SIZE. TR. H.V. MINS. SAT. YELLOW [10YR 6/6] FOR UPPER 1.7'; THEN BLENISH YELLOW [10YR 6/6]	29/50	S-5	ASSUMING CLAY DEPTH IS TRUE, LOSS OF RECOVERY FROM SAND. GIVEN THAT 25-30' SPOON WAS ALL SAND, ABOVE ASSUMPTION PROBABLY INCORRECT
	25.0	CL	CLAY, VY STIFF, GRAY [10YR 5/2] (21.0-24.7)			
		SP	SILT, VY SAND, SAND FINE GR. SUBRANDED, WELL SORTED, TR. H.V. MINS. SAT. LT. YELLOWISH BROWN [10YR 6/4] (24.7-25.0)			
		SW	SAND, FINE-MED GR., MOD WELL SORTED, SUBRANDED, OCC. SUBRANDED GRAVEL UP TO 0.5" IN SIZE IN BOTTOM 0.3', TR. H.V. MINS. SAT., SAME LT YEL. BROWN (25.0-25.1)	44/50	S-6	
		SP	SAND, FINE GR. SANDS - SUBRANDED, WELL SORTED, SAT., LT GRAY [10YR 7/2] (25.5-27.7)		S-7	
	30.0	SP	SAND, FINE-MED GR., MOD WELL SORTED, SUBRANDED, TR. H.V. MINS. SAT., LT YELLOWISH BROWN [10YR 6/4] (27.7-29.4)			
		SA-SM	SAND, FINE GR. SUBRANDED, WELL SORTED, SOME SILT, SAT., GRAY [10YR 6/1] (30.0-31.7)	38/50	S-8	
	35.0	SA-SM	SAND, SANDS, ABUN. LIGHTER MUD BOTTOM 0.2' BUT STARTS APPEARING @ 37.7', SEVERAL PYRITE CONCRETIONS AND NODULES FROM 37.7' DOWN, VY STIFF CLAY LENS @ 36.6-36.7' W/ GRAY [10YR 4/1], SAND IS SAME GRAY AS ABOVE (31.7-33.8)	40/50	S-9	
	40.0		SAME SAND AS ABOVE (35.0-39.0)			
	41.25	SA-SM				
	42.5			43/50	S-10	
	43.75	CL	CLAY, VY STIFF, GRAY [10YR 6/1] (40.7-43.8)			
	45.0					

PROJECT		ELEVATION TOP OF HOLE		Hole No.		
RT/FS		EAGLEWOOD		WBR-19		
SHEET		OF 3		SHEETS		
3						
ELEVATION	DEPTH	LEGEND	CLASSIFICATION OF MATERIALS (Description)	% CORE RECOVERY	BOX OR SAMPLE NO.	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant)
a	b	c	d	e	f	g
	48.0	CL	CLAY, STIFF - Y-Y STIFF, LT BROWN & GRAY [10YR 6/2] AND BROWN [10YR 5/3], TR. MICA	25/25	J-11	
	47.5		(45.0-47.5)			
			BOTH			

Hole No. WBR-19B

DRILLING LOG		DIVISION CGNAB-EN-66	INSTALLATION APG-EDGEWOOD	SHEET OF 1 SHEETS
1. PROJECT RT/F5 EDGEWOOD		10. SIZE AND TYPE OF BIT		
2. LOCATION (Coordinates or Station) CLUSTER 15		11. DATUM FOR ELEVATION SHOWN (TBM or MSL)		
3. DRILLING AGENCY CDE-MOBILE AIST.		12. MANUFACTURER'S DESIGNATION OF DRILL CME 75		
4. HOLE NO. (As shown on drawing title and file number) WBR-19B		13. TOTAL NO. OF OVER-BURDEN SAMPLES TAKEN	DISTURBED	UNDISTURBED
5. NAME OF DRILLER J. BUTTS		14. TOTAL NUMBER CORE BOXES		
6. DIRECTION OF HOLE <input checked="" type="checkbox"/> VERTICAL <input type="checkbox"/> INCLINED _____ DEG. FROM VERT.		15. ELEVATION GROUND WATER	16. DATE HOLE STARTED 10/5/94	COMPLETED 10/5/94
7. THICKNESS OF OVERBURDEN		17. ELEVATION TOP OF HOLE		
8. DEPTH DRILLED INTO ROCK		18. TOTAL CORE RECOVERY FOR BORING 79.0 %		
9. TOTAL DEPTH OF HOLE 20'		19. SIGNATURE OF INSPECTOR		

ELEVATION	DEPTH	LEGEND	CLASSIFICATION OF MATERIALS (Description)	% CORE RECOVERY	BOX OR SAMPLE NO.	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant)
		DL	SILT CLAY, MED STIFF, w/ FINE-GRS SANDS, MOD. W/CL SORTED, TR. HVY MINS + MICA, WET TO SAT IN SPOTS, LT GRAY [10YR 5/6] AND LT GRAY [10YR 7/2], BECOMING BRNISH YELLOW [10YR 6/6] AT 1.6'	5.4/5.0		3 1/2" DRIVE SPOON NO SAMPLES BEING TAKEN DUE TO PROXIMITY TO WBR-19 BTW IN WBR-19 - 14.11' FROM TOC
		CL-ML				
		CL	CLAY, MED STIFF - SOFT, STRAIGHTY YELLOWISH BROWN [10YR 5/6] AND LT GRAY [10YR 7/2], W/ MOD. PRES. INDICATES IN UPPER 1.3', LT GRAY IN LOWER 1.3'			10/5/94 BTW - 12.11' FROM GROUND THROUGH 15' AUGERS IN 20' HOLE BTW - 13.38' FROM TOC @ 1300 (ON COMPLETION)
5.0		CL	SAME AS ABOVE, SOFT, WET			10/9/94 BTW - 14.12' FROM TOC @ 1300 (> 24 HRS)
		ML	SANDY SILT, SAND FINE GR, RAGGED-OVERBLENDED, MOD. W/CL SORTED, TR. HVY MINS + MICA, WET TO SAT IN SPOTS, LT GRAY [10YR 7/2] AND LT YELLOWISH BROWN [10YR 6/4] w/ STRONG GRAY [7.5YR 5/6] MOTTLING	3.0/5.0		
10.0		HL	SAME AS ABOVE, LT GRAY [10YR 7/2]			
		SW	GRADES FROM AL INTO SAND, FINE-GRS CL, SUBANGS - SUBANG, MOD. W/CL SORTED, TR. HVY MINS, W/CL, BECOMING SAT TOWARD BOTTOM, WHITE [10YR 8/2]	2.4/5.0		BTW - 15.20' FROM TOC @ 1300 (NOTE: ADDL RECOVERY)
15.0		SW	SAME AS ABOVE, SCATTERED RAISED 1/2" GRAY CLAY SAND, YELLOWISH BROWN [10YR 5/6] OVERLAP 0.2'			
		CL	CLAY, W/ SOFT, W/ FINE GR SANDS + MOD. W/CL SORTED, TR. HVY MINS + MICA, WET TO SAT IN SPOTS, LT GRAY [10YR 7/2]	5.0/5.0		
		CL	SAND FINE-GRS CL, SUBANGS - SUBANG, MOD. W/CL SORTED, TR. HVY MINS + MICA, WET TO SAT IN SPOTS, LT GRAY [10YR 7/2]			
		SP	SAND, FINE GR, SUBANGS - SUBANG, W/CL SORTED, TR. HVY MINS + MICA, SAT, W/ PALE BROWN [10YR 7/3 + 7/4]			
20.0						

DEPTH	H ₂ O (APR)	RAD (M/SK)	REMARKS
0-5'	6.3	0.01	
5-10'	6.6	0.01	
10-15'	6.6	0.01	
15-20'	6.2	0.05	
20'	6.3	7.0	0.0

Hole No. WBR-20

DRILLING LOG		DIVISION	INSTALLATION	SHEET 1 OF 2 SHEETS	
1. PROJECT RT/FS CAGWOOD		CEWAB-EN-66	APG - CAGWOOD		
2. LOCATION (Coordinates or Station) CLUSTER 15				10. SIZE AND TYPE OF BIT	
3. DRILLING AGENCY COE - MOBILE DIST.				11. DATUM FOR ELEVATION SHOWN (TBM or MSL)	
4. HOLE NO. (As shown on drawing title and file number) WBR-20				12. MANUFACTURER'S DESIGNATION OF DRILL CME 75	
5. NAME OF DRILLER J. BUTS				13. TOTAL NO. OF OVER-BURDEN SAMPLES TAKEN DISTURBED: _____ UNDISTURBED: _____	
6. DIRECTION OF HOLE <input checked="" type="checkbox"/> VERTICAL <input type="checkbox"/> INCLINED _____ DEG. FROM VERT.				14. TOTAL NUMBER CORE BOXES	
7. THICKNESS OF OVERBURDEN				15. ELEVATION GROUND WATER	
8. DEPTH DRILLED INTO ROCK				16. DATE HOLE STARTED: 9/28/94 COMPLETED: 9/29/94	
9. TOTAL DEPTH OF HOLE 38'				17. ELEVATION TOP OF HOLE	
				18. TOTAL CORE RECOVERY FOR BORING 79.7 %	
				19. SIGNATURE OF INSPECTOR	

ELEVATION	DEPTH	LEGEND	CLASSIFICATION OF MATERIALS (Description)	% CORE RECOVERY	BOX OR SAMPLE NO.	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant)
		CL-ML	SANDY SILTY CLAY, SOFT, ABUND. ROOTS, SAND FINE GR. SUBSTR. DE. CANTON BROWN [10TR4/1] (0.0-0.4)			3 1/2' BRIVE SPDN 3 1/4' HSA
		CL-ML	SILTY CLAY w/ SOME FINE GR. SUBSTR. SAND, MED STIFF, SOME ROOTS, YELLOW/CR. BROWN [10TR4/2] (0.4-1.3)			
		ML-CL	SANDY CLAY/SILT, STIFF-VY STIFF, FINE, SAND FINE GR. SUBSTR. DE. YELLOW/CR. BROWN [10TR4/2] TO 2.2', THEN MIXED SAND/YL. BROWN AND WHITE [10TR4/2]	4.8/5.0	S-1	9/29/94 DTW - 9.33' FROM TDL @ 9.30 (ON COMPLETION)
		ML	SANDY SILT, SAND FINE GR. SUBSTR. DE. W/LL. SOFT, BROWN YELLOW [10TR4/2] TO 4.3' THEN STRONG BROWN [7.54R/2]			9/30/94 DTW - 8.56' FROM TDL @ 10.00 (24 HRS)
50		ML	SANDY TO SANDY, FINE GR. SUBSTR. DE. W/LL. SOFT, BROWN [10TR4/2] w/ SOME SAND STRONG BROWN		S-2	
		CL-ML	SILTY CLAY, STIFF-VY STIFF, LT BROWN GRAY [10TR4/2] w/ STRONG BROWN [7.54R/2] MOTTLED	4.6/5.0		
100		CL-ML	SAME SILTY CLAY, TR. MICA, SOME ROOTS		S-3	
		CL	CLAY, SOFT OVER TOP 0.4' THEN MED. STIFF, LIGHT BROWN, BROWN [10TR4/2] OVER TOP 0.4', THEN VY DARK GRAY [10TR4/2], MOIST	4.4/5.0		
150		CL	SAME CLAY, STIFF-MED. STIFF, LIGHTER LESS ABUNDANT		S-4	IN 25' HOLD THRU ANGLES FROM GROUND
200				3.9/5.0		IN 35' OPEN #16 FLY SAND

DEPTH	AVG. PEN.	AVG. PEN.	AVG. PEN.
0-5'	3.7	3.1	0.01
5-10'	2.9	2.9	0.015
10-15'	2.7	2.7	0.01
15-20'	2.1	2.5	0.01
20-25'	1.5	1.5	0.01
25-30'	1.1	1.1	0.01
30-35'	0.8	0.8	0.015
35-38'	2.4	2.4	0.01

DRILLING LOG (Cont Sheet)		ELEVATION TOP OF HOLE		Hole No. WBR-2D		
PROJECT RT/PS EAGLEWOOD			INSTALLATION APG - EAGLEWOOD		SHEET 2 OF 2 SHEETS	
ELEVATION	DEPTH	LEGEND	CLASSIFICATION OF MATERIALS (Description)	% CORE RECOVERY	BOX OR SAMPLE NO.	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant)
a	b	c	d	e	f	g
	20.0	CL	SAME AS ABOVE, LIGHT ABUNDANT			
	21.0	SC	(20.0-21.6) CLAYEY SAND, SAND FINE-MED GR, SUBRNDG, SUBANG, MOD. WELL SORTED, SAT. TR. LIGITE, SCATTERED CESS GR SANDS AND SUBRNDG GRAVEL UP TO 0.5" IN SIZE, GRAY [10YR 6/1]	3.6/5.0	S-5	∇ SAT. SAND ENCOUNTERED
	25.0	SP	(21.6-23.6) SAND, FINE-MED GR, SUBRNDG, MOD. WELL SORTED, OCC. CESS GR & SUBRNDG GRAVEL UP TO 0.5" IN SIZE - SAT. SAND GRAY, WAXY IN SPOTS, TR. HVY MINS		S-6	
	25.0	SM	(25.0-27.0) SILTY SAND, SAND FINE GR, RNDG-SUBRNDG, WELL SORTED, LIGITE COMMON, SOFT CLAY LENSES AT 27.0-27.2', 27.4-27.7', & 27.9-28.0', SAT., TR. DARK GRAYISH BROWN [10YR 3/2]	4.7/5.0		
	30.0	SM	(28.0-29.1) SAME AS ABOVE GRAVEL (GRAVEL) UP TO 1" IN SIZE, SUBRNDG, AT CONTACT W/CLAY			
	30.0	CL	(30.0-31.6) CLAY, TR. STIFF, TR. HICH, BROWN [7.5YR 5/3] W/ SWIRLS OF WEAKRED [10R 5/4]	3.2/5.0	S-7	DRILLER FEELS CLAY ENCOUNTERED @ ~31.5'
	36.0	CL	(31.6-33.2) SAME AS ABOVE	1.8/3.0	S-8	
	38.0		BoH			

Hole No. WBK-21

DRILLING LOG	DIVISION <u>CCNAB-CN-GG</u>	INSTALLATION <u>EDGEWOOD</u>	SHEET <u>1</u> OF <u>2</u> SHEETS
1. PROJECT <u>RI/FS' EDGEWOOD</u>	10. SIZE AND TYPE OF BIT <u>3 3/4" 8 1/2" CUTTERHEAD</u>		
2. LOCATION (Coordinates or Station) <u>CLUSTER 15</u>	11. DATUM FOR ELEVATION SHOWN (TBM or MSL)		
3. DRILLING AGENCY <u>COC - MOBILE & ISI.</u>	12. MANUFACTURER'S DESIGNATION OF DRILL <u>CME 75</u>		
4. HOLE NO. (As shown on drawing title and site number) <u>WBK-21</u>	13. TOTAL NO. OF OVER-BURDEN SAMPLES TAKEN		UNDISTURBED
5. NAME OF DRILLER <u>J. BUTTS</u>	14. TOTAL NUMBER CORE BOXES		15. ELEVATION GROUND WATER
6. DIRECTION OF HOLE <input checked="" type="checkbox"/> VERTICAL <input type="checkbox"/> INCLINED _____ DEG. FROM VERT.	16. DATE HOLE STARTED <u>9/12/94</u>		COMPLETED <u>9/13/94</u>
7. THICKNESS OF OVERBURDEN	17. ELEVATION TOP OF HOLE		
8. DEPTH DRILLED INTO ROCK	18. TOTAL CORE RECOVERY FOR BORING		<u>92.4 %</u>
9. TOTAL DEPTH OF HOLE <u>25'</u>	19. SIGNATURE OF INSPECTOR		

ELEVATION a	DEPTH b	LEGEND c	CLASSIFICATION OF MATERIALS (Description) d	% CORE RECOVERY e	BOX OR SAMPLE NO. f	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant) g								
0.0	0.0	OL	SILT, SOME FINE CL. SUBANG-MUD SAND, ABN. REFS, SCATTERED 0.5" QZ GLAUC. BROWN (10YR 5/2)			5 3/4" HSA 3 1/2" DRIVE-SPDRN								
		CL-ML	SILTY CLAY, VERY STIFF, FINE GR. TO 25', SCATTERED FINE GR SAND, SUBANG, SCATTERED REFS TO BOTTOM, MOTTLED YELLOWISH BROWN (10YR 5/4), GRAY (10YR 6/1), AND STRONG BROWN (7.5YR 5/8)	42/50	S-1	9/13/94 STW - 10.67' FROM GROUND IN HOLE COLLAPSED TO 11' w/ 3 3/4" HSA LEFT IN HOLE - OVERNIGHT DROPPED TO 12.5' STW WAS ~ 10" FROM GROUND STW - 12.94' FROM TDC @ 1040 (ON COMPLETION)								
	5.0	CL-ML	SAND AS ABOVE, BUT WET (0.5-4.2)			9/14/94 STW - 12.60' FROM TDC @ 1040 (~24 HRS)								
		ML	SANDY SILT, SAND FINE-MED GR. POSSIBLY SORTED, SUBANG, HYD MINS & MICA COMMON, WET, SAND BECOMES TOWARD BASE, VY FINE BROWN (10YR 7/2)	49/50	S-2									
		ML-CL	CLAYEY SILT, SOFT, TR. HYD MINS & MICA, LT YELLOWISH BROWN (10YR 6/4)											
	10.0	CL-ML	SAND AS ABOVE - GRABING INTO SILTY CLAY VY STIFF, MICA COMMON, SCATTERED FINE GR SUBANG & SAND, LT GRAY (10YR 7/1) WITH BANISH YELLOW (10YR 6/6) STREAKS (10.0-11.1)			2025' <table border="1"> <tr> <td>HLV</td> <td>RAO</td> </tr> <tr> <td>DL</td> <td>DL</td> </tr> <tr> <td>3.0</td> <td>3.0</td> </tr> <tr> <td>OUT</td> <td>0.01</td> </tr> </table>	HLV	RAO	DL	DL	3.0	3.0	OUT	0.01
HLV	RAO													
DL	DL													
3.0	3.0													
OUT	0.01													
		SW	SAND, FINE-MED GR, OIL CASE GR, SUBANG, REL. POORLY SORTED, TR. HYD MINS, CRT, VY FINE BROWN (10YR 7/4), BECOMING STRONG BROWN (7.5YR 5/8) AT 18.1'	40/50	S-3	SAT. SANDS ENCOUNTERED								
	15.0	CL-ML	SILTY CLAY, MED STIFF, MOST LT BANISH GRAY (10YR 4/2) AND PALL-BROWN (10YR 6/3)											
		SM	SILTY SAND SAND FINE GR, REL. WELL SORTED, SUBANG-SUBANG, TR. HYD MINS & MICA, CRT, CLAYEY SAND FROM 16.6-17.1' COLOR OF SM IS VY FINE BROWN (10YR 7/4) TO CLAYEY SAND WITH BANISH YELLOW (10YR 6/6)	50/50	S-4									
		CL	CLAY, VY STIFF, GRABES FROM MOST SILTY CLAY, MED. STIFF OVER TOP 0.8' GRAY (10YR 5/1) w/ BANISH YELLOW (10YR 6/6) STREAKS IN SILTY CLAY											

DRILLING LOG (Cont Sheet)		ELEVATION TOP OF HOLE		Hole No. WBR-21		
PROJECT RI/PS Edgewood		INSTALLATION Edgewood		SHEET 2 OF 2 SHEETS		
ELEVATION a	DEPTH b	LEGEND c	CLASSIFICATION OF MATERIALS (Description) d	% CORE RECOV. ERY, e	BOX OR SAMPLE NO. f	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant) g
		CL	SANDY CLAY, VY STIFF, GRAYISH BROWN (10/25/2) TO 21.5', THEN DARK GRAY (5/24/1)	5.0 5.0	55	
	25.0		804 (20.0-25.0)			

Hole No: WBR-23

DRILLING LOG	DIVISION CENAB-CN-66	INSTALLATION APG-COGEWOOD	SHEET OF 2 SHEETS
1. PROJECT RT/PS COGEWOOD		10. SIZE AND TYPE OF BIT	
2. LOCATION (Coordinates or Station) CLUSTERS		11. DAYUM FOR ELEVATION SHOWN (TBM or MSL)	
3. DRILLING AGENCY COG-MOBILE DIST.		12. MANUFACTURER'S DESIGNATION OF DRILL CME '75	
4. HOLE NO. (As shown on drawing title and file number) WBR-23		13. TOTAL NO. OF OVER-BURDEN SAMPLES TAKEN	
5. NAME OF DRILLER J. BOYB		14. TOTAL NUMBER CORE BOXES	
6. DIRECTION OF HOLE <input checked="" type="checkbox"/> VERTICAL <input type="checkbox"/> INCLINED _____ DEG. FROM VERT.		15. ELEVATION GROUND WATER	
7. THICKNESS OF OVERBURDEN		16. DATE HOLE STARTED 10/6/94 COMPLETED 10/7/94	
8. DEPTH DRILLED INTO ROCK 45'		17. ELEVATION TOP OF HOLE	
9. TOTAL DEPTH OF HOLE 45'		18. TOTAL CORE RECOVERY FOR BORING 74.5%	
		19. SIGNATURE OF INSPECTOR	

ELEVATION	DEPTH	LEGEND	CLASSIFICATION OF MATERIALS (Description)	% CORE RECOVERY	BOX OR SAMPLE NO.	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant)
			GRAVEL, ROAD SURFACE		NO SAMPLE	3/2" DRIVE-SPIN
1.0		OL	SANDY SILTY CLAY TO SILT, STIFF, SAND FINE GR. RANDBL. SANDS, 1 FOOT FROM 4" TO MAX. 10" SANDS (10/18/94) (10.0-1.6)	3.7/4.0	S-1	10/6/94 DTW - 4.3' FROM GRAVEL THRU 30' AUGERS 10/7/94 DTW - 6.6' FROM TOL @ 1425 (ON COMPLETION) 10/8/94 DTW - 6.44' FROM TOL @ 0750 (>24hrs!)
		MC-CL	CLAYEY SILT, FINE GR. BECOMING STIFF TO HARD BASE W/ COARSE CLAY CONTACT INCLUDING SLITTED FINE GR. RANDBL SAND, 1/2" RANDBL. SILT, GRAY, YELLOW (10/18/94) W/ LG GRAY (10/18/94) TO HARD BASE, SCATTERED ROOTS IN UPPER HALF (10.6-4.7)			
5.0		CL-ML	SILTY CLAY, MED STIFF, MOST TO WET OVER LAYER 0.2', INCLUDING SANDY CLAY INCL. LAYER 0.2', SAND IS FINE-MED GR. RANDBL, ROOT CONTACT, FREQUENT LG GRAY (10/18/94) & YELLOWISH BROWN (10/18/94) MOTTLED, INCLUDING GRAY (10/18/94) OVER LAYER 0.5' (5.0-10.3)	4.1/5.0	S-2	SAT. SAND (CALCULATED)
		SP	SAND, FINE GR., SUBANGED-SUBANG, 1-2" RANDBL, TR. HRY MILLS, SAT., VT. HALE BROWN (10/18/94) (10.3-9.1)			
10.0		SP	SAME AS ABOVE (10.0-9.1)			
		SW	SAND, FINE-GR. SAND, ANGLED-SUBANG, POORLY SORTED, SAT., YELLOWISH GR. (10.0-12.7)	4.8/5.0	S-3	
		SW	SAND FINE-GR. SAND, ANGLED-SUBANG, POORLY SORTED, SAT., YELLOWISH GR. (11.3-12.7)			
		SP	SAND SAND AT AT TOP OF SPOON, GRAYISH YELLOW (10/18/94), 1 2" RANDBL. GRAY AT CONTACT W/ SM. BLEN. (12.7-13.5)			
15.0		SM	SILTY SAND, SAND W/ FINE GR. RANDBL, WELL SORTED, SAT., WHITE (10/18/94) (13.5-14.6)			
		SM	SILTY SAND, SAND W/ FINE GR. RANDBL, WELL SORTED, SAT., WHITE (10/18/94), TR. HRY MILLS (14.6-15.0)	4.1/5.0	S-4	

DEPTH	H2O (H2O)		R2O (H2O)	
	STES	DRY	STES	SUMMS
0.0-0.5	5.3	—	0.01	—
1.0-5.0	3.2	5.2	0.01	0.01
5.0-10.0	4.9	4.9	0.01	0.01
10.0-15.0	6.6	6.6	0.01	0.01
15.0-20.0	6.6	6.8	0.01	0.01
20.0-25.0	7.4	—	—	—
25.0-30.0	7.7	8.4	0.01	0.01
30.0-35.0	6.8	8.1	0.01	0.01
35.0-40.0	5.1	7.7	0.01	0.01
40.0-45.0	4.4	7.1	0.01	0.01
45.0-50.0	3.2	6.3	0.01	0.01

DRILLING LOG (Cont Sheet)		ELEVATION TOP OF HOLE		Hole No. WBR-23		
PROJECT RT/S EDGEWOOD			INSTALLATION APG-CAGEWOOD		SHEET 2 OF 2 SHEETS	
ELEVATION	DEPTH	LEGEND	CLASSIFICATION OF MATERIALS (Description)	% CORE RECOVERY e'	BOX OR SAMPLE NO. f	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant) g
20.0	20.0		SAME AS ABOVE, w/ SOME REDDISH YELLOW STAIN FROM 20.9-21.3	3.0/50	S-5	
25.0	25.0	SM	SAME AS ABOVE w/ CLAYY SILT LENSES ~0.5" THICK, FROM 25.9' TO BASE			
		SM	SAME FINE GR. SAND, WELL SORTED, TIGHTLY BOUND LIGHTER COLOR ON LOWER 0.2', SAT. GRAY [10426/1]	3.1/50	S-6	
30.0	30.0	SP	SAME SAND AS ABOVE LIGHTER COLOR, SANDY SILTY CLAY, STIFF, OCCURS AS LAYERS UP TO 0.3" THICK	3.0/50	S-7	ATTEMPTED TO EXCLUDE CLAY IN SAMPLE
35.0	35.0	SP + CL	SAME SAND, CLAY LENSES MAKE UP ~50% OF SAND. CLAY IS STIFF, CT BRNISH GRAY [10426/2], LIGHTER COLOR	2.9/50	S-8	COMPOSITE SAMPLE
40.0	40.0	SP + CL	SAME AS ABOVE			
		CL	CLAY, PREDOMINANTLY STIFF BUT STIFF IN SPOTS, MULTICOLORS IN STREAKS: BROWN [10426/3 + 4/3] CT BRNISH GRAY [10426/2] AND WEAKE RED [10426/4], SCATTERED LIGHT	3.8/50	S-9	
45.0	45.0		BOTH			

DRILLING LOG		DIVISION	INSTALLATION	HOLE NO.	SHEET
		CENAB-CN-GG	EDGEWOOD	WWR-24	1 OF 2 SHEETS
1. PROJECT			10. SIZE AND TYPE OF BIT		
RI/PS EDGEWOOD			11. DATUM FOR ELEVATION SHOWN (TBM or MSL)		
2. LOCATION (Coordinates or Station)			12. MANUFACTURER'S DESIGNATION OF DRILL		
CLUSTER 15			CME 75		
3. DRILLING AGENCY			13. TOTAL NO. OF OVER-BURDEN SAMPLES TAKEN		
COE - MOBILE DIST.			DISTURBED UNDISTURBED		
4. HOLE NO. (As shown on drawing title and file number)			14. TOTAL NUMBER CORE BOXES		
WBR-24			15. ELEVATION GROUND WATER		
5. NAME OF DRILLER			16. DATE HOLE		
J. BUTTS			STARTED 9/13/94 COMPLETED 9/14/94		
6. DIRECTION OF HOLE			17. ELEVATION TOP OF HOLE		
<input checked="" type="checkbox"/> VERTICAL <input type="checkbox"/> INCLINED _____ DEG. FROM VERT.			18. TOTAL CORE RECOVERY FOR BORING		
7. THICKNESS OF OVERBURDEN			19. SIGNATURE OF INSPECTOR		
8. DEPTH DRILLED INTO ROCK			84.7 %		
9. TOTAL DEPTH OF HOLE					
312'					

ELEVATION	DEPTH	LEGEND	CLASSIFICATION OF MATERIALS (Description)	% CORE RECOVERY	BOX OR SAMPLE NO.	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant)																					
		DL	SILT TOP SOIL, SOME FINE GR. SUBSTRATA SAND, BROWN, MOIST, ONE 2" CHANNEL, LT YELLOWISH BROWN [10YR 6/4]			3 1/2" DRIVE SPDRN 3 3/4" HSA 9/14/94 DTW - 18.1' IN 30' HOLE THRU ANGLES (FROM GROUND) @ 0800 - 2D. 6.6' FROM TOL @ 1340 (ON COMPLETION)																					
		CL	CLAY, VY STIFF, SAND SILT, TR. MICA, FINABLE TO 1', SCATTERED ROOTS TO 1.7', VY FINE BROWN [10YR 7/4] TO 3.2', THEN LT GRAY [10YR 7/2], YELLOWISH RED MOTTLING [5YR 5/2] THROUGHOUT, BECOMING MDS. STIFF OVER BOTTOM 0.2'	4.9/5.0	S-1	9/15/94 DTW - 2D. 0.6' FROM TOL @ 0825 (~24 HRS)																					
	5.0	CL	CLAY, MDS. STIFF, BECOMING SOFT & MOIST AT 7.1', LT BROWN GRAY [10YR 6/2] w/ BRUSH YELLOW [10YR 6/8] MOTTLING, MOTTLING ASSOC. w/ OXIDIZED FERRIMONTS < 1cm IN SIZE, MAYBE METALLIC DEBRIS?	4.1/5.0	S-2	<table border="1"> <thead> <tr> <th>DEPTH</th> <th>PLU</th> <th>SPD</th> </tr> </thead> <tbody> <tr> <td>0.0-5.0</td> <td>1.1</td> <td>1.1</td> </tr> <tr> <td>5.0-10.0</td> <td>1.6</td> <td>2.1</td> </tr> <tr> <td>10.0-15.0</td> <td>2.0</td> <td>2.2</td> </tr> <tr> <td>15.0-20.0</td> <td>2.0</td> <td>2.0</td> </tr> <tr> <td>20.0-25.0</td> <td>2.1</td> <td>2.1</td> </tr> <tr> <td>25.0-30.0</td> <td>1.9</td> <td>1.9</td> </tr> </tbody> </table>	DEPTH	PLU	SPD	0.0-5.0	1.1	1.1	5.0-10.0	1.6	2.1	10.0-15.0	2.0	2.2	15.0-20.0	2.0	2.0	20.0-25.0	2.1	2.1	25.0-30.0	1.9	1.9
DEPTH	PLU	SPD																									
0.0-5.0	1.1	1.1																									
5.0-10.0	1.6	2.1																									
10.0-15.0	2.0	2.2																									
15.0-20.0	2.0	2.0																									
20.0-25.0	2.1	2.1																									
25.0-30.0	1.9	1.9																									
		ML	SANDY SILT, SAND FINE GR. SUBSTRATA, FINE MINS COLUMN, MOIST, VY PALE BROWN [10YR 7/4] w/ SOME SANDY BROWN YELLOW																								
	10.0	ML	SAME SANDY SILT, TR. MICA, BECOMES WHITE [10YR 8/2] AT 12.7'	3.9/5.0	S-3	7' TOP 1st																					
	15.0	ML-CL	SAME AS ABOVE EXCEPT SILT AT 15.5' BECOMING CLAYEY FROM 16.4-17.5', FINE GR. SUBSTRATA SAND LENSES AT BASE																								
		CL	SANDY CLAY, VY STIFF, SAND FINE GR. LENSES, WET, TIREMAY LT GRAY [10YR 7/1] YELLOWISH BROWN [10YR 5/2] AND YELLOWISH RED [5YR 5/2]	3.3/5.0	S-4																						
	20.0																										

DRILLING LOG (Cont Sheet)		ELEVATION TOP OF HOLE		Hole No. <u>WBR-24</u>		
PROJECT <u>RI/FS GAGEWOOD</u>			INSTALLATION <u>EAGEWOOD</u>		SHEET <u>2</u> OF <u>2</u> SHEETS	
ELEVATION a	DEPTH b	LEGEND c	CLASSIFICATION OF MATERIALS (Description) d	% CORE RECOV. ERY e	BOX OR SAMPLE NO. f	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant) g
	20.0	CL	SANDY CLAY FOR TOP 0.1' BECOMING CLAY WITH SOME FINE GR. LINDS SAND, MED. STIFF (20.0-22.5)	50% 5.0	S-5	
		SP	SAND, FINE-MSD GR. SUBRANSET SANDS, REL. POORLY SORTED, TR. HVT MINS. SAT. YELLOW [10YR 7/6], VY FINE GR. SAND [10YR 7/3] AND BRNISH YELLOW [10YR 6/8] OVER BOTTOM 0.2' (22.5-25.0)		S-6	
	25.0	SP	SAME AS ABOVE, TR. 1 CM ANGLED GRAVEL AT BASE (25.0-27.3)	48% 5.0		
		CL	CLAY, VY STIFF, STEAKY DARK GRAY [10YR 5/2] AND LT BRNISH GRAY [10YR 6/3], SOME SILT (27.3-29.3)		S-7	
		ML-CL	SANDY CLAYEY SILT, MED STIFF, SAME LT BRNISH GRAY (29.3-29.8)			
	30.0		BOX			

DRILLING LOG	DIVISION CENAB-EN-66	INSTALLATION EDGEWOODS	SHEET OF 2 SHEETS
1. PROJECT RT/PS EDGEWOODS		10. SIZE AND TYPE OF BIT	
2. LOCATION (Coordinates or Station) CLUSTER 15		11. DATUM FOR ELEVATION SHOWN (TBM or MSL)	
3. DRILLING AGENCY COE - MOBILE DIST.		12. MANUFACTURER'S DESIGNATION OF DRILL CME 75	
4. HOLE NO. (As shown on drawing title and file number) WBR-25		13. TOTAL NO. OF OVER-BURDEN SAMPLES TAKEN DISTURBED: _____ UNDISTURBED: _____	
5. NAME OF DRILLER J. BUTTS		14. TOTAL NUMBER CORE BOXES	
6. DIRECTION OF HOLE <input checked="" type="checkbox"/> VERTICAL <input type="checkbox"/> INCLINED _____ DEG. FROM VERT.		15. ELEVATION GROUND WATER	
7. THICKNESS OF OVERBURDEN		16. DATE HOLE STARTED: 9/14/94 COMPLETED: 9/23/94	
8. DEPTH DRILLED INTO ROCK		17. ELEVATION TOP OF HOLE	
9. TOTAL DEPTH OF HOLE 40'		18. TOTAL CORE RECOVERY FOR BORING 81.8 %	
		19. SIGNATURE OF INSPECTOR	

ELEVATION	DEPTH	LEGEND	CLASSIFICATION OF MATERIALS (Description)	% CORE RECOVERY	BOX OR SAMPLE NO.	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant)
0.0	0.0	ML	SILT, FRAGILE, SOME FINE GR. REDDISH SAND, ORG. ROOTS, PALE BROWN [10YR 6/3] COARSE AT, THIN VY PALE BROWN [10YR 8/4] (10-1.4)			3/4" DRIVE SPODN 3 3/4" HSA 9/15/94 BTW - 8.5' TERU AVGERS IN 20' HOLE + STILL RISING @ 1035 - 7.3' THRU AVGERS IN 35' HOLE @ 1240
		ML-CL	CLAYEY SILT, VERY STIFF FRAGILE, TR. ROOTS & FINE GR. REDDISH SAND, MOTTLED LT TAUHISH BROWN [10YR 4/4] AND BRNISH YELLOW [10YR 6/8]	46/50	S-1	9/23/94 DID NOT TAKE BTW ON COMPLETION BEARING FILTER PAPER EMPLOYED FOR LOWER LEVEL TO NEAR GROUND LEVEL; WATER IS SLOWLY DROPPING TO TRUE BTW OF 1035
	50	SM	SILT SAND, SAND FINE GR. SUBANGS, WELL SORTED, SAT., LT BRNISH GRAY [10YR 6/2] (11.4-11.6)			9/26/94 BTW - 7.07' FROM TOL @ 1030 (-2444) SAT. SANDS ENCOUNTERED
		SP	SAND, FINE-MED GR., SUBANGS-REDDED, REL. PARTLY SORTED, TR. HVY MINS & MILCA, SAT., YELLOW [10YR 7/6], REDDISH YELLOW [7.5YR 6/8] AND PALE BROWN [10YR 6/3] ALL 1/2" SPHERICAL GRAVEL AT BASE (11.0-11.2)	36/50	S-2	
	10.0	SP	SAND AS ABOVE (5.9-8.6)			
		SP	SAND FINE GR. SUBANGS, WELL SORTED, TR. HVY MINS, SAT., BROWN CLAYEY TO BLACK AT BOTTOM, RUBBY GRAVEL UP TO 2" IN SIZE AT BASE, VY PALE BROWN [10YR 7/4] (10.0-11.2)	49/50	S-3	
		ML	SANDY SILT, SAND FINE GR., SUBANGS, WELL SORTED, TR. HVY MINS, SAT., WHITE [10YR 8/2] (11.0-12.5)		S-4	
	15.0	CL	CLAY, MED. STIFF, TR. MILCA, MAST, YELLOWISH BROWN [10YR 5/2] (12.5-14.9)			9/15/94
		SM	SANDY SAND, SAND FINE-MED GR. REL. PARTLY SORTED, SAT., TR. HVY MINS, VY PALE BROWN [10YR 7/4] & SPOTS OF VY. BROWN [10YR 5/2] (15.5-16.2)		S-5	
		SM	SILT SAND, SAND VY FINE GR. SUBANGS, WELL SORTED, TR. HVY MINS, WHITE [10YR 8/2] (15.5-16.2)	22/50		POOR RECOVERY PROBABLY RESULT OF BLOCKAGE IN SPODN; SAMPLE DEPTHS NOT ACCURATE
	20.0		NOTE: THIS IS SAME AS FROM 12.5-14.9'; DO NOT KNOW HOW MUCH OF SPODN IS REAL SAMPLE (16.4-17.2)			

DEPTH	WATER	TEMP	RES
0.0-3.3	3.3	-	0.01
0.0-5.0	3.4	3.6	0.01
5.0-10.0	3.5	3.5	0.01
10.0-15.0	3.0	3.0	0.01

PROJECT		ELEVATION TOP OF HOLE		Hole No.		
RT/Fs EAGLEWOOD		EAGLEWOOD		WBR-25		
PROJECT		INSTALLATION		SHEET		
RT/Fs EAGLEWOOD		EAGLEWOOD		2 OF 2 SHEETS		
ELEVATION	DEPTH	LEGEND	CLASSIFICATION OF MATERIALS (Description)	% CORE RECOV. ERY.	BOX OR SAMPLE NO.	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant)
a	b	c	d	e	f	g
	20.0		SILTY SAND, SANDY FINE CL, SUBSANG- SUBANG, WELL SORTED, SH. VY PALE BROWN [10YR 7/3] TO 21.5'; BECOMING WHITE [10YR 8/2]			
	25.0	SM	(20.0-24.3) SAME SILTY SAND, SAME WHITE	43/5.0	S-6	
Δ SCALE ↓	30.0	SM	(25.0-30.0) SAME AS ABOVE	50/5.0	S-7	
Δ SCALE ↓	35.0	SM	(30.0-34.2) SAME SILTY SAND, EXCEPT TR. HYMNUS, 0.05' LIGHT SEAMS AT TOP AND AT 33.1', COLOR OF SM IS GRAY [10YR 5/7]	49/5.0	S-8	
Δ SCALE ↓	40.0	SM	(31.2-34.0) SAME AS ABOVE			
		CL	(35.0-35.5) CLAY, STIFF, DARK GRAY [N4] OVER TOP 0.7' GRADUALLY FROM SAND TO SANDY CLAY TO CLAY, SILTY SAND LENSE, 0.05' THICK AT 37.1'	37/5.0	S-9	BUTS & BENJEN BELIEVE CLAY WAS ENCOUNTERED AT ~36'
	40.0		(35.5-35.2) BOTT			

Hole No. **WBR-26**

DRILLING LOG	DIVISION CENAR-ENG-66	INSTALLATION EDGEWOOD	SHEET 1
1. PROJECT RTFS EDGEWOOD	10. SIZE AND TYPE OF BIT		
2. LOCATION (Coordinates or Station) CLUSTER 15	11. DATUM FOR ELEVATION SHOWN (TBM or MSL)		
3. DRILLING AGENCY COE-MOBILE BIST.	12. MANUFACTURER'S DESIGNATION OF DRILL CM-75		
4. HOLE NO. (As shown on drawing title and file number) WBR-26	13. TOTAL NO. OF OVER-BURDEN SAMPLES TAKEN	DISTURBED	UNDISTURBED
5. NAME OF DRILLER J. BUTTS	14. TOTAL NUMBER CORE BOXES		
6. DIRECTION OF HOLE <input checked="" type="checkbox"/> VERTICAL <input type="checkbox"/> INCLINED _____ DEG. FROM VERT.	15. ELEVATION GROUND WATER		
7. THICKNESS OF OVERBURDEN	15. DATE HOLE STARTED 9/17/94	COMPLETED 9/19/94	
8. DEPTH DRILLED INTO ROCK	17. ELEVATION TOP OF HOLE		
9. TOTAL DEPTH OF HOLE 20'	18. TOTAL CORE RECOVERY FOR BORING 84.5%		
19. SIGNATURE OF INSPECTOR			

ELEVATION e	DEPTH b	LEGEND c	CLASSIFICATION OF MATERIALS (Description) d	% CORE RECOVERY e	BOX OR SAMPLE NO. f	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant) g
		DL	SILT CLAY, MED. STIFF, SAND FINE GR. SUBRANGED SANDS - SUBRANGED SAND, MED. BROWN [10YR 4/3] (0.0-0.3)			3/4" DRIVE SPOON 3/4" x 3/4"
		CL-ML	SILT CLAY, VY STIFF, SAND FINE GR. SUBRANGED SAND, OCC. ROOTS AT TOP, ONE 1" LENS OF STEEL GRAVEL AT 3.4', STRONG BROWN [7.5YR 5/6] AND BRNISH YELLOW [10YR 6/6] WITH LT GRAY [10YR 7/2] MOTTLING	4.8/5.0	S-1	9/17/94 BTW - 8.95' FROM GROUND THRU AUGERS IN 20' HOLE w/ AUGERS PULLED UP TO 114' - 868' FROM TOL 01640
	5.0	CL-ML	SANDY SILTY CLAY, SAND FINE GR. SUBRANGED SAND, (0.3-4.6) COLORS AS ABOVE (1.0-4.3)			9/19/94
		ML	SANDY SILT, SAND FINE GR. SUBRANGED SAND, MED. WELL SORTED, TR. HVY MINS. WHICH, MOST BECOMES LIGHT AT 6.0', GRASSES INTO CL-ML BELOW, DISCRETE LAYERS OF BRNISH YELLOW [10YR 6/6] AND VY PALL BEOWN [10YR 7/2]		S-2	9/21/94 BTW - 10.23' FROM TOL 00870 (ON COMPLETION) BTW - 10.23' FROM TOL @ 0940 (-18 HRS)
		CL-ML	SILT CLAY, MED. STIFF - SOFT, SAT., OCC. FINE GR. SAND, LT GRAY [10YR 7/2] STRONG BROWN [7.5YR 5/6] AND LT YELLOWISH BROWN [10YR 6/4]	3.6/5.0		
	10.0	CL	CLAY, SOFT, SAT., LT BRNISH GRAY [10YR 6/2] AND GRAYISH BROWN [10YR 5/2], OCC. ORG. FRACS w/ STRUCTURE VISIBLE (7.2-8.6)		S-3	
		SM	SILT SAND, SAND FINE GR. SUBRANGED SAND, MED. WELL SORTED, TR. HVY MINS, SAT., LT GRAY [10YR 7/2], THEN VY PALL BROWN [10YR 4/4] OVER BOTTOM 0.2' (10.0-12.5)	3.0/5.0		▽ SAT. SAND ENCOUNTERED
	15.0	SM	SANDY SILTY SAND, VY PALL BROWN [10YR 7/2], SOME 1/4" SUBRANGED GRAVEL (12.5-13.5)		S-4	
		SW	SAND, FINE-GRS GR. MODERATELY SORTED, SUBRANGED SANDS, TR. HVY MINS, BECOMES COARSE TOWARD BOTM, SAT., VY PALL BROWN [10YR 8/3] (15.0-16.7)	5.0/5.0		
		CL	CLAY, VY STIFF, TOP 0.3' CONSISTS OF INTERMINGLED LAYERS OF CLAY AND FINE-GRS GR. SAT. SAND, ORG. FRACS w/ STRUCTURE VISIBLE AT TOP OF CL, MULTICOLORED; REDDISH BROWN [5YR 4/1], YELLOWISH BROWN [10YR 5/2] WHITE [10YR 8/1], AND LT YELLOWISH BROWN [2.5Y 6/6] (16.7-17.8)		S-5	
	20.0		BSH (17.8-20.0)			

Hole No. WBR-27

DRILLING LOG		DIVISION		INSTALLATION		SHEET	
1. PROJECT		CENAB-EN-06		APG - EDGWOOD		1 OF 1 SHEETS	
2. LOCATION (Coordinates or Station)		RI/FS EDGWOOD		10. SIZE AND TYPE OF BIT		11. DAYUM FOR ELEVATION SHOWN (TBM or MSL)	
3. DRILLING AGENCY		CLUSTER 15		12. MANUFACTURER'S DESIGNATION OF DRILL		13. TOTAL NO. OF OVER-BURDEN SAMPLES TAKEN	
4. HOLE NO. (As shown on drawing title and file number)		COG - MOBILE DIST.		CME 75		DISTURBED UNDISTURBED	
5. NAME OF DRILLER		WBR-27		14. TOTAL NUMBER CORE BOXES		15. ELEVATION GROUND WATER	
6. DIRECTION OF HOLE		J. BUTTS		16. DATE HOLE		17. ELEVATION TOP OF HOLE	
<input checked="" type="checkbox"/> VERTICAL <input type="checkbox"/> INCLINED _____ DEG. FROM VERT.				10/1/94		10/3/94	
7. THICKNESS OF OVERBURDEN				18. TOTAL CORE RECOVERY FOR BORING		97.4 %	
8. DEPTH DRILLED INTO ROCK				19. SIGNATURE OF INSPECTOR			
9. TOTAL DEPTH OF HOLE		19'					

ELEVATION	DEPTH	LEGEND	CLASSIFICATION OF MATERIALS (Description)	% CORE RECOVERY	BOX OR SAMPLE NO.	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant)
		DL	SILT SANDY, THICK ROOT MAT, VY OL (0.2-0.4) [10YR 2/2]			3 3/4" HST 3 1/2" DRIVE STON
		CL-ML	SILTY CLAY, HARD, PILEABLE, DARK ROOTS, BRUSH YELLOW [10YR 6/6] w/ yellowish brown [10YR 5/8] AND LT GRAY [10YR 7/2] MOTTLED	43/40	S-1	10/1/94 DTW - 6.5' FROM TOP OF GROUND THROUGH 10' AUG. 12. IN 19' HOLE (GRAVEL IS 1.1' THICK)
		CL-ML	SANDY SILTY CLAY, STIFF, SAND PRESENT FINE GR, SUBRANDED BOT DEC. MDR - CLSE GR, SOME ROOTS, LT GRAY [10YR 7/2] AND YELLOWISH BROWN [10YR 5/8]	41/50	S-2	10/3/94 DTW - 10.78' FROM TOL w/ 3' STICKUP RELATIVE TO THIS LOG (ON COMPLETION)
		CL	CLAY, STIFF, TR HICA, ROOTS COMMON, GRAYISH w/ SOME BRUSH YELLOW [10YR 6/8] AND LT BRUSH GRAY [10YR 6/2], SOME FINE CA SAND APPEARING AT VERY BOTTOM OF SAMPLE			10/4/94 DTW 9.30' FROM TOL @ 8:10 (24 HRS)
		SO	SAND, FINE GR, SUBRANDED, W/CL SORTED, STIFF, VY FINE BROWN [10YR 7/2], BRUSH BRUSH YELLOW [10YR 6/6] AT 11.2'	50/50	S-3	▽ SAT. SANDS ENCOUNTERED
		CL	SANDY CLAY, STIFF, SAND FINE GR, ROOTS, LT GRAY [10YR 7/2]			
		SW	SAND, FINE CASE GR, RUBBY-SUBRANDED, MIDDLE SORTED, STIFF, BRUSH YELLOW [7.5YR 6/8]		S-4	
		CL	CLAY, MDR STIFF FOR TOP 0.4', THEN VY STIFF, LIGHTER COMMON TO 17.3', GRAYISH BROWN [10YR 5/2] TO 14.4', THEN GRAY [10YR 5/1]	46/50	S-5	
			Both			

DRILLING LOG		DIVISION CONAB-EN-66	INSTALLATION APLI-EDGEWOOD	SHEET OF 2 SHEETS
1. PROJECT R/PS EDGEWOOD		10. SIZE AND TYPE OF BIT		
2. LOCATION (Coordinates or Station) CUSTOLIS		11. DATUM FOR ELEVATION SHOWN (TBM or BSL)		
3. DRILLING AGENCY COE - MOBILE DIST.		12. MANUFACTURER'S DESIGNATION OF DRILL CME 75		
4. HOLE NO. (As shown on drawing title and file number) WBR-28		13. TOTAL NO. OF OVER-BURDEN SAMPLES TAKEN	DISTURBED	UNDISTURBED
5. NAME OF DRILLER T. BOITZ		14. TOTAL NUMBER CORE BOXES		
6. DIRECTION OF HOLE <input checked="" type="checkbox"/> VERTICAL <input type="checkbox"/> INCLINED _____ DEG. FROM VERT.		15. ELEVATION GROUND WATER		
7. THICKNESS OF OVERBURDEN		16. DATE HOLE	STARTED 9/30/94	COMPLETED 10/4/94
8. DEPTH DRILLED INTO ROCK		17. ELEVATION TOP OF HOLE		
9. TOTAL DEPTH OF HOLE 34'		18. TOTAL CORE RECOVERY FOR BORING 79.7 %		
19. SIGNATURE OF INSPECTOR				

ELEVATION e	DEPTH b	LEGEND c	CLASSIFICATION OF MATERIALS (Description) d	% CORE RECOVERY e	BOX OR SAMPLE NO. f	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant) g
		CL	SANDY CLAY W/ FINE GR. SANDS, SUBS. TR. LENS, SPOTS ABUNDANT, VY GRAY BROWN (10YR 2/1) (10.0-03)	5.0/50	S-1	3 1/2' DRIVE STON
		CL	SANDY CLAY, SOFT-TO STIFF, SCATTERED ROOTS, SANDS FINE-TO M. GR., REDD, YELLOWISH BROWN (10YR 5/6) W/ SPATTERS OF GRAY (10YR 7/1) SPOTS			10/3/94 BTW - 2.9' FROM GROUND THRU 10' AUGERS IN 34' BORE
		SH	(09-37) SILTY SAND, SAND FINE TO M. SUBS. SCATTERED, TR. H. VY MIN, SAT., CLAYEY UP TO 1.3' IN THICK, SAND YELLOW (10YR 7/4)			10/4/94 BTW - 4.22' FROM TFL @ 1325 (ON COMPLETION)
		SL	(14.0-17.0) SANDY GRAY, SAND FINE GR. SUBS. WELL SORTED, SAT., TR. H. VY MIN, VY PALE BROWN (10YR 7/4)			10/4/94 BTW - 4.03' FROM TFL @ 1250 (W/ 24 HRS)
		CL	(17.0-2.0) SANDY CLAY, SAND VY FINE GR. SUBS. VY STIFF, COLOR BETWEEN LT GRAY (10YR 7/1) AND WHITE (10YR 8/1)			
		SM	(5.0-7.0) SILTY SAND, SAND VY FINE GR. SUBS. WELL SORTED, TR. H. VY MIN, SAT., CLAYEY W/ SPOTS, A FEW THIN (2.0") CLAY LENSES, SAND COLOR AS ABOVE W/ SOME VY PALE BROWN (10YR 8/4)	4.4/50	S-2	Y SAT. SANDS ENCOUNTERED
		SM	(7.0-9.4) SAME AS ABOVE, LIGHTER STREAKS FROM 11.1-11.4, VY STIFF SILTY CLAY FROM 11.5-11.8	2.0/2.0	S-3	
		SM	(10.0-12.0) SAME AS ABOVE, SOME LIGHTER STREAKS, LT YELLOWISH BROWN (10YR 6/4), SAT. RETURN	1.8/2.0	S-4	
		SM	(12.0-19.8) SAME AS ABOVE BUT NO LIGHT	1.0/1.0	NO SAMPLES TAKEN	
		SA	(14.0-15.0) SAND, FINE GR. REDD-SUBS. WELL SORTED, SAT., TR. H. VY MIN, VY PALE BROWN (10YR 7/4), BECOMING YELLOW (10YR 7/6) AT 17.8'	5.0/5.0	S-5	10/3/94
		CL-MI	(15.0-18.7) SILTY CLAY INTERBEDDED W/ SAND AS ABOVE, TR. LIGHTER, SANDS & CLAY INTERBEDS ARE 0.2-0.3" THICK, CLAY IS GRAY (10YR 7/1) AND LT GRAY (10YR 7/2), SAND AS ABOVE, CLAY IS STIFF (18.7-20.0)			

DEPTH	SAND (PPH)		SILT (PPH)	
	Grain	Subs	Grain	Subs
0'-5'	6.7	0.01	0.01	0.01
5'-10'	6.2	6.5	0.01	0.01
10'-12'	5.3	6.1	0.01	0.01
12'-14'	4.5	6.1	0.01	0.01
14'-15'	4.5	5.8	0.01	0.01
15'-20'	3.9	—	0.01	—
20'-25'	3.8	4.3	0.01	0.01
25'-30'	3.6	4.1	0.01	0.01
30'-34'	3.6	4.1	0.01	0.01

DRILLING LOG (Cont Sheet)		ELEVATION TOP OF HOLE		Hole No. ¹ WBR-28		
PROJECT RI/FS EDGEWOOD		INSTALLATION AP6-EDGEWOOD		SHEET 2 OF 2 SHEETS		
ELEVATION	DEPTH	LEGEND	CLASSIFICATION OF MATERIALS (Description)	% CORE RECOVERY	BOX OR SAMPLE NO.	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant)
a	b	c	d	e	f	g
	20.0		SILTY CLAY STIFF - YR STIFF, DRY-MOIST, DARK GRAY (OY44) VERY THIN SILTY SAND LENSES SCATTERED THROUGHOUT, SAT.			
		CL-HL		1.2/5.0	S-6	
	25.0		(20.0-21.2') SAME AS ABOVE SILTY SAND LENSES UP TO 1" THICK, DARK LSY FINE GR, ENGCT-SUBSANDS, SAME BK GRAY			
		CL-HL				
			(25.0-26.2') SILTY SAND W/ NUMEROUS SILTY CLAY LENSES UP TO 1" THICK, THESE ARE SAME SOILS AS ABOVE, BUT REVERSED ABUNDANCE, SAME BK GRAY	2.7/5.0	S-7	
		SM				
	30.0		(26.2-27.7') SAME SILTY CLAY W/ SILTY SAND INTERLACES AS AT TOP OF PREVIOUS SPOON, TR. LIGHTER			
		CL-HL		4.0/4.0	S-8	DEFINITELY A COMPOSITE SAMPLE; ALTHOUGH ATTEMPTED TO EXCLUDE SANDY LENSES
	34.0		(30.0-34.0) BOT			

Hole No. WBR-31

DRILLING LOG	DIVISION ENAB-EN-66	INSTALLATION EAGLEWOOD	SHEET 1 OF 2 SHEETS
1. PROJECT RT/FS EAGLEWOOD	10. SIZE AND TYPE OF BIT		
2. LOCATION (Coordinates or Station) CLUSTER 15	11. DATUM FOR ELEVATION SHOWN (TBM or IRL)		
3. DRILLING AGENCY COE-MOBILE DISTRICT	12. MANUFACTURER'S DESIGNATION OF DRILL CME 75		
4. HOLE NO. (As shown on drawing title and file number) WBR-31	13. TOTAL NO. OF OVER-BURDEN SAMPLES TAKEN	DISTURBED	UNDISTURBED
5. NAME OF DRILLER J. BUTTS	14. TOTAL NUMBER CORE BOXES		
6. DIRECTION OF HOLE <input checked="" type="checkbox"/> VERTICAL <input type="checkbox"/> INCLINED _____ DEG. FROM VERT.	15. ELEVATION GROUND WATER		
7. THICKNESS OF OVERBURDEN	16. DATE HOLE	STARTED 9/26/94	COMPLETED 9/27/94
8. DEPTH DRILLED INTO ROCK	17. ELEVATION TOP OF HOLE		
9. TOTAL DEPTH OF HOLE . 30'	18. TOTAL CORE RECOVERY FOR BORING 82.3 %		
19. SIGNATURE OF INSPECTOR			

ELEVATION e	DEPTH b	LEGEND c	CLASSIFICATION OF MATERIALS (Description) d	% CORE RECOVERY e	BOX OR SAMPLE NO. f	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant) g
		DL	SILT CLAY w/ FINE GR. SANDS, SPT, (10.0-10.4)			3/4" DRIVE DOWN 3/4" #5A
		ML	SANDY SILT, SAND FINE GR. SUBANG-SUBANG, WELL SORTED, BOT O.C. C.S.G. SAND, MOIST, WET, BECOMING SAT AT 3.1', TR. MICA FINE MIN. LT YELLOWISH BROWN [10YR 6/4] w/ SOME YELLOWISH BROWN AREAS [10YR 5/8], LT GRAY [10YR 7/2] OVER BOTTOM 0.1', CLAYEY IN SPOTS	3.9/5.0	S-1	9/26/94 5' - 4.17' in 5' over 10' - 5.71' over (ON COMPLETION) NO EXTRA. NOTES
	5.0	ML-CL	SAME AS ABOVE, BOT CLAYEY (10.4-10.9)			
		CL	CLAY, MOD. STIFF-SOFT, LT GRAY [10YR 7/2] (10.9-12.3)			
		SM	SILT SAND, SAND FINE GR. SUBANG, MOD. WELL SORTED, TR. FINE MIN. SAT., VY. PR. LT-BROWN [10YR 7/2] (12.3-15.1)	3.9/5.0	S-2	✓ SAT. SANDS ENCOUNTERED
	10.0	SM	SAME AS ABOVE, BOT SOME AREAS REL. FREE OF SILT (15.1-17.9)			
		CL	SANDY CLAY SAND FINE GR. SUBANG, MOD. WELL SORTED, VY. STIFF WET-SAT, SAND IS VY. ABUNDANT, LT. GRAY [10YR 7/1] TO 12.9' THEN PINKISH CLAY [7.5YR 7/2], DEC. 1/4" RINGS GRAVEL (10.0-11.4)	4.9/5.0	S-3	
		CL-ML	SILT CLAY, VY. STIFF, TR. MICA, WET, GRAY [10YR 6/1 AND 5/1] (11.4-13.3)			
	15.0	CL-ML	SAME AS ABOVE (13.3-14.9)			
		ML	SANDY SILT, SAND FINE GR. SUBANG-SUBANG, WELL SORTED, w/ SOME CLAY, SAT., GRAY [10YR 5/1] (15.0-15.7)			
		CL-ML	SILT CLAY, VY. STIFF, TR. MICA, SANDY LIGHT GRAY [10YR 5/1] AND DARK GRAY [10YR 4/1] (15.7-16.5)	3.8/5.0	S-4	
		SM	SILT SAND, SAND FINE GR. SUBANG-SUBANG, WELL SORTED, SAT., SAND LIGHT GRAY [10YR 6/1] (16.5-18.5)			
	20.0		(18.5-18.7)			

DRILLING LOG (Cont Sheet)		ELEVATION TOP OF HOLE		Hole No. <u>WBR-31</u>		
PROJECT <u>RI/FS CAGWOOD</u>		INSTALLATION <u>CAGWOOD</u>		SHEET <u>2</u> OF 2 SHEETS		
ELEVATION a	DEPTH b	LEGEND c	CLASSIFICATION OF MATERIALS (Description) d	% CORE RECOV- ERY e	BOX OR SAMPLE NO. f	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant) g
	280	SM	SAME AS ABOVE <i>(20.0-20.8)</i>			
		HL	SANDY SILT ALTERNATING W/ SANDY SILTY CLAY, SAND FINE GA, LARGER SUBRNDLS, WELL SORTED, SILTY CLAY IS MED. STIFF, SANDY AREAS ARE INT., GRAY (10YR 6/7)	38/ 50	S-5	
		CL	CLAY, VY STIFF, GRAY (10YR 6/7) <i>(20.8-23.1)</i>			
	250	SM	SILTY SAND, SAND FINE GA, LARGER SUBRNDLS, WELL SORTED, INT. LT BROWN GRAY (10YR 7/2) (25.0-25.4)			
		CL	CLAY, VY STIFF, LT GRAY (10YR 7/1) TO 26.4' THEN LT OLIVE BROWN (2.5Y 5/3), SANDY CLAY OVER TOP 0.4'	4.4/ 5.0	S-6	
	300		<u>BOH</u> <i>(25.4-29.1)</i>			

Hole No. WBR-45

DRILLING LOG	DIVISION GENAB-EN-66	INSTALLATION EDGEWOOD	SHEET 1
1. PROJECT RI/RS EDGEWOOD	10. SIZE AND TYPE OF BIT		
2. LOCATION (Coordinates or Station) CLUSTERIS	11. DATUM FOR ELEVATION SHOWN (TBM or MSL)		
3. DRILLING AGENCY COE-MOBILE DIST.	12. MANUFACTURER'S DESIGNATION OF DRILL CME TS		
4. HOLE NO. (As shown on drawing title and file number) WBR-45	13. TOTAL NO. OF OVER-BURDEN SAMPLES TAKEN		UNDISTURBED
5. NAME OF DRILLER J. BATES	14. TOTAL NUMBER CORE BOXES		
6. DIRECTION OF HOLE <input checked="" type="checkbox"/> VERTICAL <input type="checkbox"/> INCLINED _____ DEG. FROM VERT.	15. ELEVATION GROUND WATER		16. DATE HOLE STARTED 9/19/94 COMPLETED 9/21/94
7. THICKNESS OF OVERBURDEN	17. ELEVATION TOP OF HOLE		
8. DEPTH DRILLED INTO ROCK	18. TOTAL CORE RECOVERY FOR BORING 70.8 %		19. SIGNATURE OF INSPECTOR
9. TOTAL DEPTH OF HOLE 37'			

ELEVATION	DEPTH	LEGEND	CLASSIFICATION OF MATERIALS (Description)	% CORE RECOVERY	BOX OR SAMPLE NO.	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant)
		OL	SANDY SILT TOP SOIL, SAND FINE GR. RUBBED SANDS, ADV. ROOTS, BROWN [10YR 5/3] (0.0-0.6)			3/4" DRIVE SPDRW 3/4" HSA
		ML	SANDY SILT, SAND FINE GR. RUBBED SANDS, OCC. ROOTS, ALWISH YELLOW [10YR 6/6] (0.6-1.4)			9/19/94 BTW - 13' THRU AUGERS IN 37' OPEN HOLE
		CL	CLAY, MED. STIFF-30FT, SOME AREAS SANDY W/ FINE GR. RUBBED SANDS, BROWN [10YR 5/3] BECOMING LT OLIVE BROWN [2.5Y 5/3] AT 2'. HEAVILY OXIDIZED FRAGS FROM 1.4-1.8' EMBEDDED IN CLAY (1.4-3.1)	31/50	5-1	9/20/94 BTW - 6.3' THRU AUGERS IN 37' HOLE 9/21/94 BTW - 7.72' FROM TOL @ 0955 (ON COMPLETION)
	5.0	CL	SAME CLAY, BUT LIGNITE SCATTERED THROUGHOUT, SOFT-VL 30FT, SAT., GRAYISH BROWN [2.5Y 5/3] FINE GR. RUBBED SANDS SCATTERED THROUGHOUT (1.4-3.1)	33/50	5-2	9/22/94 BTW - 7.59' FROM TOL @ 0810 (~24 HLT)
	10.0	CL	SAME AS ABOVE (5.0-9.5')			*MUCH OF THIS IS PROBABLY FALL IN
		CL	CLAY, MED STIFF LT GRAY [10YR 7/1] W/ SOME BRNISH YELLOW [10YR 6/6] STREAKS, SOME LIGNITE (10.0-11.3)	50/50	5-3	
		CL	CLAY, MED STIFF, SOME FINE GR. RUBBED SANDS, LT CLAY [10YR 7/1] AND STAINING BROWN [5YR 6/6] (11.3-13.4)			
	15.0	CL	SAME AS ABOVE, W/ RUBBED GRATEL UP TO 25' EMBEDDED (13.4-15.0)			
		CL	CLAY, MED. STIFF SCATTERED FINE GR. RUBBED SANDS, LT GRAY [10YR 7/1] W/ YELLOWISH BROWN [10YR 7/8] SPOTS (15.0-16.4)	24/50	5-4	
	20.0		(16.4-17.4)			

DRILLING LOG (Cont Sheet)		ELEVATION TOP OF HOLE		Hole No! WBR-45		
PROJECT		INSTALLATION		SHEET		
RT/RS (EDGEWOOD)		EDGEWOOD		2 OF 2 SHEETS		
ELEVATION	DEPTH	LEGEND	CLASSIFICATION OF MATERIALS (Description)	% CORE RECOVERY	BOX OR SAMPLE NO.	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant)
a	b	c	d	e	f	g
	28.0	SP	SAND, FINE-MED GR, REL. POORLY SORTED, SUBANGS-SUBSAG, TR. HVY MIN. SAT, VY PALE-BROWN [10YR 2/4]		S-5	SAT SANDS ENCOUNTERED
			(20.0-23.0)	4.7/50		
		CL-ML	SANDY SILTY CLAY, VY STIFF SAND VY FINE GR, SUBANGS, SAND OCCURS W/IN CLAY AND ALSO AS DISCRETE, THIN LENSES, RARE THICK, LIGHT, DK GRAY [10YR 4/1]			
	25.0	CL-ML	SAME AS ABOVE		S-6	
			(23.0-24.7)			
		SM	SILTY SAND, SAND VY FINE GR, SUBANGS, W/CLL SORTED, TR. HVY MIN. SAT, GRAY [10YR 4/1] THIN [0.25"] SILTY CLAY LENSES ROUGHLY HALF IN. AT BASE	3.1/50	S-7	H ₂ O - 12' UP DRILL RIG IN 30' HOLE
			(25.0-26.1)			
	30.0	SM	SAME AS ABOVE, ABUNDANT LIGNITE MEDM 31.2-31.5'		S-8	
			(26.6-28.1)			
		CL	CLAY, VY STIFF, MULTICOLORS: LT GRAY [10YR 2/1], BRNISH YELLOW [10YR 6/6] W/ DK RED [10R 3/6] STRAKS	3.3/50		
			(30.0-31.8)			
	35.0	CL	SAME AS ABOVE, STIFF		S-9	
			(31.8-33.3)	1.1/2.0		
	37.0					
			BOH			
			(35.0-36.1)			

Hold No. WBR-47

DRILLING LOG		DIVISION		INSTALLATION		SHEET	
1. PROJECT		CENAB-EN-66		EDGEWOOD		OF 2 SHEETS	
2. LOCATION (Coordinates or Station)		CLUSTER 15		10. SIZE AND TYPE OF BIT		3 3/4" x 7 1/2" (WATERLIFT)	
3. DRILLING AGENCY		COE-MOBILE DST.		11. DATUM FOR ELEVATION SHOWN (TBM or BSL)			
4. HOLE NO. (As shown on drawing title and file number)		WBR-47		12. MANUFACTURER'S DESIGNATION OF DRILL		CME 75	
5. NAME OF DRILLER		J. BOVIS		13. TOTAL NO. OF OVER-BURDEN SAMPLES TAKEN		8	
6. DIRECTION OF HOLE		<input checked="" type="checkbox"/> VERTICAL <input type="checkbox"/> INCLINED _____ DEG. FROM VERT.		14. TOTAL NUMBER CORE BOXES		UNDISTURBED	
7. THICKNESS OF OVERBURDEN				15. ELEVATION GROUND WATER			
8. DEPTH DRILLED INTO ROCK				16. DATE HOLE		STARTED 9/9/94 COMPLETED 9/9/94	
9. TOTAL DEPTH OF HOLE		35'		17. ELEVATION TOP OF HOLE			
18. TOTAL CORE RECOVERY FOR BORING				19. SIGNATURE OF INSPECTOR		[Signature]	

ELEVATION	DEPTH	LEGEND	CLASSIFICATION OF MATERIALS (Description)	% CORE RECOVERY	BOX OR SAMPLE NO.	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant)
		CL	SILT TO SILT, SOME SAND, SOME FINE GR SAND (10YR 7/2)			
		CL-HL	SILTY CLAY, VY STIFF, TRILMILC, SCATTERED REDS, SOME TOP, VY PALLC BROWN [10YR 7/5] TO 12, THEN BROWN [10YR 7/3] WITH YELLOWISH RED [5YR 4/6] MOTTLING	4.2/5.0	S-1	9/9/94 BITW-14.3' THRU AUGERS IN 25' HOLE -11.89' FROM TOC @ 1320 (ON COMPLETION) 9/12/94 BITW-11.51' FROM TOC @ 0810 (> 24 HRS)
5.0		CL-HL	SILTY CLAY, VY SOFT, SAT, SOME FINE GR SANDS, TRILMILC, 2 FRAGMENTS OF GRANA (P/10M RAILROAD BED?), GRANA IS FOLIATED METAMORPHIC ROCK, SAND BROWN & YELLOWISH RED AS ABOVE	2.8/5.0	S-2	H ₂ O ENCOUNTERED
10.0		CL-HL	SANDS AS ABOVE			
		HL-CL	CLAYEY SILT, SOFT, SAT, WITH SAND FINE GR SUBARCTIC SAND, VY VY'S COMMON, PALLC BROWN [10YR 6/3] w/ SOME TEL RED MOTTLING AS ABOVE	4.1/5.0	S-3	
		CL	CLAY, VY SOFT, LT GRAY [10YR 7/5]			
15.0		CL	SAME CLAY		S-4	
		SM	SILTY SAND, SAND FINE GR, WELL SORTED, SANDS - SUBARCTIC, VY VY'S COMMON, SAT, VY PALLC BROWN [10YR 7/3] FOR TOP 0.4', THEN LT GRAY [10YR 7/2]	4.8/5.0	S-5	SAT. SANDS ENCOUNTERED
20.0						

DRILLING LOG (Cont Sheet)		ELEVATION TOP OF HOLE		Hole No. WBR-47		
PROJECT RT/RS ENGWOOD			INSTALLATION		SHEET 2 OF SHEETS	
ELEVATION a	DEPTH b	LEGEND c	CLASSIFICATION OF MATERIALS (Description) d	% CORE RECOVERY e	BOX OR SAMPLE NO. f	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant) g
	20.5	SH	SAME SILTY SAND, ALTHOUGH SOME AREAS REL. SILT FREE, VY PALL-BROWN [10YR7/4], LT YELLOWISH BROWN [10YR6/4] AND BANISH YELLOW [10YR6/8], 1 CM LIGHTLY MED STIFF CLAY LENS AT 22.2', 0.1' LT GRAY SANDY CLAY LENS AT 23.7'	4.3/5.0	5-6	
	25.0	SP	(20.0-24.3) SAND, FINE GR, WELL SORTED, ANGLED-SUBROD, VY PALL-BROWN [10YR7/3]			
		CL	(25.0-26.7) SANDY CLAY, MED STIFF, SAND FINE GR, SUBROD, BANISH YELLOW FOR TOP HALF, THG WHITE [10YR7/1]	4.9/5.0	5-7	
		SP	(26.7-27.6) SAME SAND AS AT TOP OF SPD, VY FINE BROWN [10YR7/3], YELLOWISH BROWN [10YR5/6] AND LT GRAY [10YR7/2]			
	30.0	SP	(27.1-27.9) SAME SAND, BANISH YELLOW [10YR6/6]			9/10/94
		CL	(30.0-32.2) CLAY, MED STIFF, GRAYCH BROWN [10YR7/2] VY A FEW GRAY [10YR6/6] LAYERS, HIGH PLASTICITY, MAY BE CH?	5.0/5.0	5-8	
	35.0		(32.2-35.0) BOT			

Hole No. WBR-48

DRILLING LOG DIVISION CENAR-EN-GG		INSTALLATION APG-EDGEWOOD		SHEET 1 OF 4 SHEETS
1. PROJECT RI/FS EDGEWOOD		10. SIZE AND TYPE OF BIT 9 3/4" HAUTEBOURG		
2. LOCATION (Coordinates or Station) CLUSTER 15		11. DATUM FOR ELEVATION SHOWN (TBM or MSL)		
3. DRILLING AGENCY DOE-MOBILE DIST.		12. MANUFACTURER'S DESIGNATION OF DRILL CHEFS/FAILING 1500/FAILING 314		
4. HOLE NO. (As shown on drawing title and file number) WBR-48		13. TOTAL NO. OF OVER-BURDEN SAMPLES TAKEN DISTURBED: _____ UNDISTURBED: _____		
5. NAME OF DRILLER J. BOYSS/C. MOON/ARLAWAY		14. TOTAL NUMBER CORE BOXES		
6. DIRECTION OF HOLE <input checked="" type="checkbox"/> VERTICAL <input type="checkbox"/> INCLINED _____ DEG. FROM VERT.		15. ELEVATION GROUND WATER		
7. THICKNESS OF OVERBURDEN		16. DATE HOLE STARTED: 11/2/94 COMPLETED: 12/23/94		
8. DEPTH DRILLED INTO ROCK		17. ELEVATION TOP OF HOLE		
9. TOTAL DEPTH OF HOLE		18. TOTAL CORE RECOVERY FOR BORING %		
19. SIGNATURE OF INSPECTOR				

ELEVATION a	DEPTH b	LEGEND c	CLASSIFICATION OF MATERIALS (Description) d	% CORE RECOVERY e	BOX OR SAMPLE NO. f	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant) g
		CL	CLAY TOPSOIL - 1/2" SLATERS HD. CR. SANDS SAND, MKS STIFF, LOTS LUMEN, BAN [10YR 5/1] (10YR 5/1)			3/2" DRIVE-SPUD
		CL	CLAY w/ SAND-3/4" ADD FINE GR SANDS VERY STIFF, OCC. ROOTS, BRNISH Y CLAY [10YR 6/3], YELLOWISH BROWN [10YR 5/2], w/ LT BRNISH GRAY [10YR 4/2] APPEARING TOWNS BOTTOM	4.5/5.0	S-1	11/3/94 BTW - 10.35' FROM GROUND THRU 37.5' AUGERS 12/22/94 BTW - 13.47' FROM TOL w/ 3.5' STICKUP - 13.66' FROM TOL w/ 3.5' STICKUP @ 1440 12/23/94 BTW - 12.45' FROM TOL @ 6905 (ON COMPLETION) 2' STICKUP
	5.0	CL	SAME CLAY AS ABOVE, BUT FINE GR SAND MORE COMMON IN SPKS, MOIST, COLOR MIGRATED LT GRAY [10YR 7/2] AND LT BRNISH GRAY [10YR 6/2] w/ REDDISH YELLOW [7.5YR 8/3] MOTTLED & STREAKS, BECOMES PALE BROWN [10YR 6/3] AT 9.4'	4.9/5.0	S-2	
	10.0	CL	CLAY, SOFT-4Y SOFT, WET-SAT, IN SPKS, ALL SIZE FINE SIL SUBANG SAND LENSES AT 10.5' TO 8', SAND IS SAT. GRAYISH BROWN [10YR 5/2] AND LT GRAY [10YR 7/2], SAND LENSES ARE YELLOWISH RED [5YR 2/6]	1.8/2.5	S-3	3/2" WIRE-LINE SAMPLER H ₂ O ENCOUNTERED
	12.0	CL	SAME CLAY AS ABOVE			
	17.0	SM	SILT SAND, SAND FINE-MED GR. REL. POORLY SORTED, SUBANG, SAT, PALE BROWN [10YR 6/3]	2.1/5.0	S-4	SAT. SAND ENCOUNTERED RUNNING SAND
	17.0	SA	SAND, FINE GR, WELL SORTED, SUBANG, SAT, TR. HVT MIN., RUNNY, YELLOW [10YR 6/6]	1.7/5.0	S-5	
	22.5					

ENG FORM 1836 MAR 71

PREVIOUS EDITIONS ARE OBSOLETE. (TRANSLUCENT)

PROJECT RI/FS EDGEWOOD


HOLE NO. WBR-48


DRILLING LOG (Cont Sheet)		ELEVATION TOP OF HOLE		Hole No. <u>WBR-48</u>		
PROJECT <u>RI/RS EDGEWOOD</u>		INSTALLATION <u>APG-EDGEWOOD</u>		SHEET <u>2</u> OF <u>4</u> SHEETS		
ELEVATION	DEPTH	LEGEND	CLASSIFICATION OF MATERIALS (Description)	% CORE RECOVERY	BOX OR SAMPLE NO.	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant)
↓ A SCALE ↓	22.5	c				
	27.5	SP	SAND, VY FINE-FINE GR, WELL SORTED, SUBANGED, TR. HYY MINS, SAT, RUMBY, VY ALC BROWN [10YR 8/3] w/ SPOTS OF YELLOWISH BROWN [10YR 8/2] (22.5-24.1)	24/50	S-6	
		SM	SILTY SAND, SAND FINE GR, SUBANGED, WELL SORTED, TR. HYY MINS, SAT, ALC-BROWN [10YR 6/3] (21.5-24.1)		S-7	
		CL	INTERBEDDED CLAY, SILTY CLAY AND SANDY SILT, CLAY IS VY STIFF, SILTY CLAY IS STIFF, SAND IS VY FINE GR, RANGES-SUBANGED, SILT LAYERS ARE SAT, GRAY [10YR 5/1] INDIVIDUAL LAYERS ARE ROUGHLY 0.2-0.4" THICK (21.5-24.1)	49/50		
	29.6	CL				
		CL	SAME AS ABOVE (29.6-32.4)			
		CL				
		ML				
		ML				
		SP	SAND, FINE GR, WELL SORTED, RANGED-SUBANGED, TR. HYY MINS, SAT, RUMBY, A FEW 0.1" VY STIFF CLAY LENSES THROUGH, LT GRAY [10YR 7/2], TWO PYRITE CONCRETIONS SAND NODULES, 1.0" IN MAX DIMENSION (32.5-34.4)	34/50	S-8	
↓ A SCALE ↓	37.5	SP	SAME SAND AS ABOVE, NO CLAY LENSES, SAT, RUMBY, 1.0-1.5" NODULES OF PYRITE CONCRETIONS (34.4-35.8)	21/25	S-9	
	40.0	SP	SAME SAND, LIGNITE COMMON AT 41.5", 1-2" MASS OF PYRITE CONCRETIONS (37.5-39.6)	24/25	S-10	11/3/74
	42.5	SP	SAME SAND, LIGNITE COMMON AT BASE (40.0-42.4)	16/25	S-11	
	45.0	SM	SILTY SAND, SAND FINE-MED GR, RANGED SORTED, SUBANGED, SAT, RUMBY, LIGNITE ABUNDANT AT TOP, SCATTERED THROUGH, GRAY [10YR 5/1], OCC 0.5" STIFF CLAY LENSES (41.5-43.1)	25/25	S-12	
↓ A SCALE ↓	47.5	CL & SM	INTERBEDDED SANDY CLAY AND SILTY SAND, LIGNITE ABUNDANT THROUGH, CLAY SOFT-MED STIFF, SILTY SAND AS ABOVE (43.5-47.9)			
		CL	CLAY, VY STIFF, MULTICOLORED IN SHALES: LT GRAY [10YR 7/1], OR RED [7.5R 9/6] AND LT OLIVE BROWN [2.5Y 5/3], K CLAY? (47.5-49.9)	34/50	S-13	
↓ A SCALE ↓	52.5	CL	SAME CLAY AS ABOVE, BUT VERY LITTLE LT GRAY (49.9-50.9)			
		CL		30/30	S-14	
	55.5					


DRILLING LOG (Cont Sheet)		ELEVATION TOP OF HOLE		Hole No. WBR-48																																																																		
PROJECT: R/PS EDGEWOOD		INSTALLATION: APG-ENGINEERING		SHEET 3 OF 4 SHEETS																																																																		
ELEVATION	DEPTH	LEGEND	CLASSIFICATION OF MATERIALS (Description)	% CORE RECOVERY	BOX OR SAMPLE NO.	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant)																																																																
ASCALE 50.5		CL	CLAY, STIFF-VERY STIFF, TAN, MICA, REDDISH BROWN [2.542/3]; MINOR WHITE [5.242/1], WHITE [5.242/2], AND RED [7.542/6] (55.5-56.4)	14/10.5	NO SAMPLE	11/19/94 GEO BARRON																																																																
ASCALE 56.0		CL	CLAY, VERY STIFF, SLIGHTLY WEAK, RED [7.542/1] AND DK GRAYISH BROWN [2.542/2]	15/3.0	S-15																																																																	
ASCALE 58.0		CL	SAME AS ABOVE, W/ A CL. PORT OF SANDY SILTY CLAY, SANDS FINE GR, SUBRANDED, WHITE [5.242/1]	0.8/5.0	S-16	THIS RUN PICKED UP PART OF PREVIOUS RUN																																																																
ASCALE 64.0		CL	SAME CLAY AS ABOVE, W/ SILTY CLAY LENSES AT 63.7-64.0 AND 65.7-66.0. SAND WHITE AS ABOVE. CLAY IS STIFFER AT 64.0-65.7 W/ PORTS OF RED [10.2/1], SAND OR YR. BROWN [10.2/2] (69.0-72.2)	3.1/2.0	S-17																																																																	
ASCALE 66.0		CL	SANDY CLAY, REDDISH BROWN [2.542/1/4], BROWN [7.542/5] AND WHITE [5.242/7]	1.8/2.0	S-18	<table border="1"> <thead> <tr> <th>DEPTH</th> <th>BLK</th> <th>SPRNG</th> <th>RAD (M/D)</th> </tr> </thead> <tbody> <tr><td>86-88</td><td>1.9</td><td>—</td><td>—</td></tr> <tr><td>88-89</td><td>1.9</td><td>1.9</td><td>—</td></tr> <tr><td>89-91</td><td>2.1</td><td>2.1</td><td>—</td></tr> <tr><td>91-94</td><td>2.1</td><td>2.1</td><td>—</td></tr> <tr><td>94-96</td><td>2.5</td><td>2.5</td><td>—</td></tr> <tr><td>96-98</td><td>2.9</td><td>2.9</td><td>—</td></tr> <tr><td>98-100</td><td>2.9</td><td>2.9</td><td>—</td></tr> <tr><td>100-102</td><td>2.7</td><td>2.7</td><td>—</td></tr> <tr><td>102-104</td><td>1.7</td><td>—</td><td>0.02</td></tr> <tr><td>104-106</td><td>2.2</td><td>2.2</td><td>0.015</td></tr> <tr><td>106-108</td><td>2.5</td><td>2.5</td><td>—</td></tr> <tr><td>108-110</td><td>2.4</td><td>2.4</td><td>—</td></tr> <tr><td>110-112</td><td>2.4</td><td>2.4</td><td>—</td></tr> <tr><td>112-114</td><td>2.2</td><td>2.2</td><td>—</td></tr> <tr><td>114-116</td><td>2.1</td><td>2.1</td><td>—</td></tr> </tbody> </table>	DEPTH	BLK	SPRNG	RAD (M/D)	86-88	1.9	—	—	88-89	1.9	1.9	—	89-91	2.1	2.1	—	91-94	2.1	2.1	—	94-96	2.5	2.5	—	96-98	2.9	2.9	—	98-100	2.9	2.9	—	100-102	2.7	2.7	—	102-104	1.7	—	0.02	104-106	2.2	2.2	0.015	106-108	2.5	2.5	—	108-110	2.4	2.4	—	110-112	2.4	2.4	—	112-114	2.2	2.2	—	114-116	2.1	2.1	—
DEPTH	BLK	SPRNG	RAD (M/D)																																																																			
86-88	1.9	—	—																																																																			
88-89	1.9	1.9	—																																																																			
89-91	2.1	2.1	—																																																																			
91-94	2.1	2.1	—																																																																			
94-96	2.5	2.5	—																																																																			
96-98	2.9	2.9	—																																																																			
98-100	2.9	2.9	—																																																																			
100-102	2.7	2.7	—																																																																			
102-104	1.7	—	0.02																																																																			
104-106	2.2	2.2	0.015																																																																			
106-108	2.5	2.5	—																																																																			
108-110	2.4	2.4	—																																																																			
110-112	2.4	2.4	—																																																																			
112-114	2.2	2.2	—																																																																			
114-116	2.1	2.1	—																																																																			
ASCALE 68.0		CL	SANDY CLAY, DK REDDISH BROWN [2.542/3/7] W/ SPK. LT. OLIVE BROWN [2.542/5]	4.2/5.0	S-19																																																																	
ASCALE 73.0		CL	SAME AS ABOVE	4.9/5.0	S-20																																																																	
ASCALE 78.0		CL-ML	SILTY CLAY, RED-VERY STIFF, ABUNDANT MIN. THIN VEG. W/ WHITE CRISTALLINE INCLUS. BROWN BROWN [2.542/1] W/ LT. BROWN BROWN SAND [2.542/2] (78.0-81.1)	3.1/3.5	S-21	11/23/94																																																																
ASCALE 83.0		CL-ML	SAME AS ABOVE, OIL VEG. W/ ZEPHYRUS? MACHING, TR. LGS COMB	4.5/4.5	S-22																																																																	
ASCALE 88.0		CL-ML	SAME AS ABOVE, VEINS ABUNDANT, PARTICULARLY IN MIDDLE THIRD	5.2/5.0	S-23																																																																	
ASCALE 96.0		CL-ML	SANDY SILTY CLAY, INTERBEDDED W/ SANDY SILT, SAND VY FINE GR, SUBRANDED, WELL SORTED, TR. THY MINS + MICA, WET, LT GRAY [10.2/1.5]																																																																			
ASCALE 92.4		ML	91.0-92.4	4.8/5.0	S-24																																																																	
		ML	92.4-92.6																																																																			
		ML	92.6-92.9																																																																			
		ML	92.9-93.1																																																																			
		ML	93.1-93.3																																																																			
		ML	93.3-93.8																																																																			
ASCALE 94.4		ML	93.8-94.2																																																																			
		ML	94.2-94.6																																																																			
		ML	94.6-95.0																																																																			
		ML	95.0-95.7																																																																			
		ML	95.7-95.8																																																																			
ASCALE 106.0		CL	CLAY, VERY STIFF, TAN, RED [2.542/6]	3.2/5.0	S-25																																																																	
		ML	SANDY SILT, AS IN PREVIOUS SAMPLE																																																																			
		CL																																																																				
		ML																																																																				
ASCALE 106.0		CL	CLAY, VERY STIFF, TAN, MICA, BROWN [7.542/3], W/ SANDY CLAYEY SILT INTERBED FROM 0.7-1.4', SIMILAR TO ML ABOVE BUT CLAYEY, CLAY HAS SOME MIN. THICK SILT LENSES, SAME LT GRAY AS PREVIOUS	1.5/5.0	S-26																																																																	


RILLING LOG (Cont Sheet)		ELEVATION TOP OF HOLE		Hole No. <u>WBRL-48</u>		
PROJECT <u>RT/PS GAGEWORK</u>		INSTALLATION <u>APG - EDGEWOOD</u>		SHEET # <u>4</u> OF <u>4</u> SHEETS		
LEVATION	DEPTH	LEGEND	CLASSIFICATION OF MATERIALS (Description)	% CORE RECOVERY	BOX OR SAMPLE NO.	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant)
a	b	c	d	e	f	g
	106.0		SANDY SILT, SAND FINE-VERY FINE GR. SUBRANDED WELL SORTED, TR. MICA, LIGHT STREAKS COMMON, WET, LT GRAY [104.2-107.1]	0.3/12.2	NO SAMPLE	
	108.0	ML	(106.0-106.3)			
	110.0		CLAY, VY SOFT, YELLOWISH GR [5.4-5.6] FOR TOP 0.1'			
	112.0	CL CL-ML	SANDY SILTY CLAY, SOFT, SAND FINE GR, MICA ABUNDANT, GRAY [10.4-6.6], WET, MIDDLE OBS LIGHTS, BOTTOM 0.05'	0.2/14.4	NO SAMPLE	12/10/94 STAKING @ 109.7' FAILING 314
	114.0		(107.1-107.9)			A TO LONGER SHOE
	116.0		(114.1-116.1)			
	118.0	CL-ML	SANDY SILTY CLAY W/ ABUNDANT LIGHTS (114-116)	0.0/2.0	NO RECOVERY	B TO SHORTER SHOE; LONG SHOE NOT CUTTING
	120.0	CL-ML ML	(116.4-118.5) SAME SANDY SILTY CLAY W/ ABUNDANT LIGHTS OVER TOP 0.3' THEN SANDY SILT W/ CLAY, SAND VY FINE GR, RANCO, SAT, LT GRAY [10.4-7.2] AND LT OLIVE BROWN [2.5-4.5]	0.0/2.1	NO RECOVERY	BELIEVE IN GRAVEL @ ~119'
	122.0			0.0/5.0	NO SAMPLE	
	123.5	SP	(118.5-119.0) GRAVELLY SAND, SAND FINE-MOD GR. WELL RANCO TO RANCO, MOD. WELL SORTED, GRAVEL UP TO 1/2" IN SIZE, SUBRANDED SAT, TR. MICA & MICA, COSS' SILTY CLAY LENS, MOD. STIFF SOME LT GRAY AS ABOVE, COLOR OF SAND IS INDETERMINATE BECAUSE OF DRILLING MUD	0.2/5.0	NO SAMPLE	
	125.0		(123.5-123.7) SAME GRAVELLY SAND AS ABOVE, RUNNY			
	133.5		(128.5-129.5) BOT.	1.0/5.0	S-27	


Appendix B:
Gamma and Induction Logs

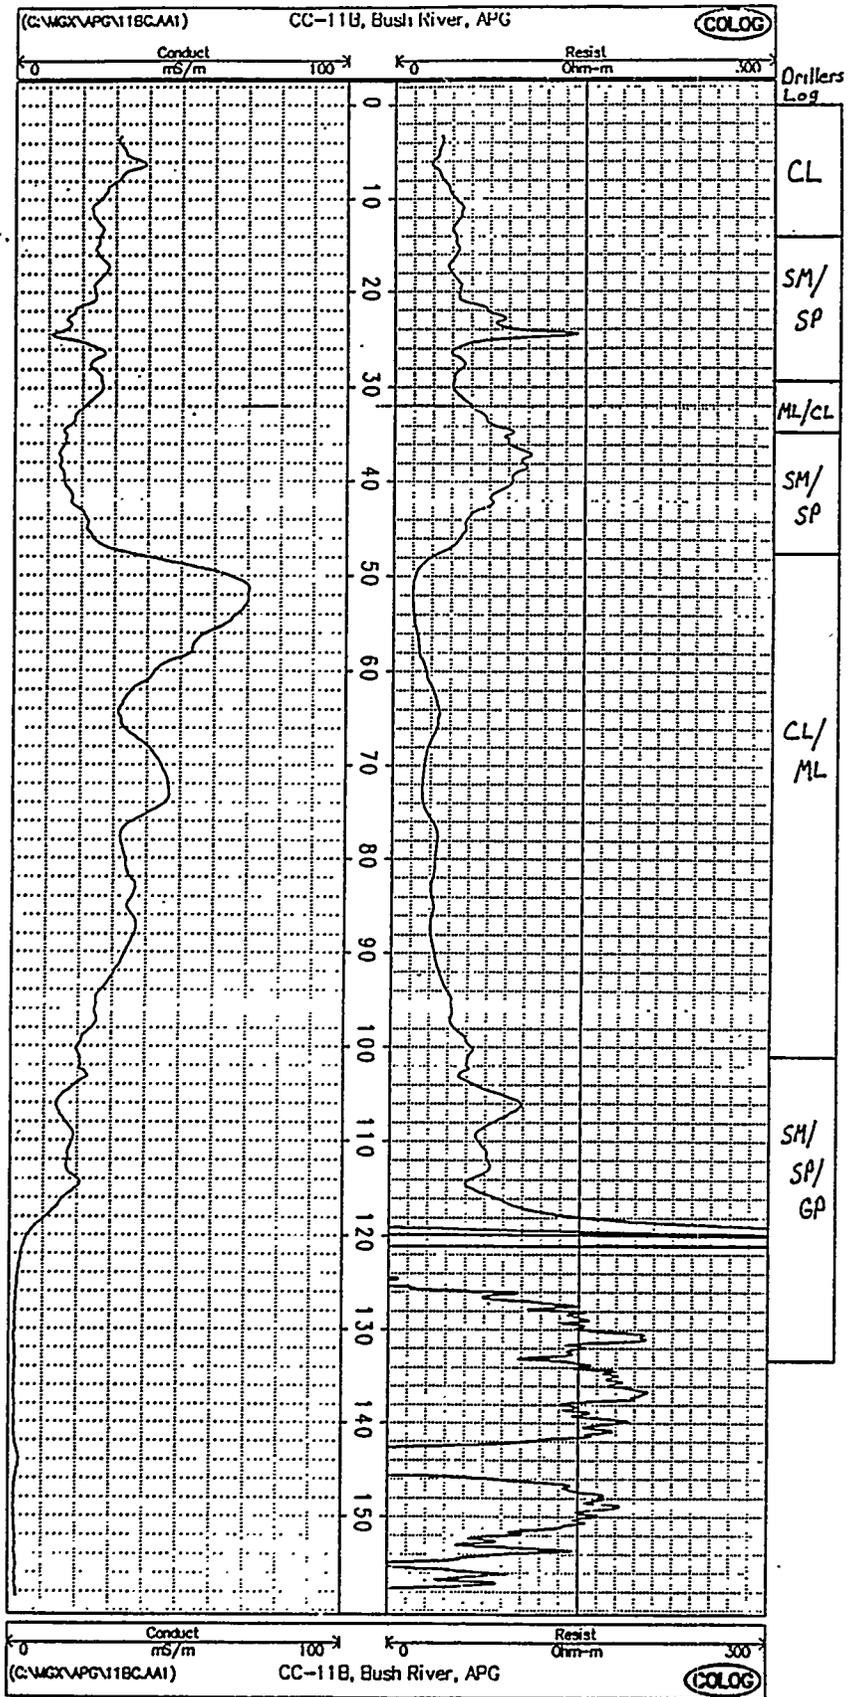


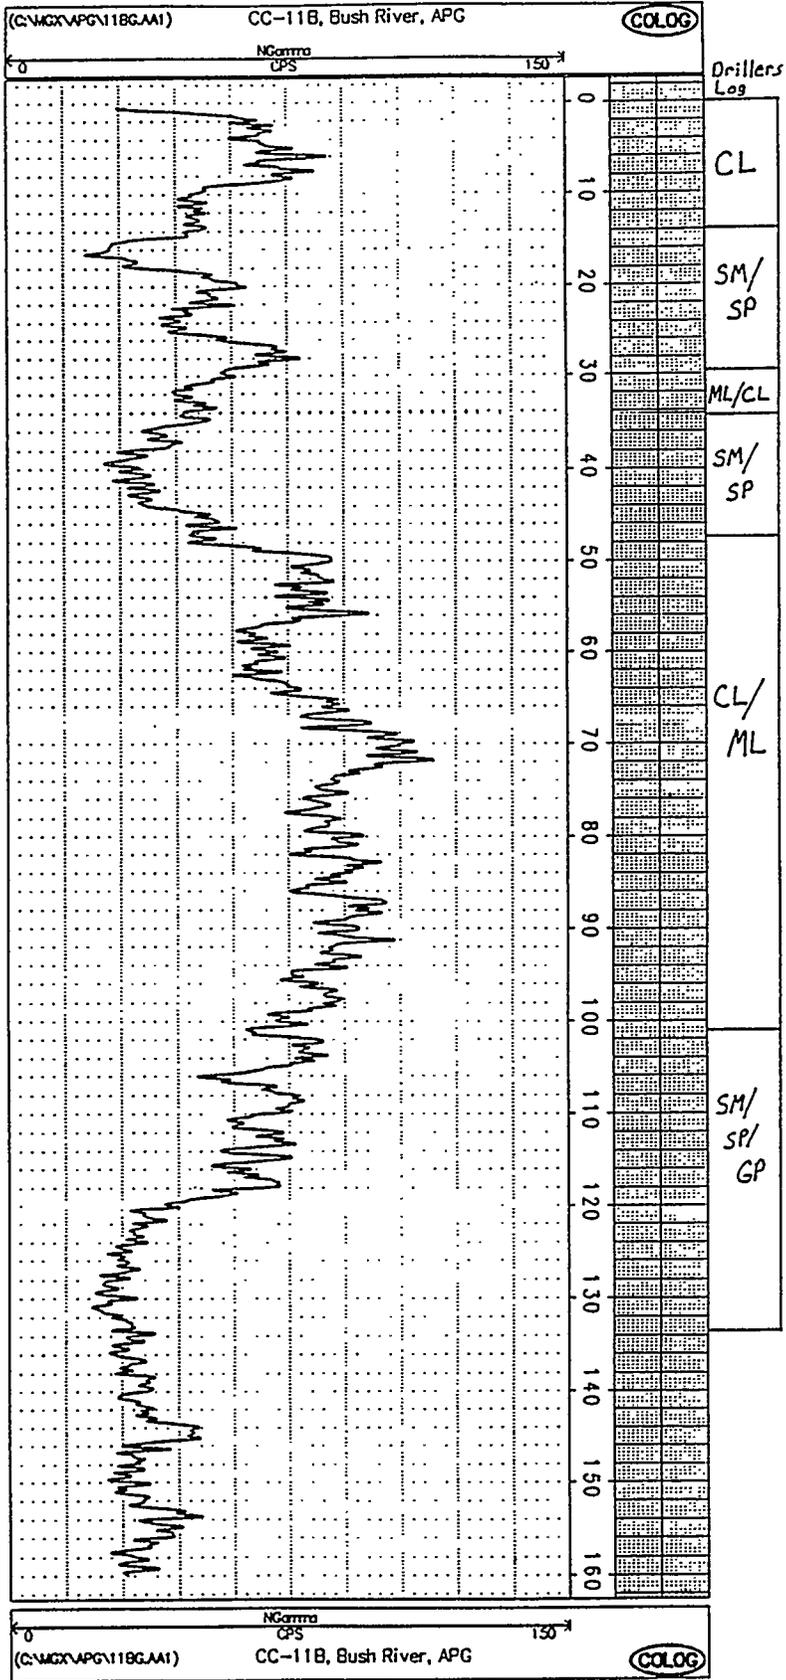


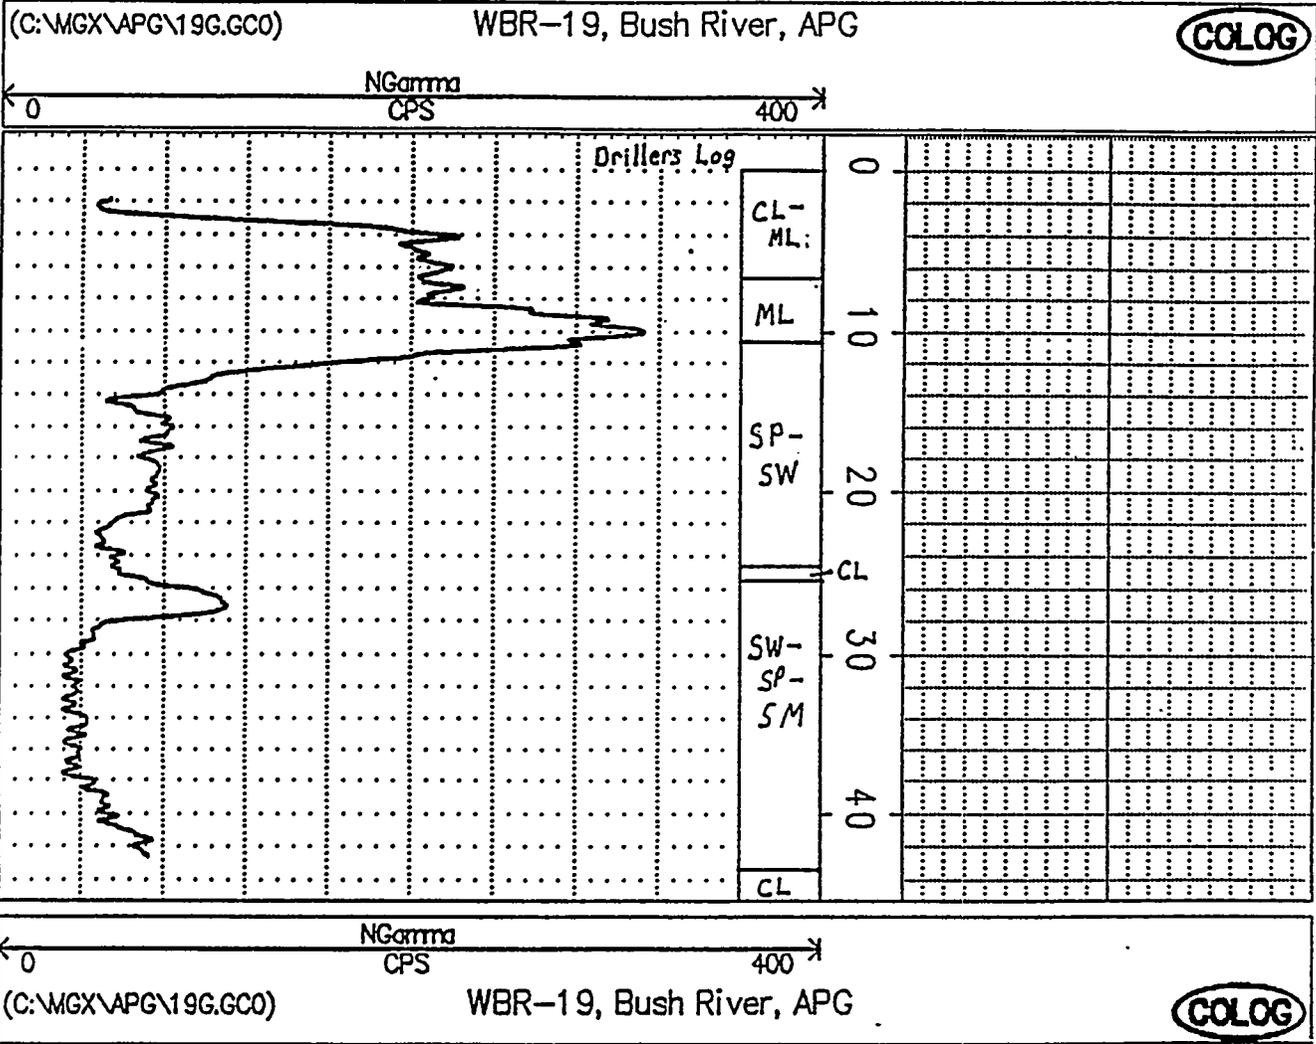


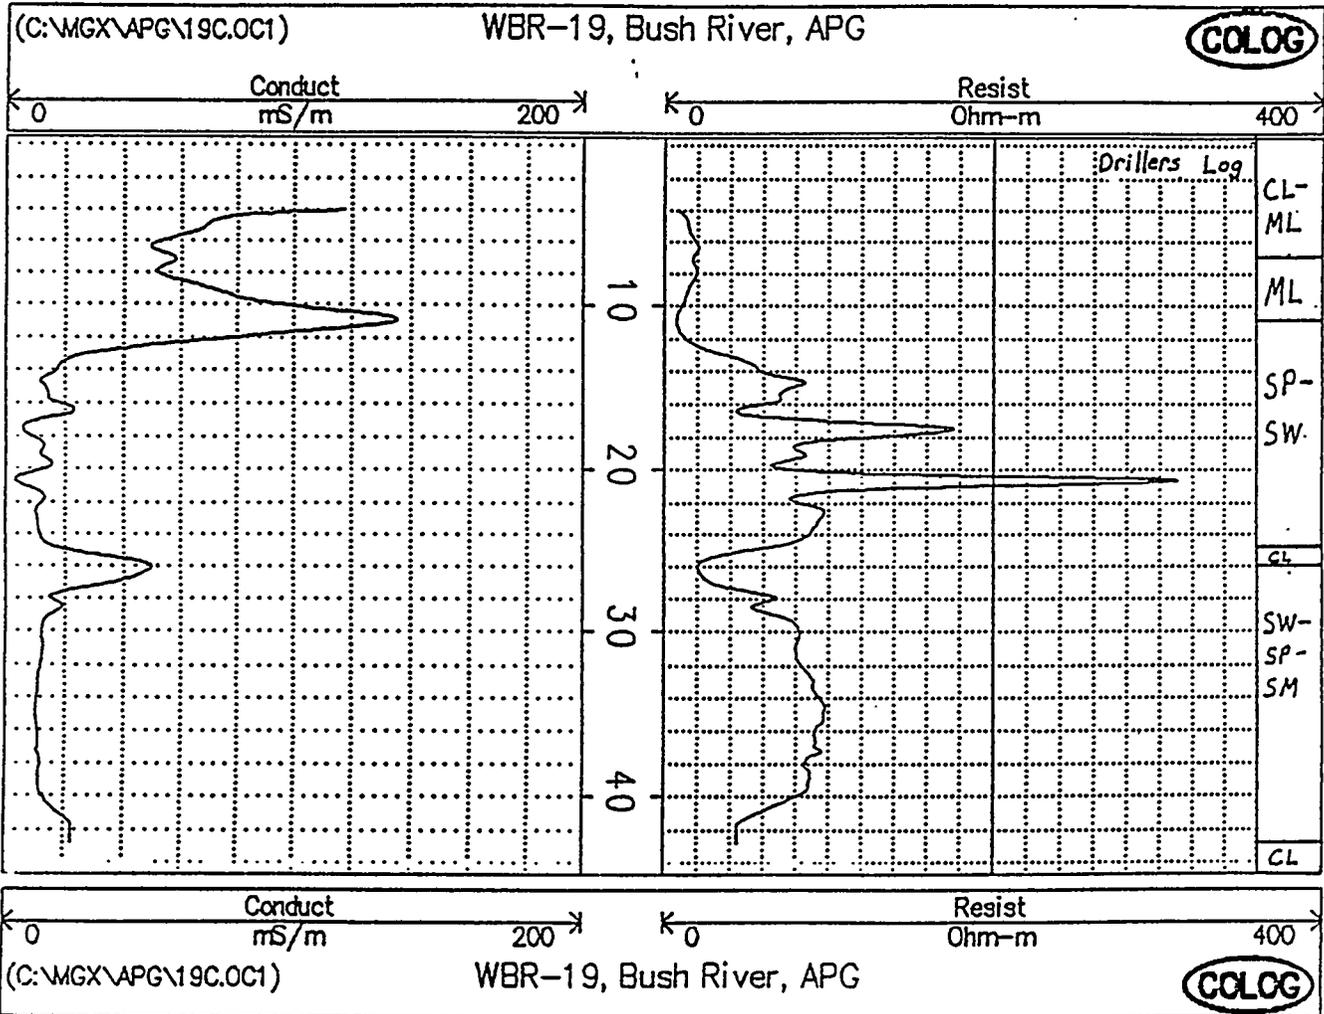

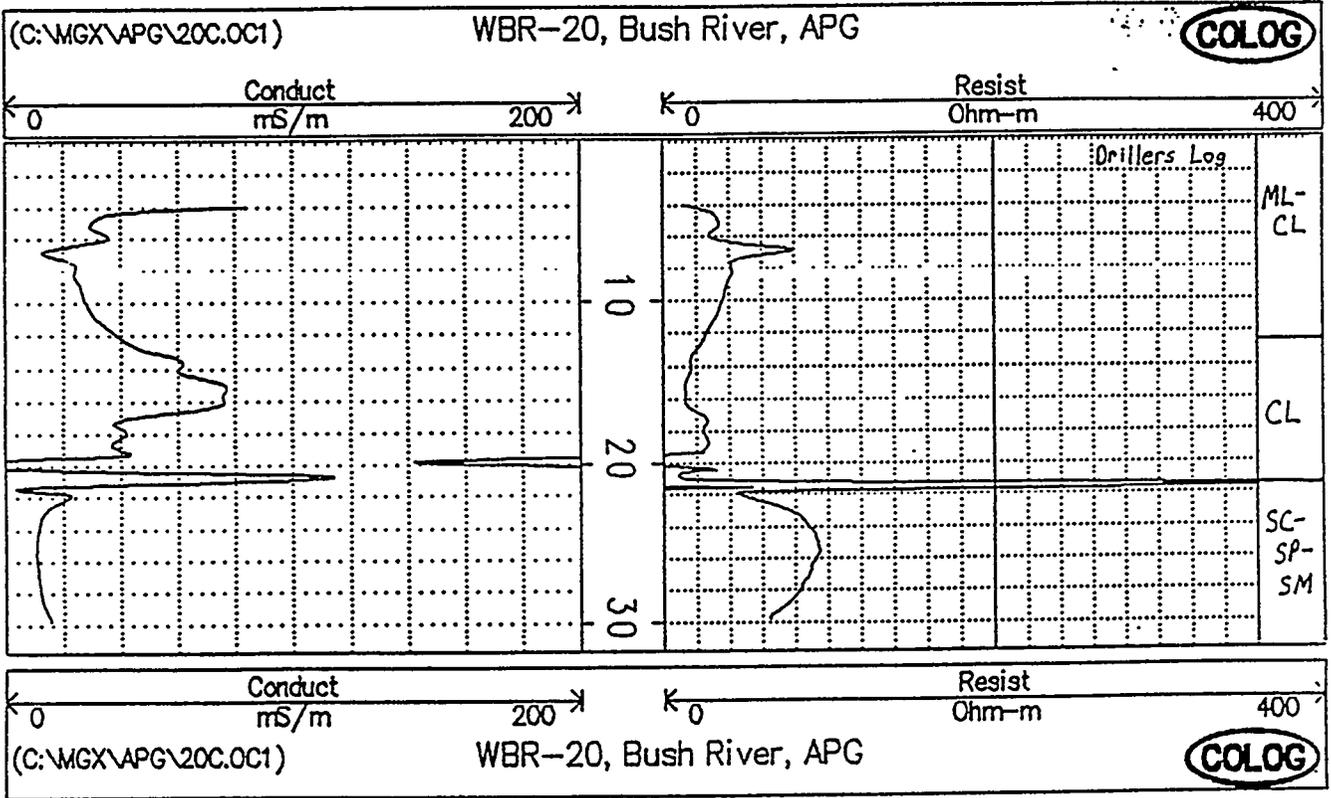


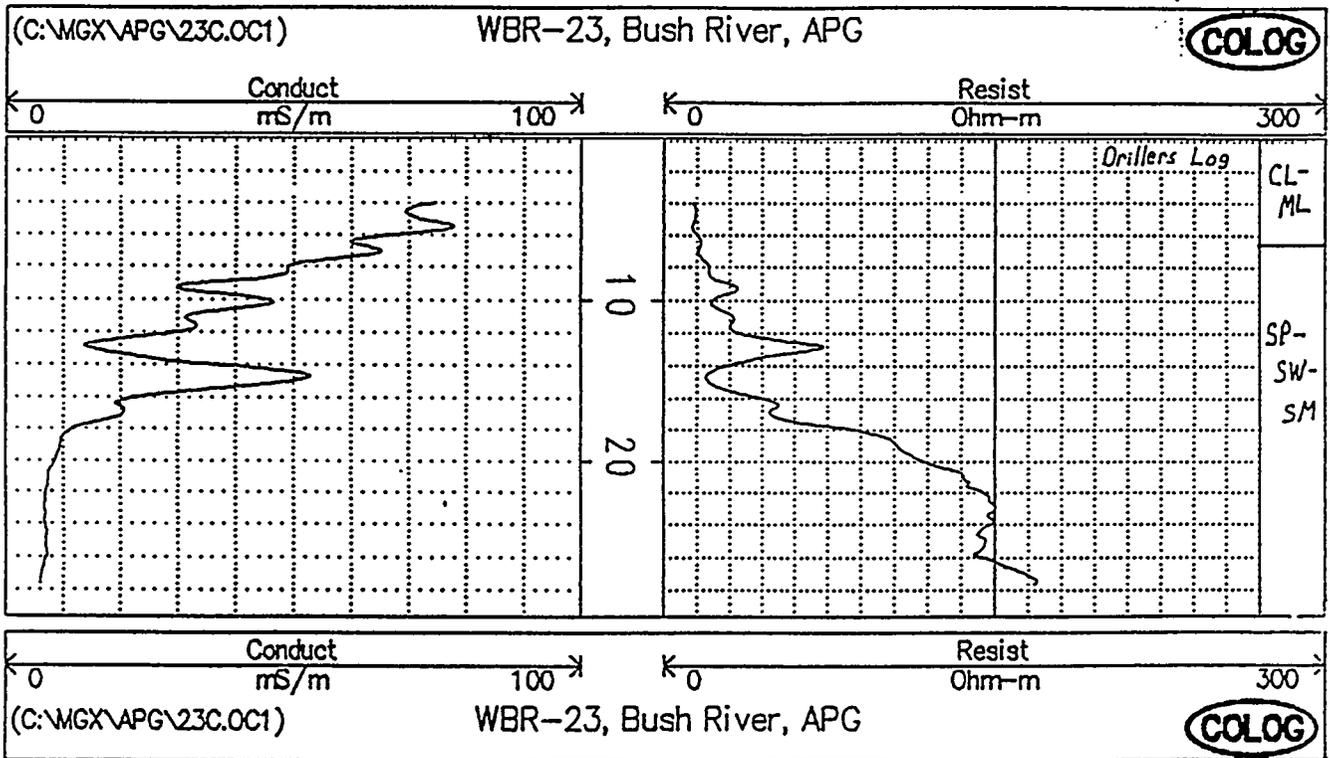


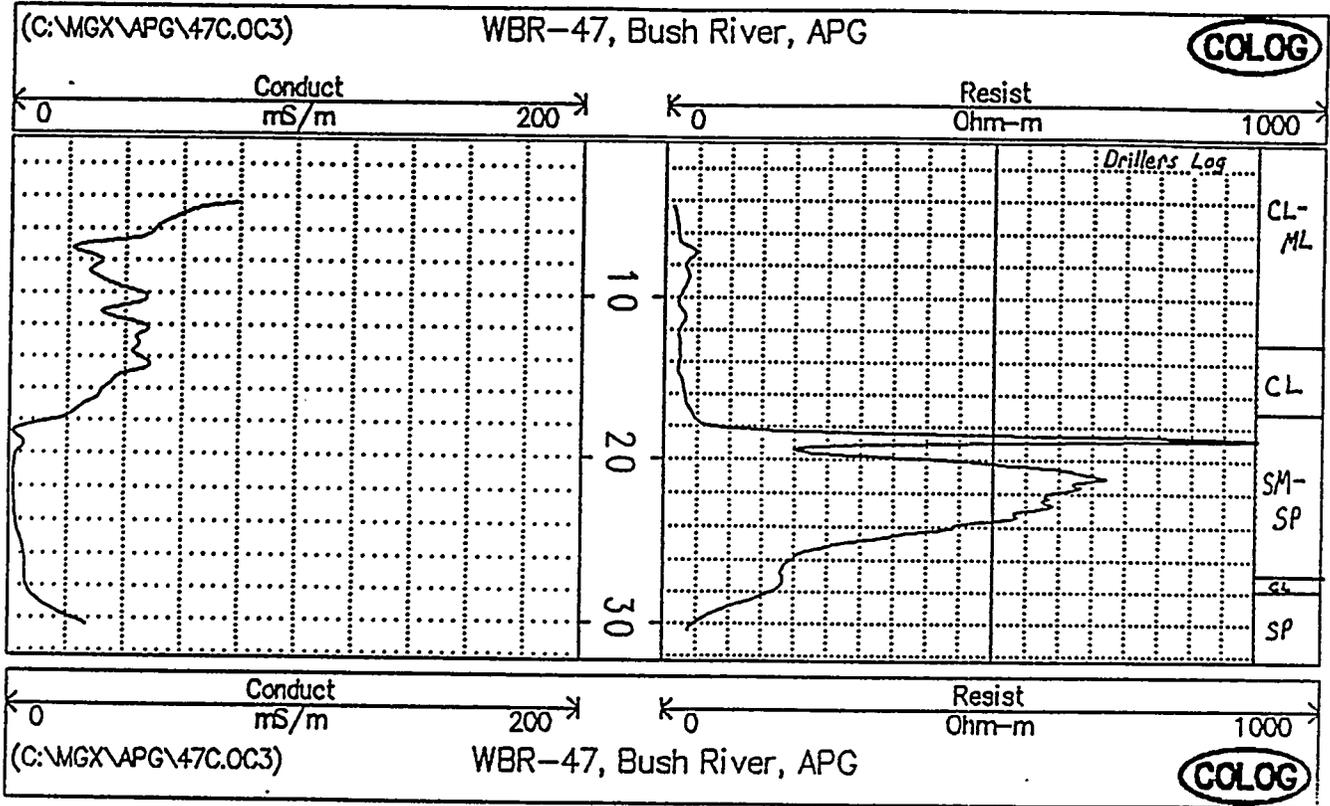

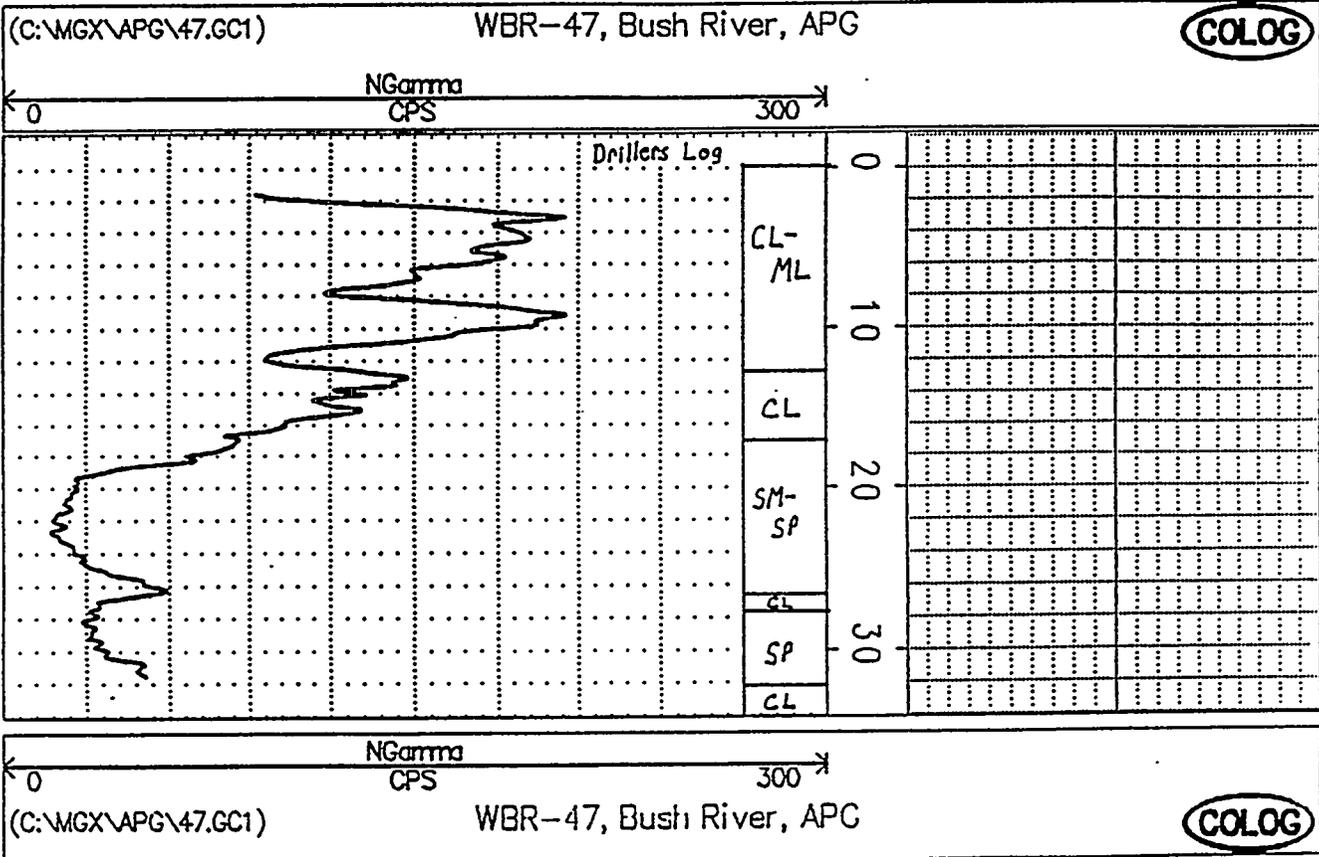

C:\MGX\APG\35C.OD1)

WBR-35, Bush River, APG

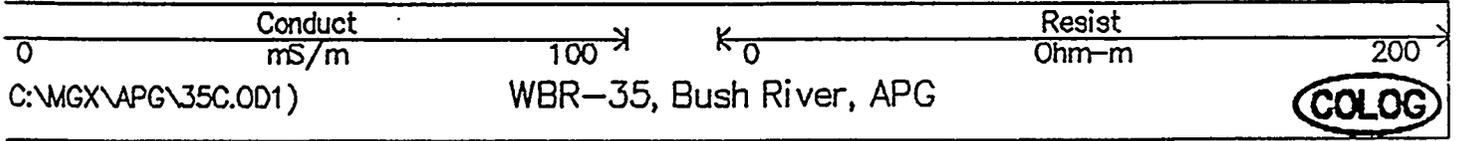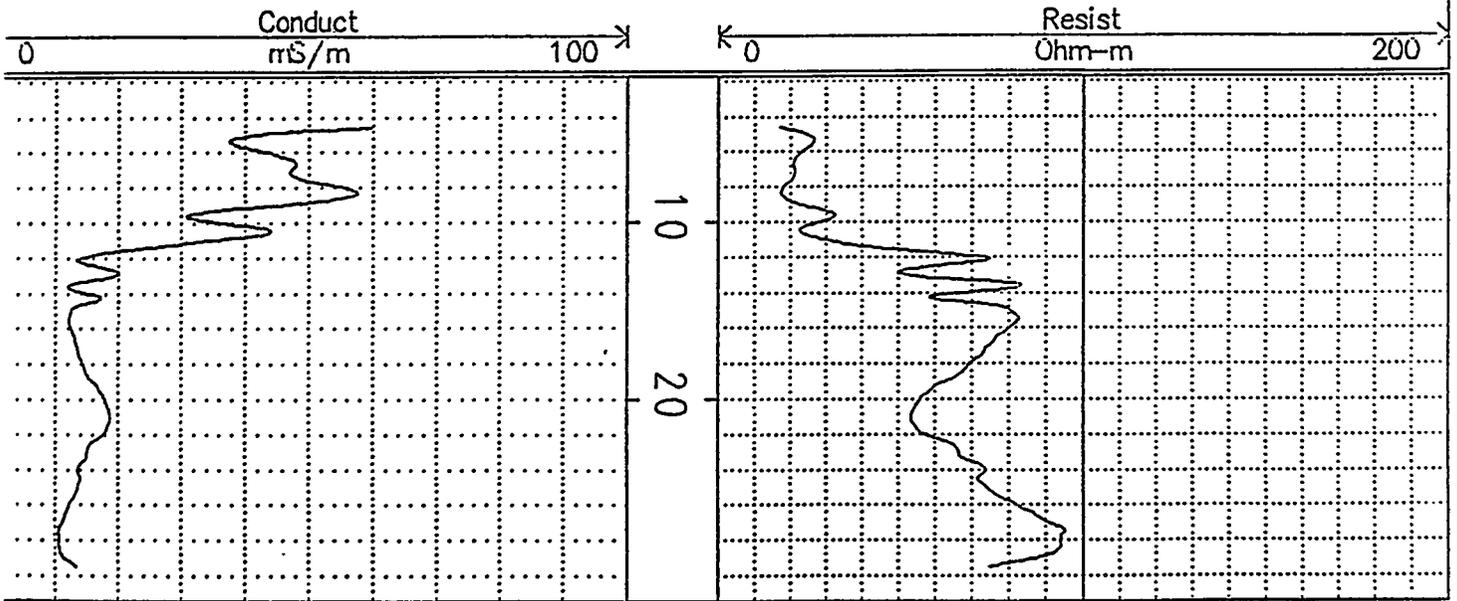



C:\MGX\APG\35C.OD1)

WBR-35, Bush River, APG



C:\MGX\APG\35G.GC0)


WBR-35, Bush River, APG

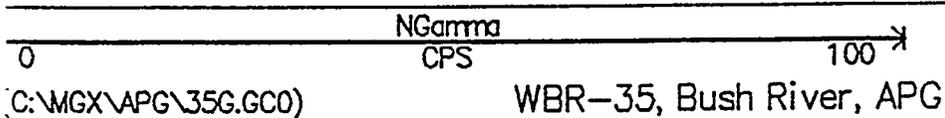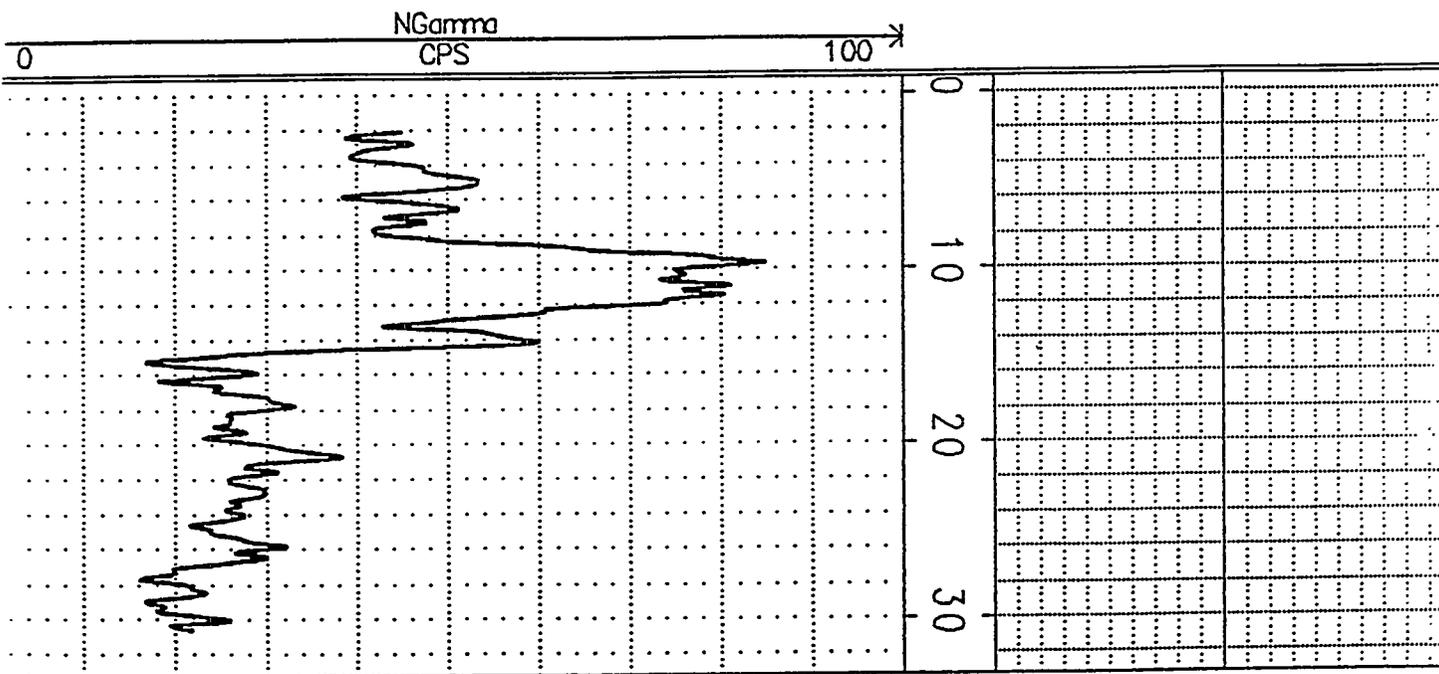

D:\MGX\APG\38C.0E1)

WBR-38, Bush River, APG

COLOG

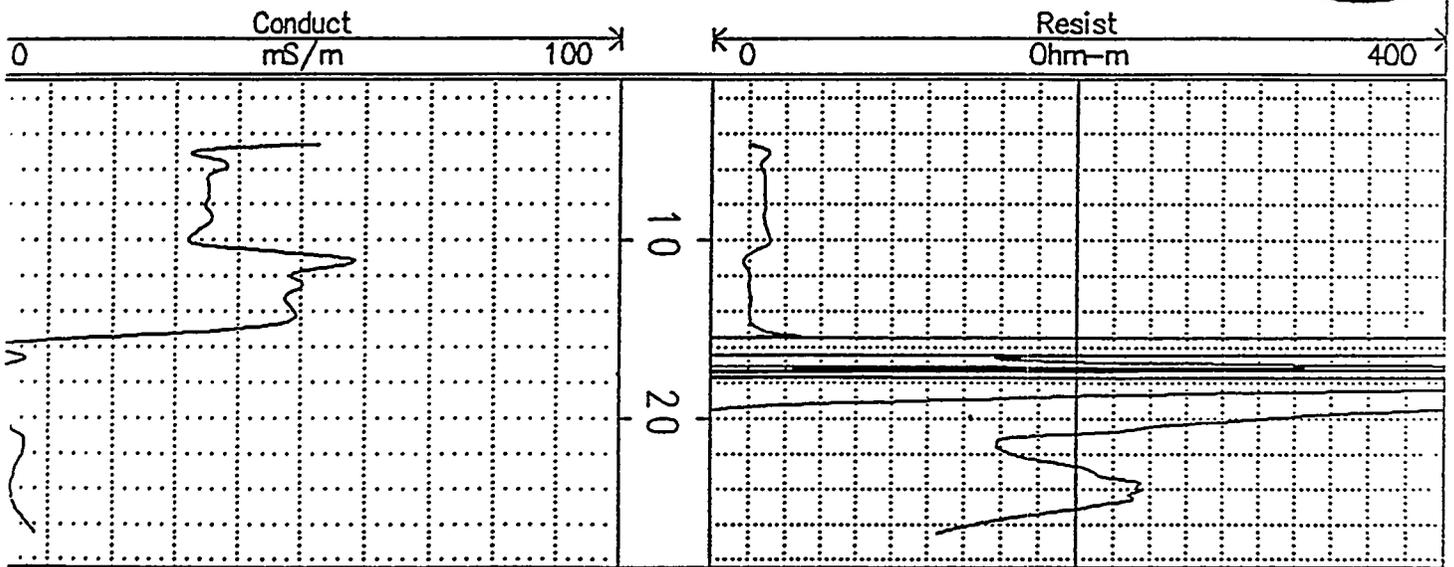

Conduct mS/m 0 100

WBR-38, Bush River, APG

Resist Ohm-m 0 400


COLOG

D:\MGX\APG\38C.0E1)

C:\MGX\APG\38G.GC0)

WBR-38, Bush River, APG

COLOG

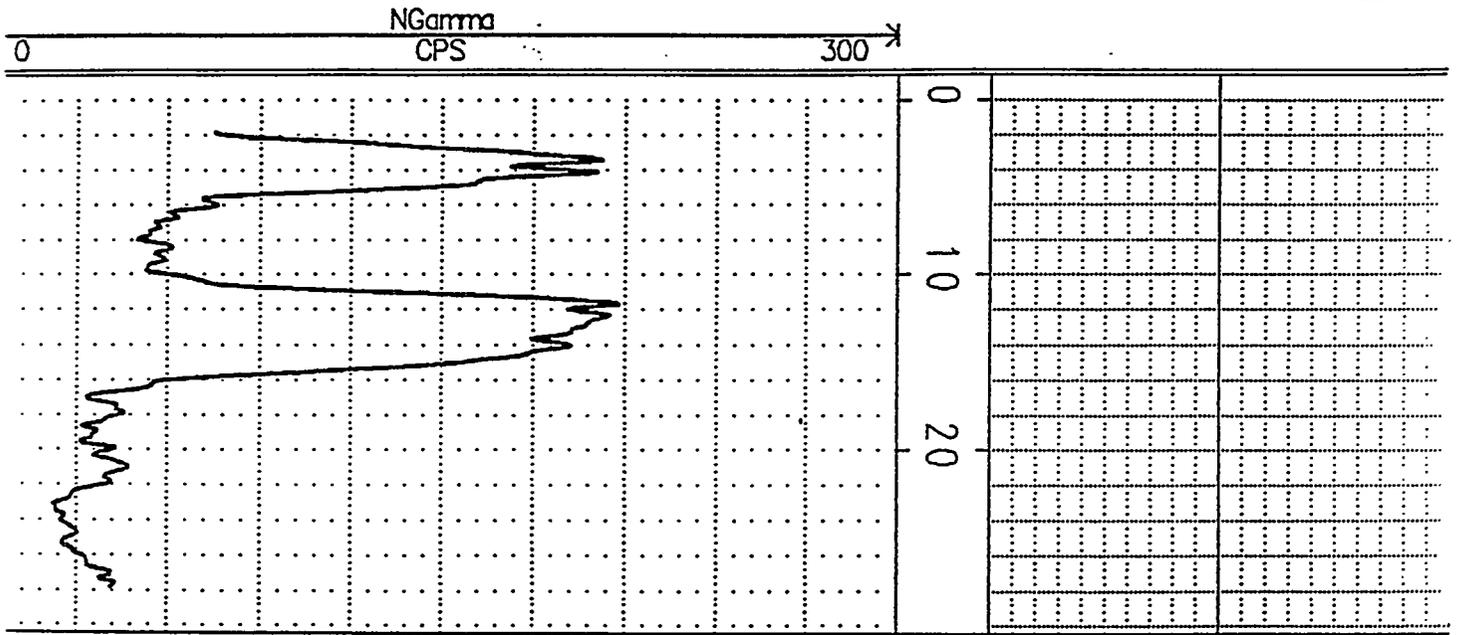

0 NGamma CPS 300 ↗

C:\MGX\APG\38G.GC0)



WBR-38, Bush River, APG

COLOG

C:\MGX\APG\42C.AB1)

WBR-42, Bush River, APG

COLOG

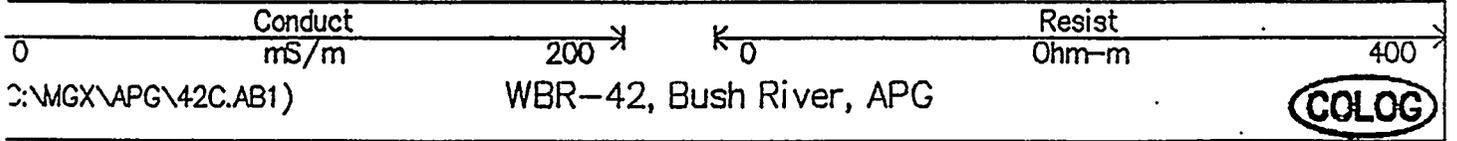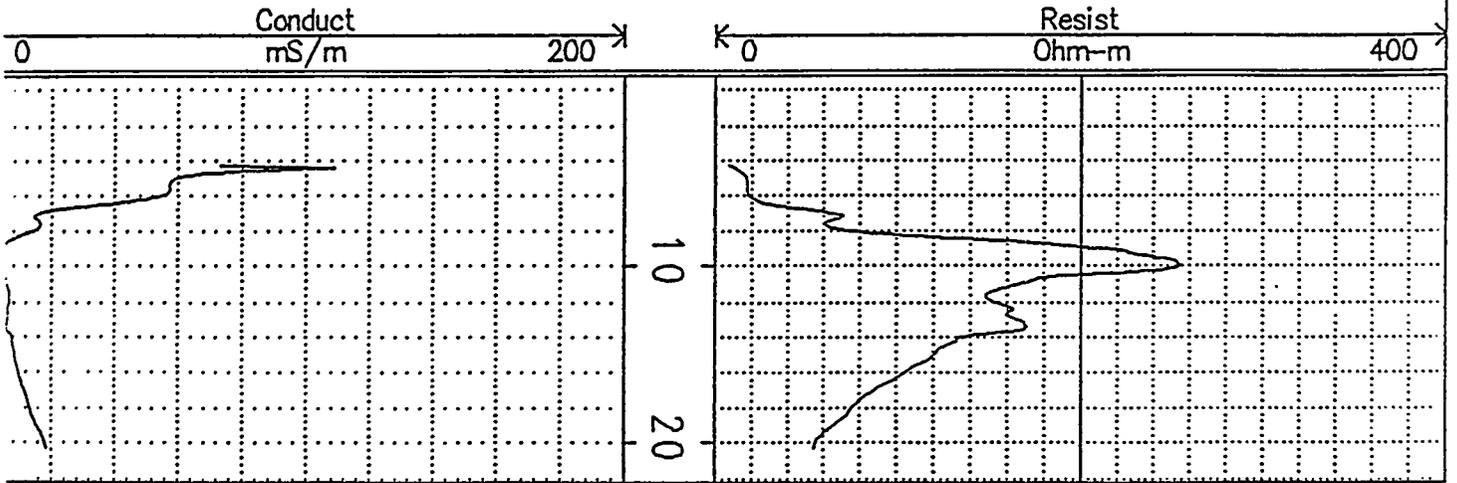

C:\MGX\APG\42C.AB1)


WBR-42, Bush River, APG

COLOG

C:\MGX\APG\42G.GC0)

WBR-42, Bush River, APG

COLOG

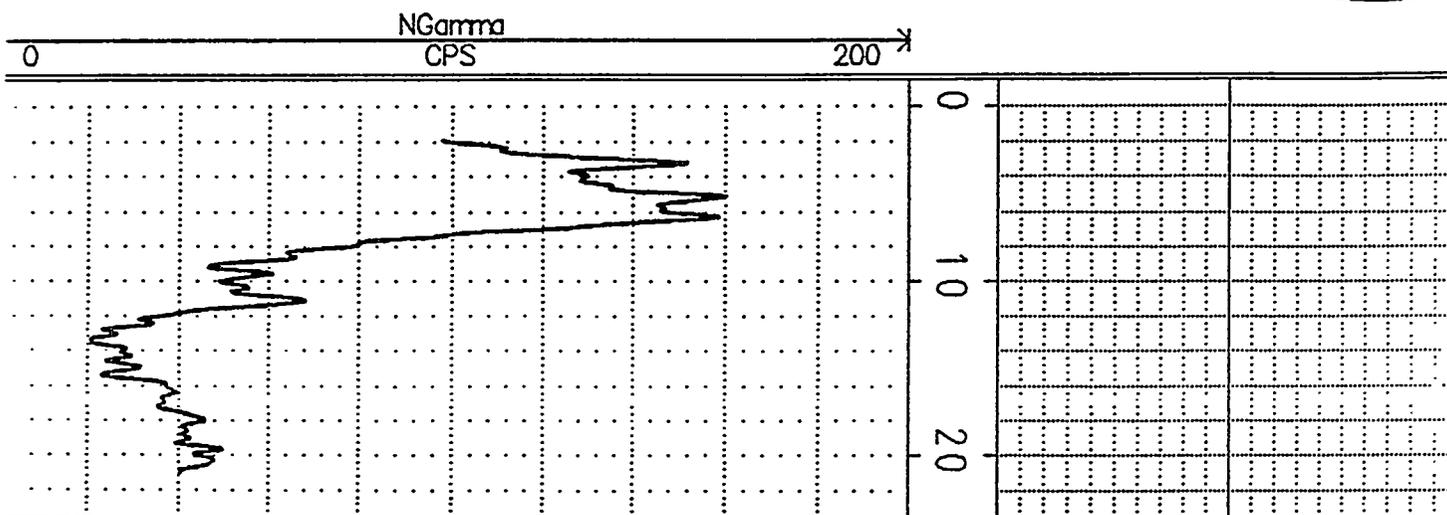

0
C:\MGX\APG\42G.GC0)



NGamma CPS 200 ↗

WBR-42, Bush River, APG

COLOG

D:\MGX\APG\43C.OC1)

WBR-43, Bush River, APG

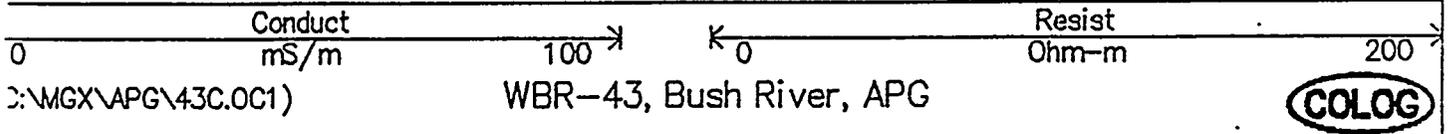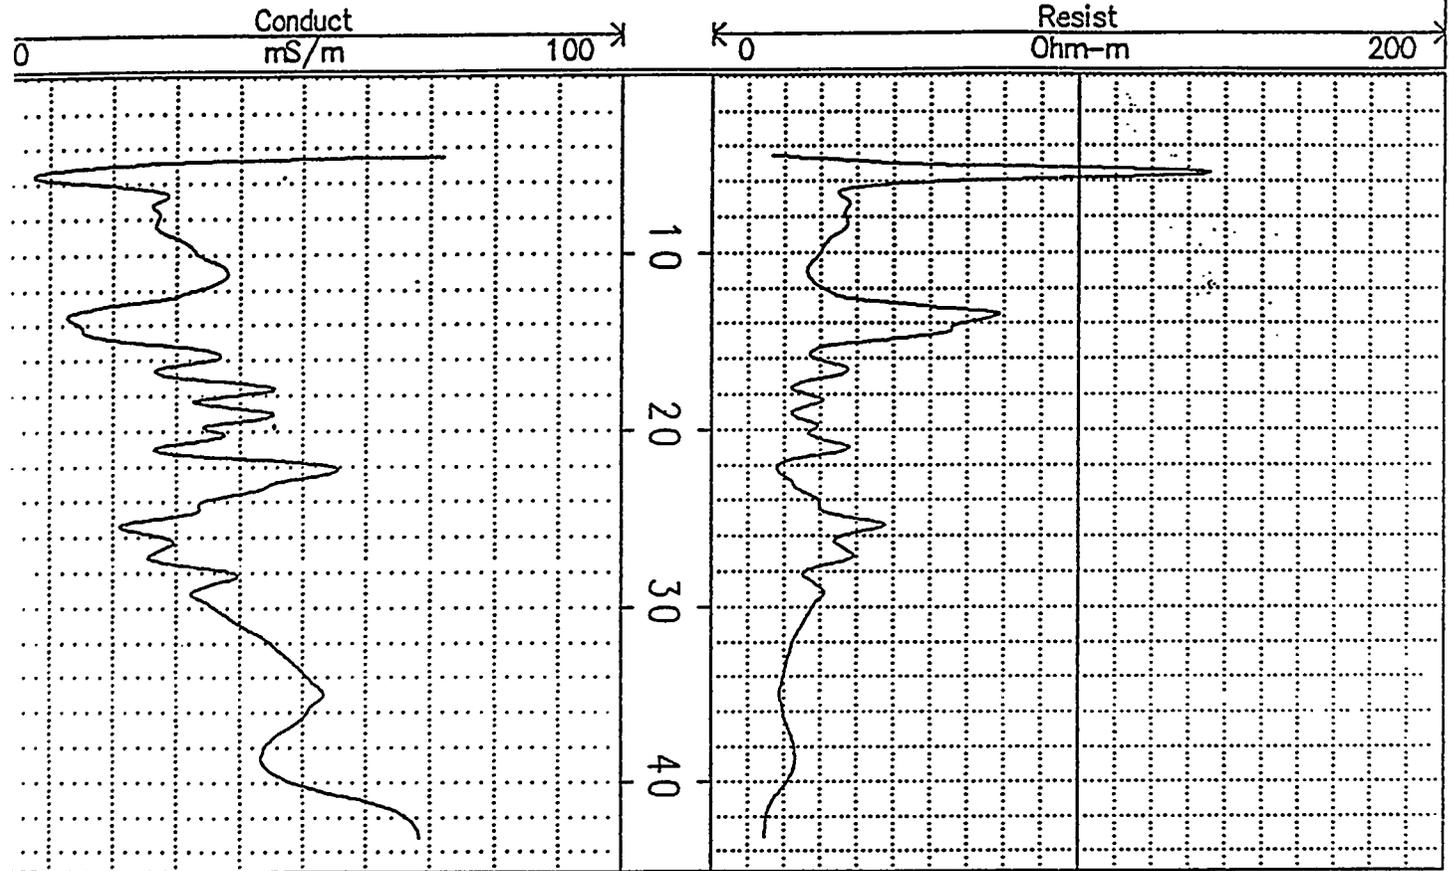



D:\MGX\APG\43C.OC1)

WBR-43, Bush River, APG



(C:\MGX\APG\43G.GC0)

WBR-43, Bush River, APG

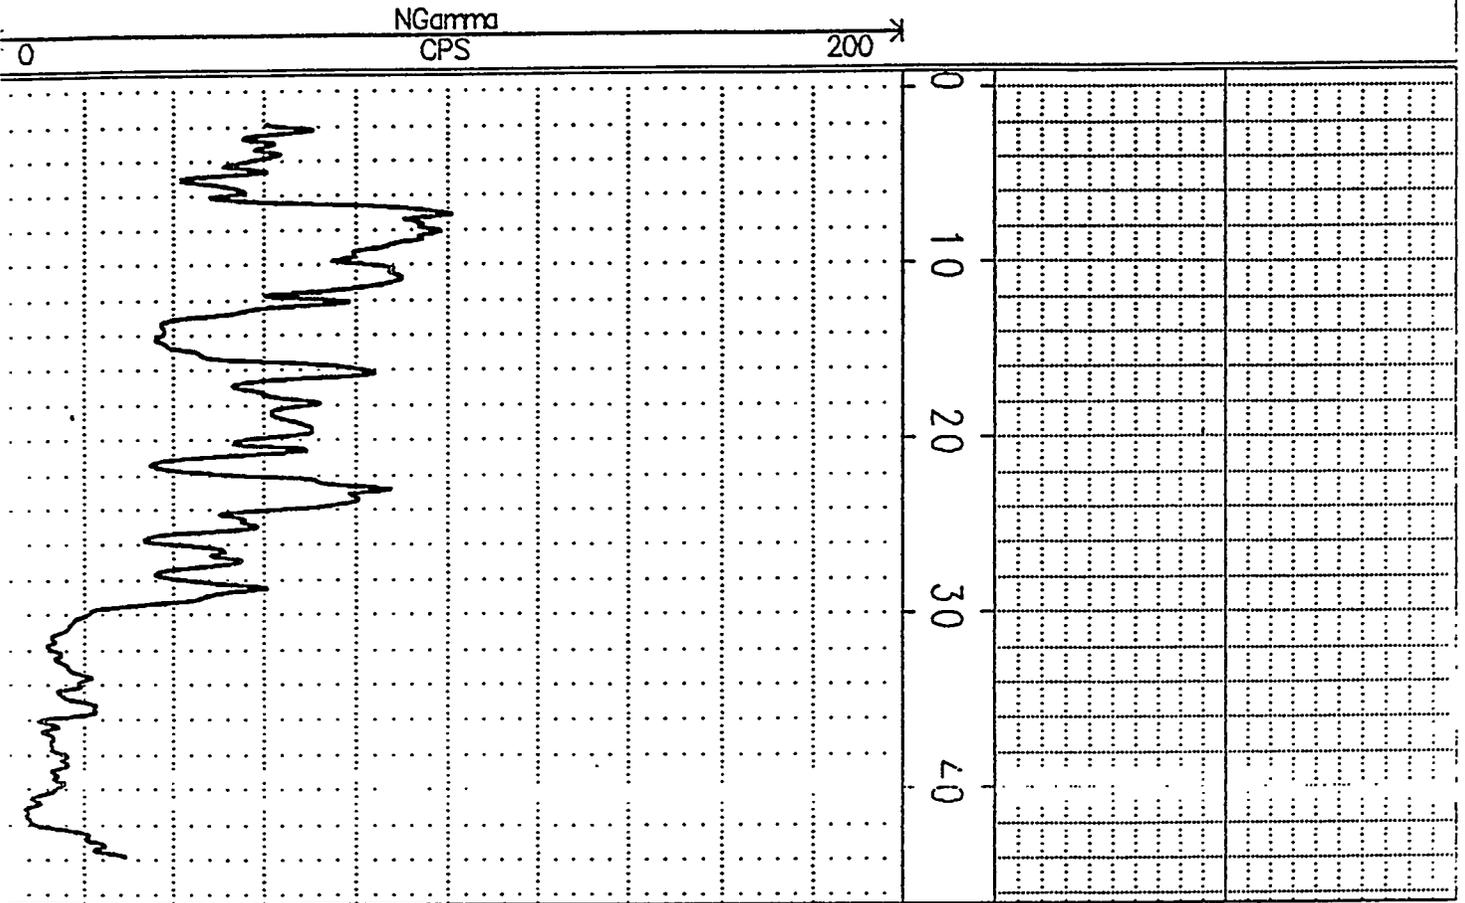

0
C:\MGX\APG\43G.GC0)

NGamma
CPS

0 200



WBR-43, Bush River, APG



(C:\MGX\APG\MW2C.OC0)

MW-2, Bush River, APG

COLOG

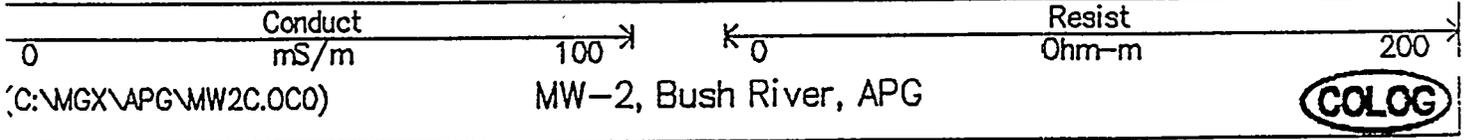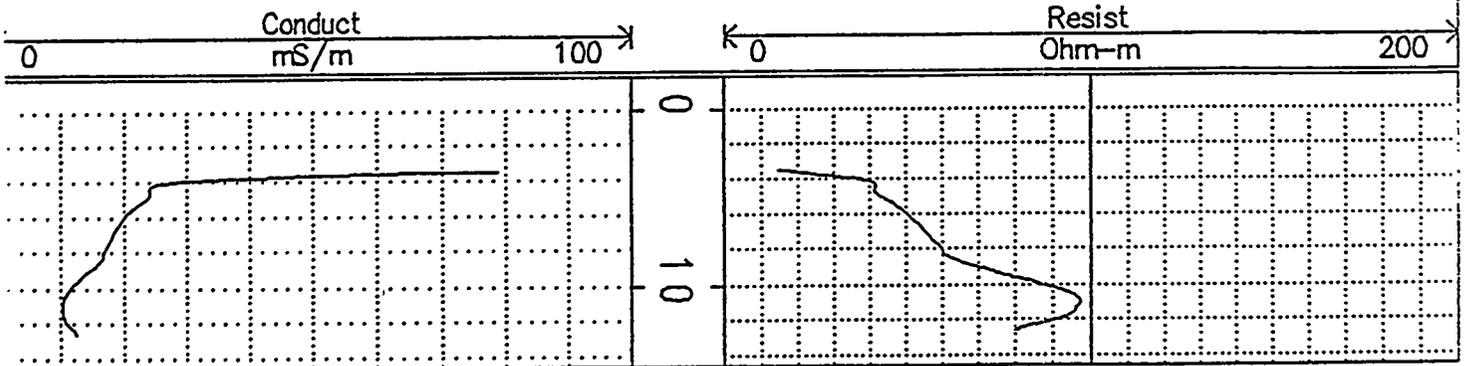

(C:\MGX\APG\MW2C.OC0)


MW-2, Bush River, APG

COLOG

C:\MGX\APG\MW2G.GC1)

MW-2, Bush River, APG

COLOG

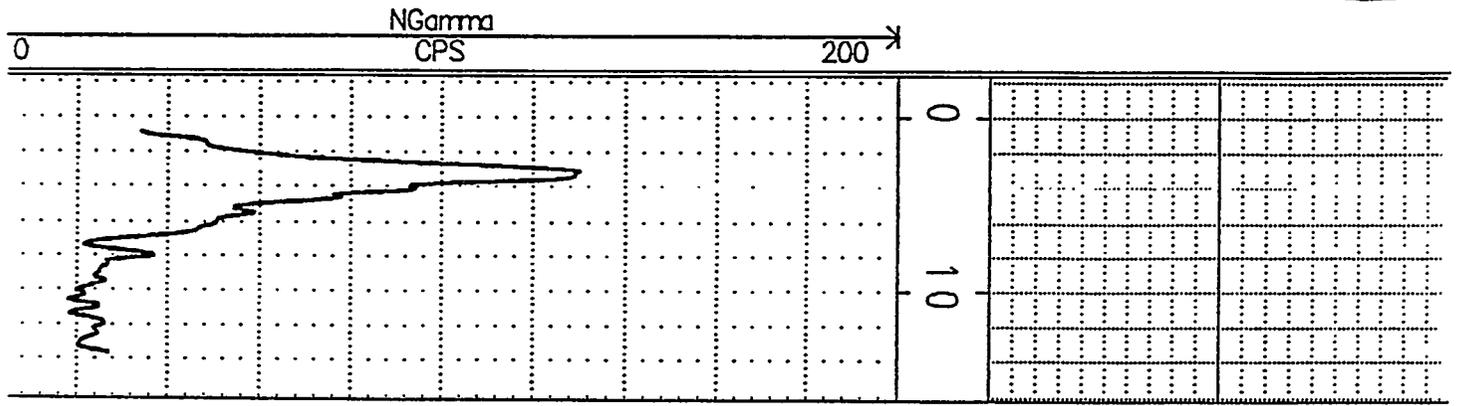

C:\MGX\APG\MW2G.GC1)

MW-2, Bush River, APG

COLOG