


**MASTER**

Report No. NYO 2640  
Category UC 23  
AEC Research and  
Development Report

**STUDY OF THE INDUSTRIAL POTENTIAL  
OF RADIOISOTOPIC METHODS  
IN THE TEXTILE INDUSTRY**

A Study Performed for  
Office of Isotopes Development  
U. S. Atomic Energy Commission

April 1959 — June 1960

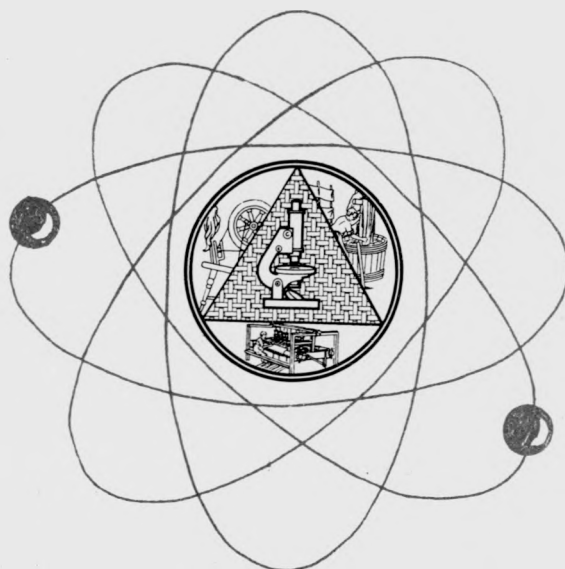

**TEXTILE RESEARCH INSTITUTE**

PRINCETON

NEW JERSEY

July 25, 1960

## **DISCLAIMER**

**This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.**

---

## **DISCLAIMER**

**Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.**

TEXTILE RESEARCH INSTITUTE  
Princeton, New Jersey

STUDY OF THE INDUSTRIAL POTENTIAL OF RADIOISOTOPIC  
METHODS IN THE TEXTILE INDUSTRY

April 1959 - June 1960

A Study Performed for  
Office of Isotopes Development  
U. S. Atomic Energy Commission

Contract No. AT(30-1)-2365

Submitted

by

Ludwig Rebenfeld  
Howard J. White, Jr.

July 25, 1960

Report No. NYO 2640  
Category UC 23  
AEC Research and  
Development Report

DISTRIBUTION

Office of Isotopes Development (35 copies)  
U. S. Atomic Energy Commission  
Washington 25, D. C.

Technical Information Services (465 copies)  
Extension  
U. S. Atomic Energy Commission  
P. O. Box 62  
Oak Ridge, Tennessee

STUDY OF THE INDUSTRIAL POTENTIAL OF RADIOISOTOPIC  
METHODS IN THE TEXTILE INDUSTRY

by

Ludwig Rebenfeld  
Howard J. White, Jr.

ABSTRACT

A critical study is presented of the potential utility of radioisotope techniques in textile technology. Problem areas where radioisotope techniques might be applied are presented, and the obstacles to the introduction of these techniques are discussed. The major deterrent to greater use of isotopes in the textile field is the cost of equipment containing the isotopes. This is true both for sources for irradiation and for radiation gauging. Another significant deterrent involves the question of health physics. Several more hopeful areas of radioisotope application are presented.

STUDY OF THE INDUSTRIAL POTENTIAL OF RADIOISOTOPIC METHODS  
IN THE TEXTILE INDUSTRY

Table of Contents

DISTRIBUTION	2
ABSTRACT	3
INTRODUCTION	5
RADIATION GAUGING	
Properties of Gauges	7
Utilization of Gauges	8
(1) Current Uses and Unsuccessful Attempts	9
(2) Proposed Uses that Appear Feasible, in Need of Little Development and Easy to Evaluate	11
(3) Proposed Uses that Appear Feasible, in Need of Little Development but Difficult to Evaluate	13
(4) Proposed Uses that Appear Feasible but Require Development	15
(5) Proposed Uses that Could be of Considerable Importance but Require Extensive Development	17
IRRADIATION	
Grafting	21
Impregnation with Polymer	22
Degradation Processes	23
Irradiation for Static Dissipation	23
Irradiation for Structure	23
OTHER USES	
Tracers	24
Radioactive Fibers	24
CONCLUSIONS AND RECOMMENDATIONS	25
ACKNOWLEDGMENTS	26

## INTRODUCTION

The objective of this study was the determination of the potential utility of radioisotope techniques in textile technology, and the possible impact of these techniques on the industry. The scope of the contract called for:

- (a) A determination of problem areas where existing radioisotope techniques and technology might be applied.
- (b) A determination of obstacles to present introduction of existing radioisotope techniques.
- (c) A determination of problem areas for which new radioisotope techniques might be developed and successfully applied; recommendations as to what these techniques might be and what organizations should undertake their development.
- (d) A determination of the total volume (in appropriate units) that might be affected and what percentage of the total this is.
- (e) A determination of the estimated available man-power trained to utilize radioisotope techniques in the textile industry and recommendations for meeting possible future training needs.
- (f) A determination of the estimated developmental requirements for specialized instrumentation.
- (g) Recommendations for an integrated course of action in using radioisotope techniques in the textile industry.

The conceivable uses of radioisotopes appeared to fall into three primary categories: use of radiation gauging, use of irradiation to promote chemical change or to minimize static electrification, and the use of radioisotopes as tracers for process control. This classification proved to be helpful and has been retained in this report. It should be noted that use of radioisotopes as a research tool has been omitted except where the use might become continuing in nature and, as such, a continuing outlet for specific products containing radioisotopes. There were several reasons for the omission. First, potential research uses defy classification and enumeration except in the most general terms. Second, quite a variety of such uses has already been tried so that utilization in this way is, in fact, underway, although the volume of such uses will undoubtedly grow in the future.

The method used in carrying out the contract consisted in discussing possible uses with technical representatives of various branches of the industry and soliciting ideas for new uses. In this way a group of ideas was built up and assessed critically. Current uses in the industry are few, but have been included for completeness and because they show the types of problems which have been solved successfully.

## RADIATION GAUGING

### Properties of Gauges

In assessing the utility of radiation gauging it is necessary first to know some of the properties of the gauges and their attendant control systems.

Radiation gauging can be pushed to give 0.5% of the measured variable. This sensitivity would be satisfactory for most uses so far envisioned for the gauges in the textile field.

So far the smallest convenient source size is  $\frac{1}{2}$  in. square. Since yarns are considerably smaller than  $\frac{1}{2}$  in. in diameter, sensitivity for uses involving single yarns would be considerably lower than that stated above. However, this limitation of size is a matter of convenience rather than necessity. Special sources could be built of smaller size, or sources of appropriate flux could be masked to give satisfactory performance (see below).

A response frequency of 100 cycles/second is about the limit for radiation-gauge control systems at the present time. Since textile operations have throughputs of as much as 600 feet per minute, some attention must be paid to the degree of control desired and the rate of throughput for the process under consideration.

Costs of radiation gauging range from \$1000 to \$5000 for a simple read-out system to \$20,000 and up for control systems involving more than one gauge.

## Utilization of Gauges

This section is subdivided into the following categories:

- 1) Current uses and unsuccessful attempts
- 2) Proposed uses that appear feasible, in need of little development, and easy to evaluate
- 3) Proposed uses that appear feasible, in need of little development, but hard to evaluate
- 4) Proposed uses that appear feasible but require development
- 5) Proposed uses that require extensive development

In the first category are included all uses, successful or unsuccessful, which have been carried to completion. The unsuccessful applications are included because the reasons for failure give information about the problems involved in the introduction of radiation gauging into the textile field. Preliminary development work, occasionally of considerable scope, has been done on some of the proposed uses listed in the other categories, but none has been carried through to completion.

The next two categories contain proposed uses which seem to require little development work. The requirements for gauging are being met by radiation gauges in other applications, and the same is true for the control circuitry in the cases where control is involved. Also, the mechanism whereby the process can be controlled is evident. The two categories differ in the ease with which results can be evaluated. In the first, the benefits of the application could be evaluated readily in terms of reduced chemical costs, increased speed of operation, or the like. In the second, the benefits would not appear at the process being controlled but would result from a higher quality end product or from reduced costs in later stages of production. Generally speaking, evaluation of such proposed applications would require expensive, large-scale tests.

The proposed uses outlined in categories 4 and 5 would all require moderate or extensive development. The uses in category 5 would require the development of new machinery designed to utilize the potentialities of radiation gauging for control to accomplish tasks now done with no control other than initial machine settings.

The inclusion of a potential use in one of the categories 2 through 5 is to some extent arbitrary but, in general, the estimated amount of work required to bring a proposed use to technological fruition increases from category 2 to category 5.

(1) Current Uses and Unsuccessful Attempts

Control of Coating. The utilization of radiation gauging in the control of coating processes is widespread. All of the current applications have certain features in common. Coating material is applied to the fabric, for example, by drawing the fabric through a treating tank; and the amount taken up is controlled, usually by altering the setting of a pair of squeeze rolls. A radiation gauge senses the thickness of the untreated fabric and another senses the thickness of the final treated fabric (often after some type of curing in an oven). The weight percentage of coating (based on the final weight), corrected for variations in weight of the untreated material through use of an appropriate time-delay circuit, is then used to activate automatic control of the squeeze rolls and plotted on a chart to provide a permanent record of machine performance. The amount of material applied to the fabric is quite a large fraction of the weight of the treated fabric, and long-term variations resulting from gradual changes in machine setting or feed stocks are more serious than short-term variations resulting from fluctuations in weight of the untreated fabric.

It has been estimated that 60% of all tire calenders used for applying the body stock to the dipped cord fabric is controlled with radiation gauges. Other similar applications include the manufacture of artificial leather, pressure-sensitive tapes, vinyl-coated fabrics, and abrasive cloths. In these applications the use of radiation gauging can be termed established and successful.

Water Uptake and Evenness of Wear of Papermaker's Felts. A company manufacturing papermaker's felts has radiation gauges which they transport to customers' plants and use for service in customer problems. For example, they follow the water uptake of papermaker's felts from place to place on a machine to study changes occurring during the production cycle. Changes occurring with time give some indication of evenness of wear and gradual changes in felt properties. Actually, many papermakers have radiation gauges and some of them use them in a similar fashion. A weakness in using the gauges to follow wear results from lack of discrimination by the gauge; wear may be covered up by uptake of dirt or density changes resulting in changes in water uptake.

Fabric Wear and Abrasion Testing. A radiation gauge has been developed for use in testing wear of garments. A positioning device enables the test area of the garment (usually the knee) to be introduced into the gauge in a reproducible manner and the test area is then weighed non-destructively. Thus changes in weight can be followed as a function of use conditions.

Evenness Testing of Sliver, Yarn and Roving. A  $\beta$  gauge has been used to follow the evenness of sliver, yarn and roving. A special small source was used and was masked for use with yarn to improve sensitivity. A sample 0.5 cm. long was measured at rates up to 100 cm./sec. The system worked with satisfactory sensitivity and reproducibility. When used to control a position on a draw frame, good control on long-term variations (over  $\frac{1}{2}$  yd.) was obtained, but the unit was considered an unlikely prospect for a commercial control unit because of probable cost. Details of the instrumentation have been given by P. R. Ewald and C. B. Landstreet [Textile Research Journal 27, 493 (1957)].

Pin-Drafter Control. A pin drafter equipped for control by a radiation gauge was developed. The pin drafter takes several loose strands or ropes of fibers and, by a combing and drawing operation, makes the fibers more parallel and draws and condenses the input strands into a single strand. The radiation gauge was mounted on the pin drafter so that the final strand passed through it on the way to the receiving can. The gauge determined the linear density of the final strand; the signal from the gauge activated a control unit which controlled the amount of drafting (by controlling the speeds of the drafting rollers) and hence the linear density of the combed strand. The unit worked well and provided excellent can-to-can uniformity and good short-range uniformity.

The unit was not accepted commercially for two reasons. Addition of the gauging and control system would have roughly quadrupled the cost of the pin drafter, and it was not felt that the improvement in product justified the increase in expense. (It might be noted that the advantages of the controlled unit would appear in greater speed or ease of handling in later steps of production and in an improved final product; advantages which are difficult to evaluate without large-scale testing.) Second, a simpler, much less expensive control unit activated by a mechanical feeler was capable of providing almost as much improvement as the unit using radiation gauging.

Solution Density in Pipes. Some synthetic fiber manufacturers use radiation gauging to measure the density of polymer solutions in pipes before spinning of fibers.

(2) Proposed Uses that Appear Feasible, in Need of Little Development and Easy to Evaluate

Control of Rug-Back Sizing. In the production of tufted carpeting, a latex coating is applied to the back of the carpeting to anchor the tufts and to provide body. A back sizing is also applied to other carpeting to reduce sleaziness or to serve as a bond for a woven paper scrim which is applied to mask blemishes and improve appearance. The use of back sizing is increasing and there are 10 oz. to 16 oz. of back-size per sq. yd. of carpet. The cost of latex is the largest single chemical cost in rug manufacture.

The latex is applied by bringing the rug back in contact with a kiss roll which revolves with its lower portion in a trough containing the latex. The process is completed by an oven cure to harden the latex. The amount of latex applied can be controlled by varying the speed of the kiss roll.

Studies have been made on the feasibility of controlling this process by radiation gauging. It was concluded that installation of gauges before and after the kiss roll with control equipment similar to that used in coating operations would provide satisfactory control. Studies of the economic feasibility of control have also been made and published by W. E. Vannah [Control Engineering 5, No. 10, 84, (1958)].

As a basic economic model the following factors were taken:

1.  $2\frac{1}{2}$  million sq. yds. of rug processed per year
2. Total processing costs including latex cost  
\$2.50 per sq. yd.
3. Sales price - \$5.50 per sq. yd.
4. Margin - \$3.00 per sq. yd.

After survey, using a portable gauge, it was estimated that from \$12,000 to \$20,000 worth of latex in excess of necessary requirements was used per month and that controllable cyclic variations occurred. It was estimated that an increase of machine speed of 1% could be realized with better control which would mean an increment in profit margin of  $(2.5 \times 10^6) (0.01) (\$3.00) = \$75,000$  per year. A decrease in excess sizing of 50% would result in a saving in latex of  $(\$15,000) (12 \text{ mo.}) (\frac{1}{2}) = \$90,000$  per year. Initial costs of installation were estimated at \$57,000 (to be depreciated over 5 years) with annual maintenance costs of \$2,000 per year. Thus a return of \$151,600 for a cost of \$13,400 was projected.

Some comments can be made about the economic survey just outlined. According to informed sources the profit margin assumed is probably higher than that obtained by the industry in general at the present time. On the other hand, the above indicated number of sq. yds. of rug processed per year represents no more than a few per cent of the total yardage processed per year. The amount of excess latex was a value estimated for the specific unit surveyed and could vary widely from unit to unit throughout the industry. However, it is obvious that, if radiation gauging can provide any control at all, a reduction in the margin of safety above minimum performance (or alternatively a reduction in inferior goods) can be provided. Finally, since in some operations 25 yd. lengths of different constructions are run through the back-sizing unit consecutively, some complications in setting controls might occur which could decrease the postulated increase in speed of operation.

The net of all of these considerations would still seem to favor radiation-gauge control and it appears that the negligible use of radiation gauges in this application at the present time results from factors other than technical or economic feasibility.

Control of Dye Padding. In dyeing with azo or naphthol dyes, a paste composed of dye component, surface-active agent, water and a thickening agent such as starch or gum tragacanth is padded onto the fabric. A total pickup of 50%, 75%, or higher on the weight of the fabric is attained. The amount of pickup is controlled by the adjustment of squeeze rolls and variations in uptake are undesirable because of the resulting variations in shade in the finished fabric. Side-to-side variations are particularly undesirable. This process seems very similar to the various coating operations and should be amenable to the same type of gauging and control. Since dyes are relatively expensive, and streaky fabrics must either be stripped and redyed, dyed a darker shade or sold as seconds, the economic incentive for control in the dyeing process is considerable. In addition, an improvement in running time would be likely to result from better control.

Tenter Frame Control. In a tenter frame, fabrics are stretched and dried to a desired width and weight yield. The stretching also realigns the fabric which has been stretched and pulled out of shape in previous operations. If the final yield can be specified in terms of areal density (oz. per sq. ft., for example), a radiation gauge can obviously be used to provide a check or to control the action of the tenter frame.

Read-Out Gauge for the Study of Drying and Other Experimental Purposes. A compact, versatile, portable, inexpensive radiation gauge would seem to have many potential uses in the textile field. Current uses in connection with service problems involving papermaker's felts have been outlined.

In addition, interesting information might be developed by following the break-in period of felts during which changes in density and water content can occur.

There are many problems connected with the operation and design of dryers, agers and curing ovens in which a knowledge of the rate of loss of water or the average weight of a fabric at a given position would be useful. A simple read-out gauge would seem to be an ideal solution providing a cost of, at most, a few thousand dollars could be met.

(3) Proposed Uses that Appear Feasible, in Need of Little Development, but Difficult to Evaluate

Slashing Control. In slashing, a sizing material such as starch, carboxymethyl cellulose or polyvinyl alcohol is applied to the yarn making up the warp to insure satisfactory running in weaving. The operations involved are a padding operation, drying, and separation of individual yarns which may have become stuck together. Control of the padding operation would appear to involve standard approaches which have been discussed already. Since sizing is shed when the yarns are separated, it might well prove desirable to provide additional gauging and control to take account of the losses during separating.

In this case, since the size is a relatively inexpensive material, savings on size would not be a primary consideration except under exceptional circumstances. The value of the control system would show itself in improved performance of the more uniformly sized warp and, possibly, in decreasing the time of the slashing operation. There does not appear to be any good way to evaluate better sizing other than large-scale weaving tests. Thus, evaluation of the advantages of slashing control would be time consuming and costly. Since the gauging and control equipment are also expensive, a considerable investment would be needed before this proposed use could be evaluated. Finally, since weaving efficiency is generally high, the potential saving per unit of production is small.

Picker or Card Control. In the picker and the card a very non-uniform feed stock of unstraightened unoriented fibers is separated and ordered to some extent. Since the card follows the picker in the processing flow, its feed stock and product are more uniform. In principle, fiber-by-fiber separation is achieved in carding.

Use of radiation gauges to monitor the lap or web produced by these machines would provide information which could be used to maintain the average linear mass of the lap or web within certain limits. Short-range

lack of uniformity resulting from the inhomogeneity of the feed stock could not be controlled since no method for altering the lap or web after gauging would be available (see below, however). Corrections against long-range production of out-of-tolerance material, resulting from improper initial setting of the machine or gradual changes in machine or feed-stock performance, could presumably be made by automatic adjustment of speeds or settings.

It is generally agreed that uniformity at every step of production is to be desired and that the early steps, such as picking and carding, occupy a special position because they determine the quality of the feed stock for later operations. Mechanically actuated devices are in use at the present time to provide some long-range control of pickers. The use of gauges (as outlined in this section) would not eliminate any steps in processing, and it is doubtful whether production of either picker or card could be increased to any important extent. Thus, the potential advantage of such a utilization of gauging and control would lie primarily in the improved quality of the picker lap or card web produced. This would manifest itself in more economical production costs or superior quality of the final product.

Long-range evenness in carding is of prime importance in the nonwoven industry where several card webs are formed into a sandwich and then fixed together with a binder. At present, uniformity within 10% variation is difficult to obtain. Radiation gauges for several cards would be very expensive, but it might be possible to control the thickness of the web from the final card so as to compensate for nonuniformity in the intermediate web to which it is to be added, and thus produce a uniform final web. Again, large-scale mill tests would be needed to evaluate the potential use.

Evenness Read-Out Gauge. There are many devices designed to measure the uniformity of various fibrous assemblies from picker laps to yarns and fabrics. Most of these devices utilize some electrical measurement such as change in capacitance. These devices tend to require careful calibration since they are essentially empirical in nature and some are disproportionately sensitive to changes in water content.

The direct measurement of mass offered by radiation gauges would make them simpler and more flexible. A pilot version of such a device has already been referred to. However, the high comparative price of radiation gauges and the adequate performance of the electrical gauges in many fixed uses make it difficult to justify the radiation gauge, especially since none of the gauges has proved of great importance in control, their use being primarily limited to research studies.

A special form of evenness gauge might have some utility. A record of the uniformity of tow produced by machines spinning synthetic fibers would be of some interest as a check on the uniformity of machine operation.

It would be much more difficult to use the information recorded to control uniformity. The primary problem would be the question of what to control, especially since a rapid response would be desired. The need for improvement in average tow density is not thought to be great in any case.

#### (4) Proposed Uses that Appear Feasible but Require Development

Control of Resin Application. A large amount of cotton fabric is treated with materials which can polymerize within the cotton fibers and can interact chemically with the cellulose of the fibers to form cross links. Examples of treating materials are urea-formaldehyde, melamine-formaldehyde or epoxy resins. The treated fabrics have better resistance to wrinkling and better recovery from wrinkling than untreated fabrics. The resins are applied in a padding operation which is followed with an oven drying and curing operation, the entire process taking place on the resin range.

There are two potential uses for radiation gauging in this process. First, the average amount of resin applied could be controlled by the standard techniques which have been discussed in connection with other padding operations. Such control would presumably minimize production of off-standard goods and possibly increase speed of production, although the limiting factor on speed seems to be oven capacity rather than control. Probably no saving on resin costs would occur. Overtreatment with resin results in severe deterioration of the mechanical properties of the fabric, with the result that errors tend to be made on the side of undertreatment. This leads to the second possible use of radiation gauging for control. At the present time, thin places in the fabric tend to be overtreated, with resulting weak spots. To avoid this the average level of treatment is kept below the optimum level. If, in addition to long-range control of the average level of application, information on the presence of thin spots from an initial gauge measuring untreated fabric (which would be present for control of average level of treatment) could be used to control the application of resin to the thin spots in the padding, a considerable improvement in product could be achieved. It is, of course, evident that the same control system would also eliminate undertreatment of thick spots.

Such a use of the maximum potential of radiation gauging would appear to require a certain amount of development work. Thin spots may be only a few inches long, with a resultant need of foot-by-foot or even inch-by-inch control. Thus, the mechanical operation used to control the padding and its attendant control circuitry would need to be rapid and precise, the more so because speeds of up to 130 yd./min. are in use with resin ranges. Some reduction in speed could undoubtedly be tolerated in the interests of a superior product.

Since resin ranges cost in the neighborhood of \$150,000, the costs of gauging and control would not necessarily be out of line with the total capital costs of the resin finishing operation.

One other type of resin application might be mentioned. Resins are also sprayed on fabrics. This method is new and under investigation, but looks promising because a more concentrated solution is used with less evaporation of water necessary. Control of individual spray nozzles coupled with radiation gauging would appear capable of offering improvements in side-to-side uniformity difficult to obtain in other ways.

Blending and Feed Control. The process of blending fibers is becoming increasingly important in the textile industry. Blends of various chemically different types of fibers are increasing in use and various lots of natural fibers are often blended to reduce costs or to produce more uniform running characteristics in spinning. A new law requiring the labelling of blends, with responsibility for meeting the proportions stated on the label falling on the manufacturer, will intensify the importance of suitable blending procedures.

Current blending procedures often involve the weighing out of alternate layers of raw stocks in the appropriate proportions to form a sandwich which is passed through operations similar to picking and carding to form a web or strand in which the fibers are presumably uniformly blended. This type of blending is essentially a batch operation.

In another type of blending, partially opened raw stock is dropped automatically on a weighing pan. The pan in turn drops a batch having the appropriate weight onto a conveyor. Successive feed units add additional layers, and the resulting sandwich is fed through a picker and then carded.

Radiation gauging with appropriate control circuitry would appear to be ideally suited to the blending operation. It would appear possible for the raw stock to be fed to the conveyor continuously and more rapidly than can be done by the repeated batch type of operation (500 lb./hr.). It would also appear that the discrete units of each component of the blend could be made smaller with the probable result that the picking and carding operations would produce a more uniform blend.

However, economic factors are unfavorable at the present time. A conveyor with four feed units costs in the neighborhood of \$12,000. It would seem likely that any device using radiation gauges would have at least double the cost. Thus the benefits in terms of increased speed

and production of a superior web of blended fibers would need to be substantial to justify the increased cost.

It should be pointed out that blending is also accomplished by merging strands during drafting. In some cases this is the only way blending can be accomplished. As an example, natural fibers must sometimes be combed before blending with synthetic fibers. Since it is unlikely that the combing operation would be effective if the raw stocks were blended, the blending must follow the combing.

In addition to blending, there are other operations in which a controlled rate of delivery of feed stock could be of value. The semi-continuous raw-stock dyeing used by carpet manufacturers is an example.

Control of Cloth Weight. Cloth made for certain government uses and for some manufacturers of work clothes is required to have a certain minimum weight per unit area. Although any weight above the minimum is acceptable, it is to the manufacturer's advantage to meet the minimum specifications as closely as possible since no premium is paid for the excess weight. Currently, a safety factor is applied to allow for uncontrollable variations in yarn sizes and loom operation. Although the weight of a fabric is primarily determined by its construction and the weights of the yarns, some variation might be possible by altering the take-off speed of the loom. Radiation gauging coupled with control of take-off speed might then allow the manufacturer to operate closer to the minimum specifications. Although the savings per yard of cloth would be very small, substantial amounts of raw stock would be saved on large orders.

Measurement of Wrinkling. Since fabrics would appear to increase in mass per unit plane area when they are wrinkled, a radiation gauge would seem to offer a convenient nondestructive test of wrinkling and wrinkle recovery, particularly where garments are concerned. Development work would be necessary to see whether adequate sensitivity could be obtained. If so, a small market for inexpensive read-out gauges would be available.

(5) Proposed Uses that Could be of Considerable Importance but Require Extensive Development

Production of Greater Uniformity in Manufacture. An increase in uniformity in the spinning process is one of the most widely sought for improvements in the textile field. Somewhat paradoxically, the one application of radiation gauging carried out to date, which resulted in production of a more uniform sliver (and thus, presumably, a more uniform yarn), was not accepted by the industry. As has been explained previously, the reasons for rejection were economic in nature.

To understand how radiation gauging might best be used to control and improve the spinning process, it is helpful to consider the steps in yarn manufacturing in detail. A bale of raw stock is opened, fluffed out and separated - in principle into individual fibers. The steps involved in this process are opening, picking and carding. The sliver from the card is then subjected to drafting. The operations involved in drafting act to make the fibers parallel with each other and with the axis of the strand being formed. One purpose is production of a uniform strand, the uniformity referring to the degree of parallelization, the density, and the lateral dimensions of the strand. Often two or more strands will be run through a drafting operation which will produce a strand of the same size as those fed in. The purpose of such a doubling operation is increased uniformity. In the final steps the strand is condensed and twisted to form a yarn. These steps are roving and spinning; in modern production methods, no mechanism for introducing uniformity is present in these steps.

The non-uniformities arise from two sources. They are introduced by the inhomogeneous nature of the starting material (i.e., the bale of raw fiber), and they are introduced by the various steps of processing. The former tend to be short-term in character, the latter long-term. It is obvious that placement of a radiation gauge at the exit end of a machine with appropriate feed-back controls can act to minimize machine-induced variations, but offers no method of dealing with short-term variations caused by an inhomogeneous feed stock. To deal appropriately with such variations, it would be necessary to be able to feed information ahead to a mechanism capable of taking appropriate corrective action. Radiation gauging offers what appears to be an ideal sensing element to provide information to be fed ahead. However, to obtain maximum utilization of the potential of radiation gauging, it would be necessary to redesign existing equipment to provide mechanisms to act appropriately on the information fed ahead. Although a considerable amount of engineering development might be necessary, such machines, which would perform operations equivalent to picking, carding or drafting, should give products possessing a much higher order of uniformity.

Other factors can also be considered. The several steps in processing exist because the throughputs of various machines differ and as a means of providing control. It would be uneconomical, for example, to couple one position of a draw frame capable of delivering 40 lb./hr. directly with one spindle of a roving frame delivering 0.8 lb./hr. Also, it is more economical to reprocess a picker lap which, on inspection or weighing, has been found to be substandard, than to carry it through processing and sell the substandard yarn. However, if a system providing dynamic positive control is available, the control opportunity offered by separation into steps is no longer necessary, and the various economic factors must be reassessed. For example, using radiation gauging and existing control circuitry, it would appear to be possible to devise a machine to perform the tasks of the picker and the card with positive control which would provide a superior card web.

The benefits of the superior product and labor saving resulting from the elimination of a step in processing would have to be balanced against the probable higher capital investment and possible increased requirements for plant space. However, the possibility of substantial economic advantages from using appropriate controls to eliminate or condense steps in processing exists.

It is interesting that, according to E. Vockrodt [Der Spinner und Weber 23, 1373 (1958)], the Russians have an isotope-controlled, fully automatic bale-to-yarn pilot plant. No details are given and the schematic drawing accompanying the text gives the appearance of a coupled series of conventional units.

Card-Web Splitting. No satisfactory method for splitting a strand of fibers, such as a card web, into two equal portions exists. Although such a strand is not hard to cut, no method for controlling the size of the resulting strands is available. As a result, there is essentially one strand of fibers from opener to spindle although, by cutting the output of machines with large throughput into relatively short lengths, one fast machine is made to service many slow ones.

There is no apparent reason why controlled splitting of a strand, such as a card web, could not be accomplished with the aid of radiation gauging. Such a development would provide a new flexibility to the machinery manufacturer, which might have important results. As an example, the doubling operations used to increase uniformity are currently run using several lengths of sliver. An automatic splitting device would permit automatic doubling with a resultant increase in uniformity and speed of operation.

Drying Control. There are several processes in which a controlled drying operation would be desirable. The weighing of a strand or fabric with a radiation gauge is easily accomplished, but the distinguishing of water from fiber does not seem to be possible with radiation gauging. Since the basis weight of dry fiber varies and cannot be determined in advance, the relative proportion of water and fiber cannot be measured.

On the other hand, some gauges based on electrical measurements such as dielectric constant are extremely sensitive to the amount of water present but much less so to the fiber substance. Possibly a combination of the two types of measurement could be used to provide accurate control of drying.

Double Thickness Gauge. A double thickness gauge using a radiation has recently been developed. It is felt that this type of gauge, which depends upon differential absorption of two energy level radiations by the two substances being studied, might also be developed using  $\beta$  radiation. It

would be necessary to utilize  $\beta$  rather than  $\alpha$  radiation for textile purposes in view of the low masses in question. Two areas of textile application are possible:

- (a) Determination of water content in a system where fabric geometry and density vary, e.g., fulling and felting
- (b) Continuous analysis of two chemically different fibers

A great deal of research and development would be required in these areas. It is not known whether the underlying principles of a double thickness gauge are applicable to organic systems where large differences in atomic masses do not exist. The very high cost of a double thickness gauge would require material benefits to be derivable from its use.

## IRRADIATION

The industrial utilization of irradiation is much less highly developed than utilization of radiation gauging. There is not a great amount of information on the ultimate costs of irradiation as a routine industrial procedure. What is known suggests that, in cases where irradiation can be used as an alternative to a chemical process, the economic advantage lies with the chemical process. As a result, the most promising potential applications of irradiation are those for which there is no chemical alternative or those which offer some additional technological advantage. Although polyethylene can be cross-linked by irradiation, almost all of the other polymers of interest in the textile field are degraded by massive doses of radiation. It follows that, to be promising, a process must be brought about by a dose of irradiation well below levels producing serious deterioration. Examples are polymerization processes where the high yield of polymer per quantum of radiation absorbed allows relatively small doses of irradiation to be used for initiation and grafting processes of such nature that a relatively small number of side chains or appended units suffice to bring about the desired result.

Grafting. In grafting, polymeric side chains or other groups are caused to form on an existing polymeric material. Generally speaking, chemical alternatives are not available, although ozonolysis and UV radiation can be used to produce grafting. By copolymerization and block polymerization, possibilities for side chain formation are available - however, not to the extent offered by irradiation which, in principle, allows the initiation of any polymerization which proceeds by a free-radical mechanism. In addition to the greater range of possible side chains offered, it is important that fibers and fibrous assemblies can be irradiated to produce grafting. This makes it possible to modify the surface of fibers without appreciably altering the interior, thus retaining properties resulting from ordering of chain residues or from intrinsic chemical character. For example, stereospecific polyolefin fibers have valuable mechanical properties which would be lost with the introduction of appreciable amounts of a second monomer in the polymerization process. Polyester fibers also have valuable mechanical properties. Both types of fibers have a tendency to cause trouble in some uses because of generation and retention of a static charge (the same is true of other hydrophobic fibers). In principle, the graft polymerization of a conducting or water-retaining surface layer onto the fibers would provide a permanent solution to the problems caused by static electrification. Since, at the present, nonpermanent additive finishes are used to minimize static electrification, grafting would make possible a technological advance by making static suppression permanent and, hence, wash-fast. It would, of course, be necessary that desirable surface properties relating to drafting and the like be retained.

Grafts to polypropylene which enhance dyeability and reduce static charge retention have been successfully carried out in the laboratory. Polyesters have proved less tractable, requiring inconveniently high doses of radiation.

A related possible application involves adhesion. The adherence of plastics and rubbers to fibers is important for many industrial applications, particularly automobile tires. The grafting of a layer of polymer with excellent adhesive properties with respect to the plastic or rubber should provide a better adhesive bond than can be obtained today in a majority of cases. In fact, an adhesive bond approaching the cohesive strength of the rubber would seem possible. This approach would appear to become increasingly promising for fibers which are chemically inert. To date, experiments have shown that the grafting tends to form widely separated long chains rather than the closely-spaced short chains which appear to be preferable. Further experiments will show whether or not this is a serious problem and if it can be surmounted. Also, since chemical adhesives have been developed for several types of fibers, the economic margin for grafting treatments is limited. Improvement of adhesion to glass might offer exceptional opportunities.

It would also appear to be possible to graft short dye-receptive chains onto a fiber which is difficult to dye. Here, the grafting must occur through the fiber so that risks of degradation or unwanted changes in mechanical properties are greater. However, enhancement of dye receptivity with the aid of irradiation for special cases where wash-fastness and depth of shade are not important is already being used.

Other areas in which surface grafting might bring about technological advances are the raising of the sticking temperature of fibers such as nylon, and the addition of a permanent lubricant.

Impregnation with Polymer. Cellulosic fibers are treated with materials which can bring about cross-linking and resin deposition within the fiber. These treatments confer a degree of wrinkle resistance and recoverability to the fabric and also may be used to give rot resistance, flame resistance or other properties. Chemical initiators are currently used, but many of the reactions could be initiated by irradiation, and some of the chemical initiators cause deleterious side effects. It seems likely that in some cases the products of an irradiation-induced reaction will possess superior properties or solve special problems such as are met in military or space applications. Another area involving large-scale utilization of polymerization on fibers is the addition of binder to non-woven fabrics. In some cases the chemical initiators are suspected of being the cause of color changes. Here again, the economic factors are all important, any curing process must cost no more than 2 cents/yd. for general acceptance.

Degradation Processes. In the preparation of viscose rayon, the viscose solution is aged. It is known that one step occurring during aging is a degradation of the cellulose chains. If the aging process could be accelerated sufficiently by irradiation, a considerable saving in equipment and time could be brought about.

Rags are degraded in the production of paper. Irradiation could obviously be used to accelerate the degradation if the process could be carried out economically.

Irradiation for Static Dissipation. At the present time additive finishes, point discharges, and irradiation from radioactive sources are used to dissipate static charges. Additive finishes are used most commonly; however, no entirely satisfactory system is available, particularly where relatively high speeds of traverse are concerned. There is little agreement as to the best system to use for a given case and little basic research going on. A study of the basic principles and important parameters involved in static generation and dissipation would be very helpful. Irradiation would appear to offer advantages with respect to speed if an adequate flux of radiation could be maintained conveniently. Also, in some cases no antistatic finish is available which does not cause deleterious effects in drafting because of changes of surface characteristics.

Irradiation for Structure. Little is known about the effect of irradiation on the microstructure of fiber-forming polymeric substances. For that matter, the effect of microstructure on the mechanical properties of polymers is not fully understood. So far, only the degradative effects of irradiation of fiber-forming polymers have been considered, i.e., loss in tensile strength and extensibility. Other possible effects which may be beneficial, such as changes in fiber luster, porosity, permeability and density need to be studied.

## OTHER USES

Tracers. There are many possible applications of tracers in solving control problems in the textile field, a good example being control of fiber-blending operations. However, in every case the sale of radioactive material to the public and the handling of radioactive material by plant personnel with its attendant problems of health physics and personnel relations offer serious objections. The problem of health physics in the case of radioactive fibers is compounded by the fact that it is almost impossible to avoid contamination of the air with dust and lint during mechanical processing operations. Therefore, the use of tracers in control would seem to suffer from serious difficulties which would render it unfeasible except for possible special situations.

There is one area in research applications which might be mentioned. Studies of soiling, washing, and detergency are of continual importance. The analysis of soiling is chemically so difficult that production of a range of standard radioactive soils might provide a considerable service to the industry.

Radioactive Fibers. The incorporation of a radioactive material into a fiber structure by a permanent chemical linkage and the subsequent use of such a radioactive fiber as a source of radiation appears to offer several interesting possibilities. A mat or pad formed from such radioactive fibers would have two major advantages over other sources of radiation:

- (a) Manageability (easy handling)
- (b) Large surface area

Possible uses of radioactive fibers, taking into consideration the two advantages listed above, would be:

- (1) Air filtration
- (2) Control of exhaust fumes
- (3) Catalysis of gas phase reactions
- (4) Tumor control in medicine

The achievement of an adequate flux of radiation in a fiber mat would probably be the key problem in this application.

## CONCLUSIONS AND RECOMMENDATIONS

1. There are many areas in the textile industry where radiation gauges or irradiation could solve problems or offer the opportunity for technological advances. A few uses could be developed immediately; most would require further research.
2. The greatest single deterrent to more use of radioisotopes in the field is the cost of the equipment containing the isotopes. This is true both for sources for irradiation and for radiation gauges. A second deterrent for uses in process control involving tracers lies in the possible health hazards involved.
3. Because of the economic factors, efforts should be concentrated in those areas where the greatest technological advances seem likely. These would include irradiation to initiate chemical change and development of processing equipment designed to take maximum advantage of the potential of radiation gauging and control.
4. The textile industry possesses a cadre of engineers and scientists with a knowledge of the capabilities of radioisotopes. Although more would be needed if extensive uses should develop, it is likely that existing training facilities would be satisfactory.
5. Although work is underway on irradiation to produce chemical change, especially among the fiber producers, more work is needed if the potential of irradiation is to be assessed adequately in the next several years. It seems probable that any efforts to develop radical changes in textile processing based on radiation gauging will need support from outside the industry. Pilot studies to assess the feasibility and potential of such approaches and to develop new principles applicable in processing should be undertaken.

## ACKNOWLEDGMENT

The authors would like to express their sincere appreciation to the many people who contributed their experience and thought to the making of this report. Although it is not possible to mention every individual who assisted, representatives of the following organizations participated in discussions which formed the foundation for the analysis reported here:

Albany Felt Company  
Burlington Industries, Inc.  
Celanese Corporation of America  
Chicopee Manufacturing Company  
Coats and Clark, Inc.  
Curtiss Wright Corporation  
Deering Milliken Research Corporation  
Dow Chemical Company, The  
du Pont de Nemours & Company, E. I., Textile Fibers Department  
Huyck Corporation, The  
Industrial Nucleonics Corporation  
Mohasco Industries  
North Carolina State College, School of Textiles  
Nuclear Research Corporation  
Proctor and Schwartz, Inc.  
Radiation Applications, Inc.  
Radiation Counter Laboratories  
Riegel Textile Corporation  
Saco Lowell Shops  
Stevens and Company, Inc., J. P.  
Tennessee, University of, Agriculture Experiment Station  
U. S. Atomic Energy Commission, Office of Isotopes Development  
Warner and Swazey Company  
Whitin Machine Works