

NOVEMBER 1975

MATT-1182

ION-BEAM-DRIVEN RESONANT ION  
CYCLOTRON INSTABILITY

BY


H. W. HENDEL, M. YAMADA, S. W. SEILER

AND

H. IKEZI

PLASMA PHYSICS  
LABORATORY

MASTER



PRINCETON UNIVERSITY  
PRINCETON, NEW JERSEY

This work was supported by U. S. Energy Research and Development Administration Contract E(11-1)-3073. Reproduction, translation, publication, use and disposal, in whole or in part, by or for the United States Government is permitted.

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

## **DISCLAIMER**

**This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency Thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.**

## **DISCLAIMER**

**Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.**

NOTICE

This report was prepared as an account of work sponsored by the United States Government. Neither the United States nor the United States Energy Research and Development Administration, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness or usefulness of any information, apparatus, product or process disclosed, or represents that its use would not infringe privately owned rights.

Printed in the United States of America.

Available from  
National Technical Information Service  
U. S. Department of Commerce  
5285 Port Royal Road  
Springfield, Virginia 22151

Price: Printed Copy \$ \* ; Microfiche \$1.45

<u>*Pages</u>	<u>NTIS Selling Price</u>
1-50	\$ 4.00
51-150	5.45
151-325	7.60
326-500	10.60
501-1000	13.60

## Ion-Beam-Driven Resonant Ion Cyclotron Instability

H. W. Hendel\*, M. Yamada and S. W. Seiler

Plasma Physics Laboratory, Princeton University  
Princeton, New Jersey 08540

and

H. Ikezi

Bell Laboratories, Murray Hill, N. J. 07974

The resonant ion-beam-driven electrostatic ion cyclotron instability is identified. Measured dispersion relation and onset vs. beam energy and density agree with numerical calculations based on a theory which includes beam acoustic terms. After amplitude saturation, velocity space diffusion of the beam ions is observed.

We report experimental results on a resonant, electrostatic ion cyclotron instability destabilized by a low energy ion beam injected parallel to the confining magnetic field into a target plasma. Their interpretation is based on a theory which includes beam acoustic and target ion cyclotron terms and on numerical calculations of the dispersion relation.

Instabilities driven by ion beams have recently attracted considerable interest in connection both with neutral-beam-injection for fusion plasma heating<sup>1</sup> and with space physics:<sup>2</sup> They may scatter particles and waves, effect energy transfer from beam to fusion plasma and vary transport properties of beam and plasma. Ion injection, although differing from neutral

injection in time evolution of ion beam density and possibly beam velocity distribution, is easier to set up and should also contribute to the understanding of neutral injection and of the relevant instabilities and their effects on the beam-plasma system. In isothermal ( $T_e \approx T_i$ ) fusion and Q-device plasmas, ion sound is strongly ion Landau damped and not expected to play an important role.<sup>3</sup> However, ion cyclotron waves can have a higher parallel phase velocity and may thus be destabilized more easily by an ion beam with  $E_b > kT$ .

The significant result of the present work is the detailed identification of the resonant ion-beam-driven electrostatic ion cyclotron wave by measurements of  $\omega$  and  $k$  and of threshold beam energy as function of relative beam density. The experiment is shown to be in agreement with numerical calculations extended from Perkins' theory of counterstreaming beams<sup>4</sup> to include a beam of variable density injected into a plasma at rest. After the wave amplitude saturates, the beam's parallel energy distribution was observed to flatten in the resonant particle region.

The theory considers a uniform, low- $\beta$  Maxwellian target plasma in a constant uniform magnetic field  $B$ , with  $T_e = T_{i\perp} = T_0$  and streaming velocity  $u_t$ , and an ion beam with streaming velocity  $u_b$  and velocity spread characterized by  $v_{b\parallel} = \sqrt{\frac{2T_{b\parallel}}{M}}$ ;  $T_{b\perp} = T_0$ . The ion beam is injected parallel to  $B$  in the  $z$ -direction. All species are singly charged so that  $n_e = n_{it} + n_{ib}$ . The dispersion relation for electrostatic waves propagating almost perpendicularly to  $B$  ( $k_{\perp} \gg k_z$ ), for  $k_{\perp}\rho_e \ll 1 \lesssim k_{\perp}\rho_i$  is written

$$\begin{aligned}
 & \left. 1 + \frac{k_{De}^2}{k^2} + \frac{k_{Di}^2}{k^2} \left\{ \sum_{n=-\infty}^{\infty} I_n(\lambda) e^{-\lambda} \left[ 1 + \frac{\omega + k_z u_t}{k_z v_i} Z\left(\frac{\omega + k_z u_t + n\omega_{ci}}{k_z v_i}\right) \right] \right\} \right. \\
 & + \frac{k_{Di}^2}{k^2} \frac{n_{ib}}{n_{it}} \frac{T_i}{T_{b_n}} \left\{ \sum_{n=-\infty}^{\infty} I_n(\lambda) e^{-\lambda} \left[ 1 + \frac{\omega - k_z u_b + n\omega_{ci} (1 - (T_{b_n}/T_o))}{k_z v_{b_n}} \right. \right. \\
 & \left. \left. Z\left(\frac{\omega - k_z u_b + n\omega_{ci}}{k_z v_{b_n}}\right) \right] \right\} = 0 \tag{1}
 \end{aligned}$$

where  $k_{De(i)}^2 = 4\pi n_{e(it)} e^2 / T_o$ ,  $v_i = (2T_o/M)^{1/2}$ ,  $v_{b_n} = (2T_{b_n}/M)^{1/2}$ ,

and  $\lambda = k_i^2 T_o / M \omega_{ci}^2$ .

$Z(z)$  is the plasma dispersion function and  $I_n(\lambda)$  the modified Bessel function of  $n$ th order. We note that the parallel beam temperature decreases as  $T_{b_n}/T_o \approx (v_i^2 / 2u_b^2)$  with increased ion beam energy.<sup>5</sup>

This dispersion relation results in instabilities generated by the interaction between the slow beam-acoustic term and the ion cyclotron mode of the target plasma.<sup>4</sup> Instability occurs when beam-ion inverse Landau damping overcomes target-ion cyclotron damping. Earlier theoretical work on ion beam excited resonant electrostatic ion cyclotron instability<sup>6</sup> used the approximation  $\left| \frac{\omega - k_z u_b}{k_z v_{b_n}} \right| > 3$  for the  $n = 0$  beam term, discarding

instability based on the beam acoustic mode. Since the present experiment covers the regime  $\left| \frac{\omega - k_z u_b}{k_z v_{b\parallel}} \right| \approx 1$ ,  $\left| \frac{\omega + k_z u_t - \omega_{ci}}{k_z v_i} \right| \approx 1$ , we solved Eq. (1) by numerical computation. We note that due to the motion of the target plasma, the cyclotron frequency may be Doppler-shifted ( $\omega = \omega_{ci}/2$  for  $u_b = u_t$ , in the lab-frame), and in addition, cyclotron harmonics may be excited, so that  $\omega = n\omega_{ci}(1 - \Delta)$ . However, we expect lowest threshold for  $\omega = \omega_{ci}(1 - \Delta)$ , the wave due to coupling between the beam's slow acoustic and the target plasma's fundamental ion cyclotron modes.

The experiments were performed on the thermally ionized plasma of the Princeton Q-1 device converted into a double-plasma machine,<sup>7,8</sup> Fig. 1. A negatively biased mesh divides the plasma column into a 5 cm long beam-extraction plasma and a 120 cm long target plasma. The plasma diameter is 3.2 cm and the confining magnetic field 2-7 kG. When voltage is applied to the plasma column parallel to  $B$  through the ionizer (end) plates, the biased (-20 V) mesh (grid spacing  $< \lambda_{Debye}$ ) prevents electron flow and the potential drop occurs in the sheath region of the mesh, thus generating an ion beam. Beam and target plasma densities can be varied by regulating the neutral densities impinging on the ionizer plates. Ion collisions are negligible since  $\lambda_{mfp} > 10^3 L$  ( $L =$  machine length). The beam is generally injected on-axis. For the target plasma,  $n \approx 10^9 \text{ cm}^{-3}$ ,  $T_i \approx T_e = 0.3 \text{ eV}$ ; the relative beam density  $n_b/n_t \approx 0.1 - 5$ , and  $E_b/E_t = 0 - 10^3$ . Probes measure  $T_e$ ,  $T_i$ ,  $n_{it}$ ,  $n_{ib}$  (determined with rotating, plane collectors)

instability amplitudes and frequencies and their radial profiles. An ion energy analyzer (2 mm diam.) with a 1 mm opening can be turned into beam, target and perpendicular directions and moved radially. Wavelengths are obtained from the phase shift vs. rotation of a double probe ( $\lambda_{\perp}$ ) or vs. distance to an axially or radially moving probe ( $\lambda_{\parallel}$ ,  $\lambda_{\perp}$ ).

Fig. 2a shows measurements of the instability frequency vs.  $B$ , for constant  $u_b$ , taken well above onset. The observed frequency is below the ion cyclotron frequency,  $\omega = \omega_{ci}(1 - \Delta)$ , as expected from consideration of the target plasma drift velocity,  $\left(\frac{1 - \Delta}{\Delta}\right) \approx u_b/u_t$ . Fig. 2b displays instability frequency vs. ion beam energy, for  $B = \text{const}$ . At onset, the frequency is about 35% below  $\omega_{ci}$ , and approaches  $\omega_{ci}$  as the target-plasma drift becomes negligible relative to the beam velocity, in agreement with the prediction. The resonance coupling between beam and phase velocities is demonstrated in Fig. 2c, which indicates that the phase velocity is about 15% below the beam velocity, in agreement with the computer calculation. For Weibel's<sup>6</sup> purely growing mode  $u_b = 2\omega/k_z$ , when transformed to the experimental coordinates. We also measured  $\lambda_{\parallel}$  vs.  $B$ , for constant beam energy, and found the predicted behavior  $\lambda_{\parallel} \propto 1/\omega_{ci}$ . Spatial growth of the wave was observed, with the expected growth rate, converted to temporal growth rate,  $\gamma/\omega_{ci} \approx 0.03$  at maximum. The wave is localized in the interior of the ion beam, with a maximum amplitude  $\tilde{n}/n \approx 15\%$ . The radial wavelength was comparable to the beam diameter, so that  $k_{\perp}\rho_i \approx 1$ , as expected.

Fig. 3 shows normalized threshold beam velocity as function of normalized beam density, for constant  $B$ . Onset occurs at lowest beam velocity for approximately equal densities of beam and target plasma. We note that two colliding, equal temperature plasmas or beams would produce a symmetrical, parabolic  $u_b$  vs.  $\log n_b/n_t$  plot. If, however, one of the plasmas (the "beam") is reduced in (parallel) temperature (by acceleration), the increased inverse Landau damping leads to an asymmetric plot with lower onset values. Ion-beam-driven ion cyclotron wave results reported previously<sup>8</sup> were limited both experimentally by the set-up and theoretically by the "cold beam-cold plasma" theory used. We also note that a mode at  $\omega \approx 0$  due to coupling of ion-acoustic target and ion cyclotron beam terms at about zero frequency is suggested by Eq. (1). This mode could not be observed because of strong ion Landau damping arising from  $T_{it} \approx T_e$ .

Fig. 4 shows parallel energy spread (normalized by the initial value) of the ion-beam as function of beam energy. Since the instability is excited at the expense of parallel ion-beam energy by inverse ion Landau damping, one expects deterioration of the beam energy at the fully developed stage of the instability. At this stage the instability satisfies the qualitative condition for the presence of nonlinear effects ( $\omega_{\text{trap.}} \approx (\frac{2e\phi}{M})^{1/2} \frac{2\pi}{\lambda_{\parallel}} \approx k_z v_i (\frac{\tilde{n}}{n})^{1/2} \gg \gamma$ ). The nonlinear wave-particle interactions were observed as flattening (velocity space diffusion) of the beam distribution function on the low energy side where the resonant particles exist, Fig. 4a.

Several important considerations arise from this work. The instability observed here may occur in neutral injection fusion heating. The low threshold values of  $u_b/u_t$  measured are due to the reduction of beam parallel temperature with beam acceleration. As the beam density is increased to about 10% of the target plasma density, the instability can be excited, depending on the shape of the distribution function, i.e., transient (narrow beam spread) or steady state (wide spread, small slope) ion beam. Colliding beam tokamaks<sup>9</sup> may be expected to be unstable during the transient switch-on phase (density ratio is one and beam spread narrow) but steady state operation may lead to stable, wide velocity distributions. In linear basic research devices, effects on the target plasma due to beam injection cannot be detected easily, because of the insufficient confinement. However, increased energy transfer from the beam has been demonstrated in this work, which might affect better confined plasmas.

We thank Dr. F. W. Perkins for helpful discussions and Drs. H. P. Eubank, H. P. Furth and T. H. Stix for critical reading of the manuscript.

This work was supported by the U. S. Energy Research and Development Administration (formerly AEC) Contract E(11-1)-3073.

REFERENCES

\* On leave from RCA Laboratories, Princeton, New Jersey 08540

<sup>1</sup>T. Stix, Phys. Fluids 16, 1922 (1973); H. L. Berk, et.al., IAEA-CN-33/G2-3, 5th Conf. Plasma Physics and Controlled Nuclear Fusion, Tokyo (1974); B. Coppi, D. K. Bhadra, Phys. Fluids 18, 692 (1975); K. Bol, et.al., Phys. Rev. Lett. 32, 661 (1974); L. A. Berry, et.al., Phys. Rev. Lett. 34, 1085 (1975).

<sup>2</sup>M. D. Montgomery, et.al., Phys. Rev. Lett. 35, 667 (1975).

<sup>3</sup>T. E. Stringer, Plasma Physics 6, 267 (1964); B. D. Fried and A. Y. Wong, Phys. Fluids 9, 1084 (1966).

<sup>4</sup>F. W. Perkins, Princeton Plasma Physics Laboratory MATT-1141 (1975) (submitted to Phys. Fluids).


<sup>5</sup>N. Sato, et.al., Phys. Rev. Lett. 34, 931 (1975).

<sup>6</sup>E. S. Weibel, Phys. Fluids 13, 3003 (1970).

<sup>7</sup>R. J. Taylor, K. R. MacKenzie and H. Ikezi, Rev. Scient. Instr. 43, 1675 (1972).


<sup>8</sup>H. Ishizuka, H. Ono, S. Kojima, J. Phys. Soc. Japan 36, 1158 (1974).

<sup>9</sup>R. M. Kulsrud and D. L. Jassby, Princeton Plasma Physics Laboratory MATT-1114 (1975).

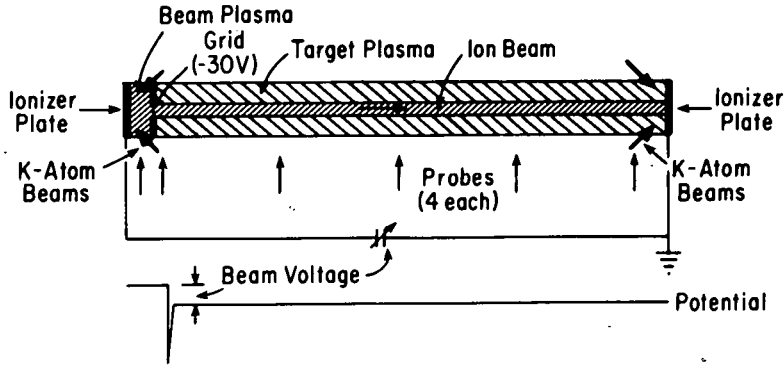


753929

Fig. 1. Diagram of Experimental Set-up.

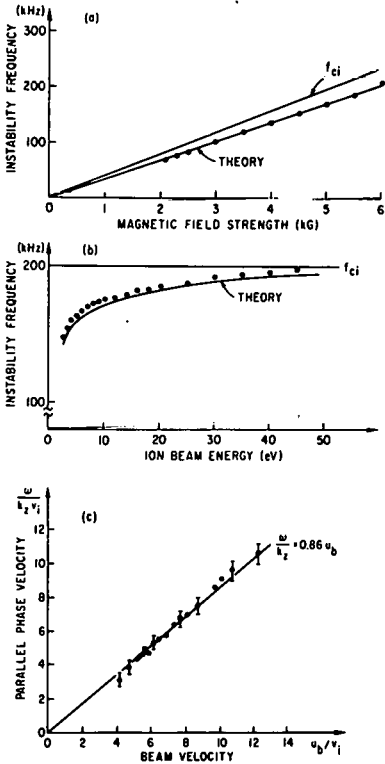


753942

Fig. 2. Instability Properties. (a) Frequency vs. magnetic field strength.  $u_b = 7 \times 10^5$  cm/sec. (b) Frequency vs. ion beam energy.  $u_t = (4T_0/m)^{1/2}$ , i.e., sound velocity. In the calculation,  $k_{\perp} \rho_i = 0.7 = \text{const.}$ , experimentally  $k_{\perp} \rho_i$  is 1.7 at onset and 0.7 far beyond onset, with 30% error. (c) Parallel phase velocity vs. beam velocity. Both axes normalized by  $v_i = (2T_0/M)^{1/2}$ .

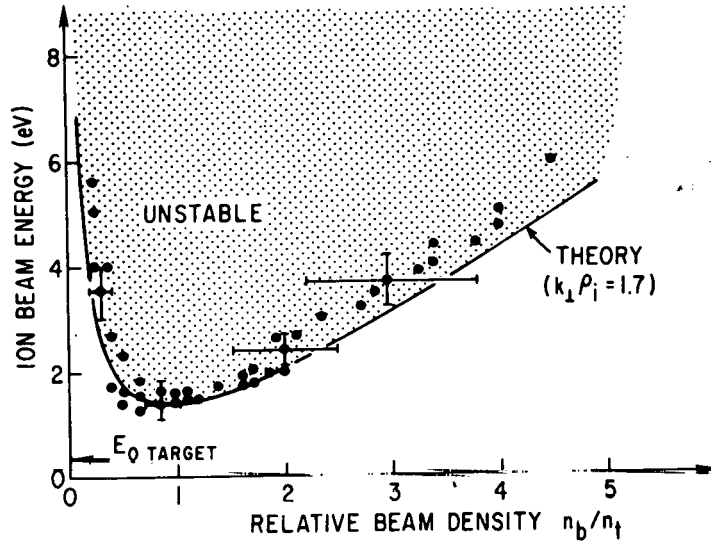

753931

Fig. 3. Threshold beam energy vs. relative beam density. The solid line was computed for the measured value of  $k_{\perp} \rho_i = 1.7$ , at onset.

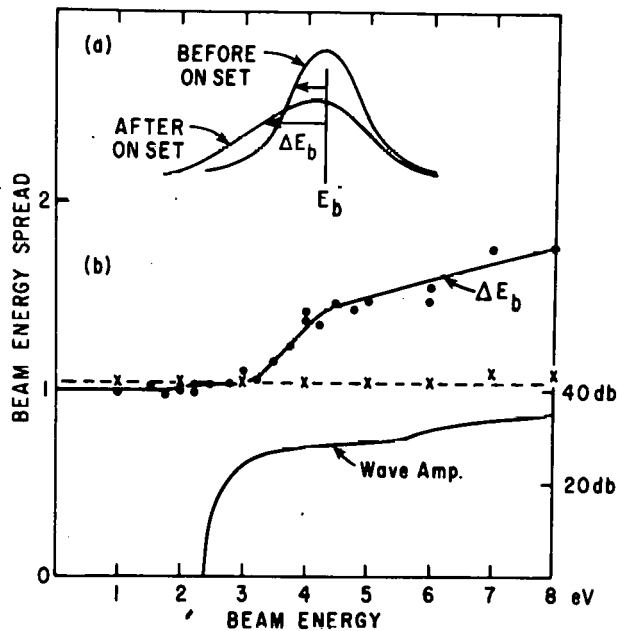

753943

Fig. 4. Beam energy spread with onset of instability. (a) Beam energy distribution before onset and with saturated instability. (b) Beam energy spread (normalized by the spread at  $E_b = 1$  eV) and instability amplitude vs. beam energy.  $\bullet$   $n_b/n_t \approx 2$ , instability present;  $\times$   $n_b/n_t \approx 7$ , instability absent.