

Paper Number:

DOE/METC/C-97/7267

Title:

High-Temperature, High-Pressure Probe for Hazardous Air Pollutants Sampling
in Advanced Power Systems

Authors:

W.P. Chisholm (METC)

Conference:

Advanced Coal-Fired Power Systems '96 Review Meeting

Conference Location:

Morgantown, West Virginia

Conference Dates:

July 16-18, 1996

Disclaimer

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

C R A D A facts

DEPARTMENT OF ENERGY
OFFICE OF FOSSIL ENERGY

FILTRATION
PROJECT

HIGH-TEMPERATURE, HIGH-PRESSURE PROBE FOR HAZARDOUS AIR POLLUTANTS SAMPLING IN ADVANCED POWER SYSTEMS

CONTACT POINTS

TECHNICAL:

Dr. William P. Chisholm

Research Chemist

Office: (304) 285-4730

E-Mail: wchish@metc.doe.gov

ADMINISTRATIVE:

Dr. Rodney Anderson

Technology Transfer
Program Manager

Office: (304) 285-4709

E-Mail: rande@metc.doe.gov

Ms. Lisa Jarr

Patent Advisor

Office: (304) 285-4555

E-Mail: ljarr@metc.doe.gov

MAIL ADDRESS:

U.S. Department of Energy
P.O. Box 880
3610 Collins Ferry Road
Morgantown, WV 26507-0880
FAX: (304) 285-4469

Capabilities

The Morgantown Energy Technology Center (METC) has developed a number of new technologies for efficient utilization of coal in the generation of electrical power. The superior performance of these systems is currently being demonstrated in a number of locations through the Clean Coal Technology program and other programs managed by METC. However, the environmental performance of these systems has not yet been thoroughly characterized, so METC has initiated programs to address this lack of data. The first step in this regard is to measure the eleven elements identified by the U.S. Environmental Protection Agency as being air toxics.

The best way to characterize advanced systems with respect to the fate of the eleven toxic elements is to perform a mass balance as they move through the various components of the system. Irrespective of the instrumental method used to analyze a sample extracted from within an advanced system, the sampling probe will need to gather a representative sample from a high-temperature, high-pressure environment. To this end, METC tasked Radian Corporation, now known as Radian International, with the design, construction, and application of a suitable probe.

The probe was used to gather data on hazardous air pollutants (HAPs) at the Destec LGTI gasifier in Plaquemine, Louisiana, in 1995. The probe performed well and provided useful particulate and gas-phase sample from the middle of the gasifier itself, prior to any cooling or pressure letdown.

The probe is a concentric tube with a ceramic filter located at the tip. A flow of nitrogen cools the probe and quenches the gas stream shortly downstream from the tip. The probe is inserted through a pair of block and bleed isolation valves, and the pressure seal around it was kept by multiple graphite gaskets. The probe is inserted and retracted by a system of hand-cranked winches, with positive action both on insertion and retraction. Two operators can readily insert the probe against a 40 bar (600 psi) pressure.

HIGH-TEMPERATURE, HIGH-PRESSURE PROBE FOR HAZARDOUS AIR POLLUTANTS SAMPLING IN ADVANCED POWER SYSTEMS


Opportunities

Hardware available for application to any pressurized system where a flange can be installed, such as:

- Gasifiers
- Pressurized combustors
- Pressurized cleanup systems

The Probe

This photo shows brass winches, rails (red), stainless steel probe and flanges, and pressurized test stand (blue).

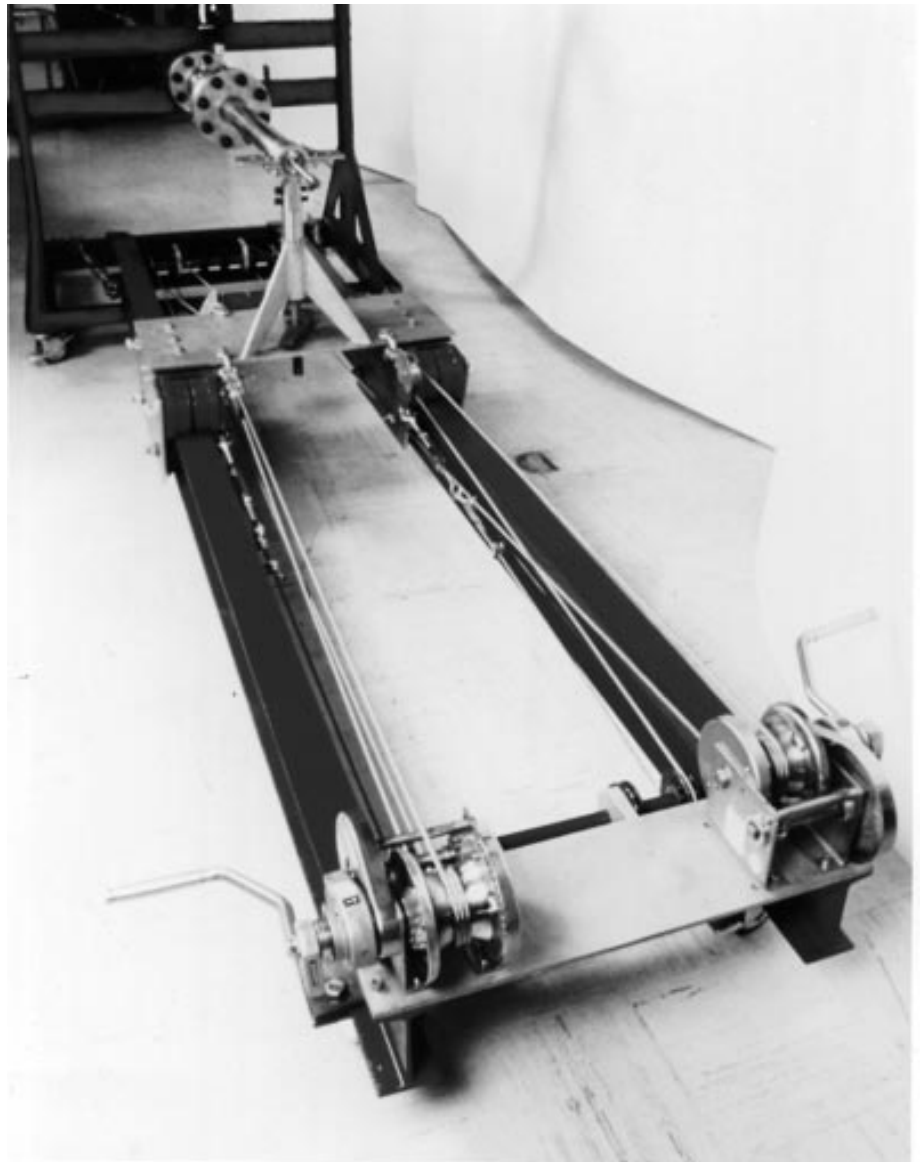

HTHP probe inserted into test stand