

SN: 08/243,317
FD: 05-16-94

PATENTS-US--A8243317
DOE CASE S-75,278

DE-AC09-89SR18035

Lewis C. Baylor
Susan M. Stephens

COMPOSITION FOR DETECTING
URANYL

243,317

RECEIVED
DEC 25 1996
OSTI

COMPOSITION FOR DETECTING URANYL

Inventors	Lewis C. Baylor 226 Longstreet Crossing North Augusta, SC 29841
	US CITIZEN
	Susan M. Stephens 1183 White Oak Drive Athens, GA 30606
	US CITIZEN

MASTER

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

JS

DISCLAIMER

Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, make any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

COMPOSITION FOR DETECTING URANYL

5 BACKGROUND OF THE INVENTION

1. Field of the Invention:

The present invention relates to an indicator composition for use in spectrophotometric detection of a substance in a solution, and a
10 method for making the composition. In particular, the invention relates to an indicator composition formed by covalently bonding an indicator to an organohalide. The indicator composition is also an indicator and is a better indicator than the indicator from which it is made, because, when it interacts with the substance of interest, better spectral resolution
15 is obtained. The United States Government has rights in this invention pursuant to Contract No. DE-AC09-89SR18035 between the U.S. Department of Energy and Westinghouse Savannah River Company.

2. Discussion of Background:

Optical indicators are used to detect the presence and
20 concentration of chemical compounds in solutions. Useful indicators are sensitive to the particular substance being measured, but are unaffected by the fluid and other chemical species that may be present in the fluid. A large number of optical indicators are known, offering a wide range of choices for the detection and analysis of their
25 corresponding analytes. As used herein, the terms "analyte," "analyte of interest" and "substance of interest" mean a substance whose presence and whose concentration is the focus of investigation. The terms

"indicator" and "optical indicator" mean compounds that interact with the substance in such a way as to have different optical characteristics compared to the indicator in the absence of the substance. Examples of analytes that can be detected with optical indicators include oxygen, carbon dioxide, hydrogen ion concentration (pH), metals and metal ions, oxidation-reduction potential, electrolytes, glucose, and organic compounds (gasoline, benzene, trichloroethylene, toluene, xylene, pesticides, etc.).

Indicators are used in several ways. For example, fluorescence and absorbance indicators may be mixed with a sample of the solution to be tested. Then, the difference intensity between the light incident on the sample and light transmitted through, reflected, or emitted from the sample is measured. Measurements may be made at a single frequency, several frequencies, or a range of frequencies to obtain a spectrum. The difference between the measurements represents the interaction between the indicator and the analyte or group of analytes present in the sample. Both fluorescence indicators and absorbance indicators form a chemical complex with the analyte, resulting in a color change and a shift in the fluorescence or absorption spectrum of the sample. The term "absorption" as used herein means the decrease in the intensity of light passing through a fluid sample as the result of the interaction of the incident light and the sample. Typically, a single indicator is used to measure a single analyte, however, Luebbers, et al. (U. S. Patent No. 4,511,660) make two, sequential measurements of the pH of a solution using two different indicators, then use the differences in measured pH to generate a signal related to the ion concentration of the solution.

One of the more recent uses of indicators is with optical sensing devices. An indicator, often in combination with a sample-permeable matrix, is positioned to interact with a test sample or process stream. Light is transmitted to the indicator by an optical fiber; the interaction
5 between the indicator and the substance to be detected alters the light transmitted through the sample prior to its receipt by a receiving fiber. The indicator-analyte complex may absorb, reflect, refract, scatter, or fluoresce in response to the incident light. The concentration of the substance can be determined by comparing the received light to the
10 transmitted light.

Alternatively, a substrate such as paper or glass can be coated with the indicator and then placed in contact with the solution to be tested. Indicators may be incorporated into a glass or polymer matrix to form an insoluble, re-usable composite, such as those described in the
15 following commonly-assigned patent applications: "Optical Apparatus and Method For Sensing Uranyl" (Attorney's Docket No. S-77,020, Serial No. _____, filed 02/01/94); "Tetraethyl Orthosilicate-Based Glass Composition and Method" (Serial No. 07/999,338, filed 12/31/92). These so-called "bound indicators" are in an insoluble form, and are
20 therefore more useful for industrial and laboratory applications because they can be used repeatedly. In many applications, the indicator is placed on or near the surface of an optical fiber, and the interaction between the indicator and the solution is monitored via the optical signals carried by the fiber to a detector.

25 Optical indicators are used to measure the uranium concentration of process solutions in facilities for extracting uranium from ores, production of nuclear fuels, and reprocessing of irradiated fuels. For

example, Fitoussi, et al. (U.S. Patent No. 4,349,350) determine U(VI) concentration in an organic solvent from the optical density of a mixed U(VI)-dialkyl dithiophosphoric acid-organophosphorus compound complex. Volesky, et al. (U.S. Patent No. 4,320,093) use a microbe
5 (Rhizopus arrhizus) to separate uranium from a solution and measure uranium concentration by using arsenazo III as a color developing agent for chelate complexes of U(IV). Jungreis, et al. (U.S. Patent No. 3,403,004) react p-dimethylaminoaniline hydrochloride with salicylaldehyde, then react the reaction product with ammonia to
10 produce a reagent that will complex with U(VI) to form $(\text{UO}_2\text{Cl}_4)^{-2}$. Mason, et al. (U.S. Patent No. 3,099,537) treat organic solvents containing uranium with a colorimetric agent (ammonium thioglycollate).

Presently-available absorbance indicators, including uranium-
15 sensitive absorbance indicators, frequently have limited sensitivities due to poor resolution between the absorbance spectra of the indicator and the chemical complex formed by the indicator and the substance or analyte to be detected. In addition, spectral analysis may be complicated by the presence of other compounds that complex with the indicator and
20 interfere with the analysis. A satisfactory indicator composition should be easily prepared, chemically stable, sensitive to low concentrations of the substance of interest, and have short response time and good separation between the absorbance spectra of the indicator and the indicator-analyte complex.

SUMMARY OF THE INVENTION

According to its major aspects and broadly stated, the present invention is a composition for "indicating," or detecting, the presence and concentration of a substance in a solution, and a method for making the composition. The composition comprises an organohalide covalently bonded to an indicator for the substance, in such a manner that the product is itself an indicator that provides increased spectral resolution for detecting the substance.

10 An important feature of the present invention is the fact that the composition has OH sites for complexing with the analyte and that the organohalide requires only one of the OH sites of the indicator to bond with it. The indicator molecule is selected to have at least two active OH sites so that, when the organohalide is covalently bonded to one of these OH sites, the indicator-organohalide composition has at least one remaining, active OH site. Therefore, although the indicator-organohalide composition differs chemically and structurally from the indicator alone, the indicator retains its ability to form a complex with the substance. Furthermore, the absorbance spectrum of the complex formed by the composition and the analyte is shifted to a greater extent than that of the complex formed by the indicator and the analyte.

Another feature of the invention is the selection of the indicator and the organohalide. As noted above, the indicator is preferably arsenazo III and the organohalide is preferably cyanuric chloride.

25 These form a composition that is ideally suited for detecting uranyl.

Still another feature of the invention is the method for making the composition. The indicator and the organohalide are dissolved into a

solvent, preferably a polar organic solvent, where they react to form the product composition. The method makes use of readily available indicators, organohalides and solvents; the reaction may take place at room temperature and pressure so no special process conditions are
5 needed.

Other features and advantages of the present invention will be apparent to those skilled in the art from a careful reading of the Detailed Description of a Preferred Embodiment presented below and accompanied by the drawings.

10

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings,

Fig. 1A shows the structure of the arsenazo III molecule in
15 abbreviated form;

Fig. 1B shows the structure of the arsenazo III molecule in expanded form;

Fig. 2 shows the arsenazo III-uranyl complex;

Fig. 3 shows the reaction of arsenazo III with cyanuric chloride
20 to form a composition according to a preferred embodiment of the present invention;

Fig. 4 shows the first derivative absorbance spectra of arsenazo III and the composition of Fig. 3; and

Fig. 5 shows absorbance spectra of arsenazo III, the arsenazo III-
25 uranyl complex, and the composition-uranyl complex.

DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

A composition for detecting the presence and concentration of a substance includes an indicator for that substance, and an organohalide covalently bonded to the indicator. Preferably, the indicator has at least two active OH sites, each site capable of forming a complex with the substance to be detected. The organohalide forms a covalent bond at one of the active OH sites, thus, the composition has at least one remaining active OH site available for forming a complex with the substance. In a preferred embodiment, the composition is prepared by reacting an arsenazo compound such as arsenazo III with cyanuric chloride in dimethylacetamide (DMAC).

Chromotropic acid-based dyes which contain the arsenous group (AsO_3H_2), known as arsenazo compounds, are widely used as indicators for pH measurement and photometric detection of various elements. The arsenazo compounds form stable complexes with cations of the elements to be detected, enabling detection of these elements in strongly acid solutions and in the presence of other complex-forming ions such as sulfates, phosphates, fluorides, oxalates and the like. For example, arsenazo I, arsenazo II and arsenazo III are indicators for uranium (U^{IV} and uranyl (U^{VI})), thorium, the transuranium elements, the rare earths, iron, copper, lead, calcium, magnesium and barium. The selectivity of the arsenazo compounds for a particular element depends on the pH of the sample solution: in strongly acid solutions, color reactions occur more readily with elements whose ions readily tend to hydrolyze, such as U^{IV} ; in weak acid solutions, with uranyl, iron III and the rare earths; in neutral solutions, with calcium and magnesium.

Arsenazo III (2,2'-(1,8-dihydroxy-3,6-bisulfo-2,7,
naphthalene)bis(azo)dibenzene) forms a highly stable complex with
uranyl and other substances. As seen in Fig. 1A, the arsenazo III
molecule has two $\text{H}_2\text{O}_3\text{S}$ groups, two arsenous groups and two OH
5 groups, each group bound to a carbon atom in a ring to form a
structure having mirror-image symmetry about a line A-A. This
structure, shown in expanded form in Fig. 1B, has eight active OH sites
and two functional $\text{AsO}_3\text{H}_2\text{-OH}$ groups. The arsenazo III molecule
forms a complex with a substance of interest by bonding a molecule of
10 the substance to one of the functional groups. Both sides of the arsenazo
III molecule are equally capable of forming a complex with the
substance, however, only one side actually bonds a molecule of the
substance thereto. By way of example, when arsenazo III is used to
detect uranyl, only one of the functional groups bonds with a uranyl
15 molecule (Fig. 2). While the molecules that form a complex are not
permanently bonded to each other, the complex shown in Fig. 2 is
highly stable since the uranyl ion is electrically attracted to the arsenazo
III molecule at three points (indicated generally by dotted lines). While
not wishing to be bound by theory, it is believed that formation of a
20 complex by bonding a uranyl ion to either of the two functional
 $\text{AsO}_3\text{H}_2\text{-OH}$ groups changes the planetary electronic structure of both
 $\text{N}=\text{N}$ bonds, preventing bonding of a second uranyl ion to the other
functional group.

When used to detect a suitable analyte (or group of analytes),
25 arsenazo III reacts with the analyte to form a stable complex that has a
different absorbance spectrum from arsenazo III alone. By way of
example, arsenazo III reacts with uranyl to form the stable, inner-

complex product shown in Fig. 2. Bonding to the left-hand $\text{AsO}_3\text{H}_2\text{-OH}$ group is shown, however, the uranyl ion can bond to either $\text{AsO}_3\text{H}_2\text{-OH}$ group. Whether bonding occurs at the left or right-hand group, the absorbance spectrum of the arsenazo III-uranyl complex is the same.

- 5 Since the change in the sample absorbance is proportional to the amount of uranyl bound to the arsenazo III, the concentration of uranyl in the sample can be determined through well-known absorbance analysis techniques. For example, the color of an aqueous solution of arsenazo III varies from pink in weak acid solutions to violet in basic solutions.
- 10 However, in an acid solution of pH between approximately 1 and 4, arsenazo III changes from pink to green in the presence of uranyl (different color changes may be found at different pH levels, or with different analytes). Uranyl concentrations of approximately $0.5 \mu\text{g/ml}$ or higher can be detected visually; concentrations as low as
- 15 approximately $0.01 \mu\text{g/ml}$ can be detected with a spectrophotometer. If desired, the pH of a sample solution can be maintained at a predetermined level by the use of a buffer such as monochloroacetic acid and its salts.

The stability of the arsenazo III-uranyl complex makes arsenazo

20 III a useful indicator for uranyl. However, other cations in the sample may bond to one of the $\text{AsO}_3\text{H}_2\text{-OH}$ functional groups and interfere with the analysis. In addition, measurement of low uranyl concentrations is difficult due to poor resolution between the absorbance peaks of the complex and arsenazo III alone.

25 It has been found that, surprisingly, covalently bonding an organohalide to one of the active OH sites of an indicator such as arsenazo III produces a composition having improved sensitivity for

detecting uranyl and other substances. By improved sensitivity, it is meant that the product composition has greater spectral resolution for detecting the substance of interest, as will be described more fully below. In addition, bonding the organohalide to one of the active OH sites of the indicator is believed to prevent bonding other, potentially-interfering cations to the composition.

A composition according to the present invention was prepared by adding arsenazo III and cyanuric chloride ($C_3N_3Cl_3$) in powder form to dimethylacetamide ($CH_3CON(CH_3)_2$; DMAC). Arsenazo III was provided in the form of its disodium salt (a crystalline, dark red powder). Once dissolved, the arsenazo III and cyanuric chloride reacted to form the composition shown in Fig. 3.

Fig. 4 shows the first derivative absorbance spectra of arsenazo III and the reaction product. A spectrum 10 (arsenazo III) and a spectrum 12 (the above-described arsenazo III-cyanuric chloride composition) have absorbance peaks 14 and 16, respectively, at a wavelength of approximately 500 nm. Spectra 10 and 12 have absorbance minima 18 and 20, respectively, at approximately 400 nm. However, a minimum 22 of spectrum 12 is displaced from a corresponding minimum 24 of spectrum 10, and spectrum 10 has an additional peak 26, indicating that spectra 10 and 12 represent chemically and structurally different compounds.

The arsenazo III molecule gives up an H atom, and the cyanuric chloride molecule a Cl atom, as the cyanuric chloride forms a covalent bond at one of the active OH sites of the arsenazo III molecule. While it is believed that the reaction of arsenazo III and cyanuric chloride proceeds generally as shown in Fig. 3, an alternate reaction scheme


involves formation of a covalent bond with cyanuric chloride at one of the HO₃S sites. Bonding to the right-hand side of the arsenazo III molecule is shown in Fig. 3, however, it will be understood that bonding can occur at either side.

5 Although bound to cyanuric chloride, the arsenazo III molecule retains its sensitivity to those substances for which the free arsenazo III molecule is sensitive (pH, uranyl, etc.). That is, if the cyanuric chloride is bonded to arsenazo III as shown in Fig. 3, the arsenazo III-cyanuric chloride composition is capable of forming a complex with uranyl (and
10 other substances of interest) at its remaining AsO₃H₂-OH functional group. If the cyanuric chloride is bonded to one of the HO₃S sites, it is believed that the composition can form a complex with uranyl at only one of the AsO₃H₂-OH functional groups. Therefore, the composition can be used to detect the same analytes as arsenazo III (pH, uranyl,
15 thorium, calcium, etc.), in a manner that is well known in the art.

The composition is preferably made by reacting approximately equimolar amounts of arsenazo III and cyanuric chloride in DMAC, however, other reagents and solvents may also be useful for the practice of the invention. By way of example, suitable solvents include those
20 nonpolar organic solvents in which both the indicator and the organohalide are soluble, such as DMAC, other acetamides such as diethylacetamide and dipropylacetamide, ethyl acetate, the alcohols, and the ketones.

Other indicators having at least two active OH sites are suitable
25 for use with the invention. As is known in the art, an active OH site (also known as a proton binding site) is an OH group bound to a carbon atom in a ring. Indicators with at least two active OH sites include the

arsenazo compounds, bromocresol green (BCG) and chrome azurol S (CAS). For such an indicator, the reaction proceeds generally as follows:

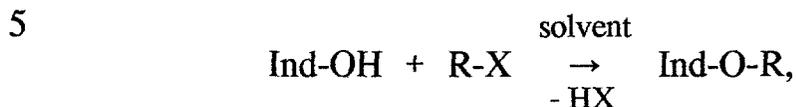

where Ind-OH represents the indicator, and R-X is an organohalide
10 having a halogen atom X attached to a carbon chain R (carbon chain R may have a single carbon ring, or a plurality of carbon rings in a chain). Organohalides such as cyanuric chloride react with arsenazo III in acidic or neutral solutions; other organohalides react with arsenazo III in the presence of a weak base. Thus, the pH of the solvent may be
15 adjusted to allow the reaction to proceed. Preferably, the organohalide is selected so that, when the organohalide is bonded to the indicator, at least one OH site is available for forming a complex with the substance of interest. In addition, the organohalide is selected so that the indicator-organohalide composition provides greater spectral resolution
20 for detecting the substance than does the indicator alone.

Selection of the indicator and the organohalide may include analysis of their structures using well known chemical analysis techniques. For example, the structure of the indicator-organohalide complex may be computed from the structures of the indicator and the
25 organohalide, and used to predict the optical absorbance properties of the complex. Alternatively, the optimum indicator and organohalide may be selected based on a modest amount of experimentation for each particular application.

In use, the composition is mixed with the fluid sample to be tested, for example, a sample that contains a quantity of uranyl ions or some other analyte of interest. The uranyl ions react with the composition to form a complex (hereinafter, the composition-uranyl complex), at a rate proportional to the uranyl concentration of the sample. The composition-uranyl complex alters the absorbance characteristics of the sample, allowing the uranyl concentration to be determined using known optical analysis techniques.

The above-described indicator composition was mixed with a uranyl-containing sample. The composition reacted with the uranyl ions in the sample to form a stable, inner-complex reaction product, and the absorbance spectrum of the sample was measured. Fig. 5 shows absorbance spectra of arsenazo III, a first complex formed by uranyl and arsenazo III, and a second complex formed by uranyl and the arsenazo III-cyanuric chloride composition. The spectra were measured over a wavelength range from approximately 350 to 800 nm using an ultraviolet-visible diode array spectrophotometer.

A reference spectrum 30 of an arsenazo III solution was measured prior to mixing the solution with a fluid sample containing uranyl ions. Spectrum 30 has a reference absorbance peak 32 at approximately 550 nm. A spectrum 34 represents the absorbance of the arsenazo III-uranyl complex, with an absorbance peak 36 at approximately 628 nm. A spectrum 38 represents the absorbance of the composition-uranyl complex, with an absorbance peak 40 at approximately 670 nm. Compared to peak 36, peak 40 is shifted further towards the longer-wavelength region of the spectrum with respect to reference peak 32. That is, the wavelength difference

between peak 40 and reference peak 32 is greater than the wavelength difference between peak 36 and peak 32. Thus, the composition provides improved spectral resolution of peaks 38 and 32 and, therefore, easier determination of the uranyl concentration of the sample. As previously discussed, the shift in the absorbance spectrum of the composition-uranyl complex is attributable to the binding of cyanuric chloride to one of the active OH sites of the arsenazo III molecule.

Fig. 5 shows absorbance spectra each having a single distinct peak in the measured wavelength range (peaks 32, 36, 40). However, a different number of absorbance peaks might be measured for substances other than uranyl, absorbance spectra measured in a different wavelength range, or different compositions. Useful indicators generally form complexes having at least one absorbance peak in a suitable wavelength region for optical measurements.

The uranyl concentration of the sample may be computed by well known chemometric techniques, using calibration spectra for samples with known concentrations of uranyl. For example, Principal Component Regression (PCR) and Partial Least Squares (PLS) model spectral data sets by constructing orthogonal vectors to describe the variance between the spectra in the set. In PCR analysis, a model is built by decomposing the calibration spectra to a set of eigenvalues corresponding to each of the principal component regression vectors, and correlating the eigenvalues with the known concentrations. Once computed, the eigenvalues of this model can be related to the eigenvalues of an unknown spectrum by well known techniques such as multiple linear regression.

PLS analysis assumes a linear relationship between the data and the concentrations. An unknown spectrum is analyzed by computing likenesses between the spectrum and the orthogonal vectors of the calibration data set, then summing the contribution to the concentration from each of the vectors. Spectrum residuals are computed by subtracting the likenesses of the vectors from the original spectrum. The number of vectors used to describe a given data set is determined by minimizing the predicted error of a set of spectra with known concentrations. Whether PCR, PLS, or some other technique is used depends on the nature of the analyte to be detected and the instrumentation used.

As an example, the absorbance spectrum $A(\nu)$ is computed from the measured intensity of light transmitted through the sample:

$$A(\nu) = -\log_{10}(I(\nu)/I_0(\nu)),$$

where $I(\nu)$ is the intensity at a frequency ν , and $I_0(\nu)$ is the blank intensity measurement. Using PCR, the concentration of an analyte such as uranyl may be found as follows:

1. Measure the spectra of a set of reference samples having a range of known uranyl concentrations to obtain S , a set of vectors that represents the spectra and their variations with uranyl concentration.
2. Take a first derivative, S' , of S .
3. Decompose the set of S' into a set of orthonormal vectors V , where V represents spectral variations contained in the set S' .
4. Compute the dot product of S' with V : $E = S' \cdot V$.

5. The uranyl concentration C is related to E by the equation $C = f(E_i)$. For many substances of interest, C is a linear function of E , that is, $C = \sum A_i E_i + B$, where the constants A_i and B are derived from a least squares fit of the computed values of E_i versus concentration. For some analytes, $f(E_i)$ may assume some other form such as a polynomial, exponential, or some other type of function. Therefore, $f(E_i)$ is best determined by a modest amount of observation and experimentation for each particular analyte.

Once $f(E_i)$ is known, the concentration of the substance can be found as follows:

1. Measure the absorbance spectrum of the sample.
2. Compute the first derivative of the measured spectrum. If desired, second and higher-order derivatives may also be computed and used in the analysis.
3. Compute E_i .
4. Compute the concentration using the equation $C = f(E_i)$.

The above-described procedure may be used to compare a single measured spectrum with a calibration set for a single substance. If the sample solution contains more than one substance capable of forming a complex with the indicator, the analysis may include comparisons of the measured spectrum to calibration spectra for a variety of substances, in order to determine which of those substances are present in the sample and the concentration of each.

The sensitivity of a composition according to the present invention varies depending on the particular analyte, the test solution, and the selection of the indicator and organohalide used to prepare the composition. For example, the above-described arsenazo III-cyanuric

chloride composition can be used to detect uranyl ion concentrations in the ppm range (as low as approximately 0.01 $\mu\text{g/ml}$). The composition forms a stable complex with uranyl, thus, it may be used to detect the presence and concentration of uranyl in a wide range of solutions, including aqueous solutions and organic solvents. In addition, the composition can be used to detect other analytes that can be detected with arsenazo III, including but not limited to cations of the transuranium elements and the rare earths.

It will be apparent to those skilled in the art that many changes and substitutions can be made to the preferred embodiment herein described without departing from the spirit and scope of the present invention as defined by the appended claims.

ABSTRACT OF THE DISCLOSURE

A composition for detecting the presence and concentration of a substance such as uranyl, comprising an organohalide covalently bonded to an indicator for said substance. The composition has at least one active OH site for forming a complex with the substance to be detected. The composition is made by reacting equimolar amounts of the indicator and the organohalide in a polar organic solvent. The absorbance spectrum of the composition-uranyl complex is shifted with respect to the absorbance spectrum of the indicator-uranyl complex, to provide better spectral resolution for detecting uranyl.

Fig 1A

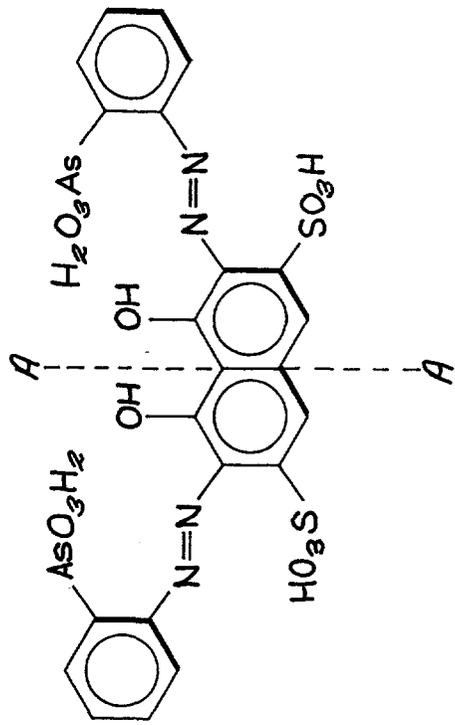


Fig 1B

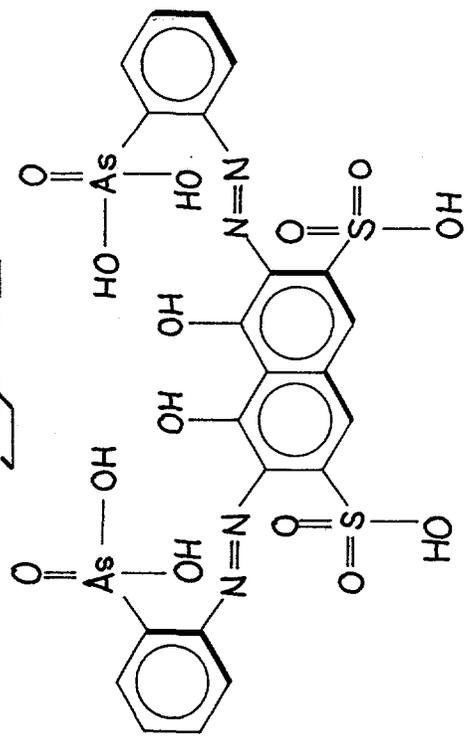


Fig 3

