

18-89850

ORNL

ORNL/TM-11322

OAK RIDGE
NATIONAL
LABORATORY

MARTIN MARIETTA

OPERATED BY
MARTIN MARIETTA ENERGY SYSTEMS, INC.
FOR THE UNITED STATES
DEPARTMENT OF ENERGY

A Preliminary Investigation of
Cold Fusion by Electrolysis
of Heavy Water

C. D. Scott
J. E. Mrochek
E. Newman
T. C. Scott
G. E. Michaels
M. Petek

DO NOT MICROFILM
COVER

REPRODUCTION OF THIS DOCUMENT IS UNLAWFUL

This report has been reproduced directly from the best available copy.

Available to DOE and DOE contractors from the Office of Scientific and Technical Information, P.O. Box 62, Oak Ridge, TN 37831; prices available from (615) 576-8401, FTS 626-8401.

Available to the public from the National Technical Information Service, U.S. Department of Commerce, 5285 Port Royal Rd., Springfield, VA 22161.

NTIS price codes—Printed Copy: A03 Microfiche A01

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

DISCLAIMER

Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.

ORNL/TM--11322

DE90 004383

Chemical Technology Division

A PRELIMINARY INVESTIGATION OF COLD FUSION
BY ELECTROLYSIS OF HEAVY WATER

C. D. Scott
J. E. Mrochek
E. Newman
T. C. Scott
G. E. Michaels
M. Petek

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Date Published—November 1989

Prepared by the
OAK RIDGE NATIONAL LABORATORY
Oak Ridge, Tennessee 37831-6285
operated by
MARTIN MARIETTA ENERGY SYSTEMS, INC.,
for the
U.S. DEPARTMENT OF ENERGY
under contract DE-AC05-84OR21400

eb
DISSEMINATION OF THIS DOCUMENT IS UNLIMITED
MASTER



CONTENTS

ABSTRACT	1
1. INTRODUCTION	2
2. MATERIALS AND METHODS	2
2.1 OPEN ELECTROLYSIS CELL	3
2.2 CLOSED ELECTROLYSIS CELL	3
2.3 SYSTEM DESIGN	7
2.4 RADIATION DETECTION	9
2.5 MATERIALS	11
2.6 START-UP PROCEDURES	12
2.7 ENERGY BALANCE	13
2.7.1 Open System	13
2.7.2 Closed System	14
3. RESULTS AND DISCUSSION	14
3.1 OPERATION OF THE INTERNAL RECOMBINER	15
3.2 EXCESS HEAT	18
3.2.1 Open System	18
3.2.2 Closed System	20
3.3 NEUTRON COUNT RATES	20
3.4 TRITIUM	25
3.5 ADDITIONAL OBSERVATIONS	25
4. CONCLUSIONS	25
5. ACKNOWLEDGMENTS	29
6. REFERENCES	29

A PRELIMINARY INVESTIGATION OF COLD FUSION BY ELECTROLYSIS OF HEAVY WATER

ABSTRACT

Several tests have been made with electrolytic cells utilizing 0.1 to 0.2 N LiOD in D₂O as the electrolyte and a palladium cathode surrounded by a wire-wound platinum anode operating at cathode current densities of 100 to 600 mA/cm². The cathodes were swaged to diameters of 2.8 or 5.5 mm with 8.0 to 8.5 cm of active length and then annealed in some tests. The electrolyte temperature was controlled and heat was removed by flowing water in a cooling jacket, and the cell was insulated. Cooling water and electrolyte temperatures were determined by thermocouples; neutron and gamma-ray spectra were measured; and the electrolyte was periodically analyzed for tritium. In one test, an internal wire coil of platinum coated with palladium black was used in a closed system to recombine the electrolytically generated D₂ and O₂ without release of any off-gas.

The electrolyte was periodically sampled and electrolyte of the nominal concentration was added to replace the volume withdrawn; makeup D₂O was also added, when required, in those experiments which did not include a recombiner. Neutron and gamma-ray spectra were recorded on magnetic media; temperatures, coolant flow rate, and voltages were recorded and, in the last two experiments, acquired by a computer data acquisition system.

Tests up to 1000 h in duration were made, and in some experiments excess power was detected for periods of many hours, usually in the range of 5 to 15%. However, during one 12-h period, excess power of up to 50% was observed. On three separate occasions, the neutron count rate exceeded the background by three standard deviations; in addition, an apparent transient increase of tritium in the electrolyte by at least a factor of 25 occurred during one test.

1. INTRODUCTION

Recently, several research groups have reported that excess energy results during the electrolysis of heavy water with a LiOD electrolyte solution and palladium cathodes.¹⁻⁴ Neutron count rate anomalies have been observed in some cases, and an increase in tritium content of the electrolyte solution has also been measured.^{4,7}

A group of Oak Ridge National Laboratory staff members, including chemists, physicists, and chemical engineers, have initiated an investigation with the goal of studying possible thermal or nuclear reactions that occur during the electrolysis of D₂O in a LiOD electrolyte with palladium cathodes. The experimental system utilizes positive heat removal by circulating cooling water, a design concept that is amenable to system scale-up and continuous operation. The goal of the research is to carry out the experiments with a very complete energy balance while simultaneously measuring the results of possible nuclear interactions.

2. MATERIALS AND METHODS

Two different primary electrolysis cell designs were used. The first was an open system in which the electrolytically produced gases, D₂ and O₂, were allowed to continuously exit the cell. A second design concept utilized a recombiner that catalyzed the recombination of D₂ and O₂ to form heavy water. The latter was a closed system that did not require replenishment of either D₂O or the electrolyte except when samples were withdrawn.

2.1 OPEN ELECTROLYSIS CELL

The open electrolysis cell was fabricated from Pyrex with a nominal ID of 4 cm and an active internal height of 12.5 cm (Fig. 1). It had an internal headspace of approximately 4 cm into which a N₂ purge gas could be introduced and removed. A Teflon cap was used to partially seal the system and allow the entrance of a glass tube for measurement of electrolyte temperatures, a glass-encased resister for internal calibration, and a polyethylene tube for the introduction of makeup D₂O and removal of electrolyte samples. The cell was surrounded by a cooling jacket with forced water flow and thermocouples inserted in the inlet and outlet streams. Two-inch-thick fiberglass insulation covered the entire exterior of the cell except for a 1- by 3-cm opening used to observe the electrolyte level.

2.2 CLOSED ELECTROLYSIS CELL

A second design concept was similar to that described above, except that the cell body was fabricated from 1.5-in. Pyrex pipe and the top was sealed with a conventional glass pipe flange (Fig. 2). Total recombination of the evolved D₂ and O₂ was carried out within an expanded gas space of the enclosed electrolysis cell. The recombiner was fabricated from 375 cm of 32-ga* platinum wire in a special coil configuration in the gas space (see Fig. 3) that had been electrochemically coated with 10 wt% palladium black. The wire was wrapped around six Teflon-sheathed screws that were attached to the top flange and extended down into the gas space. Teflon tubing, connected through the flange to the gas space, exited through a heavy-water bubbler so that off-gas could be detected. The gas-tight top flange made from Teflon provided, through conventional tubing compression fittings, electrode connections and entrance of an electrolyte thermocouple sheathed in polyethylene.

*Here, ga = gauge.

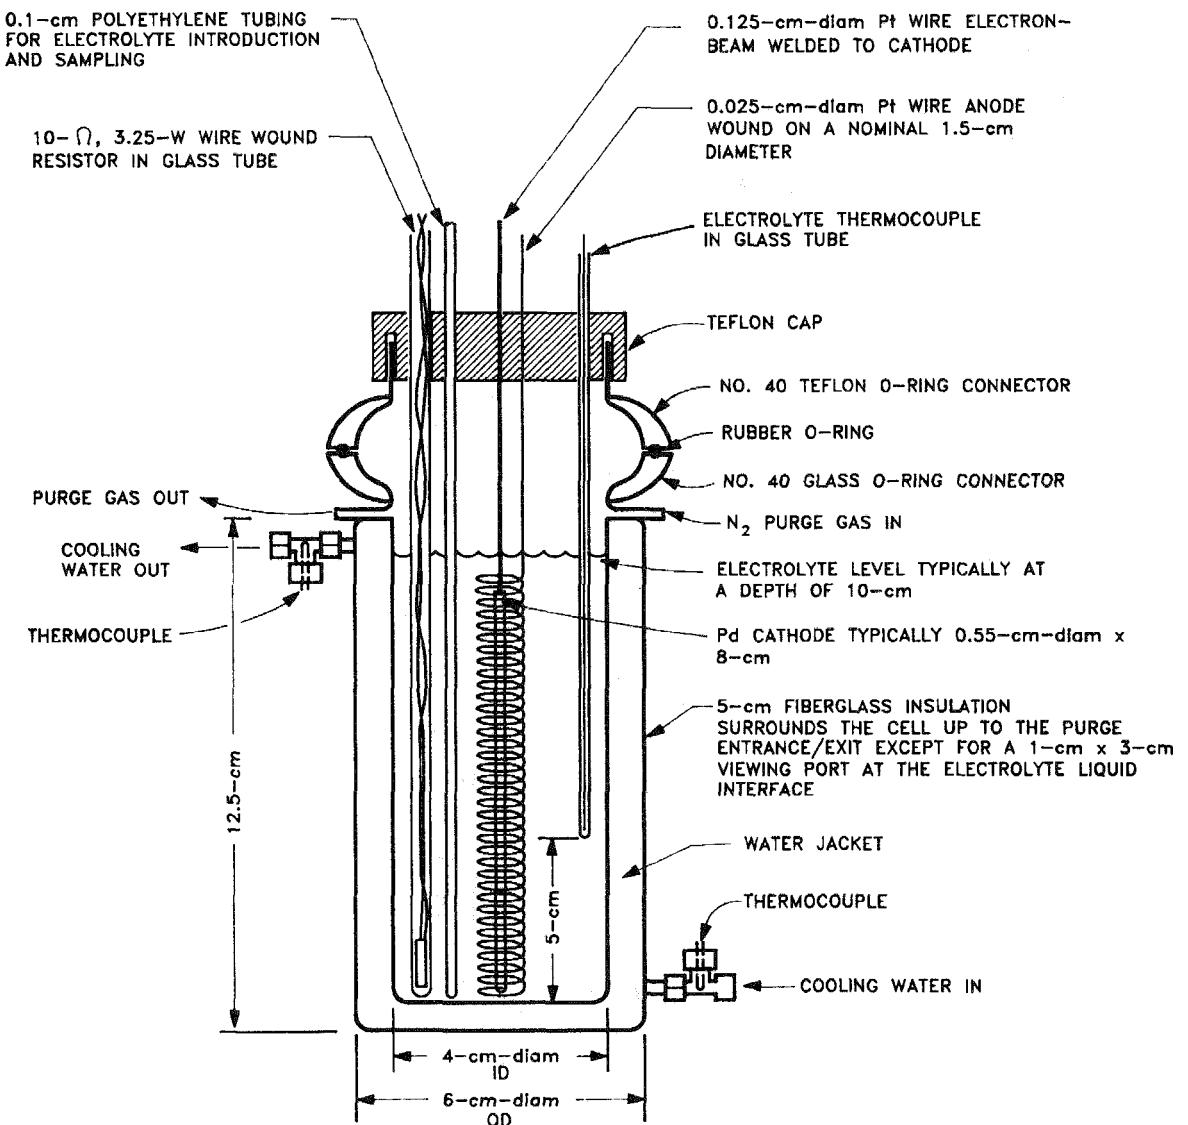


Fig. 1. Open-system electrolysis cell used in cold fusion tests.

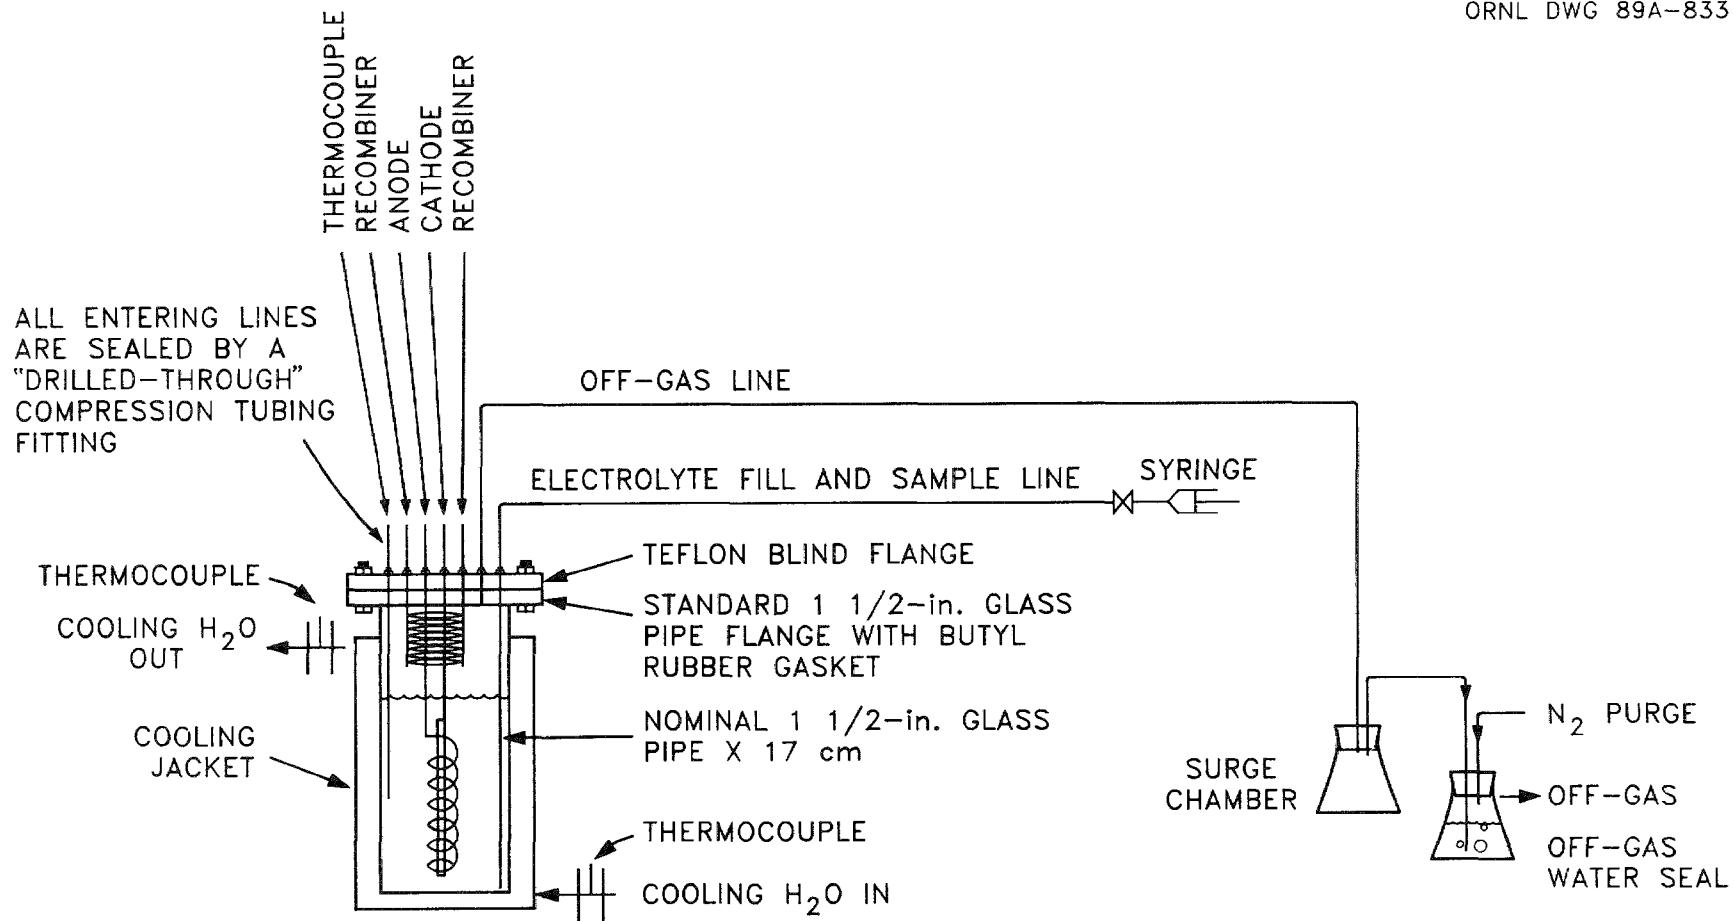


Fig. 2. Closed-system electrolysis cell used in cold fusion tests.

ORNL DWG 89A-834R

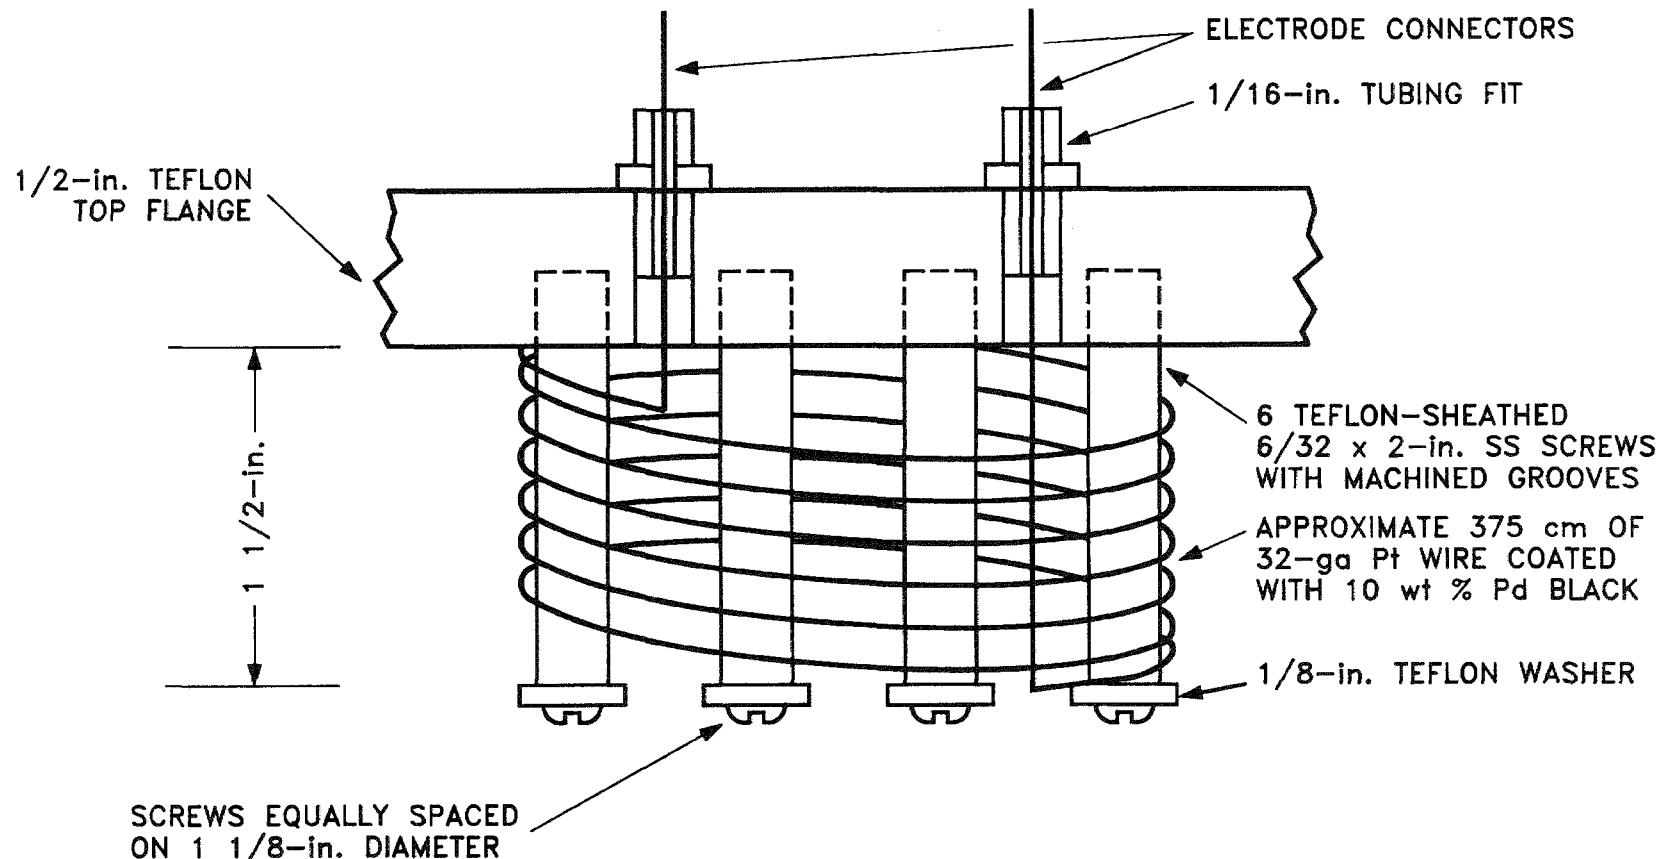


Fig. 3. Configuration of the recombiner used in the closed system.

Operation of the recombiner was initiated by imposing an electrical current of 0.7 A (2.4 V) over a period of 4 to 6 h, after which no detectable off-gas from the system was observed. After initiation, the recombiner electrical current was required only if the cell current has been stopped for an extended period and then restarted.

The cooling jacket did not extend over the entire outside surface of the cell because space was needed for the glass pipe flanges. Thus, the recombiner section, probably operating at a relatively high temperature in comparison to the electrolyte, did not have access to primary heat removal by the cooling water. This necessitated adding four more inches of fiberglass in order to reduce the heat loss at the top of the cell.

2.3 SYSTEM DESIGN

Heat removal from the electrolysis cell was determined by the temperature increase of the forced flow of distilled water. A circulating coolant bath with the temperature controlled to within 0.1°C was used, along with an external positive-displacement pump that controlled the coolant flow rate with an accuracy of 0.5% (Fig. 4). The N₂ purge gas was monitored by a rotameter, while D₂O was added and electrolyte was sampled by means of a syringe connected to a Teflon tube that entered through the flange and extended to the bottom of the cell.

The electrical power supply operated at a constant current with an accuracy of ± 1 mA. Electrolyte and coolant water inlet and outlet temperatures were measured by calibrated thermocouples, and the overall electrode voltage was determined to within 0.01 V. These system parameters were recorded on a strip-chart recorder every 6 s. With some tests, an on-line data acquisition system was also used to acquire all temperature and voltage measurements. Calibration of the thermocouples, including curve fitting by fourth-order

ORNL DWG 89A-350

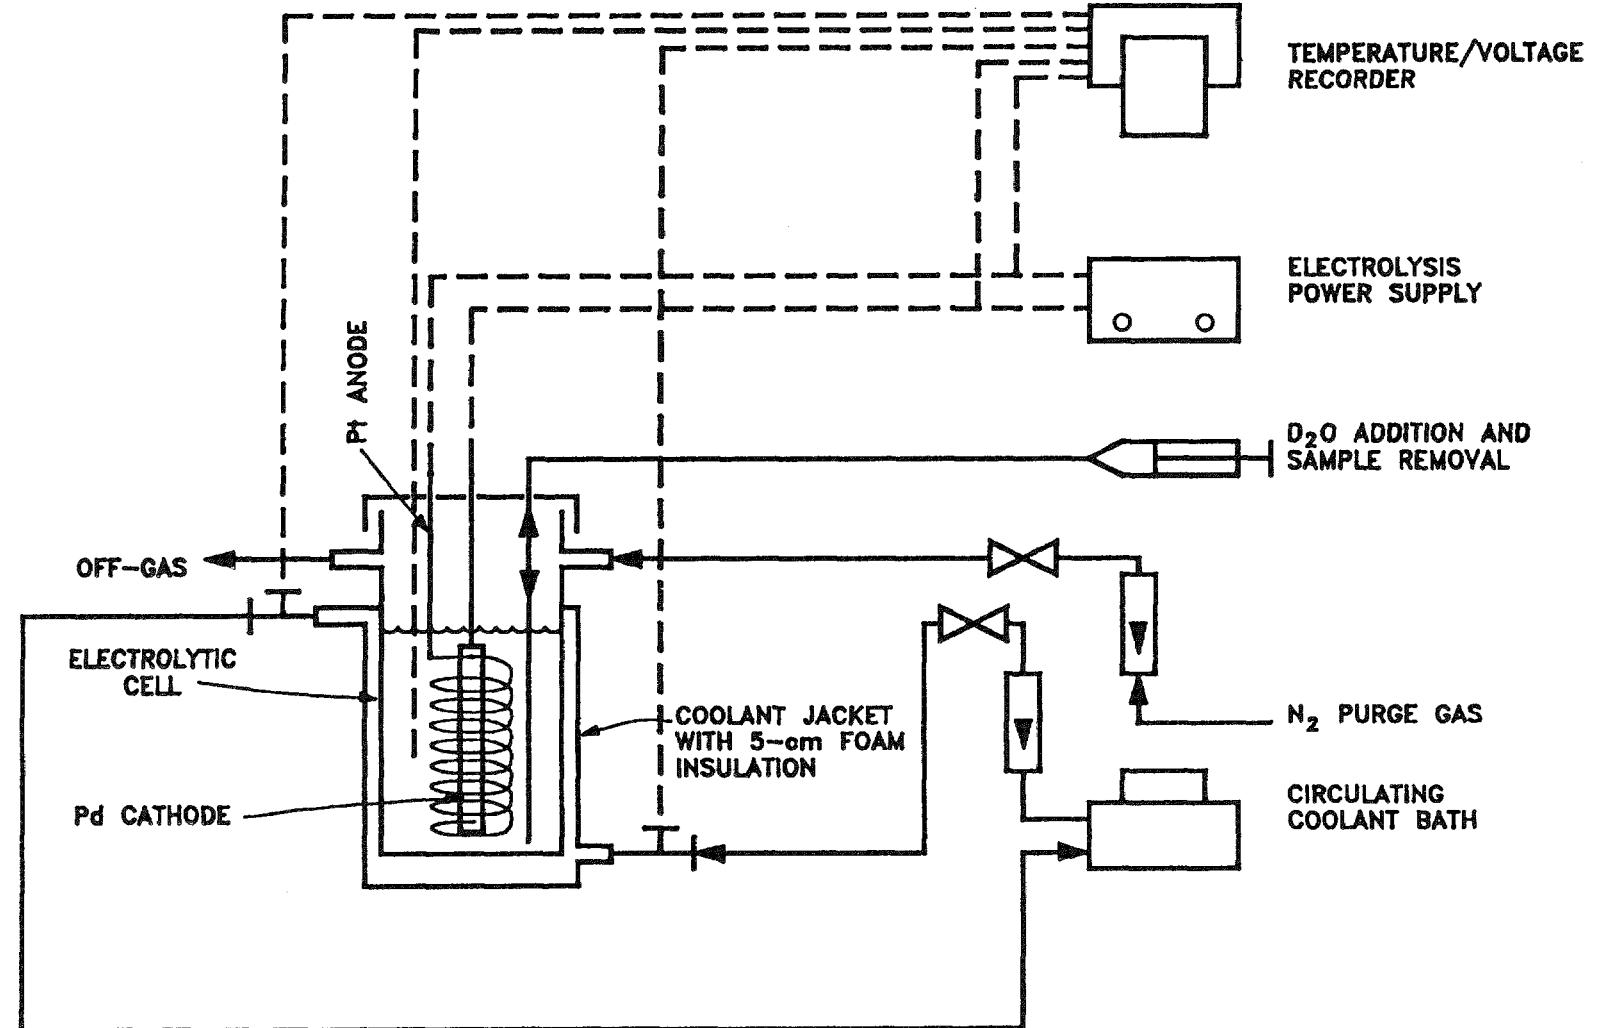


Fig. 4. Schematic of cold fusion equipment.

polynomials, allowed temperature measurements to within 0.05°C. This PC-supported system also calculated a heat balance at 1-min intervals. The calculated energy measurement error for this experiment was approximately 0.2 W.

2.4 RADIATION DETECTION

The experimental system was contained within a 2-ft-thick concrete enclosure in order to reduce the neutron background. Neutron count rates were measured by an NE-213 scintillator that was placed immediately adjacent to the insulated cell (Fig. 5) and employed pulse-shape discrimination having a threshold of 1.2 MeV. The overall detection efficiency was 1.46×10^{-3} as determined by a ^{252}Cf source. The gamma-ray contribution to the neutron peak was 4.1% of the gamma peak, or approximately 20% of the neutron peak. The reported neutron count rates were corrected for this contribution. The neutron detector had a typical sensitivity at three standard deviations of 3×10^{-24} fusion per deuterium pair per second. The same scintillation system allowed the detection of gamma rays with energies above a threshold of about 3 MeV.

A separate gamma-ray spectrometer (NaI detector) was also used for the detection of neutrons via a polyethylene converter. This system was lead shielded and contained in an airtight enclosure to reduce the background gamma-ray spectrum. A multichannel analyzer with the window set for the expected capture gamma-ray region was used, and the system had an overall detection efficiency of 5.75×10^{-5} as determined by a ^{252}Cf source; however, it had somewhat less sensitivity due to the higher gamma-ray background. Both the neutron and the gamma-ray spectra were periodically recorded on magnetic media by a small computer system. The tritium concentration in the electrolyte was measured periodically by removing small volumes of the electrolyte and counting with a liquid scintillation system.

ORNL DWG 89A-337

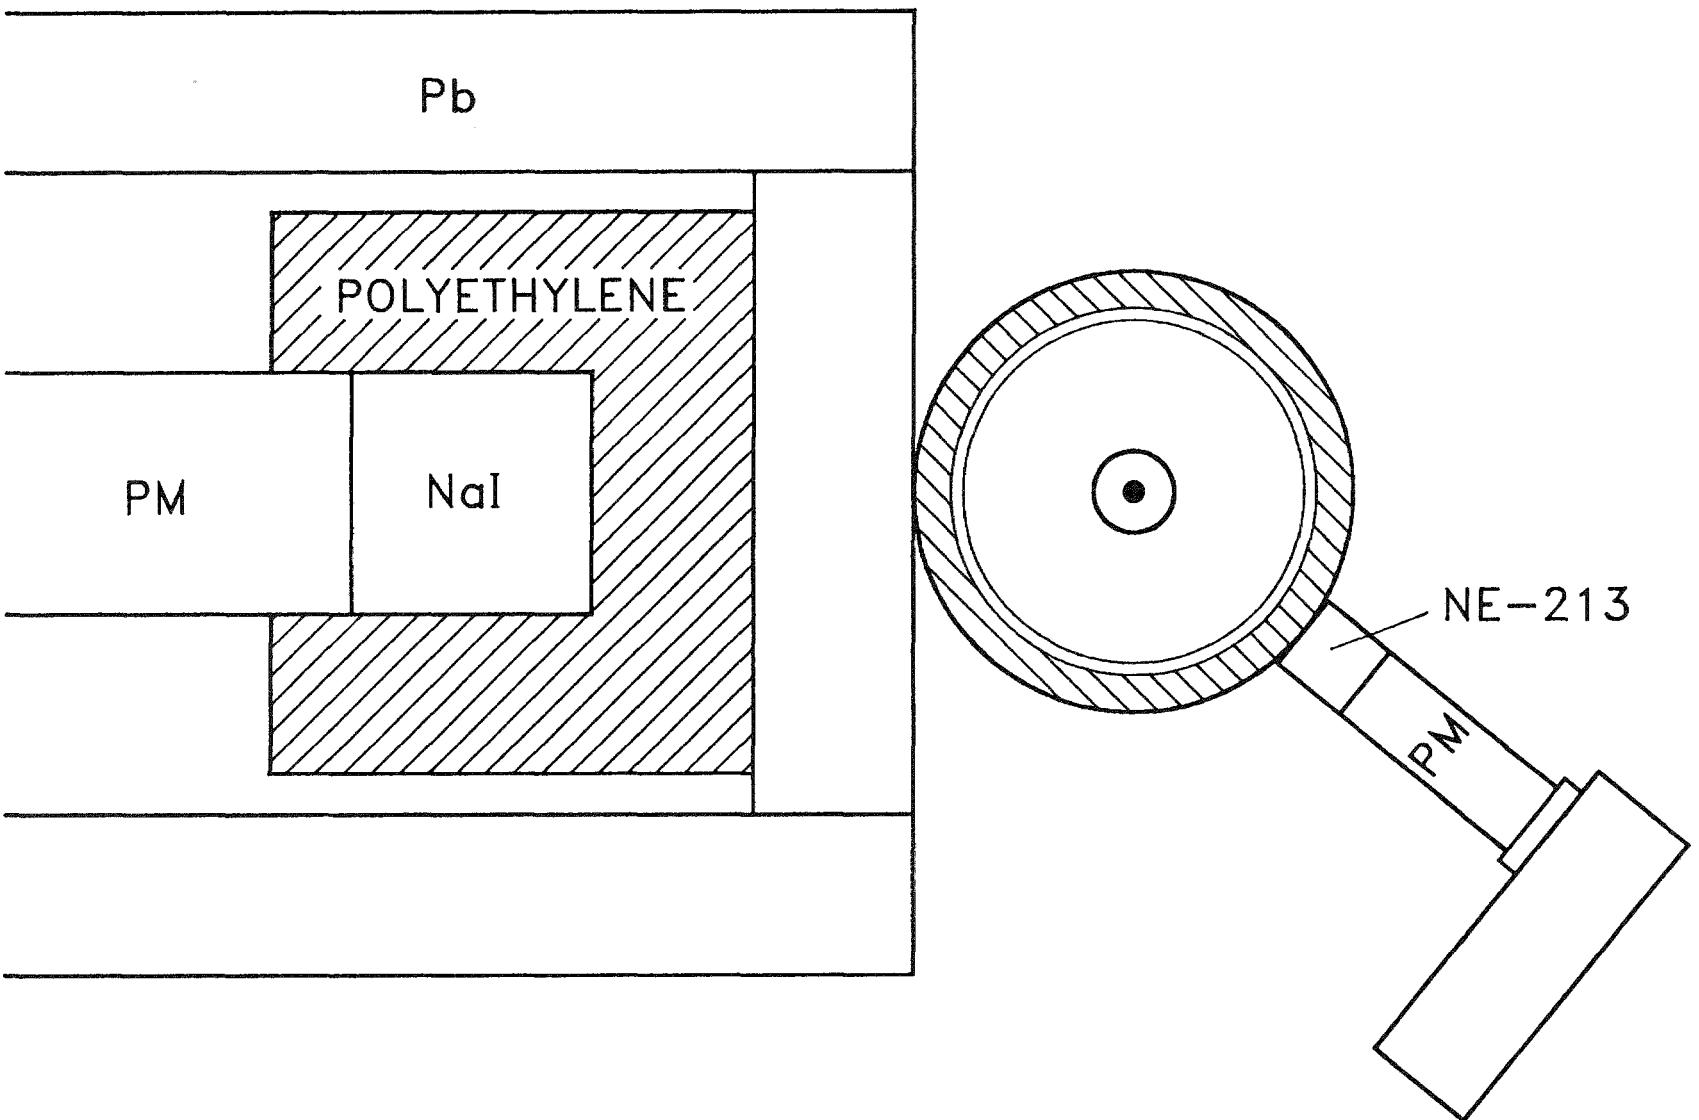


Fig. 5. Detection of neutrons and gamma rays.

2.5 MATERIALS

Some of the earlier tests were made with heavy water* that was 99.5% D₂O with an initial tritium content of 1×10^6 Bq/L. The most definitive tests were made with a very pure deuterium oxide obtained from Aldrich Chemical Company, Inc., and designated as 99.9 atom % D with a tritium content of 2000 Bq/L. The electrolyte was prepared by dissolving reagent-grade, natural lithium in the D₂O at a nominal concentration of 0.1 to 0.2 N.

The cathode material was 99.9% palladium (Materials Research Corporation) that was cast in argon and then swaged to the desired diameter. This cylindrical material was then cut to the desired length; a 0.13-cm platinum connecting wire was electron-beam-welded to the top; and, in some tests, the cathode was annealed at 900°C for 2 h in vacuum (Table 1).

All of the anode material and the recombiner were fabricated from 99.9% platinum wire in the size range of 24 to 32 ga (Englehard Corporation). The anodes consisted of wire coils made by wrapping the wire around the exterior of a skeletal glass mandrel (four 0.15-cm-diam glass rods with cross bracing) that surrounded the cathode and provided an electrode spacing of 0.3 to 0.5 cm.

*Available from previous work.

Table 1. Operating conditions for the cold fusion tests

Test	Cathode	LiOD concentration (N)	Cathode current density (A/cm^2)
CF-1	0.28-cm-diam x 8.5 cm; cast and swaged but not annealed	0.2 for entire test	100 for entire test
CF-2	0.56-cm-diam x 8.5 cm; cast and swaged but not annealed	0.2 for entire test	100 for 0 to 169 h 200 for 169 to 172 h 400 for 172 to 220 h 200 for 220 to 241 h 400 for 241 to 363 h
CF-3	0.28-cm-diam x 8.5 cm; swaged and annealed at 900°C for 2 h in vacuum	0.2 for 0 to 621 h 0.3 for 621 to 660 h 0.5 for 660 to 886 h 1.0 for 886 to 1050 h	200 for 0 to 504 h 400 for 337 to 501 h 600 for 501 to 1050 h
CF-4	0.28-cm-diam x 8.0 cm; swaged and annealed at 900°C for 2 h in vacuum	0.1 for entire test	100 for 0 to 426 h 200 for 426 to 667 h 300 for 667 to 953 h 400 for 953 to 1000 h

2.6 START-UP PROCEDURES

The tests were initiated by loading the prepared electrolytic cell with approximately 125 mL of the electrolyte, starting the purge gas at approximately 1 mL/s, if required, and turning on the electrical current. The electrolyte temperature was controlled by the cooling water flow rate and was usually maintained in the range of 28 to 32°C, but there were some controlled excursions up to 70°C and down to 10°C. More D₂O was added to the electrolyte every 8 h in order to maintain a constant electrolyte inventory for the open-system tests, and electrolyte samples were taken periodically (every 2 to 3 d). The gamma-ray and neutron spectra were measured continuously and recorded every 4 h.

2.7 ENERGY BALANCE

An energy balance was determined for each test based on the following assumptions: (1) the electric current is 100% efficient for the electrolysis of D₂O; (2) the system operates at quasi-steady state with a constant inventory of deuterium in the cathode; (3) except where internal recombination was used, all of the D₂ and O₂ exit the electrolysis cell without recombination; (4) the exiting gases, including a purge gas, were saturated with D₂O that was at equilibrium with heavy water at the temperature of the electrolyte; and (5) there was no heat loss to the ambient environment.

The second assumption will obviously not be correct when a major portion of the formed D₂ is being adsorbed by the cathode, but this will be true for only a very short period in the early phases of the test. Since the volume of makeup heavy water required to be added to maintain a constant inventory in the electrolysis cell was approximately equal to the volume electrolyzed and evaporated for the open systems, it was assumed that very little recombination of the electrolysis gases occurred. Conversely, no addition of D₂O or electrolyte was required for the closed systems with recombination except to replace samples that were withdrawn. There was obviously some heat loss to the ambient, although the system was well insulated, but this would result in a conservative estimate of the recovered heat. Necessary chemical and physical properties for D₂O were obtained from reference handbooks.⁸

2.7.1 Open System


The resulting energy balance for the open systems can be represented by:

ENERGY IN:

(Volts) x (Amps);

ENERGY OUT:

ELECTROLYSIS (Typically >30%)



FORCED COOLING (Typically >60%)

(Cooling Water Temperature Increase) x (Flow Rate)

LATENT HEAT (Typically <2%)

(Heat of D_2O Vaporization).

2.7.2 Closed System

The closed system with recombination allows a much simpler energy balance with fewer assumptions:

ENERGY IN:

(Volts x Amps);

ENERGY OUT:

(Cooling Water Temperature Increase) x (Flow Rate).

3. RESULTS AND DISCUSSION

Four long-term (hundreds of hours) electrolysis tests have been made in which a palladium cathode and a platinum anode were used in the presence of 0.1 to 1 N LiOD in D_2O (Table 1). Although each electrolysis cell and supporting equipment are similar, there has been an evolution of design, culminating with a totally closed system in which internal D_2-O_2 recombination was achieved. In each test, the total heat removed was determined by the increase in temperature of the circulating cooling water in a water jacket

around the electrolysis cell, and neutron and gamma-ray measurements were made throughout the test period. Tritium measurements were made on electrolyte samples that were periodically removed from the cell.

The results of these tests are very preliminary and certainly do not confirm "cold fusion"; however, there have been (1) periods of several hours when apparently a significant amount of excess heat was produced, and (2) periods when the neutron counts were greater than three standard deviations above the previously measured background. Tritium increase was indicated on one occasion.

3.1 OPERATION OF THE INTERNAL RECOMBINER

It is well known that platinum and/or palladium can be effectively used as a catalyst for the recombination of H_2/D_2 and O_2 . Since we were interested in a well-controlled catalytic system that could be effectively used in the gas space of an electrolytic cell, several tests were made on the use of platinum wire in a coil configuration (Fig. 6). The first tests were made with a coil of 24-ga platinum wire in the gas space of an enclosed electrolytic cell utilizing platinum electrodes in an electrolyte containing 0.2 N LiOH in H_2O . Electrical current could also be imposed on the recombiner wire for heating purposes.

It was found that with the electrolysis cell operating at 100 mA and ambient temperature and pressure, it was necessary to introduce over 2 W of energy into the platinum recombiner coil in order to induce a measurable decrease in the off-gas (Table 2). However, when 3.3 W of electrical energy was imposed on the coil, all of the off-gas stopped, indicating complete recombination; in fact, an appreciable vacuum could be maintained on the system. It was necessary to continue to add heat to the coil in order to ensure recombination. When the cell current was increased to 150 mA, it was impossible to completely stop the off-gas — a situation that indicates incomplete recombination.

ORNL DWG 89A-835R

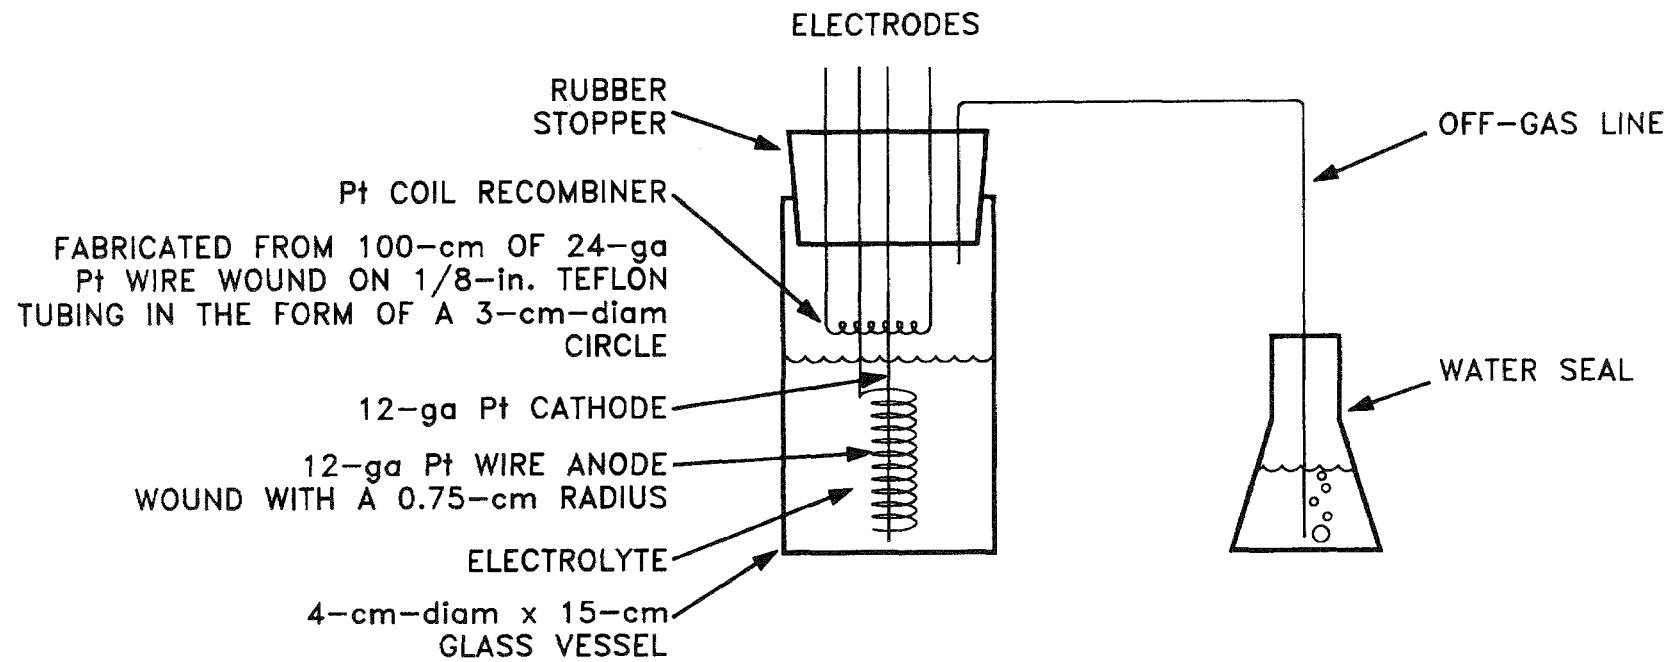


Fig. 6. Experimental apparatus for the testing of a platinum-wire recombiner in a closed electrolysis cell.

Table 2. Test of a platinum wire coil as a H₂-O₂ recombiner in a closed electrolysis cell^a

Recombiner power (W)	Relative off-gas rate (% of initial)	Comments
0.0	100	
0.22	100	
0.92	100	
2.10	80	
3.28	0	5-cm H ₂ O vacuum
2.66	60	
2.16	90	
3.20	0	4-cm H ₂ O vacuum
3.20 ^b	80	

^aAn enclosed electrolysis cell with an off-gas line exiting to a water trap was used at ambient conditions. The electrodes were 12-ga platinum wire suspended in 0.2 N NaOH, and the recombiner coil was 1 m of 24-ga platinum wire wound on 1/8-in.-diam Teflon tubing in a circular configuration. The electrolysis current was 100 mA unless otherwise specified.

^bThe electrolysis current was 150 mA.

It was expected that palladium with a large amount of surface area would be more effective as a recombination catalyst. Thus, a second catalytic system was fabricated from platinum wire that had been previously coated with palladium black (Fig. 2). It was found that the palladium-coated wire was extremely efficient as a recombiner with electrolysis currents in the range of 0.71 to 3.5 A (100 to 500 mA/cm²) as long as the interaction was first initiated by electrically heating the wire coil with approximately 1.6 W (Table 3). After initiation, the heat of recombination was sufficient to maintain complete recombination, and the system was operated under a slight vacuum.

Table 3. Test of a palladium-coated platinum wire as a H₂-O₂ recombiner in a closed electrolysis cell^a

Electrolysis electrical current (A)	Recombiner power (W)	Relative off-gas rate ^b (% of initial)
0.71	0	100
0.71	0.12	100
0.71	0.48	100
0.71	1.14	91
0.71	1.60 ^c	0

^aAn enclosed electrolysis cell with an off-gas line exiting through a water seal was used at a temperature of 25 to 30°C. The configuration and operating conditions are described in Fig. 2 and Table 1.

^bValues after operation at 5 to 15 min at these conditions.

^cAfter initiation, the recombiner power was reduced to 0. The electrolysis current was later increased to 3.5 A without any indication of an off-gas.

3.2 EXCESS HEAT

Several periods of apparent excess energy have been observed in both the open and the closed systems; some of these lasted for many hours.

3.2.1 Open System

With the various assumptions described above, including no recombination of D₂ and O₂ within the cell, heat in excess of that provided by joule heating was detected for periods of several hours in two different open-system experiments. This excess heat was usually in the range of 5 to 15%; however, during one 12-h period of Run CF-2, up to 50% was seen (Fig. 7). The experimental uncertainty during this time was calculated to be 3 to 5%.

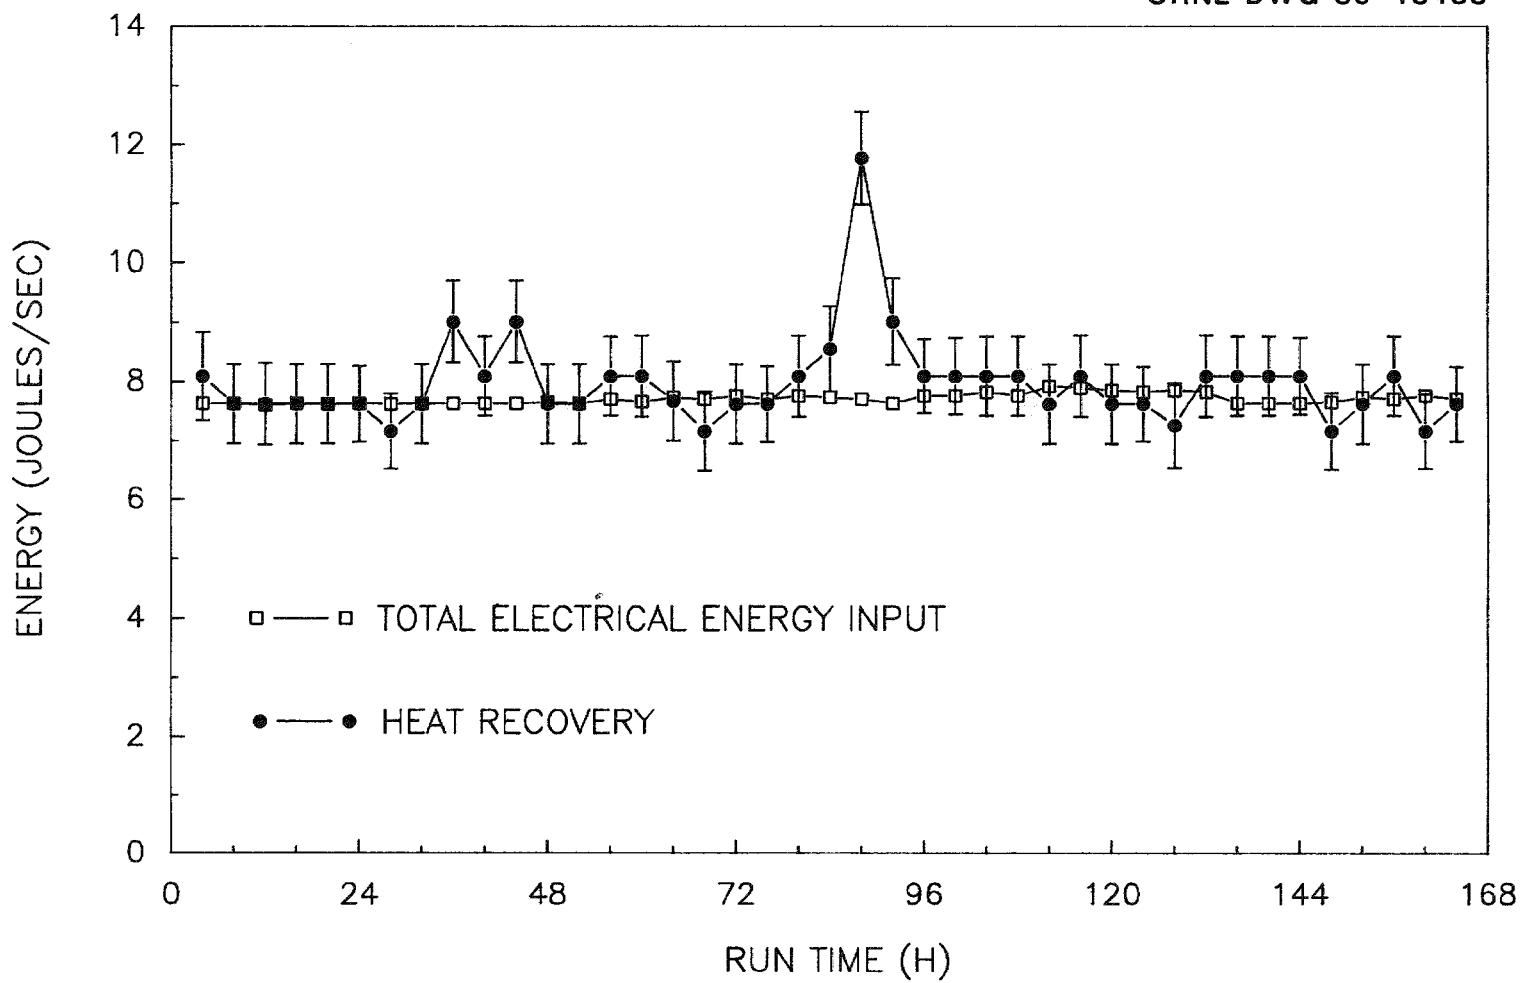


Fig. 7. Energy balance for Test CF-2.

There was no indication of extended excess power generated during Run CF-1. One extended period of excess power in Run CF-3 coincided with an increase in the cathode current density and was extended by perturbing the system — for example, by changing the electrolyte temperature or increasing the electrolyte concentration (Fig. 8).

3.2.2 Closed System

During the first 740 h of operation with the closed system, the power balance was slightly negative (typically 1 to 2% after additional insulation was included), indicating a slight heat loss through the cell insulation. Starting at about 740 h and continuing for an additional period of more than 200 h, an increasing positive power balance in excess of 5% was observed at some points (Fig. 9). The estimated error of measurement for the test is approximately $\pm 2\%$; however, this discrepancy may be partially offset by the apparent 1 to 2% heat loss to the environment.

3.3 NEUTRON COUNT RATES

In Run CF-1, in which a 0.28-cm-diam x 8.5-cm palladium cathode was used at a current density of 100 mA/cm², the neutron count rate displayed an average background of 13.1 neutrons/4 h with a standard deviation of 5.3 neutrons/4 h. An interesting period was observed during the first few hours of this test when the neutron count rate was 32 neutrons/4 h, which exceeded the background by about three and one-half standard deviations (Fig. 10). This result can be further put in perspective by considering a frequency histogram in which the above-mentioned neutron count rate for the 4-h period was well outside the assumed binomial distribution of the count rates; thus, it represents an anomaly of unknown genesis (Fig. 11). On two other occasions, the neutron count rate exceeded the previously measured average values by greater than three standard deviations:

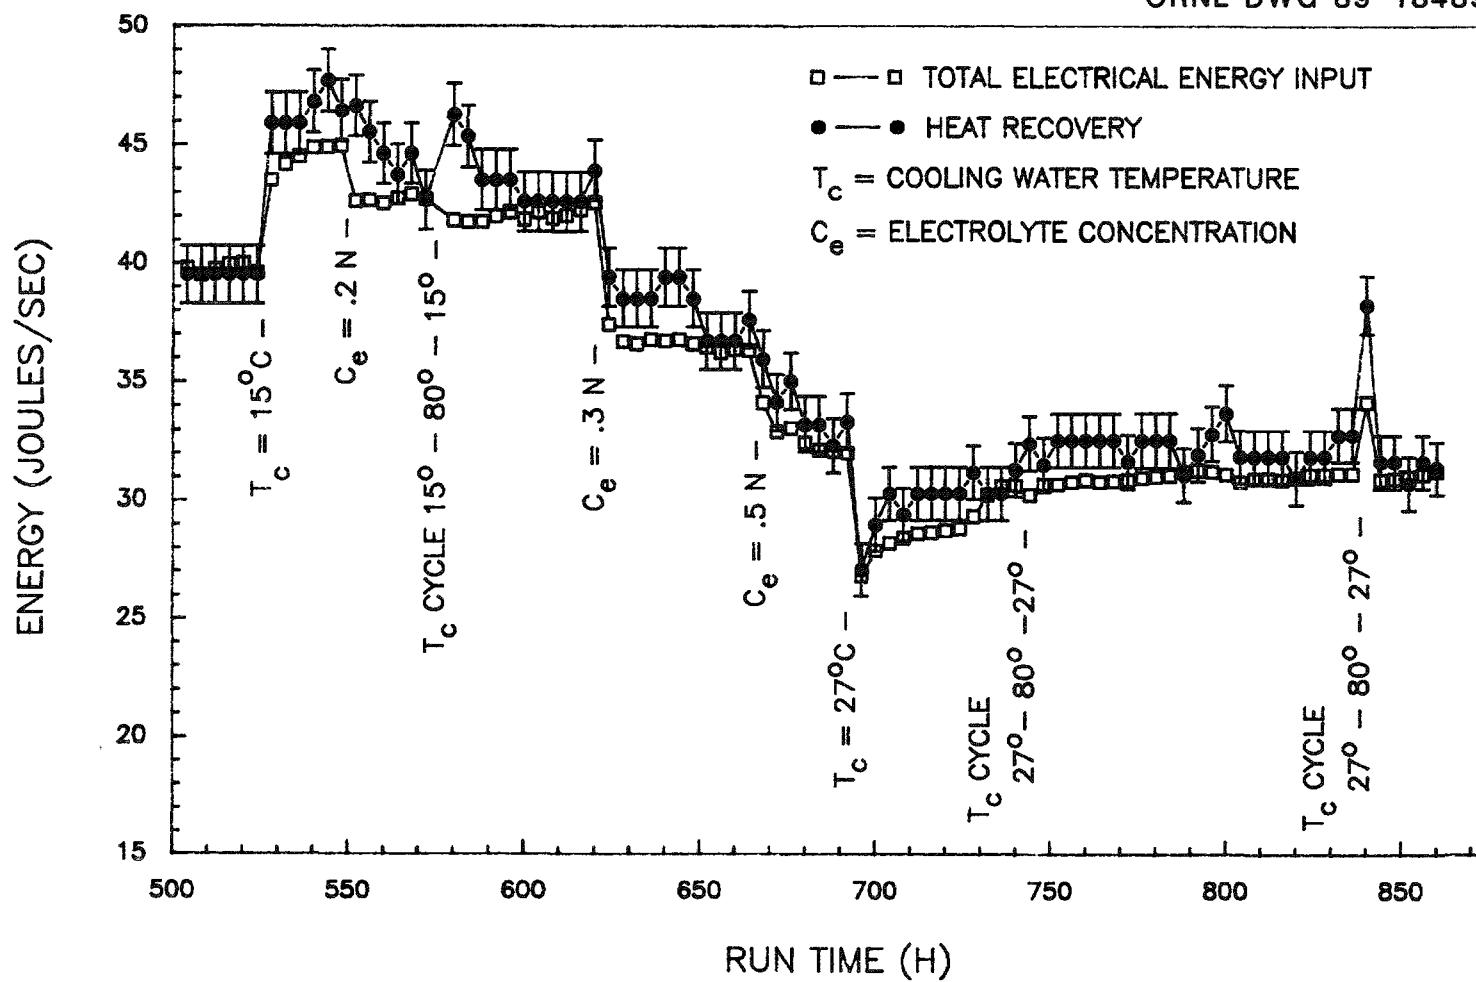


Fig. 8. Energy balance for last 500 h of Test CF-3.

ORNL DWG 89-18490

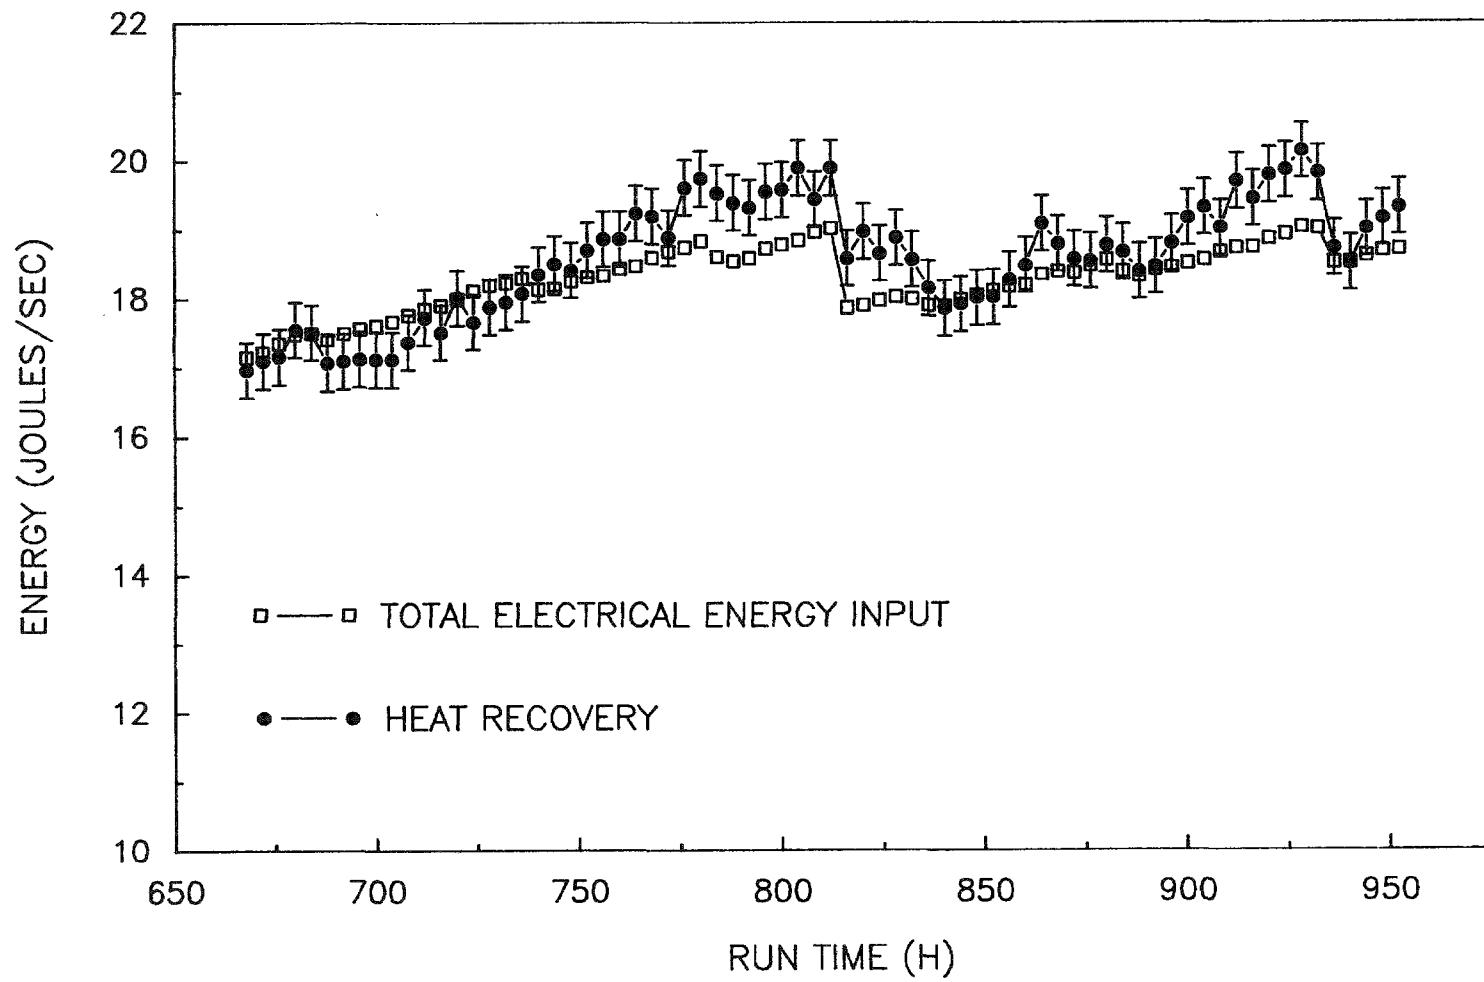


Fig. 9. Energy balance for last 300 h of Test CF-4.

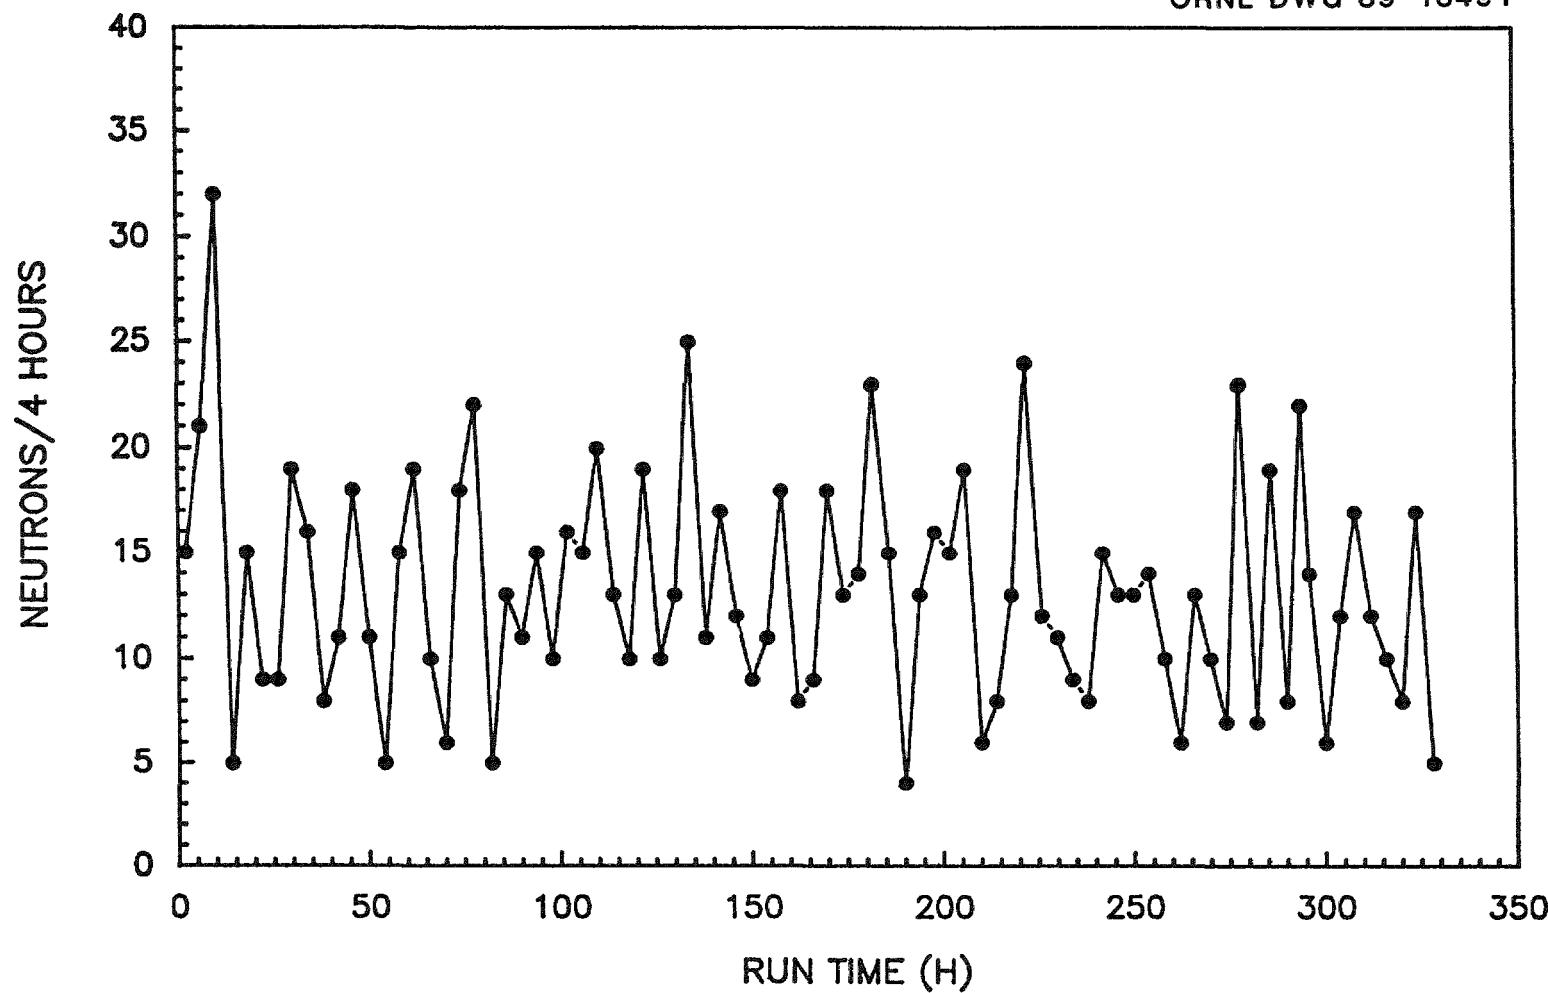


Fig. 10. Neutron count rate (corrected for overlapping gamma rays) for Test CF-1.

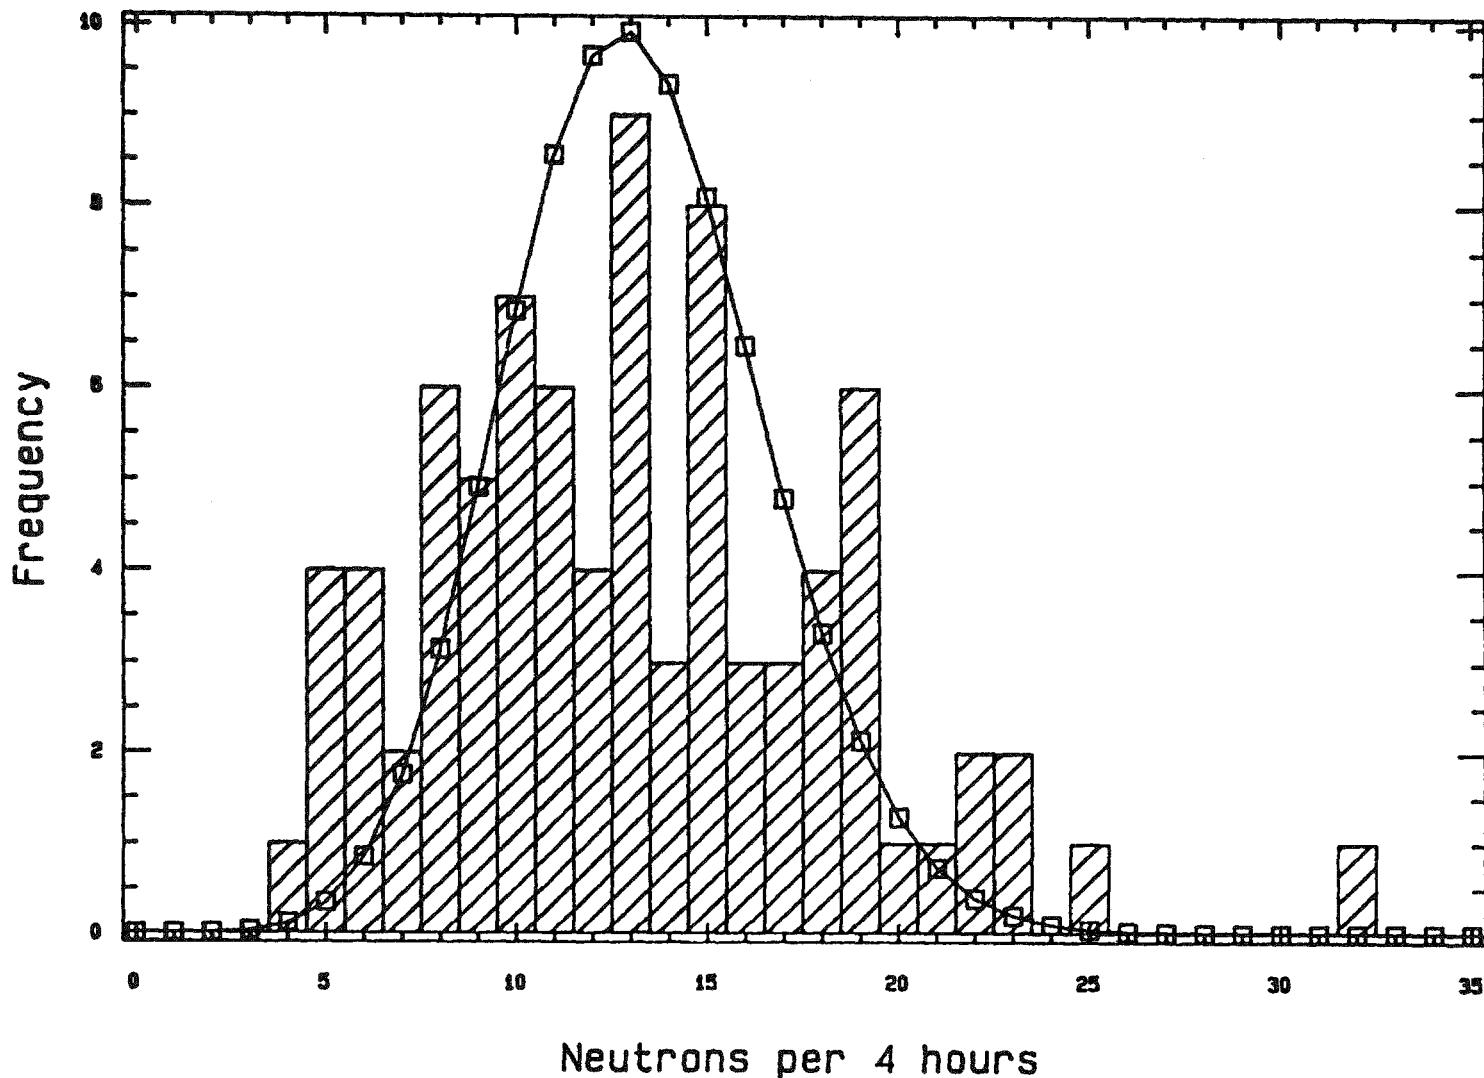


Fig. 11. Frequency histogram of the neutron count rate (corrected for overlapping gamma rays) for Test CF-1 imposed on an assumed binomial distribution.

(1) at about 90 h into Run CF-3 and (2) after more than 700 h into Run CF-4 (Figs. 12 and 13). The latter measurement occurred during the period of an increasing power excess.

3.4 TRITIUM

During Test CF-3, the tritium concentration in the electrolyte apparently increased by about a factor of 25 during the first 2 d of the experiment (Fig. 14). The tritium content then decreased to the starting concentration as fresh D₂O was added to the electrolyte solution to make up the electrolysis losses. Although contamination of the electrolyte could have produced such results, there was no indication that this happened. At other times, small tritium increases were measured in the electrolyte, but they did not exceed the possible increase due to the evaporation and electrode processes.

3.5 ADDITIONAL OBSERVATIONS

In all tests except CF-4, D₂O was periodically added to maintain the heavy-water inventory. This resulted in a changing LiOD concentration and, thus, unsteady-state operation. A series of tests was also made at different electrolyte temperatures over the range of 30 to 70°C with no apparent effect except when the cycling period was relatively short.

4. CONCLUSIONS

Preliminary tests of the electrolysis of D₂O utilizing LiOD electrolytes and palladium electrodes have not confirmed the "cold fusion" phenomena. However, there have been several apparently anomalous neutron count rates, one unexplained 25-fold increase in tritium, and periods of many hours of apparent excess energy. None of these results has been precisely reproduced, nor can they be explained by conventional nuclear or chemical theory.

ORNL DWG 89-18493

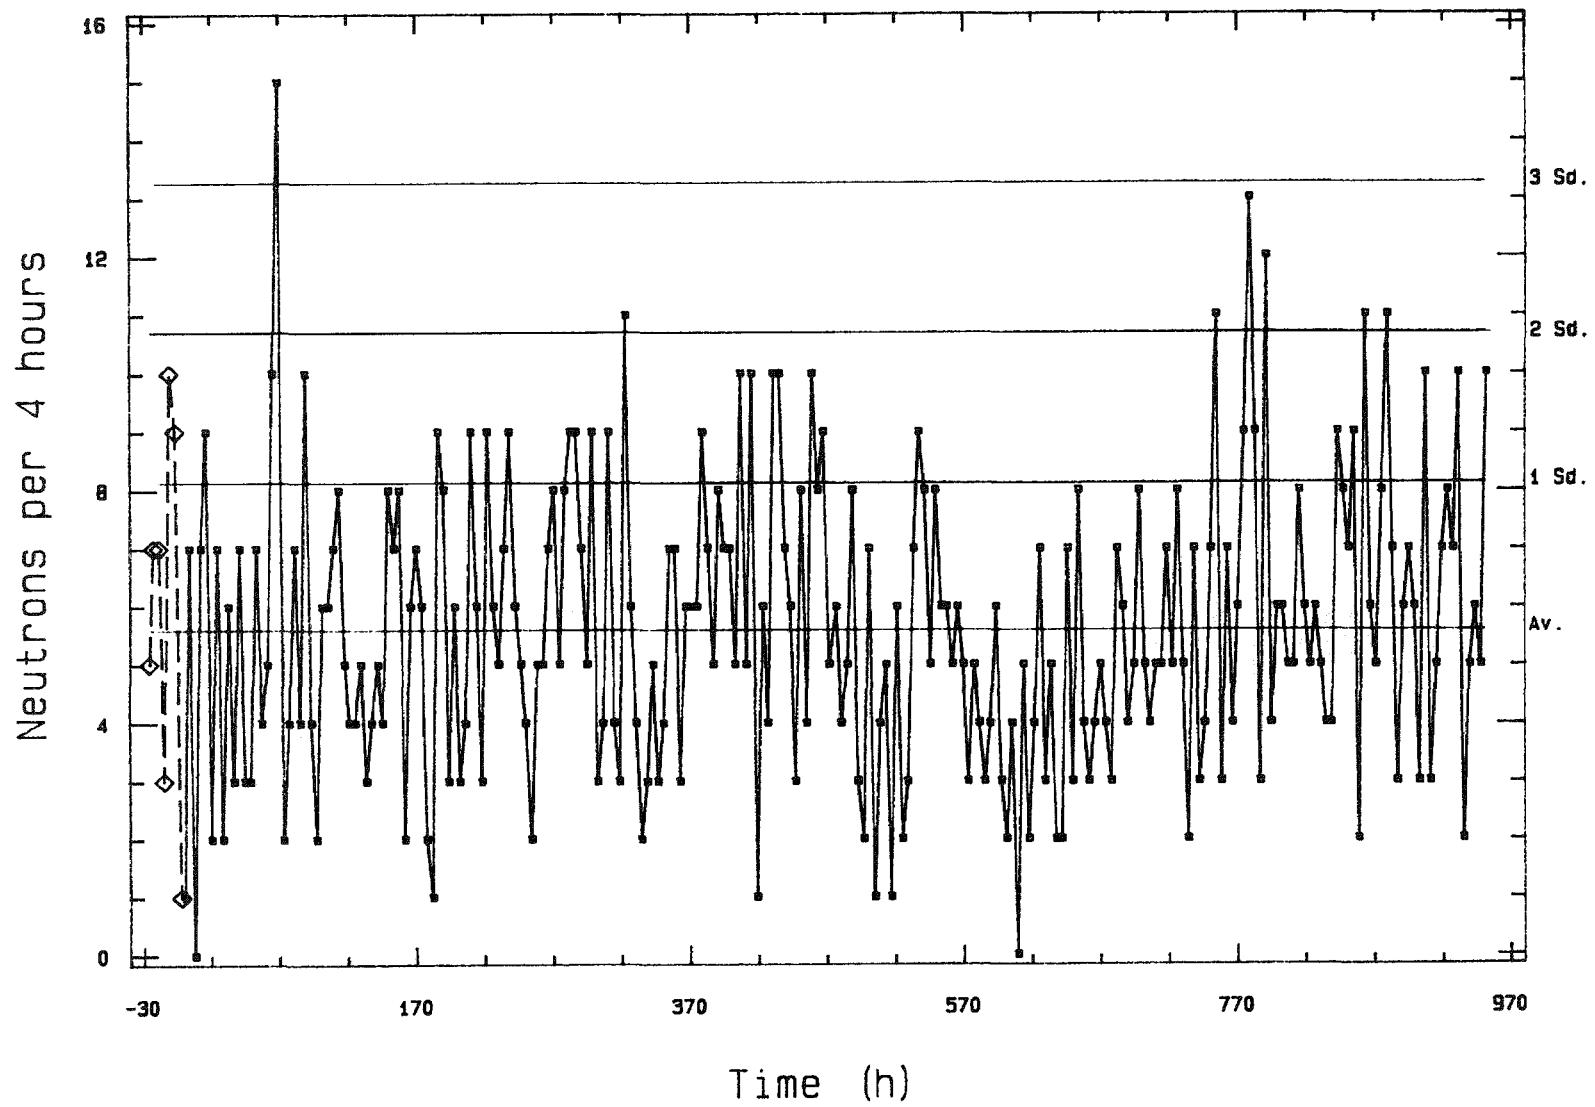


Fig. 12. Neutron count rate corrected for overlapping gamma rays for Test CF-3.

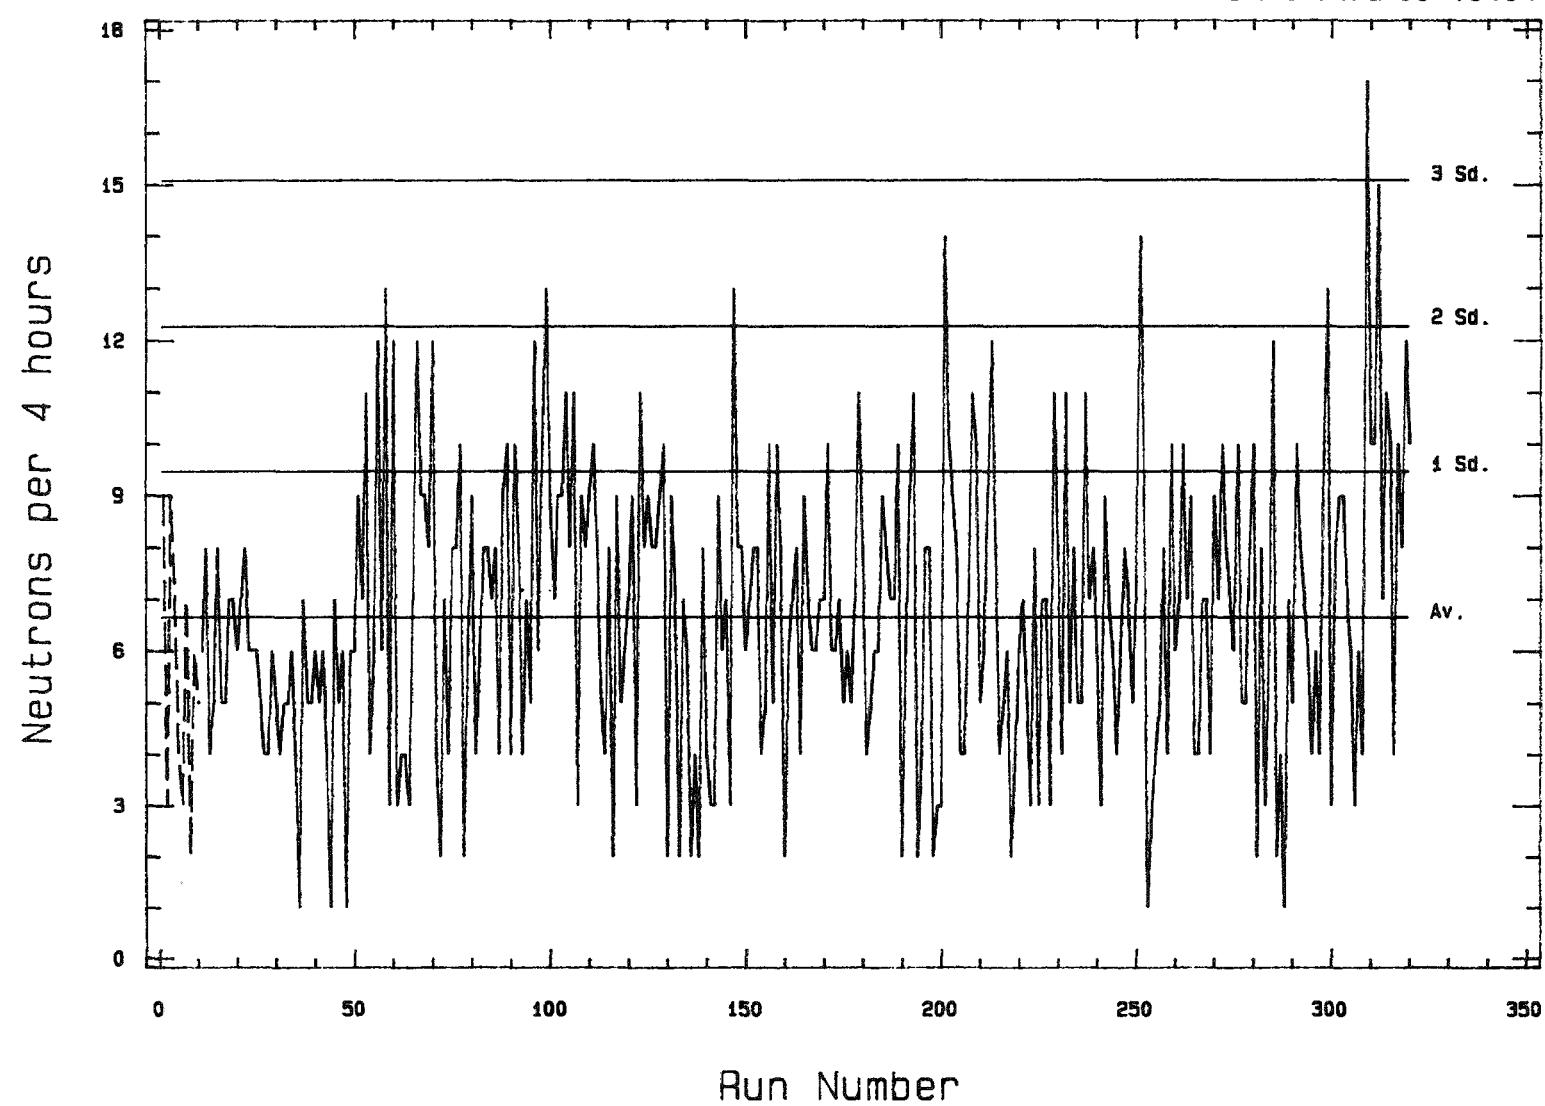


Fig. 13. Neutron count rates corrected for overlapping gamma rays for Test CF-4.

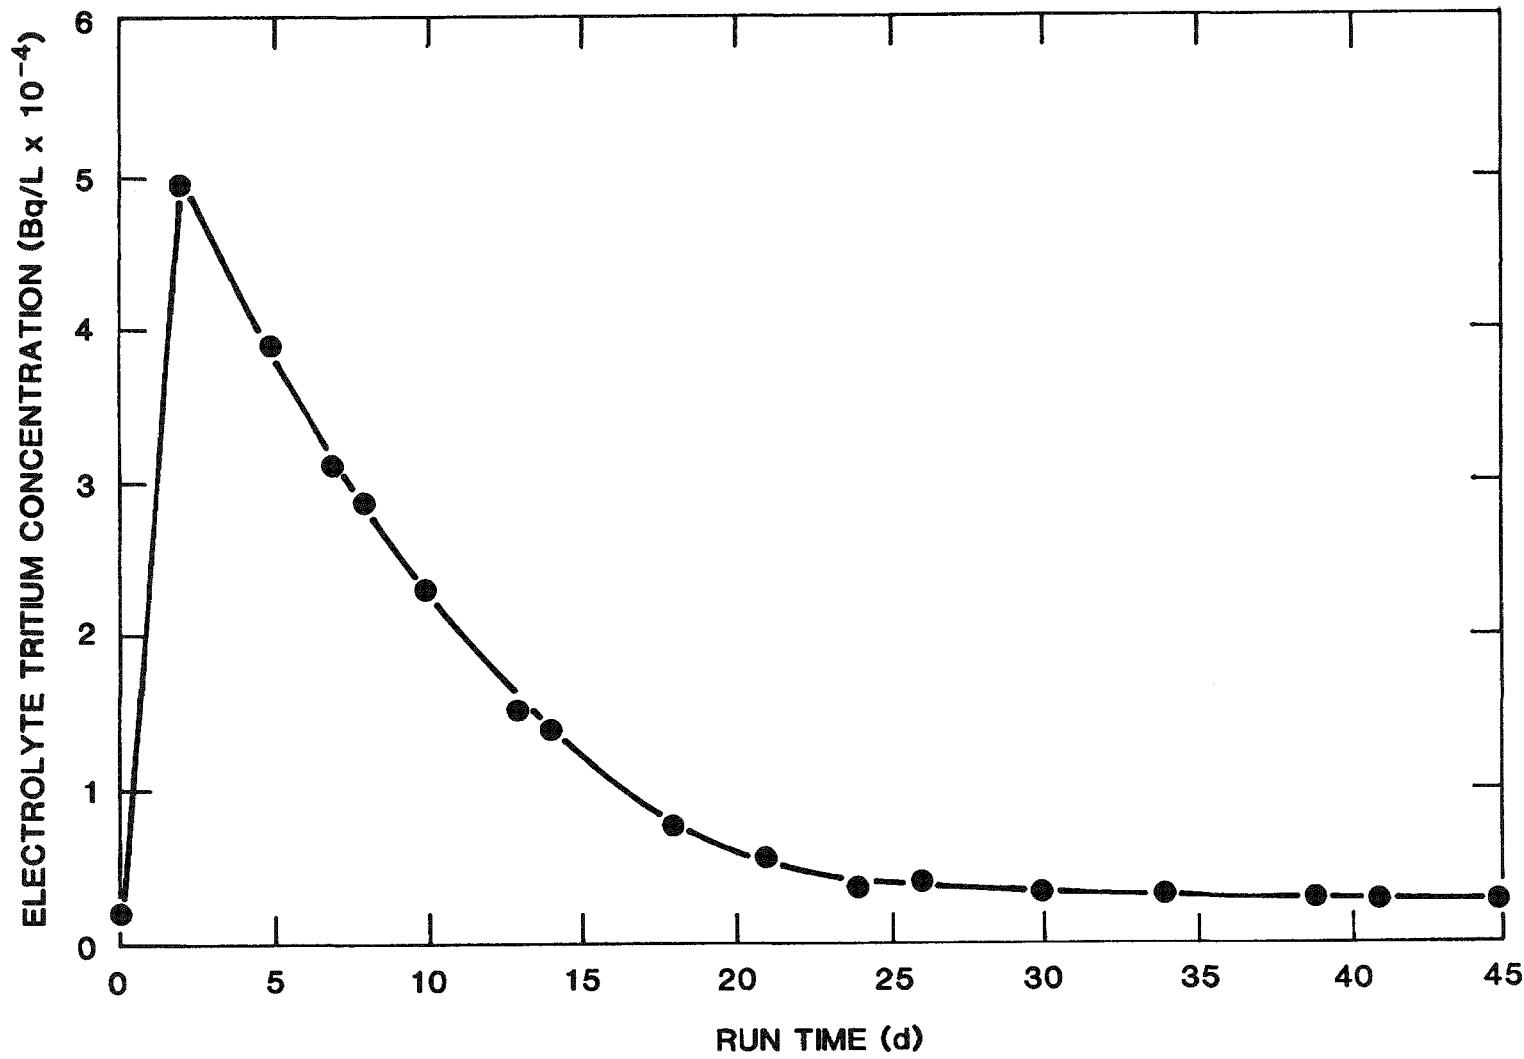



Fig. 14. Electrolyte tritium content during the first 40 h of Test CF-3.

5. ACKNOWLEDGMENTS

We appreciate the assistance of H. E. Harmon in the preparation of the cathode materials, J. W. Wade and colleagues for tritium analyses, the ORNL Glass Shop for exceptional efforts in fabricating cells and mandrels, and J. E. Bigelow, P. W. Fisher, M. L. Bauer, and M. M. Chiles for their valuable technical consultations.

6. REFERENCES

1. M. Fleischmann and S. Pons, J. Electroanal. Chem. **261**, 301 (1989).
2. A. J. Appleby, S. Srinivasan, O. J. Murphy, and C. R. Martin, paper presented at the Workshop on Cold Fusion Phenomena, Santa Fe, NM, 1989 (unpublished).
3. A. Belzer, U. Bischler, S. Crouch-Baker, T. M. Gur, M. Schreiber, and R. A. Huggins, paper presented at the Workshop on Cold Fusion Phenomena, Santa Fe, NM, 1989 (unpublished).
4. C. D. Scott et al., J. Fusion Energy (in press).
5. S. E. Jones et al., Nature **338**, 737 (1989).
6. K. L. Wolf, N. Packham, J. Shoemaker, F. Cheng, and D. Lawson, paper presented at the Workshop on Cold Fusion Phenomena, Santa Fe, NM, 1989 (unpublished).
7. N. J. C. Packham, K. L. Wolf, J. C. Wass, R. C. Kainthla, and J. O'M. Backris, "Production of Tritium from D₂O Electrolysis at a Palladium Cathode," J. Electroanal. Chem. **270**, 451 (1989).
8. R. C. Weast, ed., Reactor Handbook, 2nd ed., Vol. I (Interscience, New York, 1960), pp. 840-45.

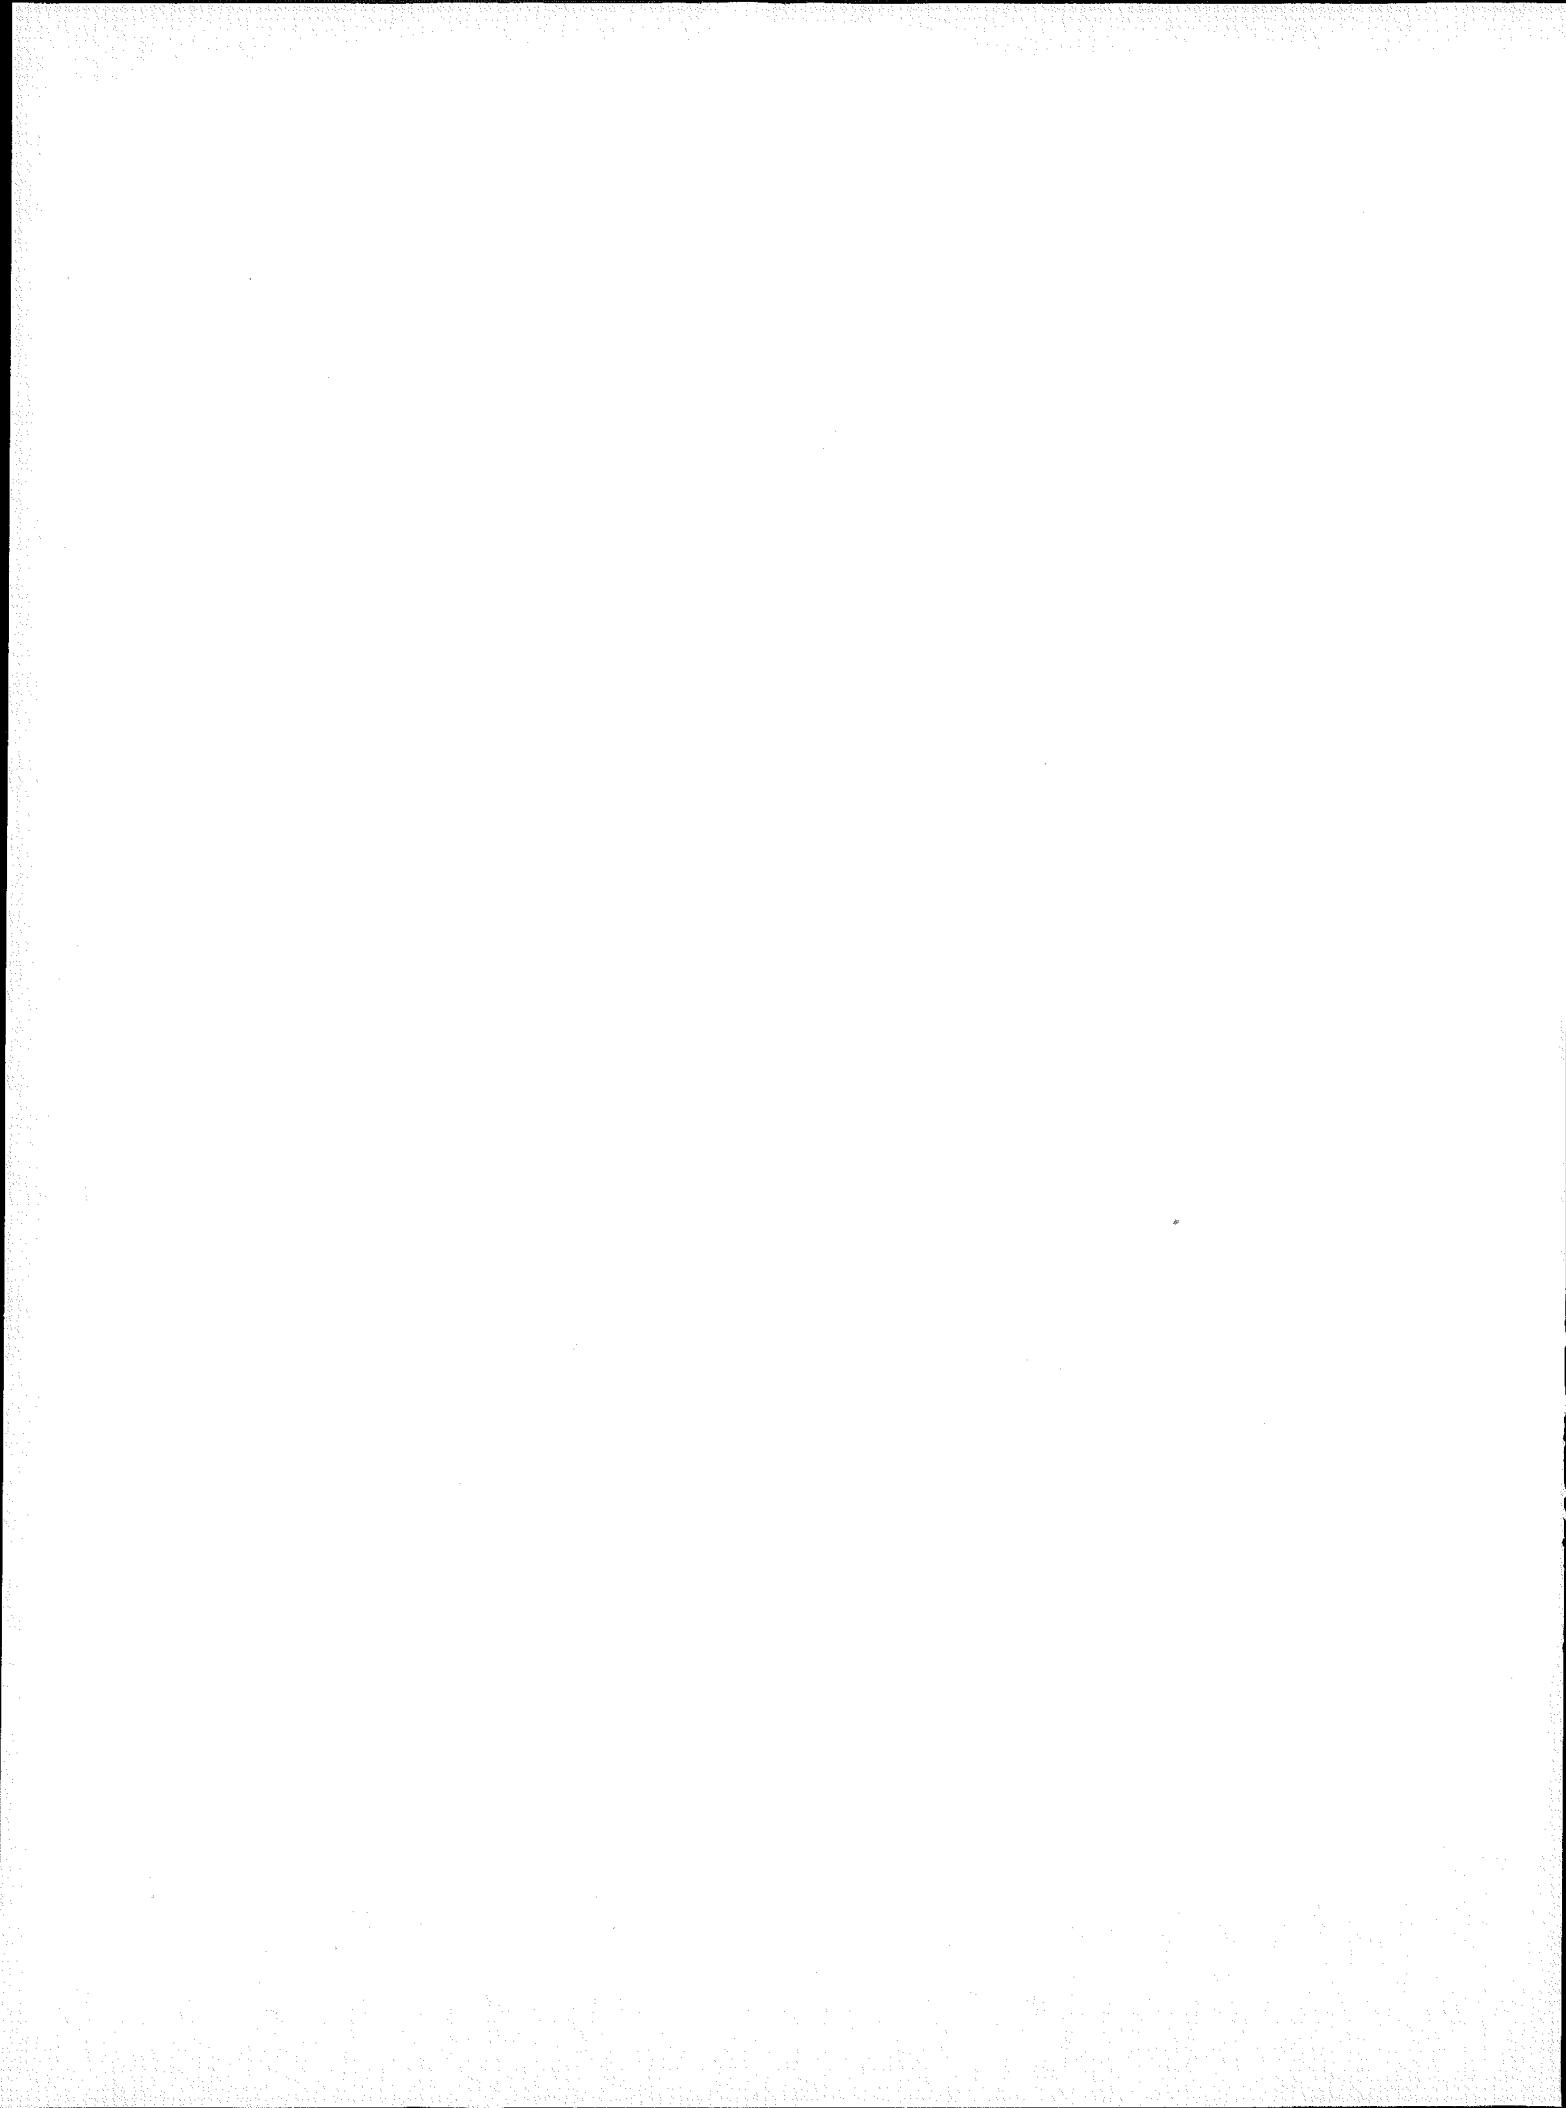

INTERNAL DISTRIBUTION

1. T. D. Anderson
2. B. R. Appleton
3. J. B. Ball
4. J. M. Begovich
5. J. T. Bell
6. L. A. Berry
7. J. E. Bigelow
8. C. H. Brown, Jr.
9. J. S. Bullock
10. E. D. Collins
11. J. F. Cooke
12. O. H. Crawford
13. A. G. Croff
14. S. Datz
15. P. W. Fisher
16. W. Fulkerson
17. E. L. Fuller
18. R. K. Genung
19. E. Greenbaum
20. J. R. Hightower
21. D. P. Hutchinson
22. E. K. Johnson
23. R. L. Jolley
24. E. J. Kelly
25. G. E. Michaels
26. O. B. Morgan
- 27-37. J. E. Mrochek
38. F. R. Mynatt
39. M. T. Naney
40. E. Newman
41. B. D. Patton
42. F. G. Perey
43. M. Petek
44. H. Postma
45. M. L. Poutsma
46. G. L. Powell
47. J. B. Richard
48. C. R. Richmond
49. M. W. Rosenthal
50. M. J. Saltmarsh
- 51-76. C. D. Scott
77. T. C. Scott
78. R. W. Smithwick
79. A. W. Trivelpiece
80. A. Zucker
- 81-82. Central Research Library
- 83-84. Laboratory Records
85. Laboratory Records — RC
86. ORNL Y-12 Technical Library
Document Reference Section
87. ORNL Patent Section

EXTERNAL DISTRIBUTION

88. Office of Assistant Manager for Energy Research and Development,
DOE-ORO, Oak Ridge, TN 37831-8600
89. R. Gajewski, U.S. Department of Energy, GTN/ER-16,
Washington, D.C. 20545
90. R. L. Gordon, U.S. Department of Energy, GTN/ER-142,
Washington, D.C. 20545
91. F. D. Stevenson, U.S. Department of Energy, GTN/ER-142,
Washington, D.C. 20545
- 92-101. Office of Scientific and Technical Information, P.O. Box 62,
Oak Ridge, TN 37831

**DO NOT MICROFILM
THIS PAGE**