

BNL-NUREG-30722

Conf-820609--10

Paper Submitted to the 1982 Annual Meeting of the
American Nuclear Society, Los Angeles, California,
June 6 - June 11, 1982

BNL-NUREG--30722

DE82 010624

Effects of Subcooling and Rod Drop Speed on the BWR Rod-Drop Accident

D. Cokinos, J. Carew, and A. Aronson

BROOKHAVEN NATIONAL LABORATORY
Department of Nuclear Energy
Upton, New York 11973

MASTER

January 1982

DISCLAIMER
This book was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific State Government or any agency thereof, or to any specific trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

MBCW

*Work performed under the auspices of the U.S. Nuclear Regulatory Commission.

The techniques and models used in the analysis of the control rod drop accident (CRDA) in a BWR have ranged from approximate conservative methods with a simple feedback model¹ to detailed representations of the thermal-hydraulic and neutronic mechanisms². In a recent paper Cheng and Diamond³ presented a detailed evaluation of the CRDA and the effects of varying a number of important accident parameters. Their calculations performed with the BNL-TWIGL⁴ core dynamics code, have shown that the effect of inlet subcooling and rod drop speed play an important role in determining the severity of the rod drop accident. The purpose of the work summarized in this paper has been to determine in detail the dependence of the rod drop accident parameters on the (a) inlet subcooling and (b) rod drop speed.

Knowledge of the effects of increased inlet subcooling is of interest since, during the approach to a hot standby condition from cold critical, a BWR core may be highly subcooled. On the other hand, an increase in the speed of the dropped rod will result in a faster transient and lead to higher peak power and peak fuel enthalpy. A quantitative evaluation of these effects is necessary in establishing the severity of the CRDA.

Using the Cheng and Diamond BWR-4 model at hot zero power (HZP) conditions a set of BNL-TWIGL CRDA calculations has been carried out for inlet subcoolings ranging from saturation to 100°F for the case of a 5 ft/sec rod speed. In all cases moderator feedback was included and the dropped rod was taken to be the center rod with a static rod worth of $\sim 2\% \Delta k/k$. The core power response to this $\sim 2 \Delta k/k$ rod worth at HZP is a large rapid power excursion at 0.5 sec. which, in this case, is immediately terminated by Doppler and/or void feedback. In Fig. 1 the transient behavior of the reactivity components at saturation and at 50°F inlet subcooling are presented.

The void, and to a lesser degree the Doppler reactivity can be seen to increase rapidly at ~ 0.5 sec. in order to reverse the rising power in the saturated case. However, in the 50°F subcooled case, the power rise is reversed almost entirely by the much stronger Doppler reactivity with the void reactivity being almost inconsequential in the mitigation of the accident due to the subcooled state of the core.

The variation of the peak fuel enthalpy and power as a function of subcooling is given in Fig. 2. The rapid rise in both these parameters, in the range between saturation and an inlet subcooling of 20°F is due to the decrease in the void feedback with the Doppler feedback becoming the dominant mechanism for limiting the power excursion as subcooling increases. It is important to note that in all cases the CRDA peak fuel enthalpy is well below the 280 cal/gm criterion.


In order to evaluate the effect of the rod drop speed on the CRDA peak fuel enthalpy and power BNL-TWIGL calculations were also performed with an increased rod drop speed of 15 ft/sec at saturation and an inlet subcooling of 20°F . It should be noted that a rod drop speed of 15 ft/sec is more than four times the average measured speed and represents an extreme case. Increasing the rod drop speed from 5 ft/sec to 15 ft/sec resulted in an $\sim 140\%$ increase in power for both the saturated and the 20°F subcooled cases. The corresponding increase in peak fuel enthalpy is $\sim 30\%$ and $\sim 22\%$, respectively, for the two cases.

In summary, the dependence of the CRDA peak power and fuel enthalpy on the core inlet subcooling and rod drop speed have been determined. Both the peak power and fuel enthalpy are found to increase rapidly as a function of subcooling up to a subcooling of $\sim 20^{\circ}\text{F}$ and are relatively insensitive at higher subcoolings. The peak fuel enthalpy increased by $\gtrsim 30\%$ as the rod speed was increased from 5 ft/sec to 15 ft. sec. - In all cases the peak fuel enthalpy was well below the 280 cal/gm fuel criterion.

References

1. R.C. Stirn, et.al., "Rod Drop Accident Analysis for Large Boiling Water Reactors," NEDO-10527, General Electric Co., (1972), also Supplement 1 (1972) and Supplement 2 (1973).
2. H.S. Cheng and D.J. Diamond, "Thermal Hydraulic Effects on Center Rod Drop Accidents in a Boiling Water Reactor," BNL-NUREG-27544, Brookhaven National Laboratory, 1980.
3. H.S. Cheng and D.J. Diamond, "Analyzing the Rod Drop Accident in a Boiling Water Reactor" Nucl. Technol. 56, 40 (1982).
4. D.J. Diamond, "BNL-TWIGL, A Program for Calculating Rapid LWR Core Transients" BNL-NUREG-21925, Brookhaven National Laboratory (1976).

BWR CONTROL ROD DROP ACCIDENT
HOT, ZERO POWER, SUBCOOLING - 0 DEG. F, ROD VEL. - 5 FT/SEC
REACTIVITY COMPONENT TRANSIENT BEHAVIOR

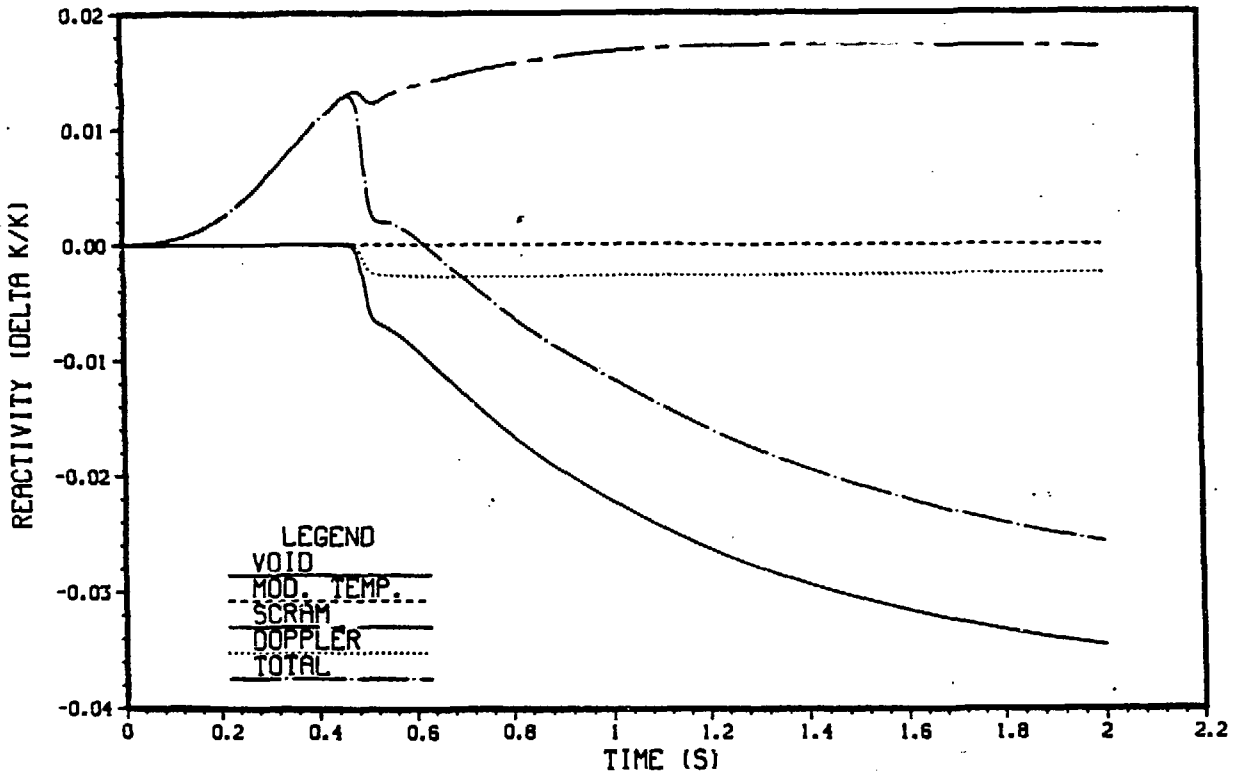

BWR CONTROL ROD DROP ACCIDENT
HOT, ZERO POWER, SUBCOOLING - 50 DEG. F, ROD VEL. - 5 FT/SEC
REACTIVITY COMPONENT TRANSIENT BEHAVIOR

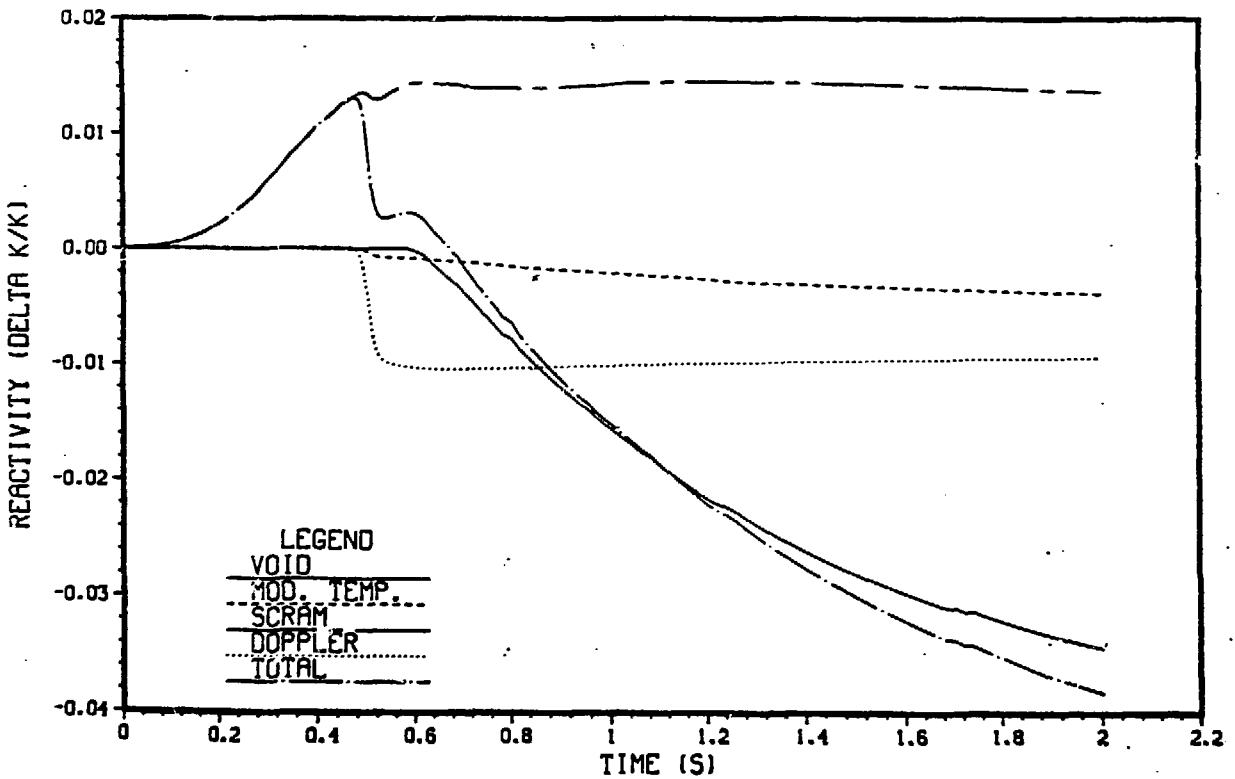


Fig. 1 Transient Behavior of the CRDA Reactivity Components at Saturation and at an Inlet Subcooling of 50°F

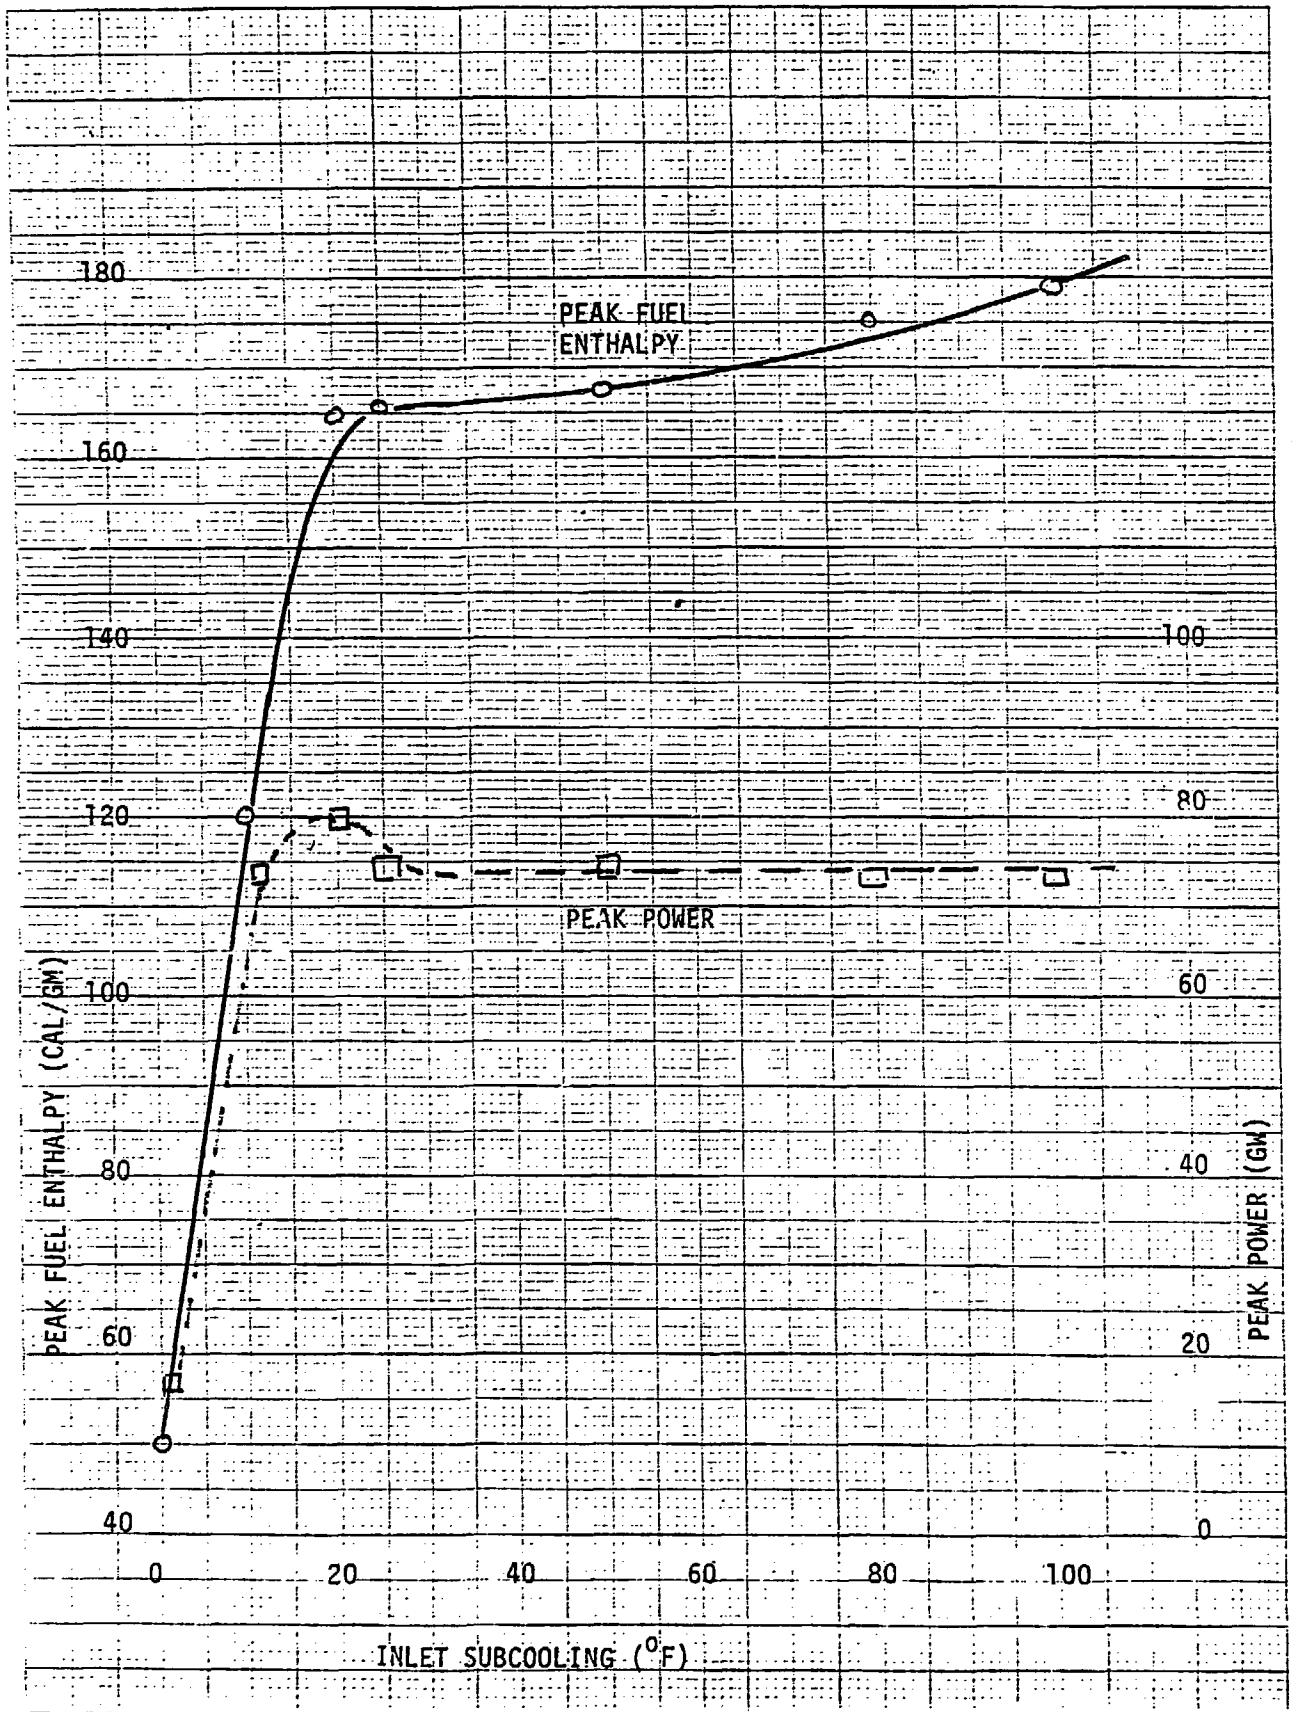


Figure 2 - Peak Fuel Enthalpy and Peak Power As A Function of Inlet Subcooling