

12
DE82013614

5N 297,307/179

PATENTS-US--A297307

5-55,682

filed: 8-28-81

-297 NTIS PC A02/MF Ad

5015

PATENTS-US--A297307

DE82 013614

OIL-SHALE-RETORTING AND COMBUSTION SYSTEM

Inventors: Augustine A. Pitrolo
Rt. 8, Box 287
Fairmont, WV 26554
U.S. Citizen

Joseph S. Mei
Parkway Drive, Apt. F6
Morgantown, WV 26505
U.S. Citizen

Jerry Y. Shang
4524 Andes Drive
Fairfax, VA 22030
U.S. Citizen

S.N. 297,307 - (S-55,682)

DOE (METC)

DISCLAIMER

This book was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

MASTER

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

MOW

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency Thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

DISCLAIMER

Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.

OIL SHALE RETORTING AND COMBUSTION SYSTEM

Background of the Invention

The present invention relates generally to the extraction of energy values from oil shale and, more particularly, to a method for sequentially retorting and combusting oil shale containing calcium carbonate to effect efficient extraction of heat values from the oil shale.

With the increasing energy demands of the world and the decreasing reserves of conventionally recovered petroleum, alternative sources of energy are being extensively investigated as substitutes for energy extracted from petroleum. For example, oil shale contains a considerable concentration of volatile hydrocarbons which are recoverable from the shale by subjecting the shale to a sufficient temperature to drive off the volatile hydrocarbons contained therein. These volatile hydrocarbons may then be used in a combustion system as the primary fuel source. A significant problem which detracts from the efficiency of using oil shale for supplying volatile hydrocarbons for combustion purposes is that most oil shales contain a considerable concentration of calcium carbonate (limestone). Common of such oil shales are those found in vast quantities in areas such as Colorado, Israel, and Morocco. When oil shales containing considerable concentrations of calcium carbonate are burned in a direct combustion process, the

calcium carbonate tends to undergo calcination which is an extensive heat-consuming reaction during which calcium carbonate is converted to lime. For each pound of calcium carbonate that is calcined as much as 600 to 700 BTU's of the available heat energy is consumed. This extensive heat consumption represents greater than about 30% of the total heat energy available in each pound of the Israeli oil shale and as much as about 24% of the heat energy available in each pound of the Colorado oil shale. Inasmuch as the limestone content in most oil shales such as mentioned above amounts to more than about 50% of the total oil shale composition, it becomes of increasing importance from the efficiency standpoint to effect the retorting or the separation of the hydrocarbons from the oil shale without simultaneously undergoing the calcination reaction to avoid the extensive loss of available heat energy suffered during concurrent calcination and combustion of the oil shale.

Summary of the Invention

It is a primary aim or objective of the present invention to provide a fluidized bed system in which oil shale containing calcium carbonate is subjected to sequentially occurring (two-stage) retorting and combustion steps whereby volatile hydrocarbons representing maximum heat value may be extracted from the oil shale prior to the occurrence of any calcination reaction so as to extensively increase the efficiency of the energy extraction processes relating to oil shale. This aim or goal of the present invention is achieved by a method which comprises the steps of heating the oil shale in a first zone of a fluidized bed in the presence of a gaseous bed-fluidizing medium (air)

having a sufficient oxygen concentration to provide a temperature adequate to thermally decompose the organic hydrocarbons in the oil shale into combustable volatiles and insufficient to provide the temperature necessary to effect substantial combustion of the extracted volatiles.

- 5 The oxygen concentration is also insufficient to support combustion and the temperature is inadequate to effect the calcination of the calcium carbonate in the oil shale in the first zone. The volatiles released from the oil shale in the first zone and the particles of calcium carbonate flow into a second zone where they are contacted with excess air
- 10 having a sufficient oxygen concentration to effect combustion of the combustable volatiles and the calcination of the calcium carbonate.
- 15 The heat values released from the combustion are extracted from the resulting combustion gases by using conventional heat exchange mechanisms. By employing the staged retorting and combustion operation of the present invention, the heat energy previously utilized for the calcination during retorting is significantly reduced.

Other and further objects of the invention will be obvious upon an understanding of the illustrative method about to be described or will be indicated in the appended claims, and various advantages not referred to herein will occur to one skilled in the art upon employment of the invention in practice.

Description of the Drawing

The figure is a schematic representation of a fluidized bed reactor wherein staged retorting and combustion of oil shale containing calcium carbonate may be practiced in accordance with the teachings of the present invention.

A somewhat schematic view of a fluidized bed reactor has been chosen for the purpose of illustration and description of the subject method. The embodiment illustrated is not intended to be exhaustive or to limit the invention to the precise form of fluidized bed disclosed.

5 It is chosen and described in order to best explain the principles of the invention and their application in practical use to thereby enable others skilled in the art to best utilize the invention in various embodiments and modifications as are best adapted to the particular use contemplated.

10

Detailed Description of the Invention

With reference to the accompanying drawing, a vertically oriented fluidized bed reactor is generally shown at 10. Within the fluidized bed 10 there is a retorting or devolatilization zone 12 where oil shale, introduced through conduit 13 in particulate form in a size 15 range of about 0 to 12 mesh, is subjected to decomposition or the thermal cracking of the kerogen or organic hydrocarbons in the oil shale to release combustable volatile hydrocarbons from the oil shale. To provide this retorting step, fluidizing air from a suitable source (not shown) is fed through conduit 14 into the retorting zone 12. A 20 suitable grid 16 is disposed in the fluidized bed 10 below zone 12 for distributing the primary air flow into zone 12 for maintaining the oil shale particulates therein in a fluidized state. Within the retorting zone 12, the fluidized oil shale particulates are heated to a temperature sufficient to release the volatile hydrocarbons contained 25 therein. In accordance with the present invention only minimal calcination of the available calcium carbonate occurs during the retorting

step by maintaining the air utilized for the fluidizing of the bed at or slightly above stoichiometric. This lack of excess oxygen assures that the temperature within the retorting zone 12, will be maintained at a value less than that required for the calcination of the available 5 calcium carbonate and also assures that only a small percent of the released volatile hydrocarbons are combusted in this retorting zone.


The gaseous volatile hydrocarbons released from the oil shale together with small particles of calcium carbonate and other gaseous and particulate material rise vertically from the retorting zone 12 in 10 the form of a "dust" cloud generally shown at 18. This cloud of gaseous and solid material rises into a freeboard combustion zone generally shown at 20. Excess secondary air is introduced through conduit 21 into the freeboard combustion zone 18 to effect the combustion of the volatile hydrocarbons released from the oil shale. The tem- 15 perature of combustion in this zone of the fluidized bed is sufficient to effect calcination of the calcium carbonate.

By utilizing the staged retorting and combustion zones of the present invention, the heat energy needed for the calcination is considerably less than that previously required if retorting, combustion 20 and calcination of the oil shale took place in the same bed. In the freeboard combustion zone 18 the temperature and residence time are sufficient to provide almost instantaneous combustion of the combustibles so as to minimize the volume requirements for the combustion zone 18. The volume of excess air introduced into the combustion zone should be 25 sufficient to provide an oxygen level in the range of about 10 to 85 percent greater than stoichoimetric. Some heat values from the combustion of the volatiles in the freeboard combustion zone 18 are

OIL SHALE RETORTING AND COMBUSTION SYSTEM

Abstract of the Disclosure

The present invention is directed to the extraction of energy values from oil shale containing considerable concentrations of calcium carbonate in an efficient manner. The volatiles are separated from the oil shale in a retorting zone of a fluidized bed where the temperature and the concentration of oxygen are maintained at sufficiently low levels so that the volatiles are extracted from the oil shale with minimal combustion of the volatiles and with minimal calcination of the calcium carbonate. These gaseous volatiles and the calcium carbonate flow from the retorting zone into a freeboard combustion zone where the volatiles are burned in the presence of excess air. In this zone the calcination of the calcium carbonate occurs but at the expense of less BTU's than would be required by the calcination reaction in the event 15 both the retorting and combustion steps took place simultaneously. The heat values in the products of combustion are satisfactorily recovered in a suitable heat exchange system.

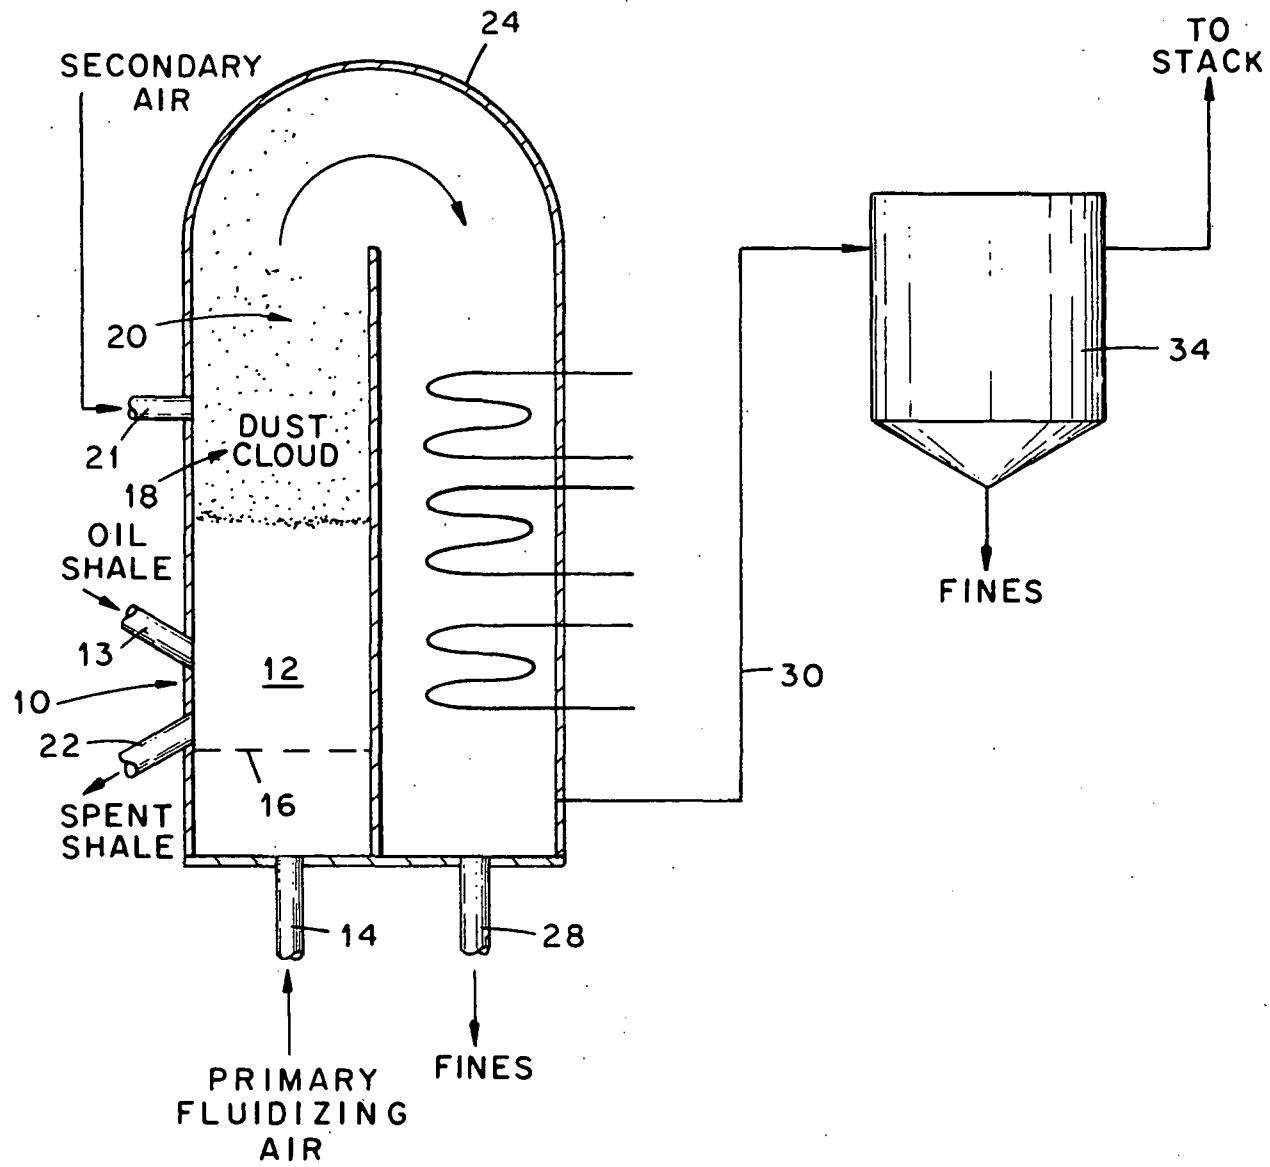

radiated back down into the retorting zone 12 of the fluidized bed so as to facilitate the extraction of the volatile hydrocarbons from the oil shale. The spent shale is removed from the fluidized bed 10 by a suitable conduit as shown at 22.

5 Calcination takes place in the freeboard combustion zone 18 at a temperature of about 1550°C which is the normal operating temperature in a fluidized bed for maximum sulfur retention. At this temperature the calcination reaction can achieve approximately 90% completion. The high temperature combustion products, resulting from the combustion of
10 the volatile hydrocarbons released from the oil shale, vertically rise or flow from the freeboard combustion zone 18 through suitable heat exchange means where the sensible heat in combustion products may be extracted for use in selected heat energy operated mechanisms. As shown in the drawing, the flow direction of the combustion products
15 rising from the combustion zone 18 is reversed in conduit 24 and directed downwardly in a heat-exchange relationship with a plurality of heat exchangers generally shown at 26 wherein the sensible heat may be extracted from the combustion products for external use. The majority of the particulate material (fines) contained in the gases emanating
20 released from the freeboard combustion zone 18 are discharged from the fluidized bed and heat-exchanger arrangement through conduit 28 located below the heat exchangers 26 while the remaining gases and fines are sent through a conduit 30 into a bag house or cyclone 34 for extraction of remaining solid material prior to the gases being discharged into
25 the atmosphere through a suitable stack.

By directing the flow of combustion products downwardly through the "bent" conduit 24 by height of the reactor 10 may be significantly reduced over that which would be required without this redirection of flow. This bend in the combustion-products flow path forms a radiation 5 arch to provide a temperature window (about 800 to 900°C) for effecting reduction and relaxation of nitrogen oxides. Also, the downward flow of combustion products reduces or minimizes the size of an "ash crown" formed on horizontal surfaces of the heat exchangers 26.

The nitrogen compounds contained in the oil shale are converted 10 into NO_x compounds during retorting. In the oil shale retorting step, the volatile hydrocarbons tend to act as reducing compounds which react with the nitrogen oxide to form nitrogen and water or oxygen. The emission of NO_x compounds remaining in the gases discharging from the stack into the atmosphere is well within EPA regulations. Sulfur 15 dioxide (SO_2), on the other hand, is also present in the oil shale, since sulfur present in the oil shale is converted into sulfur dioxide. The sulfur dioxide is elutriified into fines in the freeboard combustion zone 18 where calcination of the elutriate limestone fines is occurring. The lime formed during the calcination reacts with the sulfur dioxide 20 to form calcium sulphate for effectively and significantly reducing the level of sulfur dioxide emission in the stack gases. The quantity of sulfur dioxide discharging through the stack is considerably below the national standard of 1.2 pounds sulfur dioxide/ 10^6 BTU.

In order to provide a more facile understanding of the present 25 invention, examples set forth below are directed to the staged retorting and combustion of oil shale obtained from Israel, Morocco, and Colorado in accordance with the present invention.

EXAMPLE I

The Israeli oil shale, which has a heat value of about 1914 BTU's per pound, in a particulate size of -12 +30 mesh, was introduced into the retorting zone 12 of the fluidized bed 10. The bed temperature was 5 1300°F with a velocity of the fluidizing air at 2.68 ft./sec and a bed depth of 6 inches (static). In the retorting zone, stoichoimetric air was utilized for fluidization and retorting purposes while in the freeboard combustion zone 44% excess air was used for combustion and calcination. The combustion efficiency was 99.86% based on solid analysis 10 and the calcification of the calcium carbonate was 97.9% complete. The heat loss through calcination was 11.05% of the available heat energy in the oil shale as calculated by the heat loss over the total heat input times 100. The analyses of the flue gas of Examples I-III are set forth in the table following Example III below.

15

EXAMPLE II

Morocan shale of an Example II particle size of 12 x 0 mesh was introduced into the retorting zone of the fluidized bed and subjected to a bed temperature of about 1400°F at a fluidization velocity of 2.84 ft./sec to provide a 6 inch bed depth. Stoichoimetric air was used in 20 the retorting zone while 47.73% excess air was used in the freeboard combustion zone. The combustion efficiency of this shale which has a heat value of about 2378 BTU's per pound was 99.24% and the level of calcium carbonate calcination at 77.62%. The heat loss through calcination was only 3.5%.

Example III

Colorado oil shale which has a heating value of about 2950 BTU's per pound, was introduced into the retorting zone of the fluidized bed in a particle size of 30 X 0 mesh. A bed temperature of 1550°F was utilized with a fluidization velocity of 3.68 feet per second to provide a 6 inch bed depth. Stoichioimetric air was used in the retorting zone while 33.46% excess air was used in the freeboard combustion zone. The combustion efficiency for the Colorado oil shale was 99.54%, the calcination of the calcium carbonate was 93.78%, and the heat loss through calcination was 2.83%.

Table

| | Flue Gas Analysis | Israeli Oil Shale | Moroccan Oil Shale | Colorado Oil Shale |
|----|---|-------------------|--------------------|--------------------|
| 15 | CO ₂ Vol.% | 14.00 | 12.50 | 17.60 |
| | CO Vol.% | 0.02 | 0.05 | 0.07 |
| | O ₂ Vol.% | 6.63 | 7.00 | 5.50 |
| | SO ₂ , ppm | 100 | 100 | 100 |
| | SO ₂ , lb./10 ⁶ Btu | 0.26 | 0.27 | 0.16 |
| 20 | NO/NO _x , ppm | 772 | 800 | 200 |
| | NO _x lb./10 ⁶ Btu | 1.0 | 1.09 | 0.16 |
| | THC, ppm | 20 | 100 | 4000 |

It will be seen that the present invention provides a relatively simple and highly efficient method for recovering heat values from oil shale containing considerable concentrations of limestone.

CATEGORIES

EDB
ERA
EPA
WDA

| | |
|-----|--------------------------|
| INS | <input type="checkbox"/> |
| RIP | <input type="checkbox"/> |
| GAP | <input type="checkbox"/> |
| CRF | <input type="checkbox"/> |

TTR
DOE ✓

1. 040402

2. _____

3. _____

4. _____

5. _____

AUGMENTATION: DOE Patent Application

OIL SHALE RETORTING AND COMBUSTION SYSTEM

Abstract of the Disclosure

The present invention is directed to the extraction of energy values from oil shale containing considerable concentrations of calcium 5 carbonate in an efficient manner. The volatiles are separated from the oil shale in a retorting zone of a fluidized bed where the temperature and the concentration of oxygen are maintained at sufficiently low levels so that the volatiles are extracted from the oil shale with minimal combustion of the volatiles and with minimal calcination of the 10 calcium carbonate. These gaseous volatiles and the calcium carbonate flow from the retorting zone into a freeboard combustion zone where the volatiles are burned in the presence of excess air. In this zone the calcination of the calcium carbonate occurs but at the expense of less BTU's than would be required by the calcination reaction in the event 15 both the retorting and combustion steps took place simultaneously. The heat values in the products of combustion are satisfactorily recovered in a suitable heat exchange system.