


Conf. 910505--260

SSCL-437

Superconducting Super Collider Laboratory

Received by OSTI

JUN 17 1991

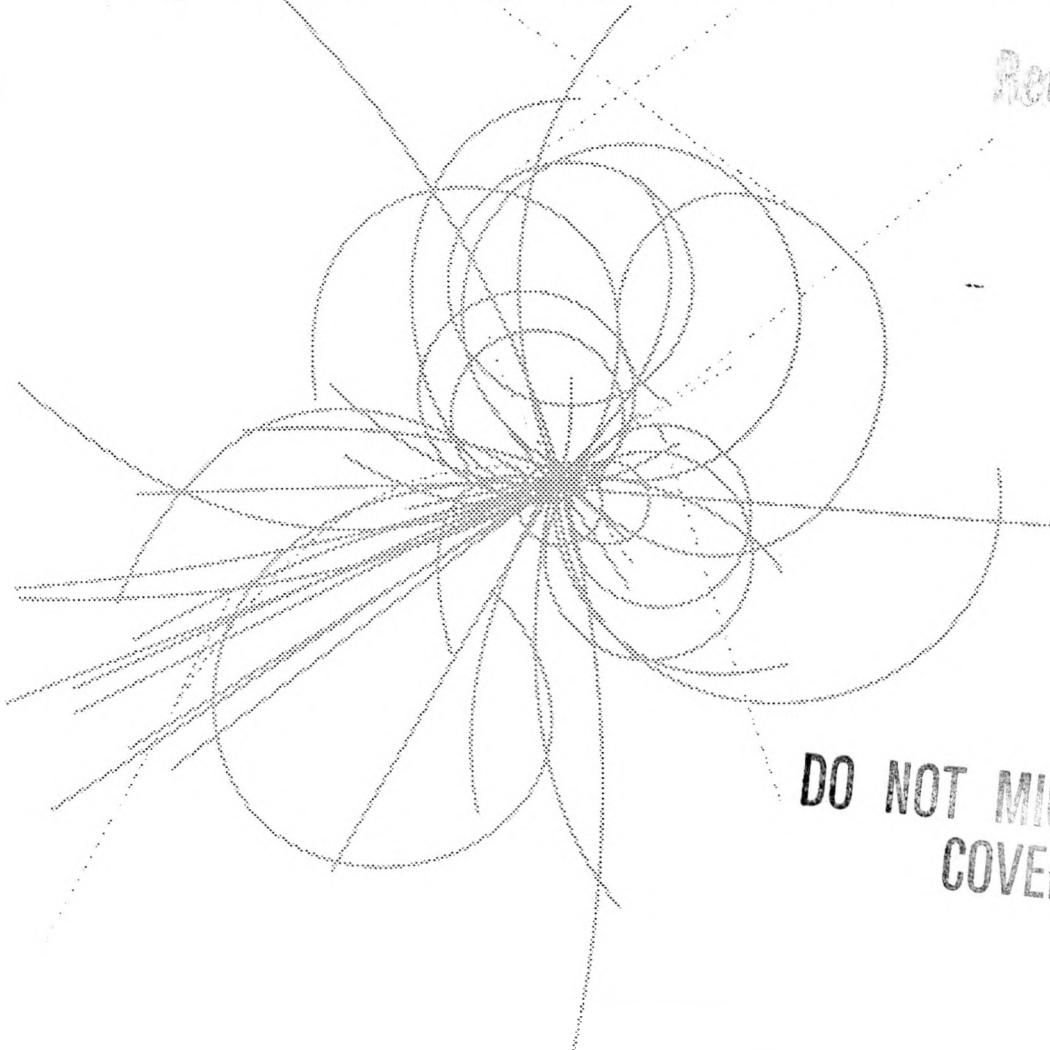

**DO NOT MICROFILM
COVER**

Hydraulic Quench Simulations in SSC Dipole Magnets

G. Snitchler and B. Aksel

May 1991

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED.

SSCL-437

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

DISCLAIMER

Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.

Hydraulic Quench Simulations in SSC Dipole Magnets*

G. Snitchler and B. Aksel

Superconducting Super Collider Laboratory[†]
2550 Beckleymeade Avenue
Dallas, TX 75237

May 1991

* Presented at the 1991 IEEE Particle Accelerator Conference, San Francisco, CA, May 6-9, 1991.

† Operated by the Universities Research Association, Inc., for the U.S. Department of Energy under Contract No. DE-AC02-89ER40486.

Hydraulic Quench Simulations in SSC Dipole Magnets

G. Snitchler and B. Aksel
Superconducting Super Collider Laboratory*
2550 Beckleymeade Ave, Dallas, TX 75237

Abstract

Anomalously high quench velocities have been observed in long 40mm aperture SSC dipole magnets. The thermal conduction mechanism does not properly explain the observed quench velocities in long SSC dipole magnets. A helium hydraulic event within the insulated conductor provides a plausible explanation for observed velocities. Preliminary results of a coupled thermal conductive and hydraulic numerical model of a conductor quench event produce velocities comparable to observations. The normal operating conditions are force-flow cooling at four atmospheres and 4.35 K temperature. The model quench velocities are dependent upon ambient pressure and slow down under pool boiling conditions. Slower pool boiling velocities in the model do not explain observations in short SSC dipole test magnets which are operated at pool boiling conditions.

I. Model

Recently, there have been several calculations of quench velocities using a helium hydraulic mechanism as the driving term in the time evolution of a quench event.[1-3] Primarily this hydraulic mechanism has been applied to conductor-in-conduit superconducting magnets. The 40mm aperture 17m SSC dipole magnets experience quench velocities which cannot be explained by thermal conduction models. An analytic model was developed which suggested that an annular helium explosion model could explain the observed velocities.[4] This model may provide an explanation for the intractable events occurring beyond 80 milliseconds, but it does not explain the fast quench velocities seen closer to the inception of a quench event.

As an outcome of the annular model, there was speculation that there was a conduit within the Rutherford cable surrounded by a porous boundary of kapton, fiberglass, and epoxy. In an attempt to model an interstitial quench event, a coupled thermal conduction and thermal hydraulic model was developed using a predictor-corrector numerical technique. In this paper, results from this model will be presented.

The model consists of a coupled solution of heat generation and thermal conduction within the cable and a hydraulic representation of interstitial helium by heat transfer. The helium continuity, momentum, and energy balance equations are

$$\frac{\partial \rho}{\partial t} = -\frac{\partial \rho v}{\partial x} \quad (1)$$

$$\frac{\rho \partial v}{\partial t} = -\frac{v \partial \rho}{\partial t} - \frac{v \partial \rho v^2}{\partial x} - \frac{\partial p}{\partial x} - \frac{f \rho v^2}{2d_h} \quad (2)$$

$$\frac{\rho \partial u}{\partial t} = -(u + \frac{v}{2}) \frac{\partial \rho}{\partial t} - \rho v \frac{\partial v}{\partial t} - \frac{\partial}{\partial x} (\rho v [u + \frac{v^2}{2}] + p v) + Q/A_{He} \quad (3)$$

and the cable thermal conduction equation is

$$\gamma C A \frac{\partial \theta}{\partial t} = \frac{\partial}{\partial x} \frac{k A \partial \theta}{\partial x} + \rho J^2 A + Q A. \quad (4)$$

The hydraulic solutions are time advanced using predictor-corrector techniques. The conductor thermal conduction is time advanced with an Euler technique. All dependent thermodynamic state functions are computed using a package subroutine.[5]

Some approximation must be made for hydraulic properties of the area within the twisted wire cable. It is not clear that a continuous path exists within the cable. An estimate of the hydraulic diameter is $d_h = 10^{-4}$ m and the friction factor is assumed to be $f = 0.08$ which is somewhere between the laminar and turbulent flow regimes. Estimates of the hydraulic diameter are based on micrographs of collared conductors. The heat transfer rate between the helium and the conductor is approximated as $h = 1 \times 10^3 \text{ J/m}^2 \text{-K}$ for 4 atm and $h = 3 \times 10^3 \text{ J/m}^2 \text{-K}$ for pool boiling conditions. The heat transfer rate is $Q = h P (\theta_{Cu} - \theta_{He})$ where P is the wetted perimeter. It would be appropriate to add a transient approximation for heat transfer and future plans include this addition to the model.

* Operated by Universities Research Association, Inc., for the U.S. Department of Energy under Contract No. DE-AC02-89ER40486.

II. Results

In figure 1, the forced flow calculations at 4 atm are presented with long magnet data, the DD series magnets.[6] The results are similar to 40mm aperture long collider magnet data. The combination of hydraulic diameter and friction factor can be considered as a tunable parameter since there is inadequate information to evaluate these model parameters. As mentioned previously, values were specified with the best information available. The heat transfer coefficient is also poorly defined parameter for this transient model, but only generates a velocity offset with little effect on the non-linear behavior as seen in the two model cases with different h values.

Near short sample quench velocities are higher in the forced flow conditions regardless of the heat transfer rate. The pool boiling velocities are slower due to latent heat, but are not significantly slower. Additional models for sub-critical flow at 1.5 atm were performed and these results were identical to the pool boiling results. An experiment for a test magnet DD0012 was conducted at 1.5 atm and there was no significant difference in the short sample quench velocities between 1.5 and 4 atm. The primary difference between supercritical and subcritical helium models is that the supercritical velocities are much more non-linear as a function of fraction of short sample current. No experimental evidence is currently available to confirm this prediction.

The models presented in this paper do not completely describe the velocities observed in short magnets. Short sample quenches in these magnets are approximately 70 m/s.[7] A possible explanation is that quench velocities accelerate significantly in the first 1-3 milliseconds and the entire data acquisition period is on the order of 10 msec. The observed velocity is an average during this period and is lower than the peak velocity.

Further analysis of the quench temperature profile near wavefront reveals that a stationary state is formed after an acceleration period. This is a coupled state where the "hot helium" extending beyond the wavefront preheats the conductor as seen in figure 2. If the thermal conductivity term is eliminated, a quench velocity at $I/I_{ss} = 0.9$ would drop to approximately 3 m/sec. Standard thermal conduction models predict approximately 25-30 m/sec depending of heat transfer rates to the helium "bath". It is a combination of thermal conduction and preheating of the superconductor beyond the wavefront which develops that large quench velocities.

This probably would not be considered to be a "hydraulic quench back" as predicted for conductor-in-conduit energy storage magnets. It is rather an extra heat transfer term advancing the thermal conduction propagation. The spacial region involved in this prop-

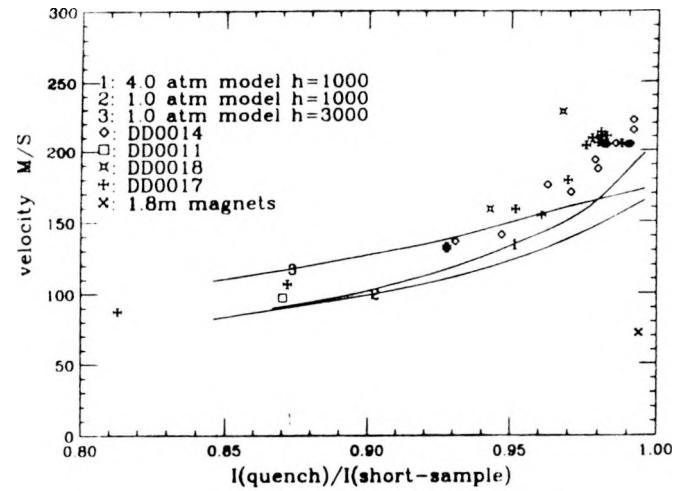


Figure 1 - Axial quench velocities

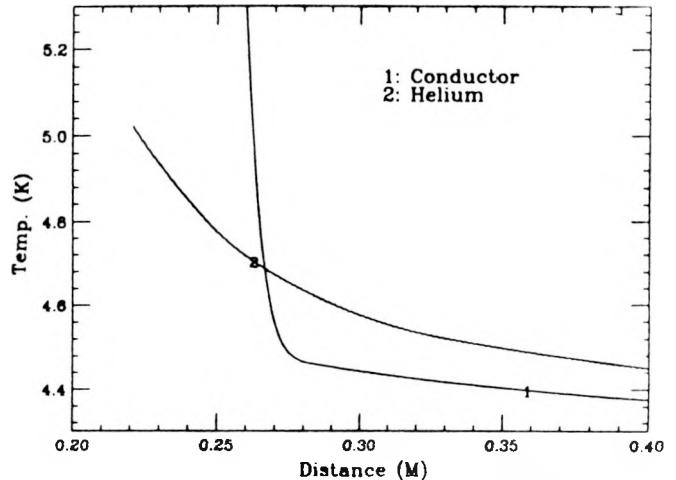


Figure 2 - Axial quench temperature wavefront profile.

agation is on the order of 5 cm. It is likely that the hydraulic mechanism would need to act within a short distance due to a small hydraulic diameter.

This hydraulic model provides a feasible explanation for the fast quench velocities observed in SSC dipole magnets under different cryogenic conditions. There are several issues which are unresolved in this mechanism. The heat transfer outside the conductor is omitted. The conduit for Rutherford cable is porous and would relieve pressure. Both of these effects would slow down quench propagation. Presently, there is a long sample test in progress which could demonstrate the change in quench velocities due to varying cryogenic conditions and without a helium bath. This test should provide evidence to support or refute hydraulic mechanisms.

In any case, the primary purpose for determining the quench propagation mechanism is to insure that future modifications to conductor and insulation design do not change the fast longitudinal velocities which help protect the SSC dipole magnets. A very porous insulation would significantly reduce the quench velocities.

References

- [1] L. Dresner, "Quench Detection by fluid dynamic means in cable-in-conduit superconductors," *Adv. Cryo. Eng. in cable-in-conduit superconductors*, *Adv. Cryo. Eng.* **33**, 167-174 (1988).
- [2] C.A. Luongo et.al., "Thermal Hydraulic Simulation of Helium Expulsion from a Cable-in-conduit Conductor," *IEEE Trans. Magn.* **25**, 1589-1595 (1989).
- [3] L. Dresner, "Quench Pressure, Thermal Expulsion, and Normal Zone Propagation in Internally Cooled Superconductors," *IEEE Trans. Magn.* **25**, (2), 1710-12 (1989).
- [4] L. Dresner, J.W. Lue, and M.S. Lubell, "Report on the Analysis of Large Propagation Velocities Observed in the Full-Length SSC Dipoles", SSC internal report SSC-322 (1990).
- [5] R.D. McCarty, "Thermodynamic Properties of Helium from 2 to 1500 K at Pressures to 10^{**8} Pa," *J. Phys. Chem Ref. Data*, 2(41),923-945(1973)
- [6] A. Devred, et. al., "Quench Characteristics of Full Length SSC R&D Dipole Magnets", *Adv. Cryo. Eng.*, **35**, 599-608 (1990).
- [7] W. Koska, private communication.

Disclaimer Notice

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government or any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Superconducting Super Collider Laboratory is an equal opportunity employer.

