

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

ORNL/TM--9439

DE85 010261

Health and Safety Research Division

SULFUR ACTIVATION AT THE LITTLE BOY-COMET CRITICAL ASSEMBLY: A REPLICA OF THE HIROSHIMA BOMB

George D. Kerr, Juel F. Emery,* and Joseph V. Pace, III**

*Analytical Chemistry Division
**Computer and Telecommunications Division

NOTICE: This document contains information of a preliminary nature. It is subject to revision or correction and therefore does not represent a final report.

Manuscript completed: December 1984
Report published: April 1985

Prepared for the
Office of Health and Environmental Research
U.S. DEPARTMENT OF ENERGY
Washington, D. C. 20545

Prepared by the
OAK RIDGE NATIONAL LABORATORY
Oak Ridge, Tennessee 37831
operated by
MARTIN MARIETTA ENERGY SYSTEMS, INC.
for the
U.S. DEPARTMENT OF ENERGY
Contract No. DE-AC05-84OR21400

CONF
483 2000

MASTER

26
DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

CONTENTS

	Page
ABSTRACT.....	1
INTRODUCTION.....	1
LITTLE BOY-COMET CRITICAL ASSEMBLY.....	3
SULFUR-ACTIVATION MEASUREMENTS.....	6
SULFUR-ACTIVATION CALCULATIONS.....	14
SUMMARY.....	21
REFERENCES.....	23

SULFUR ACTIVATION AT THE LITTLE BOY-COMET CRITICAL ASSEMBLY:
A REPLICA OF THE HIROSHIMA BOMB

George D. Kerr, Juel F. Emery,* and Joseph V. Pace, III**
Health and Safety Research Division
Oak Ridge National Laboratory
Oak Ridge, Tennessee 37831

ABSTRACT

Studies have been completed on the activation of sulfur by fast neutrons from the Little Boy-Comet Critical Assembly which replicates the general features of the Hiroshima bomb. The complex effects of the bomb's design and construction on leakage of sulfur-activation neutrons were investigated both experimentally and theoretically. Our sulfur-activation studies were performed as part of a larger program to provide benchmark data for testing of methods used in recent source-term calculations for the Hiroshima bomb. Source neutrons capable of activating sulfur play an important role in determining neutron doses in Hiroshima at a kilometer or more from the point of explosion.

INTRODUCTION

The energy yield of and radiation leakage from the Nagasaki bomb are considered to be known to an adequate accuracy from measurements made during several early test firings.¹⁻⁵ In contrast, the Hiroshima bomb was never tested, and the energy yield (i.e., total fissions) and radiation leakage (i.e., source terms for neutrons and gamma rays) have been inferred from indirect evidence and theoretical calculations. The first modern calculations of source terms for the Hiroshima and Nagasaki bombs were made in 1975 by Preeg.⁶ His calculations were done using available computer codes at Los Alamos National Laboratory (LANL) and one-dimensional (spherical) models of the two bombs. A one-dimensional

*Analytical Chemistry Division

**Computer and Telecommunications Division

model is a good approximation for the Nagasaki bomb (code named Fat Man) which was a spherical plutonium-implosion device.⁷ However, the Hiroshima bomb (code named Little Boy) was a radically different uranium gun-assembly device. Its design was two-dimensional (cylindrical) and the effects of its cylindrical construction were noted in 1945 Japanese measurements of the activation of sulfur in Hiroshima.¹⁻³ Studies at the Oak Ridge National Laboratory (ORNL) have indicated that there was a blind spot in the radiation leakage through the nose of the Hiroshima bomb and that the bomb was tilted about 15° to the vertical at the time of explosion.^{3,8}

Source terms for a two-dimensional model of the Hiroshima bomb were calculated in 1982 by Whalen and co-workers at LANL^{9,10} and the Little Boy-Comet Critical Assembly was constructed to provide benchmark data for the testing of various calculational methods.^{11,12} This replica of the Hiroshima bomb has been used to perform three different kinds of experiments: (a) critical separation experiments to establish an upper limit for the energy yield,^{11,12} (b) radiation spectra and dose measurements for comparison with calculations,¹³⁻²⁵ and (c) phenomenological experiments involving exposures of sulfur,²⁶ blood samples,²⁷ and Japanese roof tiles.²⁸ Source neutrons capable of activating sulfur by the $^{32}\text{S}(n,p)^{32}\text{P}$ reaction play an important role in determining the neutron doses in Hiroshima at a kilometer or more from the point of the explosion.²⁹

The source terms for one- and two-dimensional models of the Hiroshima bomb have also been calculated at Lawrence Livermore National Laboratory (LLNL). Currently, the LLNL and LANL calculations for the leakage of sulfur-activation neutrons differ by a factor of two.^{11,12}

The major part of this discrepancy is due to differences in the energy yields of the source-term calculations, but 20% of the discrepancy results from choices involving cross-section sets and representations. The dynamic disassembly of the exploding bomb is not duplicated in the experiments with the Little Boy-Comet Critical Assembly. However, the critical separation experiments will allow the energy yields of the LANL and LLNL calculations to be brought together, and the various radiation measurements and phenomenological experiments will aid in the choice of the best cross-sections and cross-section representations for use in final source-term calculations for the Hiroshima bomb.¹²

LITTLE BOY-COMET CRITICAL ASSEMBLY

The Little Boy-Comet Critical Assembly features a highly enriched uranium core surrounded by non-fissile components from a Hiroshima-type bomb found in storage at Los Alamos.^{11,12} These non-fissile components consisting primarily of steel were mounted in a nose-up position on the Comet Assembly Machine at the Los Alamos Critical Assembly Facility. The ^{235}U core used in the critical separation experiments was fabricated from original Hiroshima bomb drawings and specification sheets.^{30,31} A smaller ^{235}U core, sufficient only for sustained operation as a low-power delayed-critical reactor, was used in the radiation spectra and dose measurements and the phenomenological experiments. Criticality and control of the reactor were achieved by means of a hydraulic lift and precision screw mechanism on the Comet Assembly Machine. The only changes made in the general features of the Hiroshima-type bomb were the shortening of the gun barrel and the use of dummy initiators. Shortening the gun barrel allowed a shorter stroke on

the hydraulic ram and screw mechanism and contributed to the operational safety of the reactor. Use of the dummy initiators also contributed to operational safety and did not compromise the various experiments in any way.¹²

The Little Boy-Comet Critical Assembly is usually operated inside Kiva 2, one of three heavy concrete buildings located several hundred meters from the centralized control room and office building at the Los Alamos Critical Assembly Facility.¹³ During operations as a delayed-critical reactor, the center of the core is about 231 cm above floor level in Kiva 2 and 31 cm above the stand on the Comet Assembly Machine.²⁰ The cylindrical steel shell surrounding the core is 71 cm in diameter and its top surface extends approximately 60 cm above the center of the core. Because of complications from room-scattering, the Little Boy-Comet Critical Assembly has also been operated in an open area outside Kiva 2.^{12,13} An additional stand was used during outside operations so that the center of the core was elevated four meters above ground level to minimize ground-scattering at detector distances of two meters or less.

We have made sulfur-activation measurements using the Little Boy-Comet Critical Assembly both inside and outside Kiva 2. The reactor power levels were monitored primarily by a moderated and uncompensated BF_3 ion chamber having both analog (Brown recorder) and digital (current integrator) readouts. Our sulfur-activation data were normalized to total fissions in the core as determined by counts on the digital current integrator and power calibration data supplied by LANL.³² The Little Boy-Comet Critical Assembly and the detector locations used in our measurements are shown schematically in Fig. 1.

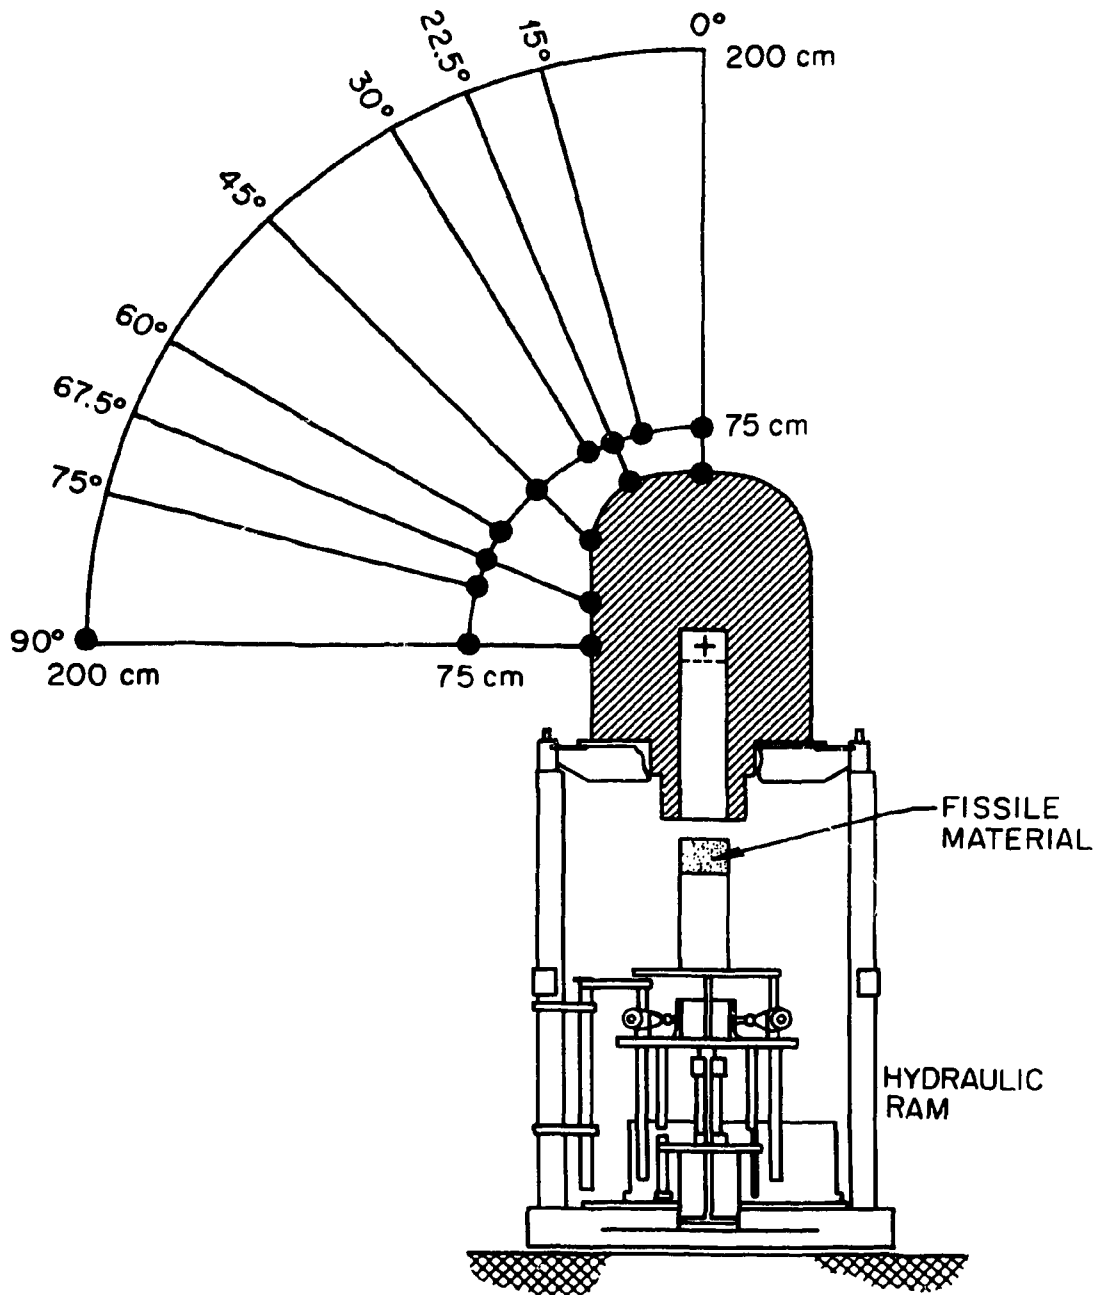


Figure 1. Detector locations (●) used in ORNL measurements of the activation of sulfur by fast neutrons from the Little Boy-Comet Critical Assembly.

SULFUR-ACTIVATION MEASUREMENTS

Our sulfur-activation measurements were made with high purity sulfur pellets having uniform diameters, thicknesses, and densities of 3.8 cm, 0.95 cm, and 2.0 g cm^{-3} , respectively. The ^{32}P formed by the $^{32}\text{S}(n,p)^{32}\text{P}$ reaction has a half-life of 14.3 days and decays by the emission of beta particles having a maximum energy of 1.71 MeV. The activated sulfur pellets were counted by placing the flat side exposed toward the reactor on the thin plastic scintillator of a beta spectrometer. To calibrate the beta spectrometer, we then measured the disintegration rate of the ^{32}P radioactivity in crushed and dissolved portions from several pellets using a calibrated liquid-scintillation counter. Due to the combined effects of background in the liquid scintillator and low ^{32}P radioactivity in the activated sulfur pellets, the calibration of the beta spectrometer was not very precise, and only a few useful results were obtained from our first set of measurements made on September 27, 1983 (Table 1).

A more precise calibration of the beta spectrometer was obtained in our second set of measurements by means of Cerenkov radiation counting. The ^{32}P radioactivity was measured by crushing several sulfur pellets and by dissolving and diluting a 5-g sample of each sulfur pellet to 50 ml. The counted samples were then spiked with a known quantity of ^{32}P using standard addition techniques and recounted to establish the Cerenkov radiation counting efficiency. The efficiency is zero below 260 keV and increases thereafter with beta particle energy so that low backgrounds are achieved in the counting of the high energy-beta particles from ^{32}P . The values which we obtained for relating

Table 1. Sulfur activation data from ORNL measurements
at the Little Boy-Comet Critical Assembly.

Sulfur pellet number	Detector location	Initial ^{32}P radioactivity	
		dpm/g of S/ 10^{16} fission	RSD (%) ^a
<u>Sept. 27, 1983^b</u>			
1-6	Surface-90°	594	11.2
1-7	90°	581	11.3
1-8	90°	572	11.2
1-15	200 cm-90°	14.8	19.4
<u>March 13, 1984^c</u>			
2-1	75 cm-90°	93.7	4.8
2-2	75°	78.0	7.3
2-3	67.5°	67.3	3.5
2-4	60°	44.3	3.7
2-5	45°	14.8	4.8
2-6	30°	2.51	8.5
2-7	22.5°	2.34	10.3
2-8	15°	2.67	10.5
2-9	0°	2.85	9.7
2-10	Surface-90°	540	3.3
2-11	67.5°	112	3.4
2-12	45°	7.17	3.6
2-13	22.5°	4.17	4.5
2-14	0°	5.83	8.2
<u>May 8, 1984^d</u>			
3-1	200 cm-90°	12.41	3.41
3-2	90°	13.14	3.48
3-3	90°	12.88	3.49
3-4	75 cm-90°	103.8	3.37
3-5	90°	102.5	3.38
3-6	90°	101.6	3.37
3-7	Surface-90°	591.7	3.39
3-8	90°	588.3	3.39
3-9	90°	592.7	3.39

^aRelative standard deviation of measured sulfur-activation values.

^bTwo maximum-power operations (2.0×10^{16} fissions) inside Kiva 2.

^cThree maximum-power operations (3.0×10^{16} fissions) inside Kiva 2.

^dThree maximum-power operations (3.0×10^{16} fissions) outside Kiva 2.

disintegrations per minute per gram of sulfur (dpm/g of S) to counts per minute (cpm) of a sulfur pellet are given in Table 2. In our second and third sets of sulfur-activation measurements, the energy gain of the beta spectrometer was established very carefully using conversion electrons from a ^{137}Cs source, the spectral region between 160 keV and 2.0 MeV was integrated, and the background subtracted to obtain the net count rate for each sulfur pellet. These count-rate data and the weighted mean calibration factor for the beta spectrometer (Table 2) were used to estimate the disintegration rates of the ^{32}P radioactivity in the sulfur pellets exposed on March 13 and May 8, 1984 (Table 1).

The primary purpose of our second set of measurements was to obtain data on the angular distribution of the leakage of sulfur-activation neutrons from the Little Boy-Comet Critical Assembly (Table 1). Hence, we exposed a number of sulfur pellets at the surface and 75 cm from the center of the core and at various angles between the nose (0°) and waist (90°) as shown in Fig. 1. The results of our measurements at angular intervals of 15° and 22.5° are illustrated in Figs. 2 and 3, respectively. In the measurements made on an arc at 75 cm from the center of the core, we could easily determine the angle of the exposed sulfur pellets to within a couple of degrees. However, we encountered experimental difficulties in determining the angles of sulfur pellets exposed at the surface of the assembly. Note, for example, that the sulfur pellet exposed at the 75 cm- 45° detector location shows a greater activation than the sulfur pellet exposed at the surface- 45° detector location. This anomaly is probably due to a combination of the rapidly changing leakage of sulfur-activation neutrons at angles of

Table 2. Summary of calibration data for beta spectrometer.

Sulfur pellet number	Initial count rate (cpm)	Initial ^{32}P radioactivity (dpm/g of S)	Calibration factor (dpm/g of S/cpm)
2-1	166.2 $\pm$ 3.5% ^a	284.04 $\pm$ 5.2% ^b	1.7090 $\pm$ 6.3%
2-10	957.0 $\pm$ 0.5%	1625.6 $\pm$ 4.6%	1.6986 $\pm$ 4.7%
2-15	64.22 $\pm$ 2.2%	107.03 $\pm$ 5.8%	1.6666 $\pm$ 6.2%
Weighted mean			1.6927 $\pm$ 3.2%

^aInitial count rate of sulfur pellet and relative standard deviation as determined by beta spectrometer and by extrapolation back to time of exposure.

^bInitial ^{32}P radioactivity and relative standard deviation as determined by Cerenkov radiation counting of a crushed and dissolved sample of sulfur from each pellet and by extrapolation back to time of exposure.

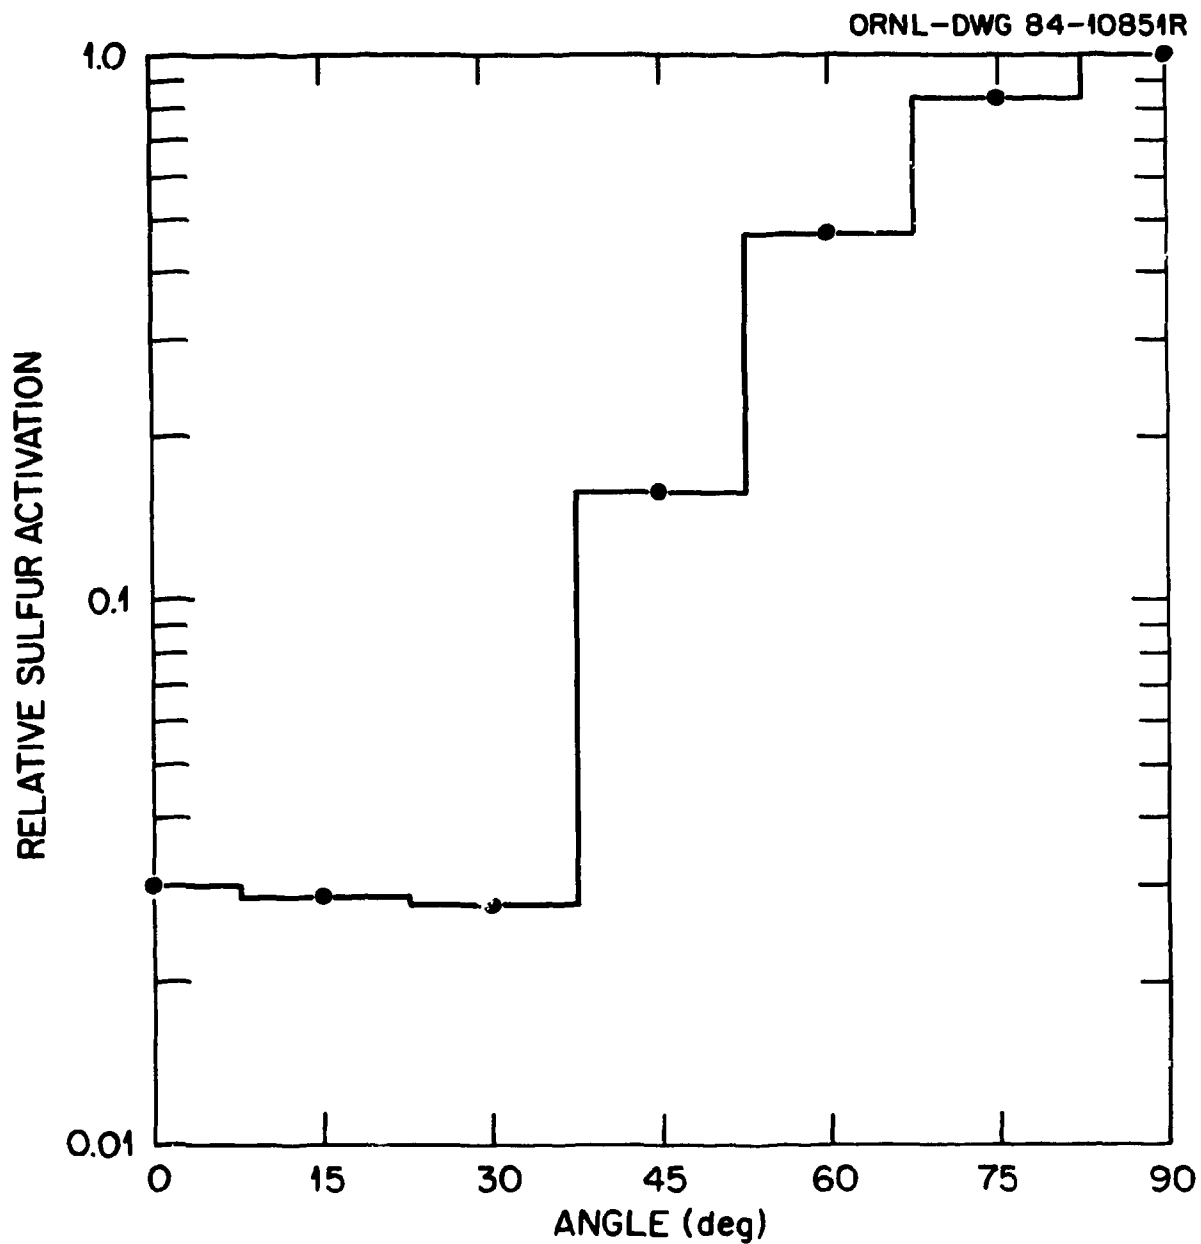


Figure 2. Experimental ORNL data on sulfur activation at 75 cm from the core and at angular intervals of 15° between the nose (0°) and waist (90°) of the reactor (Fig. 1). The data are normalized to sulfur activation at the 90° detector location.

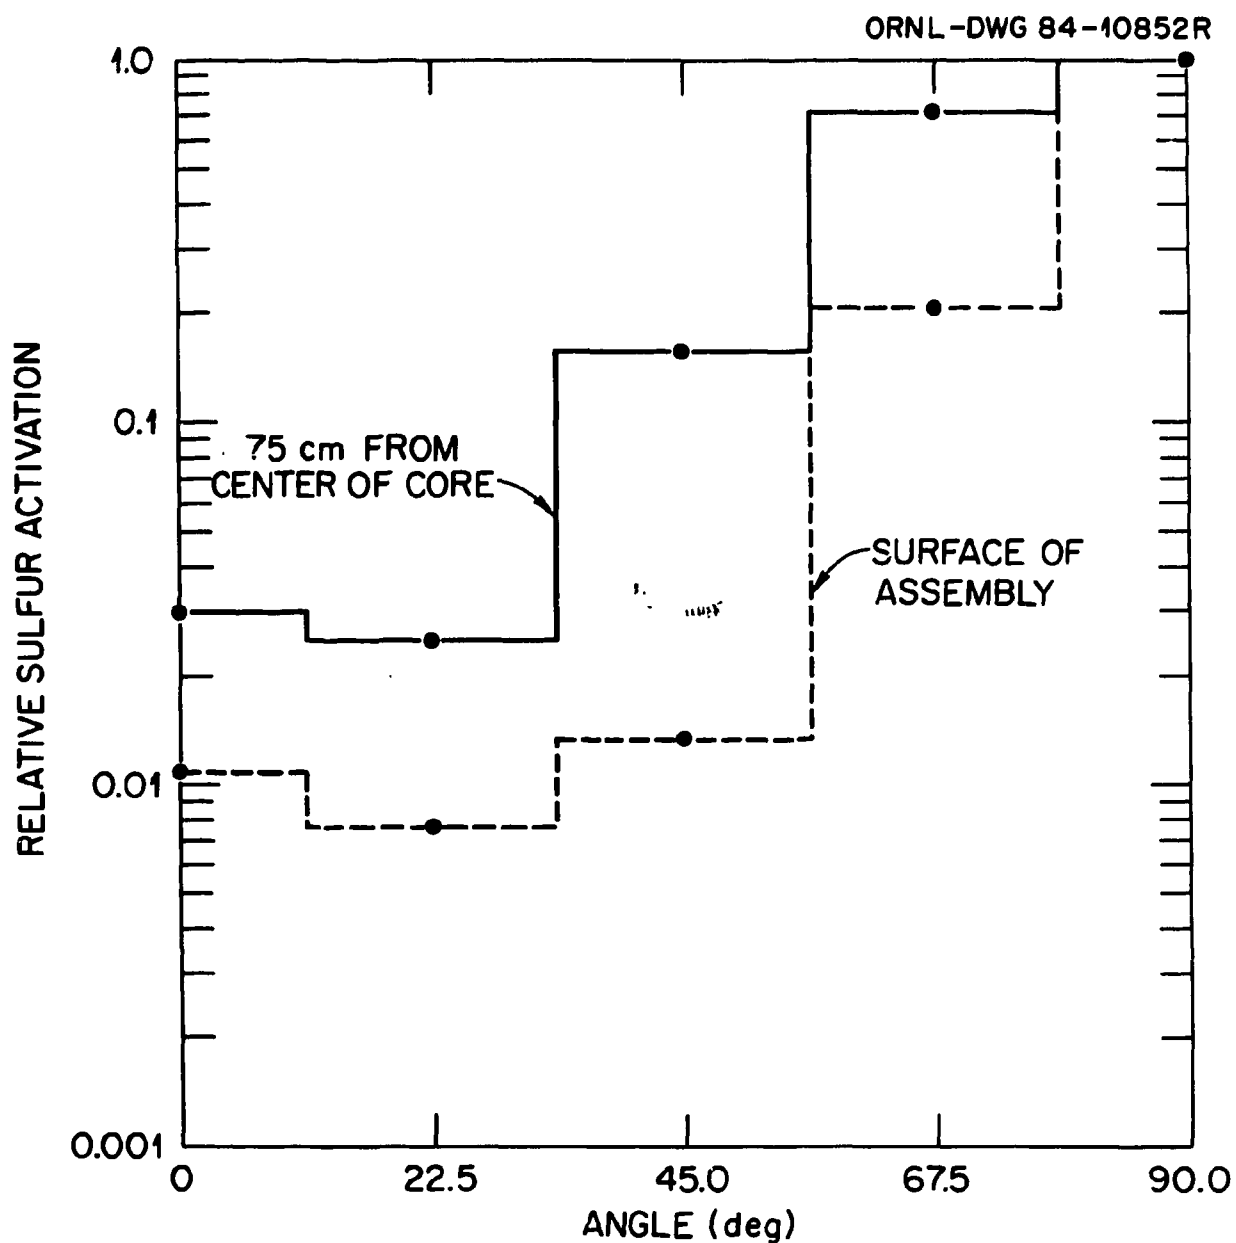


Figure 3. Experimental ORNL data on sulfur activation at the surface and 75 cm from the core and at angular intervals of 22.5° between the nose (0°) and waist (90°) of the reactor (Fig. 1). The data are normalized to sulfur activation at the 90° detector locations.

about 45° and the experimental difficulties encountered in determining the angles for sulfur pellets exposed at the surface of the assembly. Only the angle for sulfur pellets exposed at the surface- 90° detector location could be determined to within a reasonable accuracy of a couple of degrees.

A troublesome aspect of our first and second set of measurements made inside Kiva 2 was the observed difference in the activation of sulfur at the surface- 90° detector location (Table 1). Hence, the purpose of our third set of measurements made outside Kiva 2 was to refine the sulfur-activation data taken at the waist (90°) where we could accurately determine the angle of the exposed sulfur pellets. Note that the results of our third set of measurements at the surface- 90° location are more consistent with the results of our first set of measurements than those of our second set (Table 1). The results of our second set of measurements may be artificially low due to backscattering of low-energy neutrons into the reactor power-level instrumentation (i.e., the moderated and uncompensated BF_3 ion chamber) from close-by extraneous equipment as noted in reactor logbook entries for March 13, 1984.

The sulfur pellet exposures were normally made at the maximum reactor-power level of 170 watts permitted by various operational safety considerations.¹⁸ However, we also exposed sulfur pellets at several other power levels during our second set of measurements (Table 3). A nonlinear response of the reactor power-level instrumentation at higher power levels was suggested by sulfur activation and other radiation measurements made by Straume and Dobson,²⁷ and they recommended that caution should be used when normalizing data obtained at different power

Table 3. Data on sulfur activation at varying reactor power levels.

Sulfur pellet number	Initial count rate (cpm)	Irradiation time (minutes)	Reactor power (watts)
2-10	957.0 $\pm$ 0.5% ^a	90 ^b	170 ^c
2-15	64.22 $\pm$ 2.2%	20	50
2-16	54.04 $\pm$ 2.4%	50	17
2-17	27.59 $\pm$ 3.6%	90	5

^aInitial count rate of sulfur pellet and relative standard deviation as determined by beta spectrometer and by extrapolation back to time of exposure.

^bIrradiation time of sulfur pellet exposed at surface-90° detector location as shown in Fig. 1.

^cReactor power levels based on a value of 3.3×10^{10} fissions per second per watt and power calibration data provided by LANL.

levels. Our sulfur activation data for varying power levels failed to show any significant nonlinear response of the reactor instrumentation between 5 and 170 watts (Fig. 4). The backscattering of low-energy neutrons into the reactor power-level instrumentation from close-by extraneous equipment may cause normalization problems as noted previously.

Our relative angular-distribution data on sulfur activation by fast neutrons from the Little Boy-Comet Critical Assembly can be used with confidence (Figs. 2 and 3) because backscattered low-energy neutrons do not contribute to activation of sulfur by the $^{32}\text{S}(n,p)^{32}\text{P}$ threshold reaction. However, comparisons between measurements and calculations on an absolute basis should be limited to the sulfur-activation data from our third set of measurements made in the open area outside Kiva 2 (Table 1).

SULFUR-ACTIVATION CALCULATIONS

The leakage of fast neutrons from the Little Boy-Comet Critical Assembly has been calculated at LANL using Monte Carlo radiation transport techniques^{5,11,33} and ORNL using discrete ordinates transport (DOT) techniques.³⁴⁻³⁶ We have used the neutron-leakage spectra from these studies^{33,34} and the cross sections for the $^{32}\text{S}(n,p)^{32}\text{P}$ reaction from the Vitamin-E (ENDF/B-5) Library³⁷ to calculate the expected initial ^{32}P radioactivity in the exposed sulfur pellets. The results of our calculations are given in Table 4. Neutron transport through the cylindrical steel shell surrounding the core causes a severe "softening" of the fission neutron spectrum. The average energy of the fast neutrons from fissions in ^{235}U is about 1 MeV, while the average

ORNL-DWG 84-18089

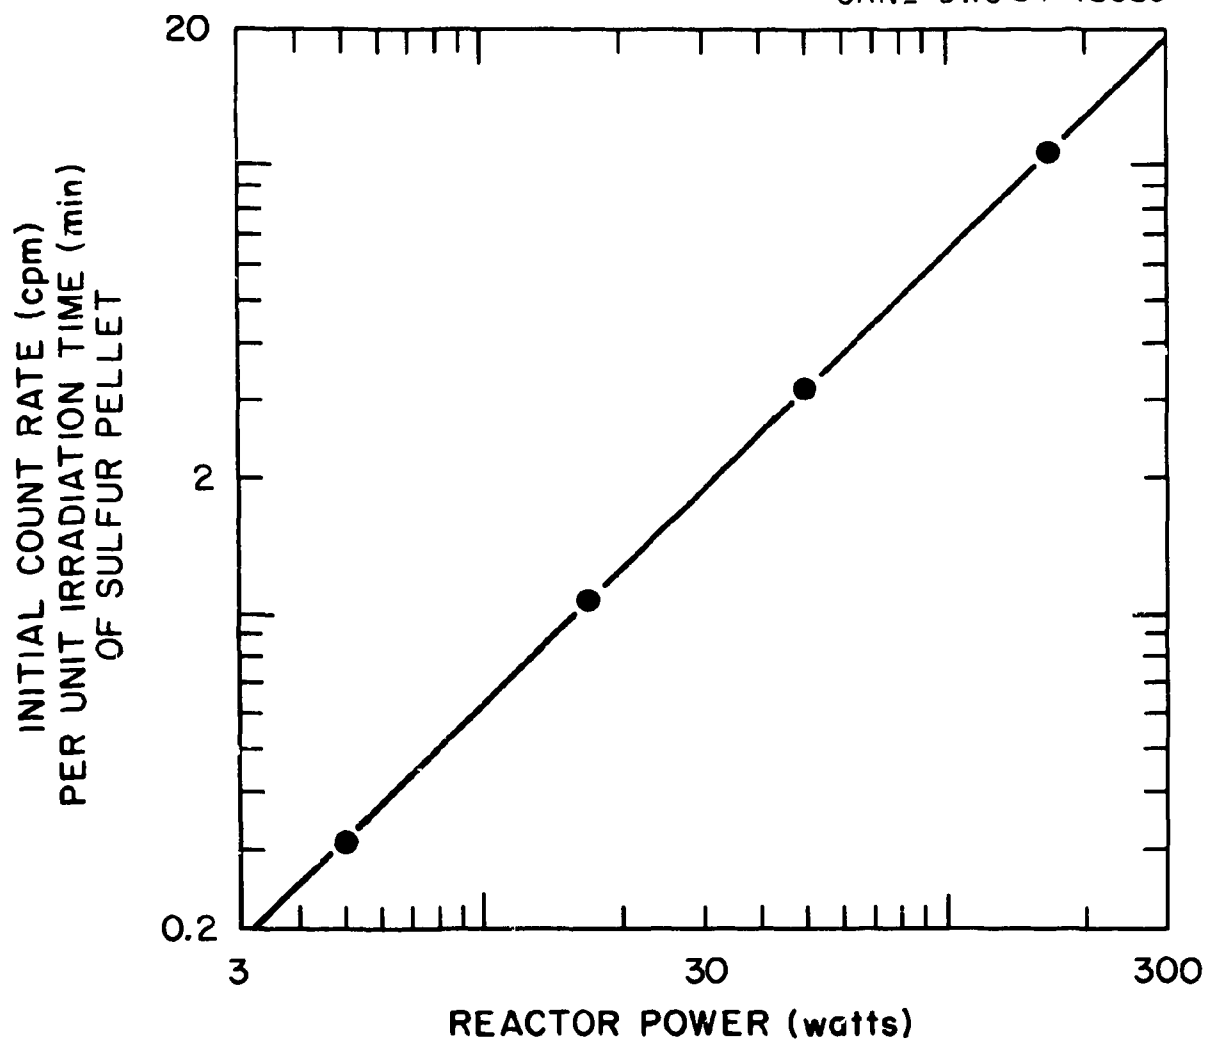


Figure 4. Experimental ORNL data on sulfur activation for varying reactor power levels. The sulfur pellets were exposed at the surface-90° detector location (Fig. 1).

Table 4. Sulfur-activation data obtained by using LANL and ORNL calculations of the neutron-leakage spectra from the Little Boy-Comet Critical Assembly.

Detector location ^a	Initial ³² P activity (dpm/g of S/fission)		Ratio
	LANL calculation	ORNL calculation	
75 cm-90°	7.37×10^{-15}	7.64×10^{-15}	0.97
67.5°	5.73×10^{-15}	5.03×10^{-15}	1.14
45°	1.10×10^{-15}	1.07×10^{-15}	1.03
22.5°	1.50×10^{-16}	1.51×10^{-16}	0.99
0°	2.15×10^{-16}	1.97×10^{-16}	1.09
200 cm-90°	1.05×10^{-15}	9.15×10^{-16}	1.15
67.5°	7.25×10^{-16}	6.62×10^{-16}	1.10
45°	2.54×10^{-16}	2.41×10^{-16}	1.05
22.5°	4.55×10^{-17}	4.27×10^{-17}	1.07
0°	2.13×10^{-17}	1.65×10^{-17}	1.29

^aSee Fig. 1.

energy of the fast neutrons leaking from the Little Boy-Comet Critical Assembly is only about 0.3 MeV. Very few of the leakage neutrons have energies greater than the effective threshold energy of about 2.5 MeV for the $^{32}\text{S}(n,p)^{32}\text{P}$ reaction, and the statistical uncertainties associated with LANL Monte Carlo calculations of the neutron-leakage fluences at energies greater than 2.5 MeV are quite large. These statistical uncertainties probably account for most of the observed differences in the ratios between the two sets of theoretical sulfur-activation data in Table 4.

A couple of comparisons can be made using the experimental and theoretical data on sulfur activation in Tables 1 and 4, respectively. Because of the low activation of sulfur near the nose (0 and 22.5°) of the Little Boy-Comet Critical Assembly (Table 4), we could not measure the angular distribution of sulfur-activation neutrons at 200 cm from the core (Fig. 1). Hence, reliable experimental data on the angular distribution of sulfur-activation neutrons are only available at detector distances of 75 cm. These experimental ORNL data and the theoretical ORNL and LANL data are compared on a relative basis in Table 5 and Fig. 5. With the exception of the data at 22.5° , the agreement is quite good ($\pm 15\%$). The overall agreement is not as good ($\pm 40\%$) when the various ORNL and LANL data at the waist (90°) and the 75- and 200-cm detector locations are compared on an absolute basis (Table 6).

Our experimental and theoretical data on sulfur activation may contain several systematic errors. The potential systematic errors in the experimental data (Table 6) due to either the beta spectrometer calibration or power calibration data are probably small compared to potential systematic errors in the theoretical data.¹⁷ For example,

Table 5. Comparison of theoretical and experimental data on the angular distribution of sulfur-activation neutrons from the Little Boy-Comet Critical Assembly.

Detector location ^a	Relative sulfur activation		
	ORNL measurement	LANL calculation	ORNL calculation
75 cm-90°	1.000 ^b	1.000 ^c	1.000 ^c
67.5°	0.718	0.777	0.658
45°	0.158	0.149	0.140
22.5°	0.025	0.020	0.020
0°	0.030	0.029	0.026

^aSee Fig. 1.

^bSee Table 1 (Measurements on March 13, 1984).

^cSee Table 4.

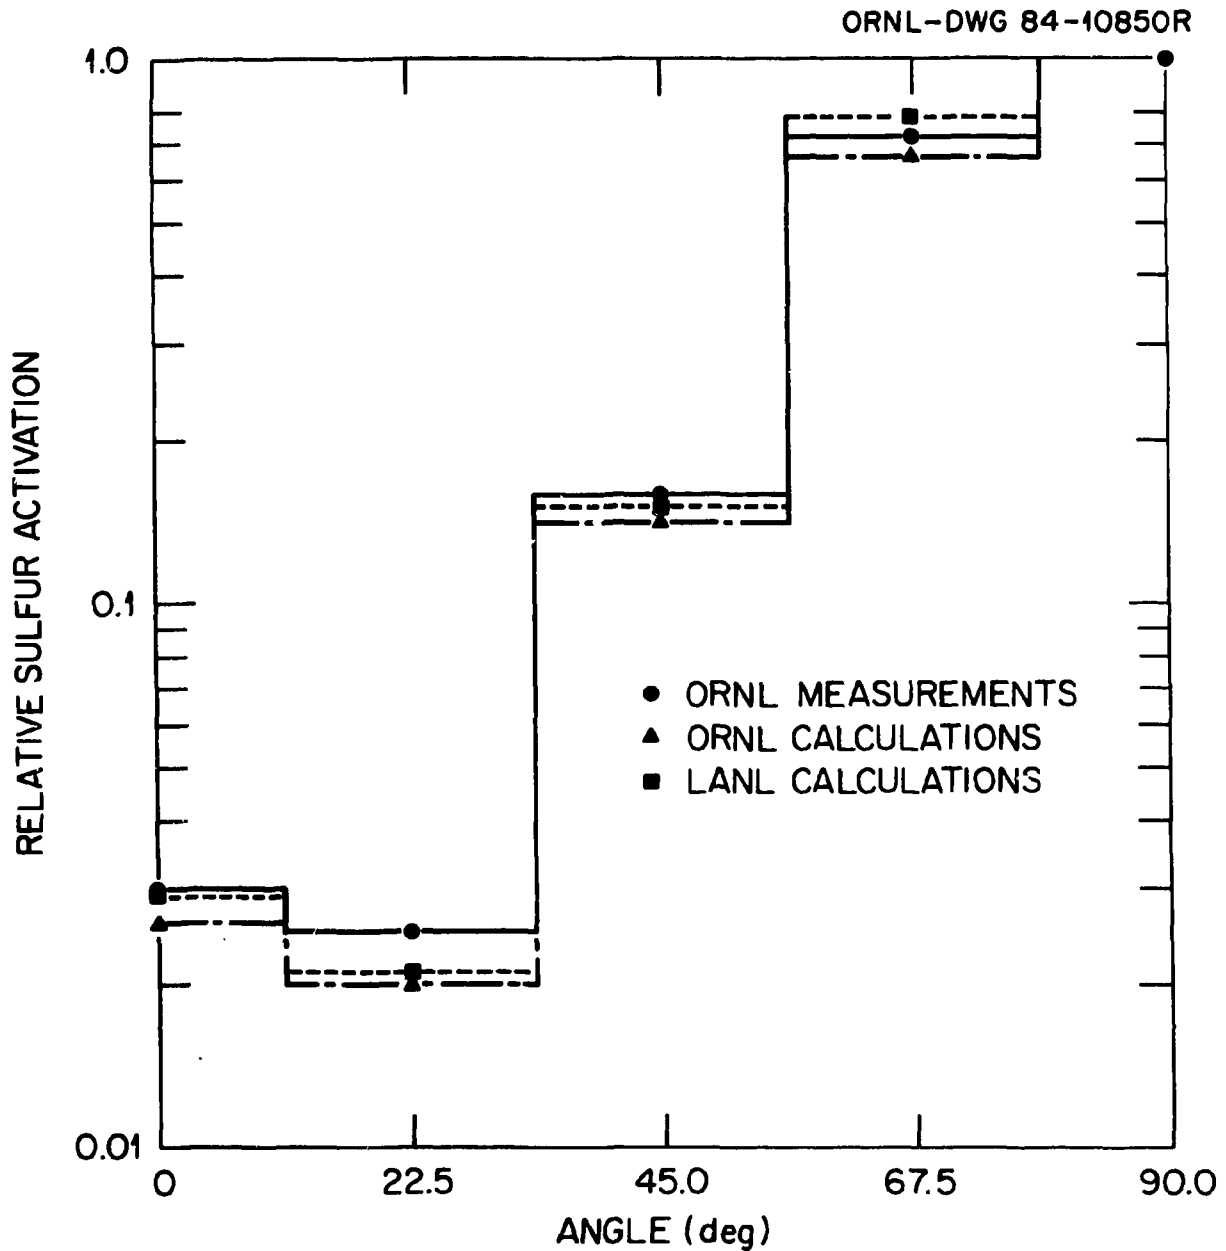


Figure 5. Comparison of measured and calculated data on sulfur activation at 75 cm from the core and at angular intervals of 22.5° between the nose (0°) and waist (90°) of the reactor (Fig. 1). The various data sets are normalized to sulfur activation at the waist detector locations.

Table 6. Comparison between experimental and theoretical data on sulfur activation at the Little Boy-Comet Critical Assembly.

Detector location ^a	Initial ³² P activity (dpm/g of S/fission)	Ratio of measurement to calculation
<u>200 cm-90°</u>		
ORNL measurement ^b	1.28×10^{-15}	
LANL calculation ^c	1.05×10^{-15}	1.22
ORNL calculation ^c	9.15×10^{-16}	1.40
<u>75 cm-90°</u>		
ORNL measurement ^b	1.03×10^{-14}	
LANL calculation ^c	7.37×10^{-15}	1.40
ORNL calculation ^c	7.64×10^{-15}	1.35

^aSee Fig. 1.

^bSee Table 1 (Measurements on May 8, 1984).

^cSee Table 4.

a systematic error as large as 15% may be embodied in both sets of theoretical sulfur-activation data (Table 6) due to uncertainties in the cross sections for the $^{32}\text{S}(n,p)^{32}\text{P}$ reaction. The theoretical neutron-leakage data also come from "deep penetration" calculations and may contain large uncertainties due to relatively small uncertainties in the cross-section data for the steel shell surrounding the core of the Little Boy-Comet Critical Assembly.¹⁸ A detailed analysis of potential systematic errors in the theoretical neutron-leakage data will require the use of experimental data from a variety of radiation spectra and dose measurements.^{11,17,18} The activation of sulfur is relevant to questions concerning the leakage of fast neutrons from the Little Boy-Comet Critical Assembly.^{19,24,25}

SUMMARY

Studies of the activation of sulfur have been completed using the Little Boy-Comet Critical Assembly at the Los Alamos Critical Facility (Table 1 and Figs. 2 and 3). We have found good agreement between experimental and theoretical data on the angular distribution of sulfur-activation neutrons at 75 cm from the core and at various angles between the nose (0°) and waist (90°) of the reactor when the comparisons were made on a relative basis (Table 5 and Fig. 5). However, the agreement was not as good when comparisons were made at the waist (90°) on an absolute basis (Table 6). Our sulfur-activation studies were performed as part of a larger program to provide benchmark data for the testing of methods used in recent source-term calculations for the Hiroshima bomb.

REFERENCES

1. G. D. Kerr, "Review of Dosimetry for the Atomic Bomb Survivors," Fourth Symposium on Neutron Dosimetry, EUR 7448 EN (Edited by G. Burger and H. G. Ebert) Vol. 1, pp. 501-513 (1981).
2. G. D. Kerr, "Review of Dosimetry for the Atomic Bomb Survivors," Nuclear Safety 23, 563 (1982).
3. G. D. Kerr, "Findings of a Recent Oak Ridge National Laboratory Review of Dosimetry for the Japanese Atom-Bomb Survivors," Reevaluations of Dosimetric Factors: Hiroshima and Nagasaki, DOE Symposium Series 55, CONF-810928 (Edited by V. P. Bond and J. T. Thiessen) pp. 52-97 (1982).
4. J. Malik, "Yields of the Hiroshima and Nagasaki Explosions," Reevaluations of Dosimetric Factors: Hiroshima and Nagasaki, DOE Symposium Series 55, CONF-810928 (Edited by V. P. Bond and J. T. Thiessen) pp. 98-110 (1982).
5. P. P. Whalen, "Status of Los Alamos Efforts Related to Hiroshima and Nagasaki Dose Estimates," Reevaluations of Dosimetric Factors: Hiroshima and Nagasaki, DOE Symposium Series 55, CONF-810928 (Edited by V. P. Bond and J. T. Thiessen) pp. 111-130 (1982).
6. W. E. Preeg, Los Alamos National Laboratory, Letter to C. P. Knowles, R & D Associates (April 5, 1976).
7. P. P. Whalen, J. Kammerdiener, and J. R. Streetman, "Source Spectra Calculations," Trans. Am. Nuc. Soc. 41, 470 (1982).
8. G. D. Kerr, J. V. Pace, III, and W. H. Scott, Jr., "Tissue Kerma vs Distance Relationships for Initial Nuclear Radiations from the Atomic Bombs: Hiroshima and Nagasaki," Reassessment of Atomic Bomb Radiation Dosimetry in Hiroshima and Nagasaki, Proceedings of a workshop held at Nagasaki, Japan, February 16-17, 1983 (Edited by D. J. Thompson) pp. 57-103 (1983).
9. P. P. Whalen, Los Alamos National Laboratory, Letter to G. D. Kerr, Oak Ridge National Laboratory (September 3, 1982).
10. P. P. Whalen, "Source Terms for the Initial Radiations," Reassessment of Atomic Bomb Radiation Dosimetry in Hiroshima and Nagasaki, Proceedings of a workshop held at Nagasaki, Japan, February 16-17, 1983 (Edited by D. J. Thompson) pp. 13-44 (1983).
11. P. P. Whalen, P. D. Soran, R. E. Malenfant, and H. M. Forehand, Jr., "Experiments at Los Alamos National Laboratory with the Replica of the Hiroshima Weapon," Reassessment of Atomic Bomb Radiation Dosimetry in Hiroshima and Nagasaki, Proceedings of a workshop held at Hiroshima, Japan, November 8-9, 1983 (Edited by H. Kato et al.) pp. 21-25 (1984).

12. R. E. Malenfant, "Little Boy Replication: Justification and Construction," Computer Applications in Health Physics, Proceedings of the Seventeenth Midyear Topical Symposium of the Health Physics Society, Pasco, Washington, February 5-9, 1984 (Edited by R. L. Kathren, D. P. Higby, and M. A. McKinney) Section 8, pp. 1-4 (1984).
13. E. A. Plassman and R. A. Pederson, "Gamma-Ray Dosimetry Measurements of the Little Boy Replica," Computer Applications in Health Physics, Proceedings of the Seventeenth Midyear Topical Symposium of the Health Physics Society, Pasco, Washington, February 5-9, 1984 (Edited by R. L. Kathren, D. P. Higby, and M. A. McKinney) Section 8, pp. 5-11 (1984).
14. C. E. Moss, M. C. Lucas, and E. W. Tisinger, "A Fieldable Computer System for Determining Gamma-Ray Pulse-Height Distributions, Flux Spectra, and Dose Rates from Little Boy," Computer Applications in Health Physics, Proceedings of the Seventeenth Midyear Topical Symposium of the Health Physics Society, Pasco, Washington, February 5-9, 1984 (Edited by R. L. Kathren, D. P. Higby, and M. A. McKinney) Section 8, pp. 13-21 (1984).
15. R. A. Pederson and E. A. Plassman, "Neutron Dosimetry of the Little Boy Device," Computer Applications in Health Physics, Proceedings of the Seventeenth Midyear Topical Symposium of the Health Physics Society, Pasco, Washington, February 5-9, 1984 (Edited by R. L. Kathren, D. P. Higby, and M. A. McKinney) Section 8, pp. 23-28 (1984).
16. A. E. Evans, "Little Boy Neutron Spectrum Below 1 MeV," Computer Applications in Health Physics, Proceedings of the Seventeenth Midyear Topical Symposium of the Health Physics Society, Pasco, Washington, February 5-9, 1984 (Edited by R. L. Kathren, D. P. Higby, and M. A. McKinney) Section 8, pp. 29-36 (1984).
17. H. M. Forehand, Jr., P. P. Whalen, and R. E. Malenfant, "A Comparison of Calculations and Measurements of Neutron Leakage from the Little Boy Replica," Computer Applications in Health Physics, Proceedings of the Seventeenth Midyear Topical Symposium of the Health Physics Society, Pasco, Washington, February 5-9, 1984 (Edited by R. L. Kathren, D. P. Higby, and M. A. McKinney) Section 8, pp. 37-41 (1984).
18. E. J. Dowdy, R. E. Malenfant, and E. A. Plassman, "A Critical Commentary on Dose-Rate Evaluations," Computer Applications in Health Physics, Proceedings of the Seventeenth Midyear Topical Symposium of the Health Physics Society, Pasco, Washington, February 5-9, 1984 (Edited by R. L. Kathren, D. P. Higby, and M. A. McKinney) Section 8, pp. 43-47 (1984).

19. H. A. Robitaille and B. E. Hoffarth, Neutron Leakage from "Comet" - A Duplicate Little Boy Device, Defence Research Establishment Ottawa Report 878 (1983).
20. F. J. Muckenthaler, Integral Measurements of Neutron and Gamma-Ray Leakage Fluxes from the Little Boy Replica, Oak Ridge National Laboratory Report ORNL/TM-9005 (1984).
21. E. F. Bennett and T. J. Yule, Neutron Spectrum Measurements Using Proton Recoil Proportional Counters: Results of Measurements of Leakage Spectra for the Little Boy Assembly, Argonne National Laboratory Report ANL/EV/AP-84-2 (1984).
22. S. Hoots and D. Wadsworth, Neutron and Gamma Dose and Spectra Measurements on the Little Boy Replica, Lawrence Livermore National Laboratory Preprint UCRL-90095 (1984).
23. C. J. Huntzinger and D. E. Hankins, Neutron and Gamma-Ray Dose Measurements at Various Distances from the Little Boy Replica, Lawrence Livermore National Laboratory Preprint UCRL-90177 (1984).
24. R. V. Griffith, C. J. Huntzinger, and J. H. Thorngate, Neutron Spectra as a Function of Angle at Two Meters from the Little Boy Assembly, Lawrence Livermore National Laboratory Preprint UCRL-90178 (1984).
25. V. V. Verbinski and C. G. Cassapakis, Neutron Threshold-Foil Spectral Flux Measurements Compared with LANL Monte Carlo Calculations for Little Boy Replica, Science Applications, Inc. Report SAI-83-1128 (1984).
26. G. D. Kerr, J. F. Emery, and J. V. Pace, III, "Sulfur Measurements to Parallel Electric Pole Insulator Data," Abstracts of papers presented at the Twenty-Ninth Annual Meeting of the Health Physics Society, New Orleans, Louisiana, June 3-8, 1984, Health Phys. 47, 133 (1984).
27. T. Straume and R. L. Dobson, "Dosimetry for a Biological Study with Hiroshima-Like Neutrons from the Little Boy Replica," Abstracts of papers presented at the Twenty-Ninth Annual Meeting of the Health Physics Society, New Orleans, Louisiana, June 3-8, 1984, Health Phys. 47, 152 (1984).
28. W. M. Lowder and Y. Kumamoto, "Thermoluminescent Measurements," Reassessment of Atomic Bomb Radiation Dosimetry in Hiroshima and Nagasaki, Proceedings of a workshop held in Hiroshima, Japan, November 8-9, 1983 (Edited by H. Kato et al.) pp. 48-51 (1984).
29. W. E. Loewe, "In Situ Measurements of Initial Radiation," Reassessment of Atomic Bomb Radiation Dosimetry in Hiroshima and Nagasaki, Proceedings of a workshop held at Nagasaki, Japan, February 16-17, 1983 (Edited by D. J. Thompson) pp. 138-155 (1983).

30. J. Malik, Los Alamos National Laboratory, Letter to G. D. Kerr, Oak Ridge National Laboratory (June 23, 1981) (Classified).
31. The Gun, Vol. 21, Los Alamos National Laboratory Report LA-1007 (1947) (Classified).
32. R. E. Malenfant, H. M. Forehand, Jr., G. E. Hansen, and C. E. Moss, Los Alamos National Laboratory, Memorandum on "Power Calibration of the Little Boy Comet Assembly for the Period 4/83-7/83," (August 8, 1983).
33. P. P. Whalen, Los Alamos National Laboratory, Private communication with G. D. Kerr, Oak Ridge National Laboratory (March 14, 1984).
34. J. V. Pace, III and J. R. Knight, "Oak Ridge National Laboratory Calculations of Radiation Leakage from a Critical Little Boy Replica," Abstracts of papers presented at the Twenty-Ninth Annual Meeting of the Health Physics Society, New Orleans, Louisiana, June 3-8, 1984, Health Phys. 47, 133 (1984).
35. W. A. Rhoades and R. L. Childs, An Updated Version of the DOT-4 One- and Two-Dimensional Neutron/Photon Transport Code, Oak Ridge National Laboratory Report ORNL-5815 (1982).
36. W. A. Rhoades, D. B. Simpson, R. L. Childs, and W. W. Engle, Jr., The DOT-IV Two-Dimensional Discrete Ordinates Transport Code with Space-Dependent Mesh and Quadrature, Oak Ridge National Laboratory Report ORNL/TM-6529 (1979).
37. C. R. Weisbin, R. W. Roussin, J. J. Wagschal, J. E. White, and R. Q. Wright, Vitamin-E: An ENDF/B-5 Multigroup Cross-Section Library for LMFBR Core and Shield, LWR Shield, Dosimetry and Fusion Blanket Technology, Oak Ridge National Laboratory Report ORNL-5505 (1979).

ORNL/TM-9439
Dist. Category UC-41

INTERNAL DISTRIBUTION

- | | |
|------------------------|--------------------------------------|
| 1. B. A. Berven | 23-27. J. V. Pace |
| 2. B. L. Broadhead | 28. C. R. Richmond |
| 3. D. C. Cacuci | 29. C. S. Sims |
| 4. R. O. Chester | 30. J. R. Stokely |
| 5. K. F. Eckerman | 31. R. E. Swaja |
| 6-10. J. F. Emery | 32. R. M. Westfall |
| 11. R. J. Fry | 33. G. E. Whitesides |
| 12. H. H. Hubbell | 34. J. P. Witherspoon |
| 13. S. V. Kaye | 35-36. Central Research Library |
| 14-18. G. D. Kerr | 37. ORNL, Y-12 Technical Library |
| 19. D. C. Kocher | 38-39. Laboratory Records Department |
| 20. B. F. Maskewitz | 40. Laboratory Records, ORNL-RC |
| 21. C. W. Miller | 41. RSIC Library |
| 22. F. J. Muckenthaler | 42. ORNL Patent Office |

EXTERNAL DISTRIBUTION

43. J. A. Auxier, Applied Sciences Laboratory, P.O. Box 549, Oak Ridge, TN 37831
44. David Auton, Defense Nuclear Agency, 6801 Telegraph Road, Alexandria, VA 22310
45. M. A. Bender, Brookhaven National Laboratory, Upton, Long Island, NY 11973
46. E. F. Bennett, Argonne National Laboratory, 9700 Cass Avenue, Argonne, IL 60439.
47. G. W. Binniger, Science Applications, Inc., 1710 Goodridge Drive, P.O. Box 1303, McLean, VA 22102
48. J. L. Blair, Director, Human Health and Assessment Division, ER-73, Office of Health and Environmental Research, U.S. Department of Energy (GTN), Washington, DC 20454
49. V. P. Bond, Associate Director, Brookhaven National Laboratory, Upton, Long Island, NY 11973
50. R. F. Christy, Department of Physics, George W. Downs Laboratory, California Institute of Technology, Pasadena, CA 91125
51. Cdr. R. T. Devine, MSC, USN, Defense Nuclear Agency, 6801 Telegraph Road, Alexandria, VA 22310.
52. R. L. Dobson, Lawrence Livermore National Laboratory, P.O. Box 808, Livermore, CA 94550
53. C. W. Edington, Associate Director, Office of Health and Environmental Research, ER-70, U.S. Department of Energy (GTN), Washington, DC 20545
54. Merril Eisenbud, Institute of Environmental Medicine, New York University Medical Center, P.O. Box 817, Tuxedo, NY 10987

55. Charles Eisenhower, Center for Radiation Research, National Bureau of Standards, Washington, DC 20234
56. W. H. Ellett, Commission on Life Sciences, National Research Council, National Academy of Sciences, 2101 Constitution Avenue, NW, Washington, DC 20418
57. A. E. Evans, Los Alamos National Laboratory, P.O. Box 1663, Los Alamos, NM 87575
58. G. C. Facer, Deputy Director, Division of Safety, Environment and Emergency Actions, Office of Military Applications, U.S. Department of Energy (GTN), Washington, DC 20545
59. H. M. Forehand, Jr., Los Alamos National Laboratory, P.O. Box 1663, Los Alamos, NM 87545
60. R. V. Griffith, Lawrence Livermore National Laboratory, P.O. Box 808, Livermore, CA 94550
61. M. L. Gritzner, Science Applications, Inc., 1200 Prospect Street, P.O. Box 2351, La Jolla, CA 92038
62. Ferenc Hajnal, Environmental Monitoring Laboratory, U.S. Department of Energy, 376 Hudson Street, New York, NY 10014
63. G. E. Hansen, Los Alamos National Laboratory, P.O. Box 1663, Los Alamos, NM 87545
64. J. H. Harley, Marine View Plaza 1, Box 825, Hoboken, NJ 07030
65. E. H. Haskell, Division of Radiobiology, Building 351, University of Utah, Salt Lake City, UT 84112
66. F. F. Haywood, Eberline Instrument Corp., 800 Oak Ridge Turnpike, Oak Ridge, TN 37831
67. Seymour Jablon, Associate Director of International Affairs, Commission on Life Sciences, National Research Council, National Academy of Sciences, 2101 Constitution Avenue, NW, Washington, DC 20418
68. D. C. Kaul, Science Applications, Inc., 1 Woodfield Place Building, Suite 819, 1701 Woodfield Road, Schaumburg, IL 60195
69. A. G. Lazen, Executive Director, Commission on Life Sciences, National Research Council, National Academy of Sciences, 2101 Constitution Avenue, NW, Washington, DC 20418
70. W. E. Loewe, Lawrence Livermore National Laboratory, P.O. Box 808, Livermore, CA 94550
71. W. M. Lowder, Physical and Technology Research Division, ER-74, Office of Health and Environmental Research, U.S. Department of Energy (GTN), Washington, DC 20545
72. R. E. Malenfant, Los Alamos National Laboratory, P.O. Box 1663, Los Alamos, NM 87545
73. John Malik, Los Alamos National Laboratory, P.O. Box 1663, Los Alamos, NM 87545
74. Jess Marcum, R & D Associates, Admiralty Way, P.O. Box 9695, Marina del Rey, CA 90291
75. C. W. Mays, Radiobiology Laboratory, Building 522, University of Utah Medical Center, Salt Lake City, UT 84112
76. Edgar Mendelsohn, Lawrence Livermore National Laboratory, P.O. Box 808, Livermore, CA 94550
77. M. L. Mendelsohn, Associate Director, Lawrence Livermore National Laboratory, P.O. Box 5507, Livermore, CA 94550
78. R. A. Pederson, Los Alamos National Laboratory, P.O. Box 1663, Los Alamos, NM 87545

79. E. A. Plassman, Los Alamos National Laboratory,
P.O. Box 1663, Los Alamos, NM 87545
80. Frederick Reines, Department of Physics, University of
California, Irvine, CA 92717
81. H. A. Robitaille, Defence Research Establishment, Department
of National Defence, Shirleys Bay, Ottawa, Ontario K1A 0Z4,
Canada
82. W. C. Roesch, Battelle Pacific Northwest Laboratories,
P.O. Box 999, Richland, WA 99352
83. H. H. Rossi, Radiological Research Laboratory, Columbia
University, 6300 West 168th Street, New York, NY 10032
84. J. H. Schulman, National Materials Advisory Board,
National Research Council, National Academy of Sciences,
2101 Constitution Avenue, NW, Washington, DC 20418
85. Frederick Seitz, President Emeritus, Rockefeller University,
1230 York Avenue, New York, NY 10021
86. Itsuzo Shigematsu, Chairman, Radiation Effects Research
Foundation, 5-2 Hijiyama Park, Minami Ward, Hiroshima City
730, Japan.
87. W. K. Sinclair, President, National Council on Radiation
Protection and Measurement, 7910 Woodmont Avenue, Suite 1016,
Bethesda, MD 20814
88. L. V. Spencer, Consultant, Radiation Physics Division,
National Bureau of Standards, Washington, DC 20234
89. Tore Straume, Lawrence Livermore National Laboratory,
P.O. Box 808, Livermore, CA 94550
90. Eizo Tajima, Vice Chairman, Atomic Energy Safety Commission,
2-2-1 Kasumigaseki, Chiyoda Ward, Tokyo 100, Japan
91. J. W. Thiessen, Acting Deputy Associate Director, Office of
Health and Environmental Research, ER-71, U.S. Department of
Energy (GTN), Washington, DC 20545
92. J. H. Thorngate, Lawrence Livermore National Laboratory,
P.O. Box 808, Livermore, CA 94550
93. A. C. Upton, Chairman, Department of Environmental Medicine,
New York University Medical Center, 550 First Avenue,
New York, NY 10016
94. V. V. Verbinski, Science Applications, Inc., 10401 Roselle
Street, San Diego, CA 92121
95. P. P. Whalen, Los Alamos National Laboratory, P.O. Box 1663,
Los Alamos, NM 87575
96. G. H. Whipple, 3301 Rutland Loop, Tallahassee, FL 32312
97. R. W. Wood, Director, Physical and Technology Research
Division, ER-74, Office of Health and Environmental Research,
U.S. Department of Energy (GTN), Washington, DC 20545
98. W. A. Woolson, Science Applications, Inc., 1200 Prospect
Street, P.O. Box 2351, La Jolla, CA 92038
99. H. O. Wyckoff, Chairman, International Commission on
Radiation Units and Measurements, 7910 Woodmont Avenue,
Suite 1016, Bethesda, MD 20814
100. Office of Assistant Manager, Energy Research and Development,
DOE-ORO, Oak Ridge, TN 37830
- 101-325. Given distribution as shown in DOE/TIC-4500 (Rev. 73),
June 1984, Category UC-41, Health and Safety