

NP-23807

MASTER

**WATER RESOURCES
SEMINAR SERIES
NO. 8**

**Paper Presented:
Spring 1975**

June 1975

Water Resources Research Center

UNIVERSITY OF HAWAII HONOLULU, HAWAII

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency Thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

DISCLAIMER

Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.

A COORDINATED
EXPLORATION
PROGRAM
FOR GEOTHERMAL
SOURCES
ON THE ISLAND
OF HAWAII

BY AUGUSTINE S. FURUMOTO

SEISMOLOGIST, HAWAII
INSTITUTE OF GEOPHYSICS,
UNIVERSITY OF HAWAII

3 APRIL 1975

ABSTRACT

Staff members of the Hawaii Institute of Geophysics carried out an exploration program for geothermal sources on the island of Hawaii by using all relevant geophysical and geochemical methods. Infrared scanning aerial surveys followed by reconnaissance-type electrical surveys and ground noise surveys narrowed down the promising area to the east rift of Kilauea.

The surveys carried out over the east rift included magnetic, gravity, and electrical surveys by various methods: microearthquake surveillance, temperature profiling of wells, and chemical analysis of water samples. Aeromagnetic, regional gravity, and crustal seismic refraction data were available in published literature.

A model of the thermal structure of the east rift was put together to account for the data. The dike complex, through which magma from the central vent of Kilauea travels laterally occupies a zone 3-km wide extending from 1-km to 5-km depth. On the south side of the dike complex, there may be a self-sealing geothermal reservoir where groundwater heated by the dike complex is trapped. Not all of the dike complex is hot; hot sections seem to occur in patches.

INTRODUCTION

The active volcanoes of Kilauea and Mauna Loa on the island of Hawaii indicate the existence of a large amount of thermal energy. Because these volcanoes are surface manifestations of thermal processes, geologists and laymen have speculated whether that energy could be harnessed for the generation of electrical power. The high porosity and permeability of the basaltic rock that make up the volcanoes has been the major obstacle so far. As the lateral flow of groundwater is consequently rather swift, even with the existence of fumeroles and warm springs, it has been generally considered that geothermal reservoirs do not exist in the Hawaiian Islands.

Most of the geothermal power development in the world is located in continental areas. Even the geothermal field in Iceland is located among acidic volcanoes which resemble continental rather than oceanic volcanoes. Because of these negative facts, it was deemed necessary to do a rather comprehensive research on the volcanoes on the island of Hawaii to see whether geothermal sources do exist there.

On the other hand, there are some encouraging speculations that have been proposed in the last decade or so. The concept of a self-sealing geothermal reservoir (Facca and Tonani 1967) could very well apply to basaltic rocks in Hawaii. Furthermore, in recent years we have seen progress in experiments attempting to utilize hot rock or magma. Because of these developments, a research program was conceived to determine whether Hawaii had a conventional type of geothermal reservoir brought about by a self-sealing mechanism or whether thermal energy was limited to the form of hot rock and magma. If the latter were the case, then the research program should determine utilizable energy content of the sources.

Although Hawaiian volcanoes have been investigated more than any other in the world, examination of the literature showed it would be necessary to carry out a coordinated series of surveys in order to define the thermal processes associated with the volcanoes. With this in mind, a proposal was submitted to the National Science Foundation for support of the research. The proposal was accepted and funded.

EXPLORATION PROGRAM

The coordinated exploration program as carried out is shown in schematic form in Figure 1. The actual program differed from what was planned because of the funding level, and the slow delivery of equipment and instruments from manufacturers. When the program was begun in May 1973, the nation was facing an acute shortage of material, especially electronic and electrical components and parts.

The persons involved in the exploration program were the following from the Hawaii Institute of Geophysics (HIG):

A. S. Furumoto	Professor
A. T. Abbott	Professor
P. F. Fan	Associate Professor
W. Suyenaga	Graduate Assistant
D. P. Klein	Graduate Assistant
J. Halunen	Graduate Assistant
E. Epp	Graduate Assistant
G. McMurtry	Graduate Assistant
J. Kauahikaua	Graduate Assistant
R. Norris	Research Associate
C. Dodd	Electronics Technician

In addition to the above, G. V. Keller of the Colorado School of Mines was engaged to conduct an electrical resistivity survey over the summit area and east rift of Kilauea. Throughout the survey he kept in contact with the HIG group and provided timely inputs. Independent of the HIG effort, C. Zablocki of the U.S. Geological Survey was carrying out self-potential surveys in areas of mutual interest. In exchange for field assistance, Zablocki made his data available to the HIG exploration program.

The island of Hawaii is composed of five volcanoes, namely Kohala, Hualalai, Mauna Kea, Mauna Loa, and Kilauea (Fig. 2). Of these, Mauna Loa and Kilauea are considered active. Associated with each volcano are rift zones that are named for the direction in which they extend. The exploration program started out with infrared scanning surveys over the rift zones. The results showed that temperatures over the east and southwest rifts of Kilauea and the southwest rift of Mauna Loa were above normal. The other rift zones of the active volcanoes as well as those of the inactive volcanoes showed no temperature anomaly.

With the information provided by the infrared surveys, the three prospective rift zones were examined by reconnaissance-type electrical and ground noise surveys. The results showed that the east rift of Kilauea was by far the best prospect as a geothermal source. In the spring of 1974, it was therefore decided to concentrate on the east rift of Kilauea, which is located in the

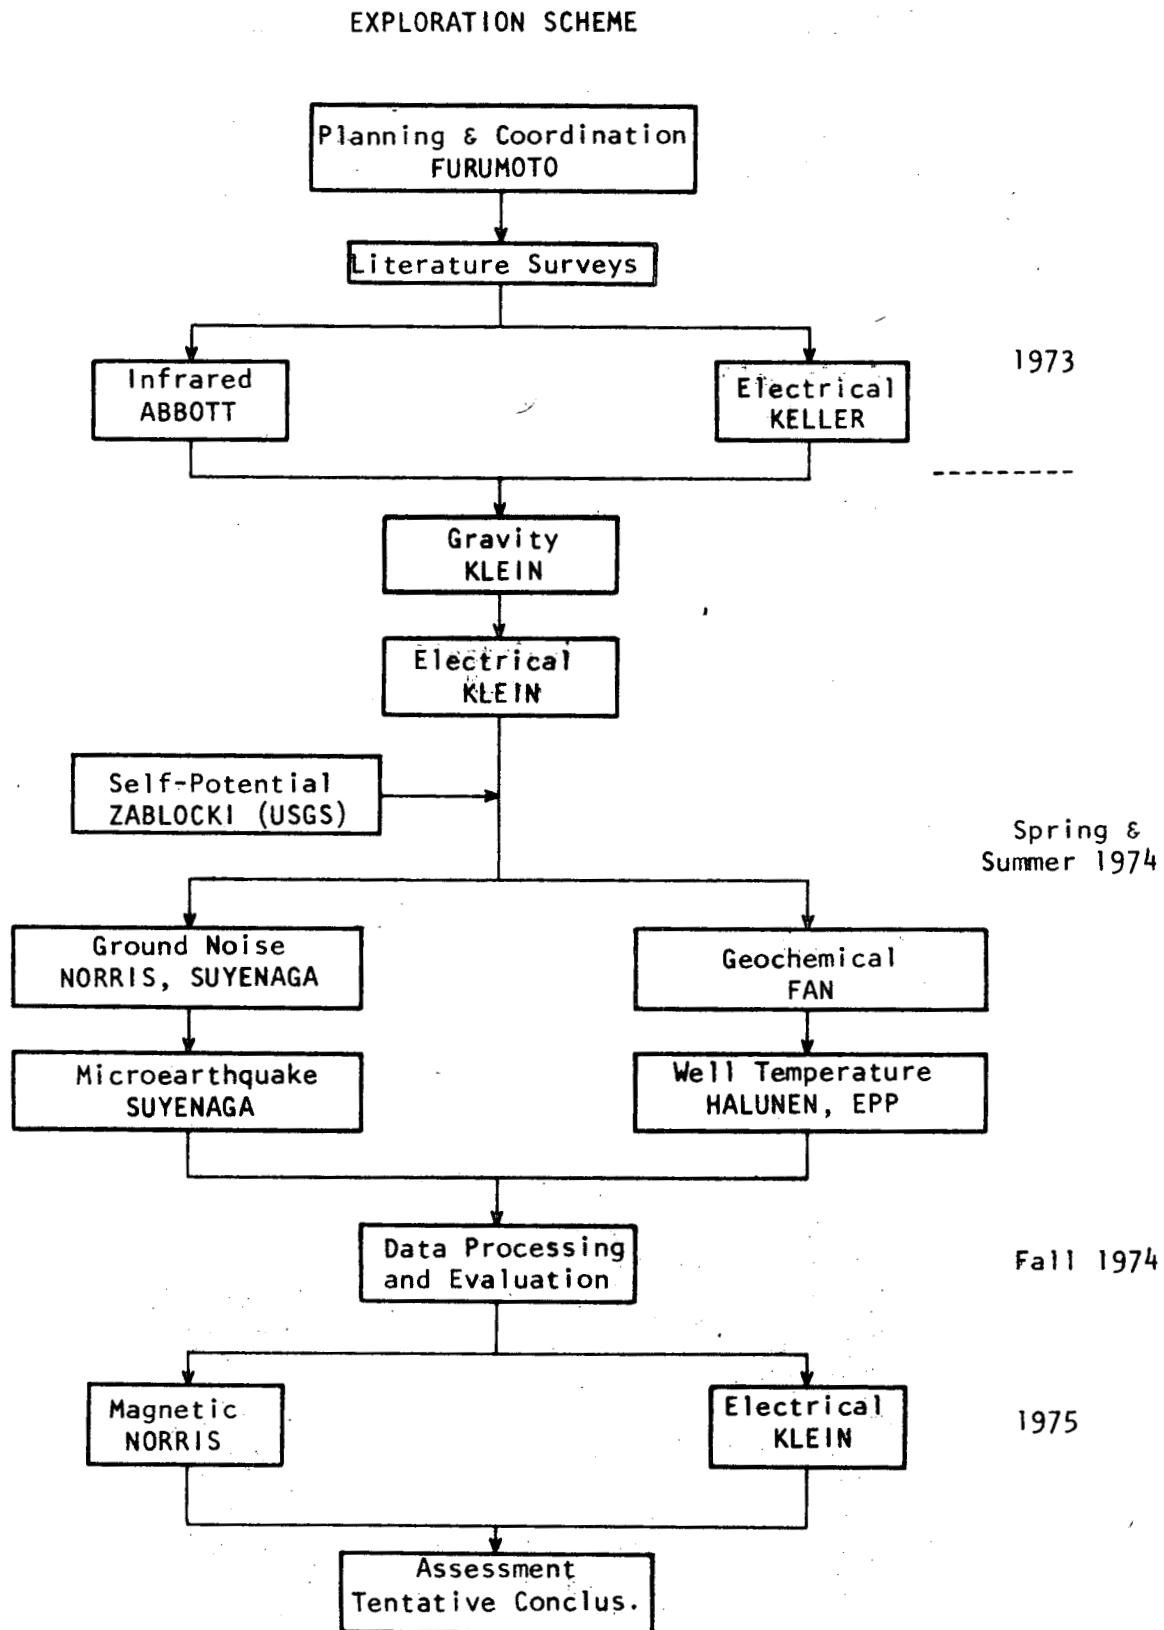


FIGURE 1. EXPLORATION SCHEME

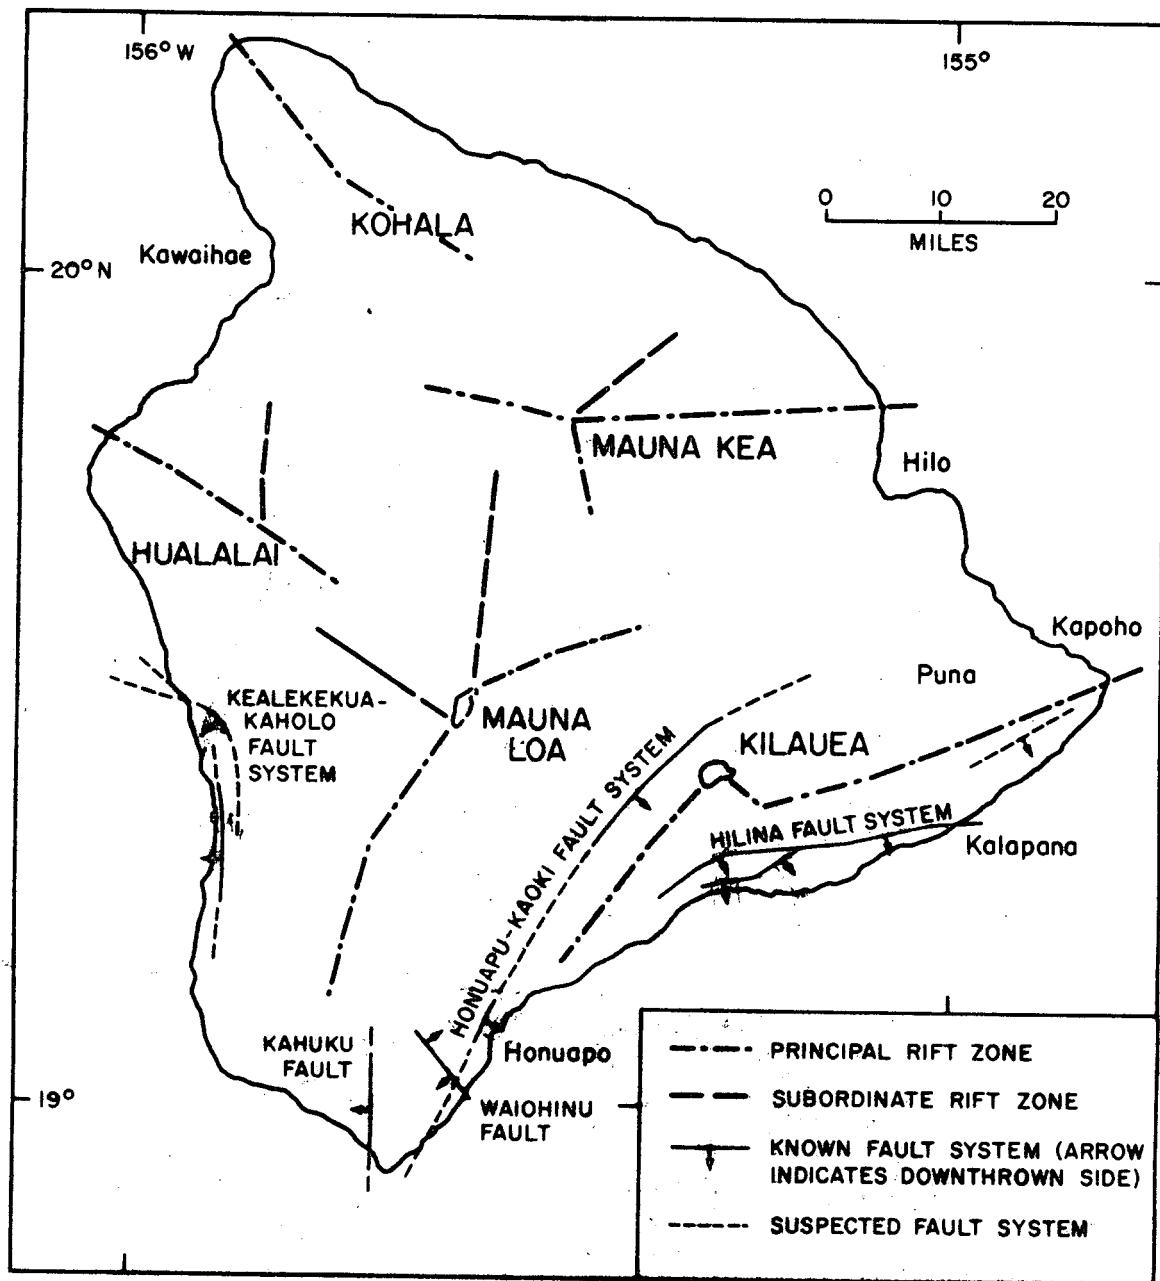


FIGURE 2. MAP OF THE ISLAND OF HAWAII SHOWING VOLCANOES AND ASSOCIATED RIFT ZONES

located in the Puna District. The central vents of Kilauea and Mauna Loa volcanoes were excluded from consideration because they are within the confines of the Hawaii Volcanoes National Park.

Upon making the decision to concentrate on the east rift of Kilauea, electrical surveys were carried out in greater detail. However, after the anomalous areas of low resistivity were delineated, we found it difficult to interpret the data in terms of thermal processes because of our limited knowledge of the structure of the east rift. Hence, gravity, magnetic, and microearthquake surveys were carried out. The exploration scheme of Figure 1 shows the manner in which the results from one survey provided information or incentive for the others. From time to time, data were assessed and plans were revised.

At this time (May 1975), the active exploration program has come to a pause, but not necessarily to completion. Although enough data have been gathered to justify a drilling program, further surveys are being planned, especially seismic refraction, gravity, and magnetic surveys, in order to better understand the hydrothermal process.

As part of the broader geothermal project for the island, a site selection committee for a drilling program was set up independent of the exploration program. Although input from the exploration program was considered, the committee selected a drill site at an early stage before the exploration program could satisfactorily analyze the data collected.


In the next section a brief summary of the geophysical data obtained to date is presented.

GEOPHYSICAL DATA

This summary is limited to data on the east rift of Kilauea, as the east rift is the only area surveyed adequately so far.

Electrical Surveys

The electrical surveys were conducted by G. Keller (1973) and D. Klein and J. Kauahikaua (1975). The techniques used included dipole-bipole mapping, line-loop time domain inductive sounding, galvanic sounding, and loop-loop frequency domain sounding. The composite results of the surveys given in Figure 3 show five areas (A, B, C, D, and E) of low resistivity. Also shown is the generalized trend of the line of vents to illustrate the geographical relationship of the rift with the areas of low resistivity. Of these, area E is considered the result of cultural sources such as water pipes, sewer pipes, and cables. The low resistivity zone in area B, which was outlined by Keller (1973), was estimated to exist from a depth of 700 m to 2100 m. As outlined by Keller, the original area for B was larger; in the map it has been trimmed to exclude those portions thought to be caused by salt water intrusions from the sea. Even so, area B is still much larger than area A.

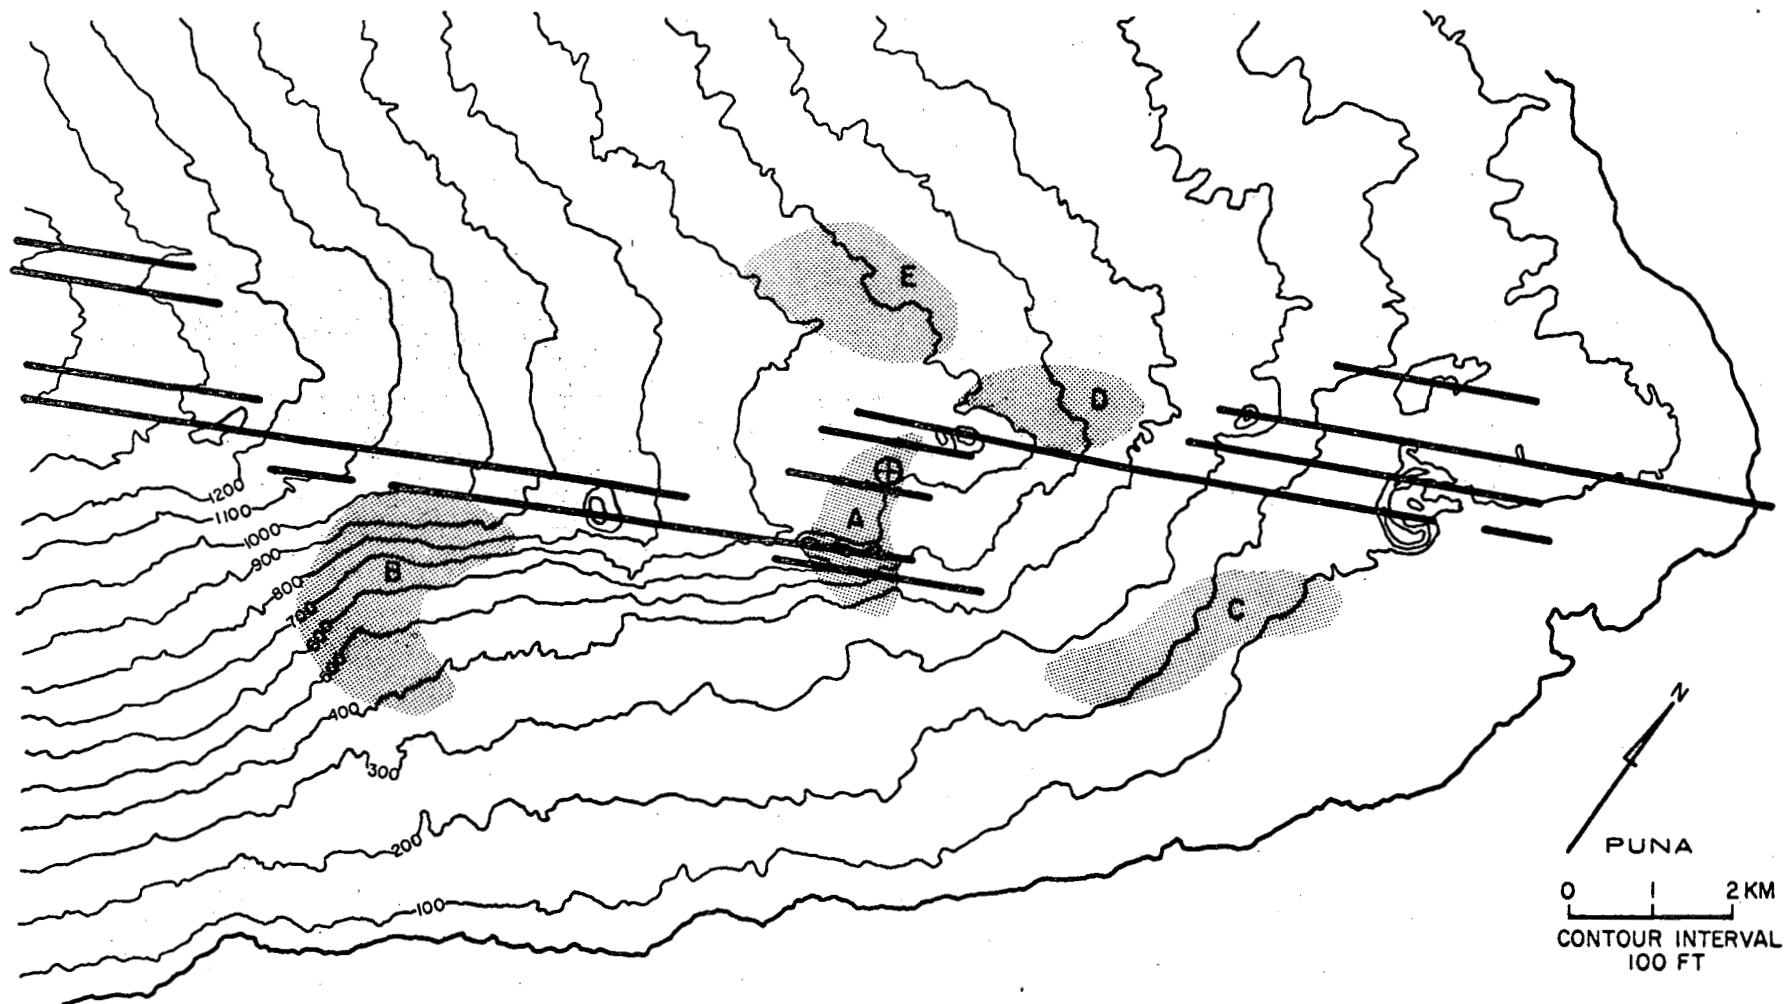

- ⊕ PROPOSED DRILLING SITE
- TREND OF RIFT ZONE
- ▨ RESISTIVITY LOWS

FIGURE 3. CONTOUR MAP OF PUNA AREA SHOWING TREND OF RIFT ZONE
AND AREAS OF LOW ELECTRICAL RESISTIVITY

Attempts have been made to interpret the resistivity data in terms of Archie's law. The conclusion, although admittedly hazardous, is that the upper limit of the temperature of hot water in the areas under consideration is about 140° C.

Gravity Survey

The available Bouguer gravity map of the island published by Kinoshita (1965) was not particularly useful to the geothermal project because the gravity stations were confined to highways and were spaced at 2-km intervals; for this reason, a more detailed survey was carried out in April 1974 over a stretch of Highway 13 in the Puna District (Fig. 4). For analysis of the data, Bouguer corrections were added and the values were projected along a line that ran perpendicular to the line of vents along the Puna east rift. On incorporating Kinoshita's data, a gravity profile crossing the east rift was obtained as shown in Figure 5.

To analyse the data, we assumed that the subsurface feature causing the gravity profile was a two-dimensional body. Also, in order to use simplified methods of analysis, we considered the body to cause a symmetrical profile around the maximum value which is shown as 275.3 mil gal in Figure 5. We assumed the high gravity values to the right of that point to be caused by a separate body. Upon using the simplified methods as proposed by Skeels (1963), the following values for the gravity anomaly were obtained.

TABLE 1. DIMENSIONS OF AN ASSUMED RECTANGULAR PRISM ANOMALY

DENSITY CONTRAST g/cm ³	DEPTH TO TOP OF ANOMALY	DEPTH TO BOTTOM OF ANOMALY	WIDTH OF ANOMALY	DEPTH TO CENTER OF ANOMALY
				km
0.6	1.0	3.4	3.2	2.2
0.5	.87	3.6	3.2	2.2
0.4	.69	4.0	3.2	2.3

Of the density contrast values given in Table 1, the value of 0.6 g/cm³ is preferred as this is the value that Strange et al. (1965) chose for analysis of volcanic intrusives in the Hawaiian Islands. From the gravity surveys, the following conclusions can be drawn:

1. The width of the anomalous body, identified as a dike complex, is 3.2 km, which agrees with topographic expression.
2. The vertical dimension of the anomaly is about 3-4 km; anomaly extends from a depth of 1 km to about 4 km.
3. The dike complex exists below the line of vents known as the east rift of Kilauea and trends N 65° E.

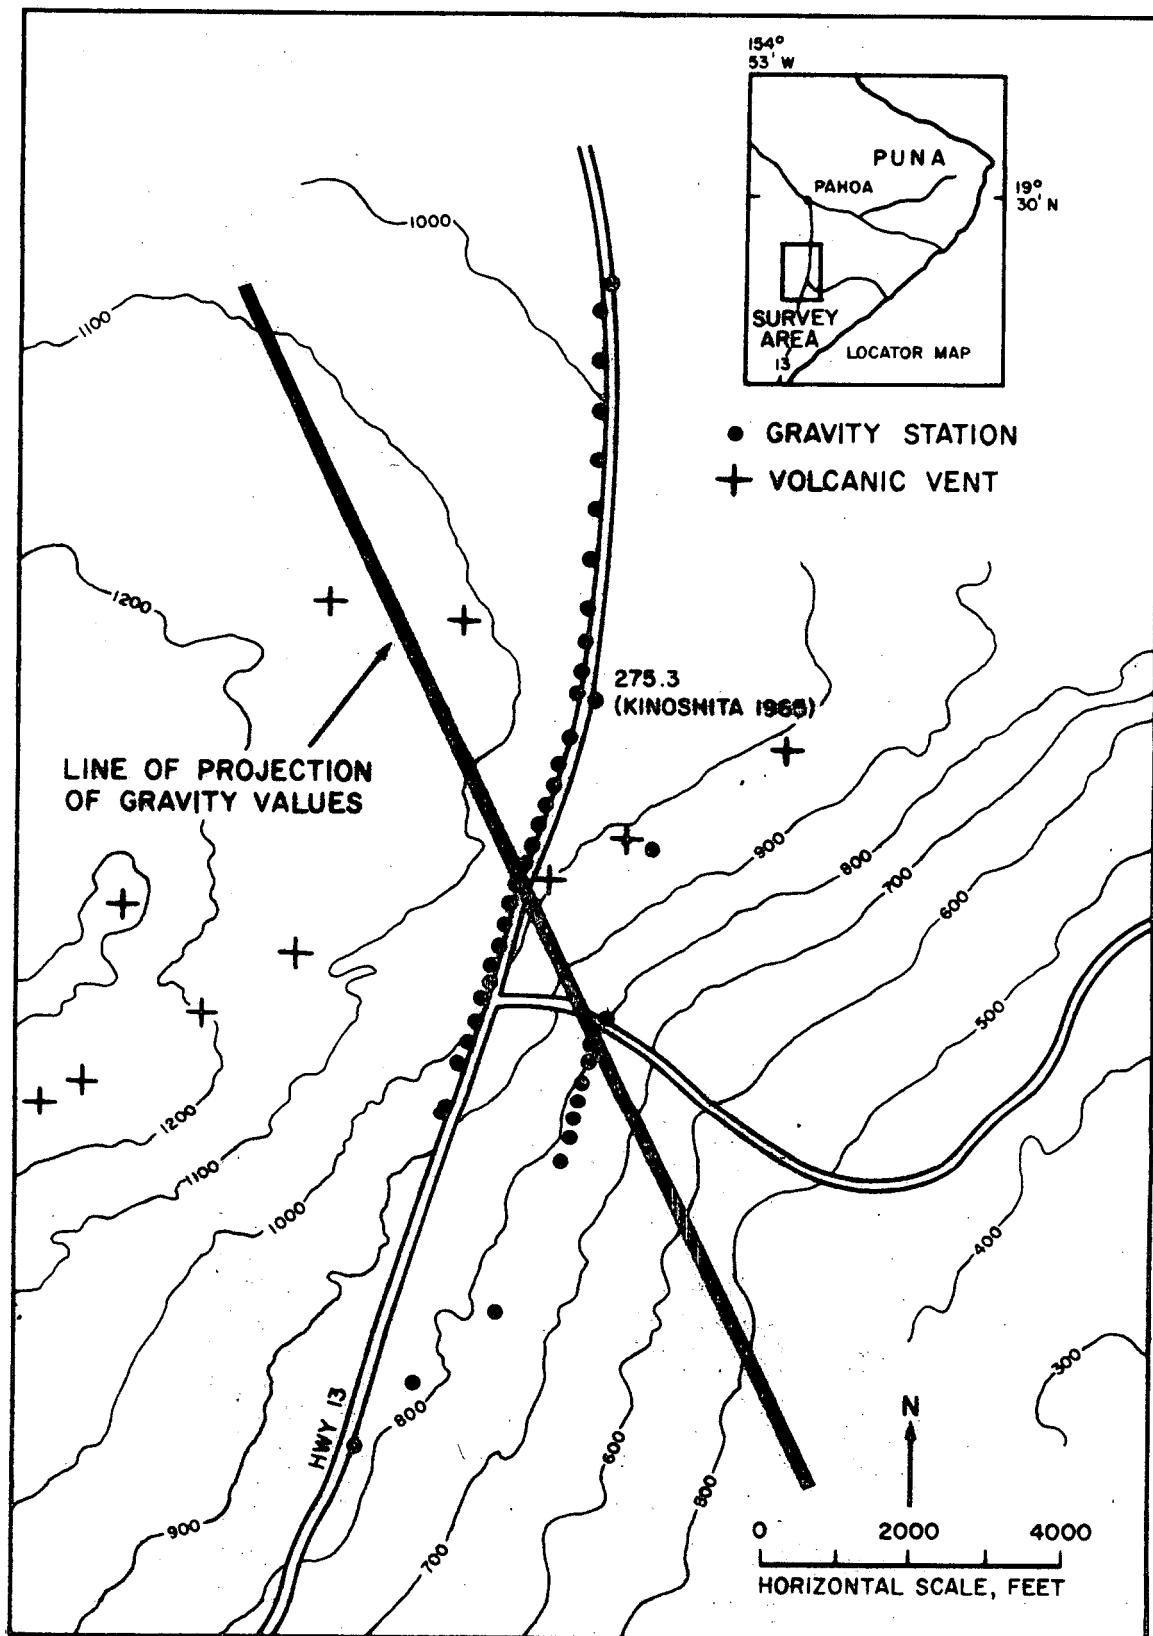


FIGURE 4. SURVEY AREA AND GRAVITY STATIONS

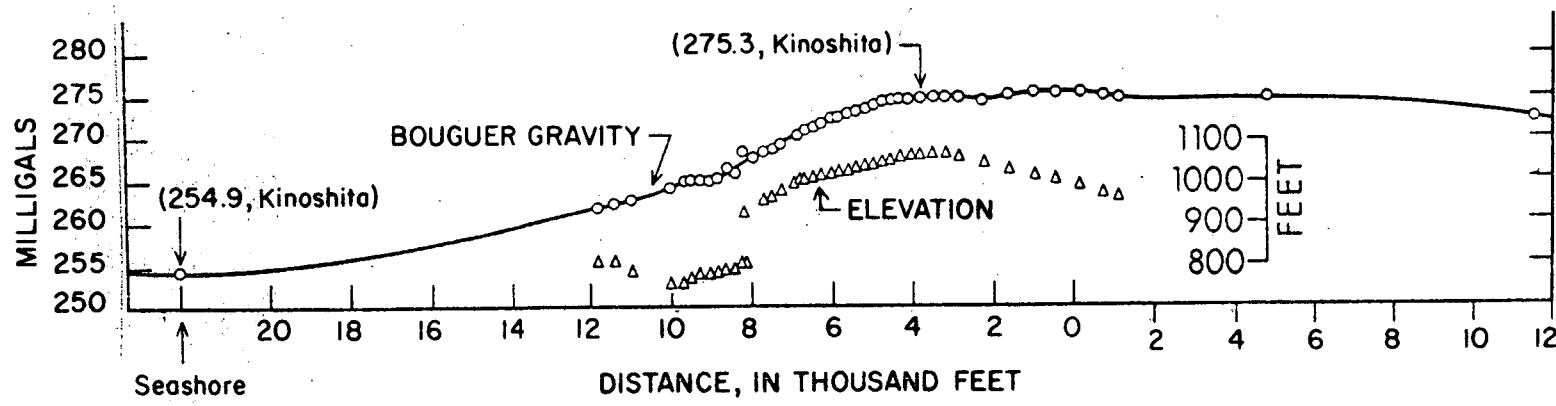


FIGURE 5. GRAVITY PROFILE

Magnetic Surveys

An aeromagnetic survey map published by Malahoff and Woppard (1965) showed the east rift as a magnetic low of about 100 gammas trending in an east-west direction. As data are sparse over the Puna District, a ground survey was carried out in January 1975 (Fig. 8). Although the amount of data gathered was large, only the traverse between the areas of Pahoa and Kaimu (Fig. 6) has been processed to date. The profile is given in Figure 7, and its interpretation in Figure 8.

In the interpretation of the data, we assumed that nonmagnetic areas are regions whose temperatures are above the Curie point and areas of intense magnetization are relatively cool regions. This meant that along the line from Pahoa to Kaimu, only the southern section of the dike complex has temperatures above the Curie point and that some of the adjacent non-dike rocks are also hot. Data from other traverses also showed that not all of the dike complex is hot and that hot sections occur in patches. Of particular concern to the project is that the spot which the drilling committee has selected for its first drill hole is in one of the relatively cool areas.

Temperature Measurements in Wells

In 1961, three wells Geothermal Test Wells 2 and 3 and Allison, were drilled in the Puna District in search of geothermal sources. All three, together with irrigation wells 9-6 and 9-9, were measured with a temperature probe to obtain the thermal profile with depth. The location of the wells is shown in Figure 9 and temperature profiles of the five wells in Figure 10. The most prominent profile is that obtained from Geothermal Test Well No. 3. The temperature in the well rises to a high of 92° C but the hot water layer is rather thin and the water table practically at sea level. This thinness of the hot water layer confirms the rather high permeability of the rocks in the area, the permeability being due not so much to porosity but to the cracks between successive layers of volcanic flows.

Microearthquake Surveys

An array of seven geophones was set up over the Puna District with signals from all seven telemetered to one central recording station, three of them by hard wire and the other four by radio. The survey covered a period of two weeks and the number of earthquakes detected was not large. Figure 11 shows epicentral locations and Figure 12, focal depths projected onto line AA'. On the left side of the figure is given the velocity structure used to obtain epicenters and focal depths. Notice in Figure 12 that there is a cluster of earthquakes concentrated in the shallow depth between the surface to 5 km. Below the 5-km depth, earthquakes are few in number. One interpretation from these data is that the dike complex, or the active part of the dike complex, is limited to a depth of 5 km. This inference is in accord with our gravity survey which indicated that the dike complex bottoms out at about 4 km.

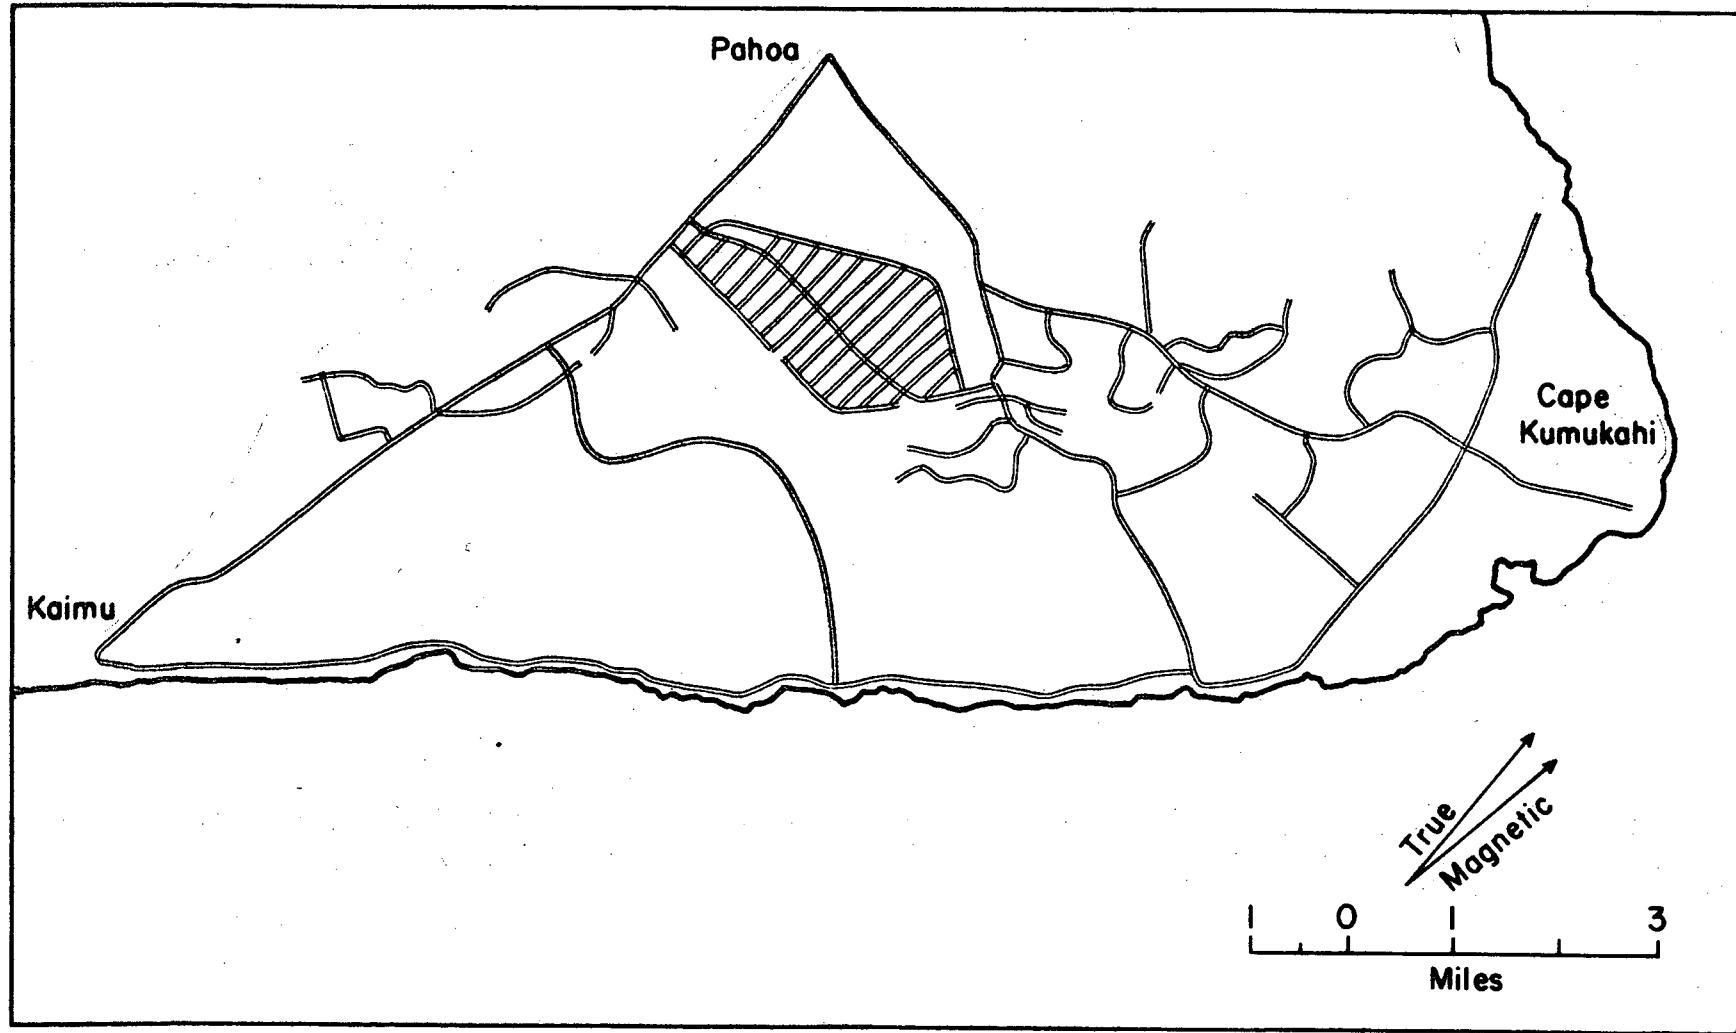


FIGURE 6. TRACKS OF MAGNETIC MEASUREMENTS IN PUNA AREA

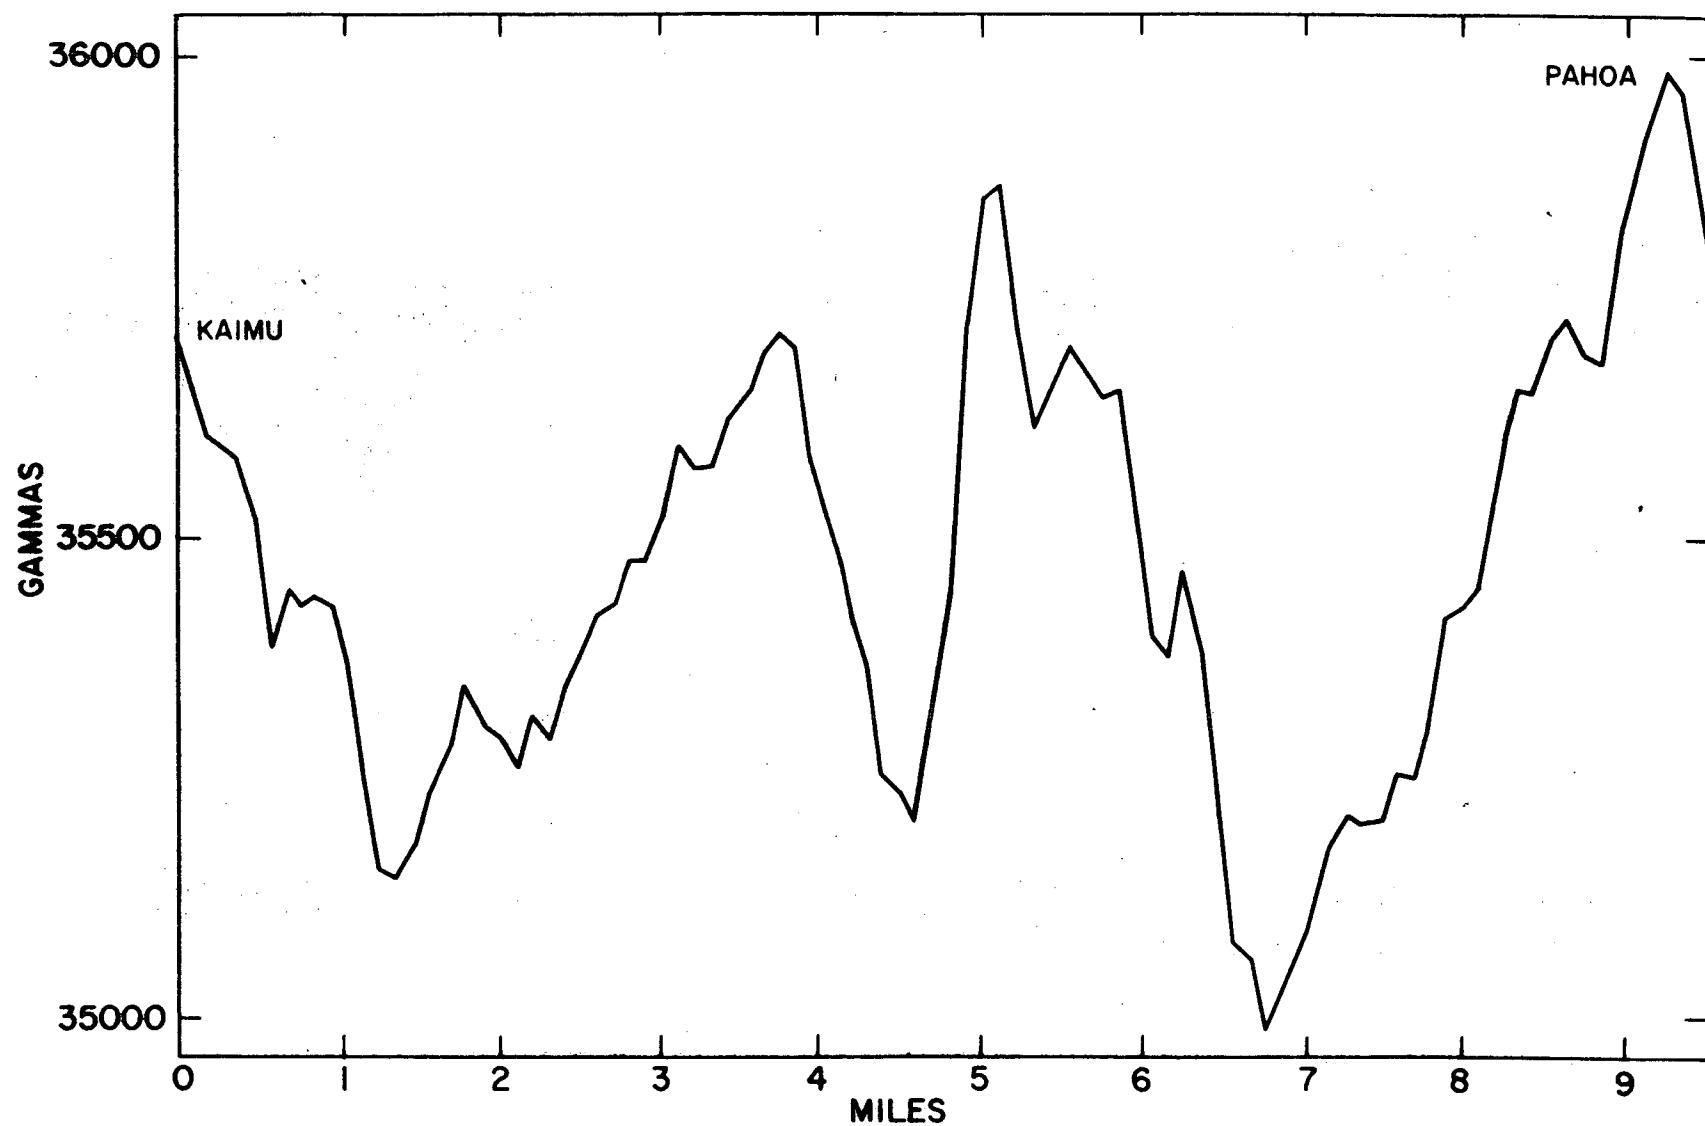


FIGURE 7. SPACE-FILTERED MAGNETIC PROFILE FROM KAIMU TO PAHOA

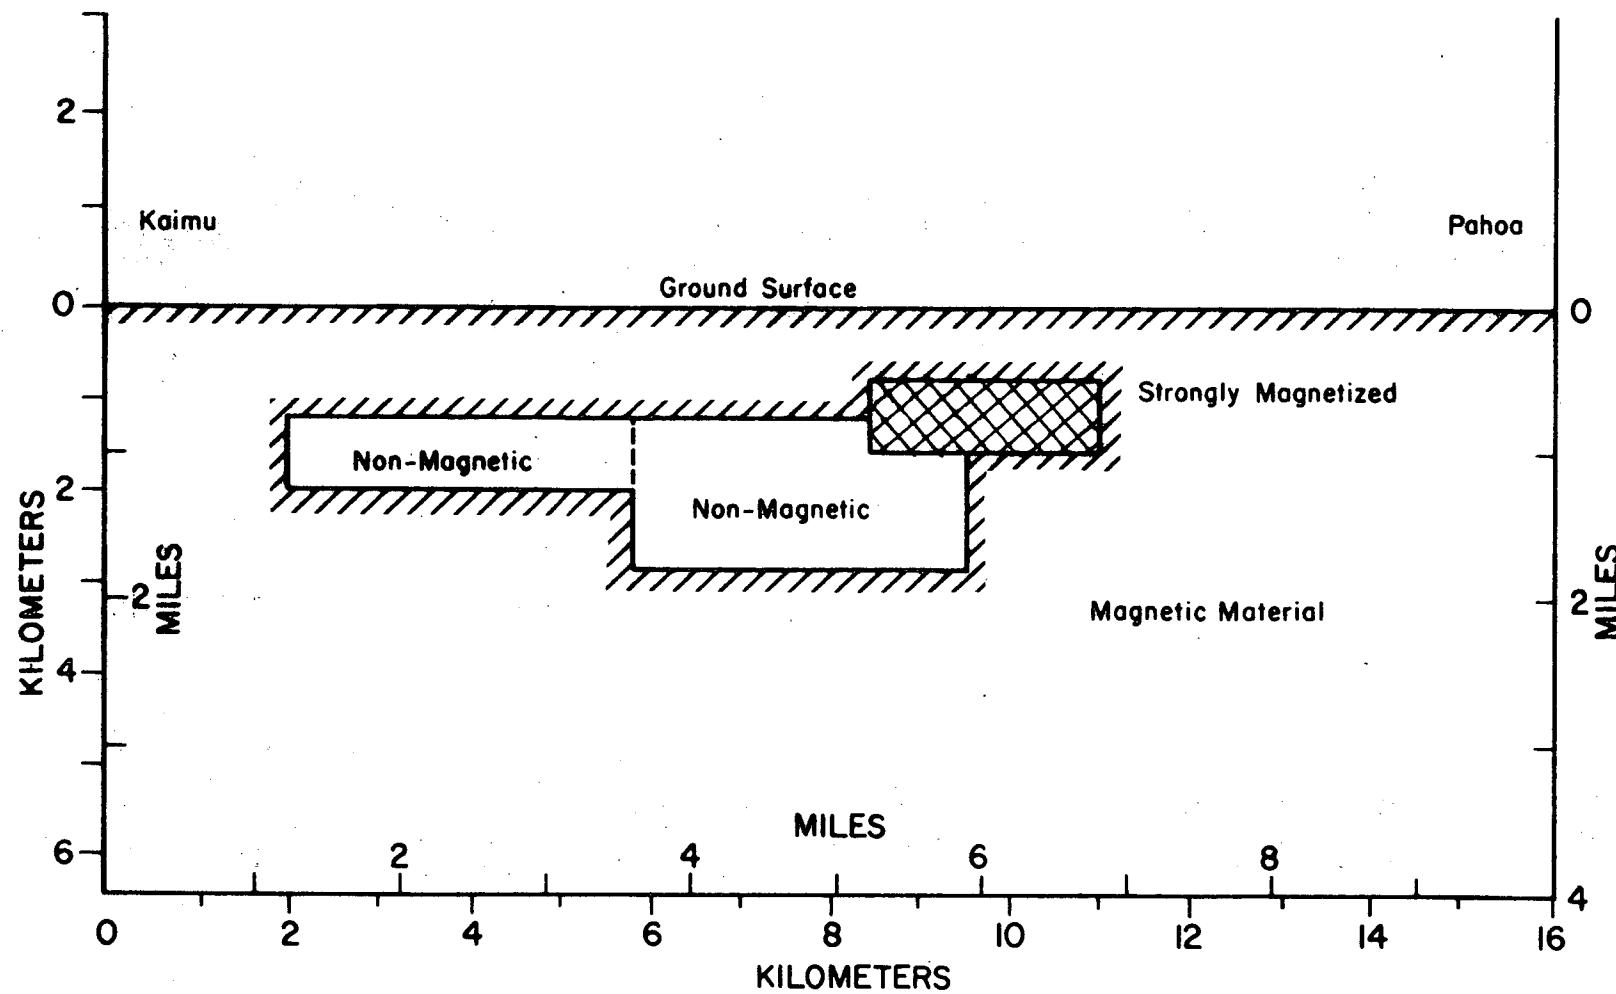


FIGURE 8. MAGNETIC ANOMALIES INFERRED FROM MAGNETIC PROFILE

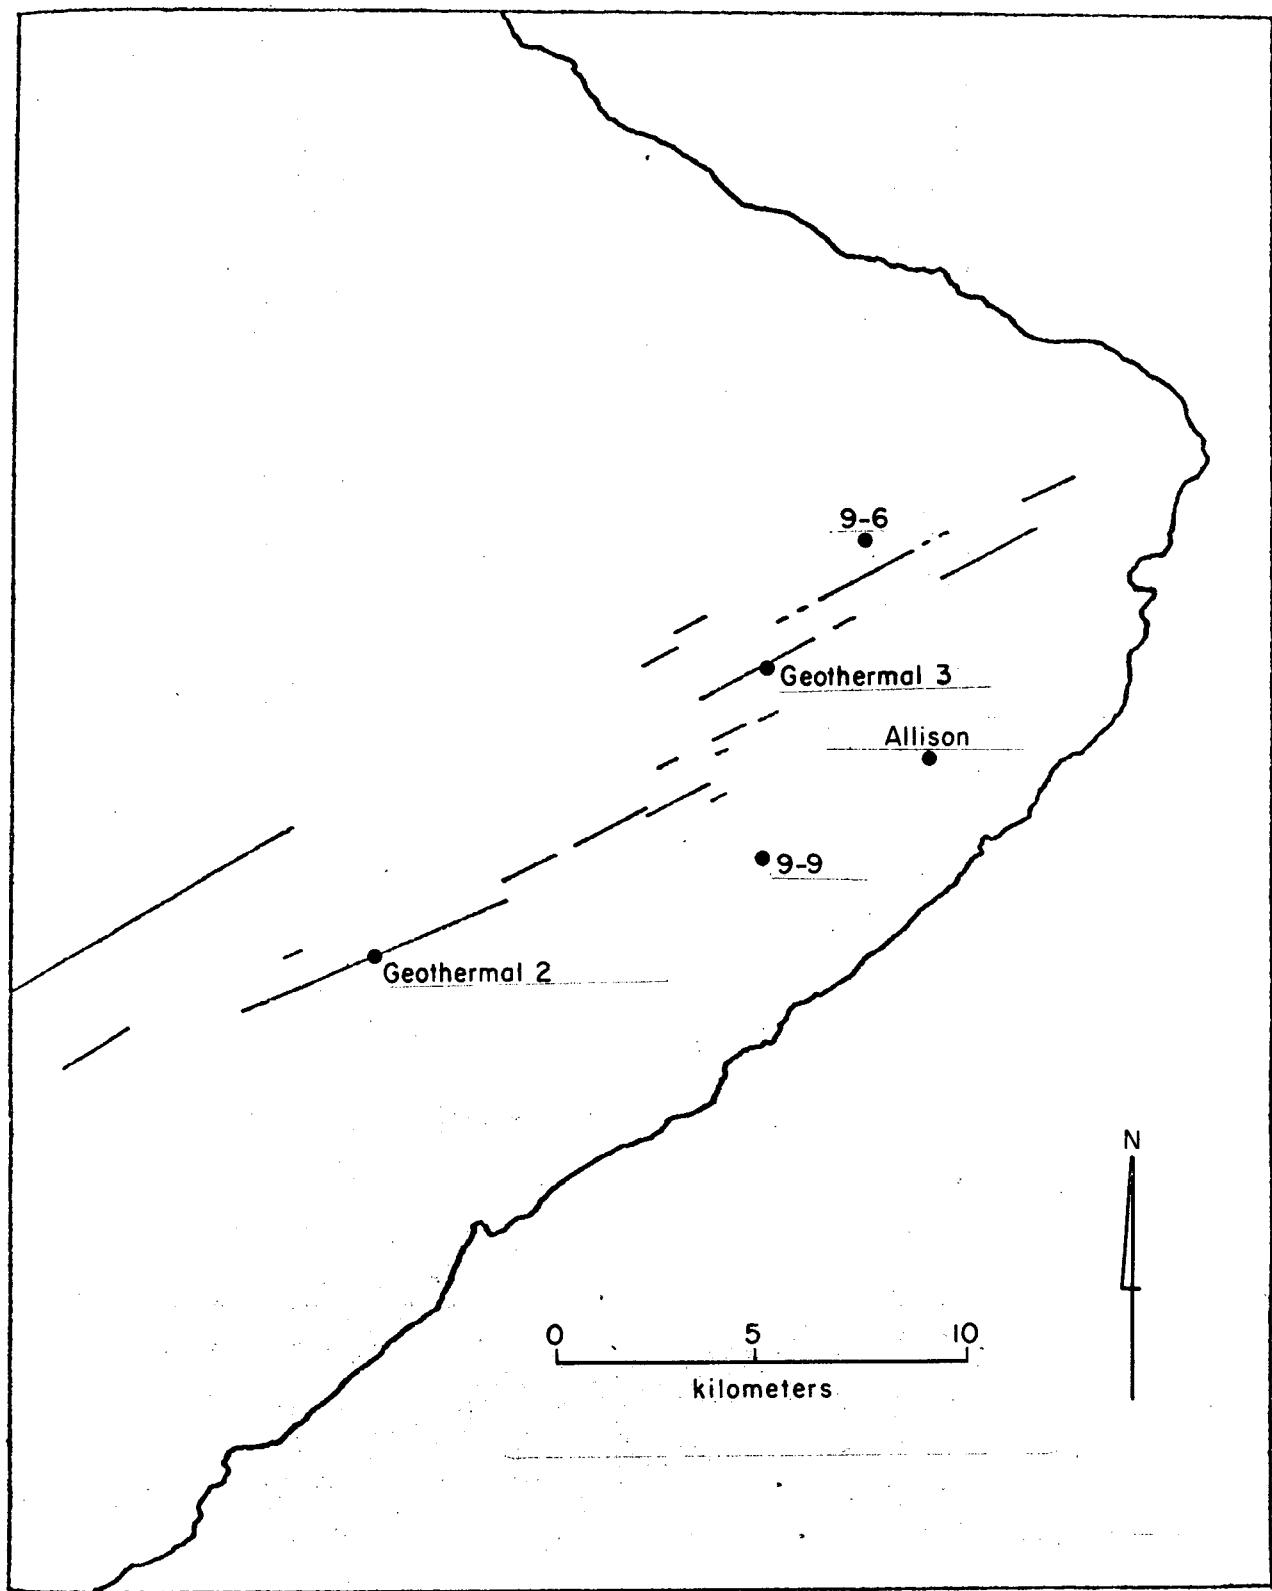


FIGURE 9. LOCATION OF WELLS, IN PUNA, ISLAND OF HAWAII

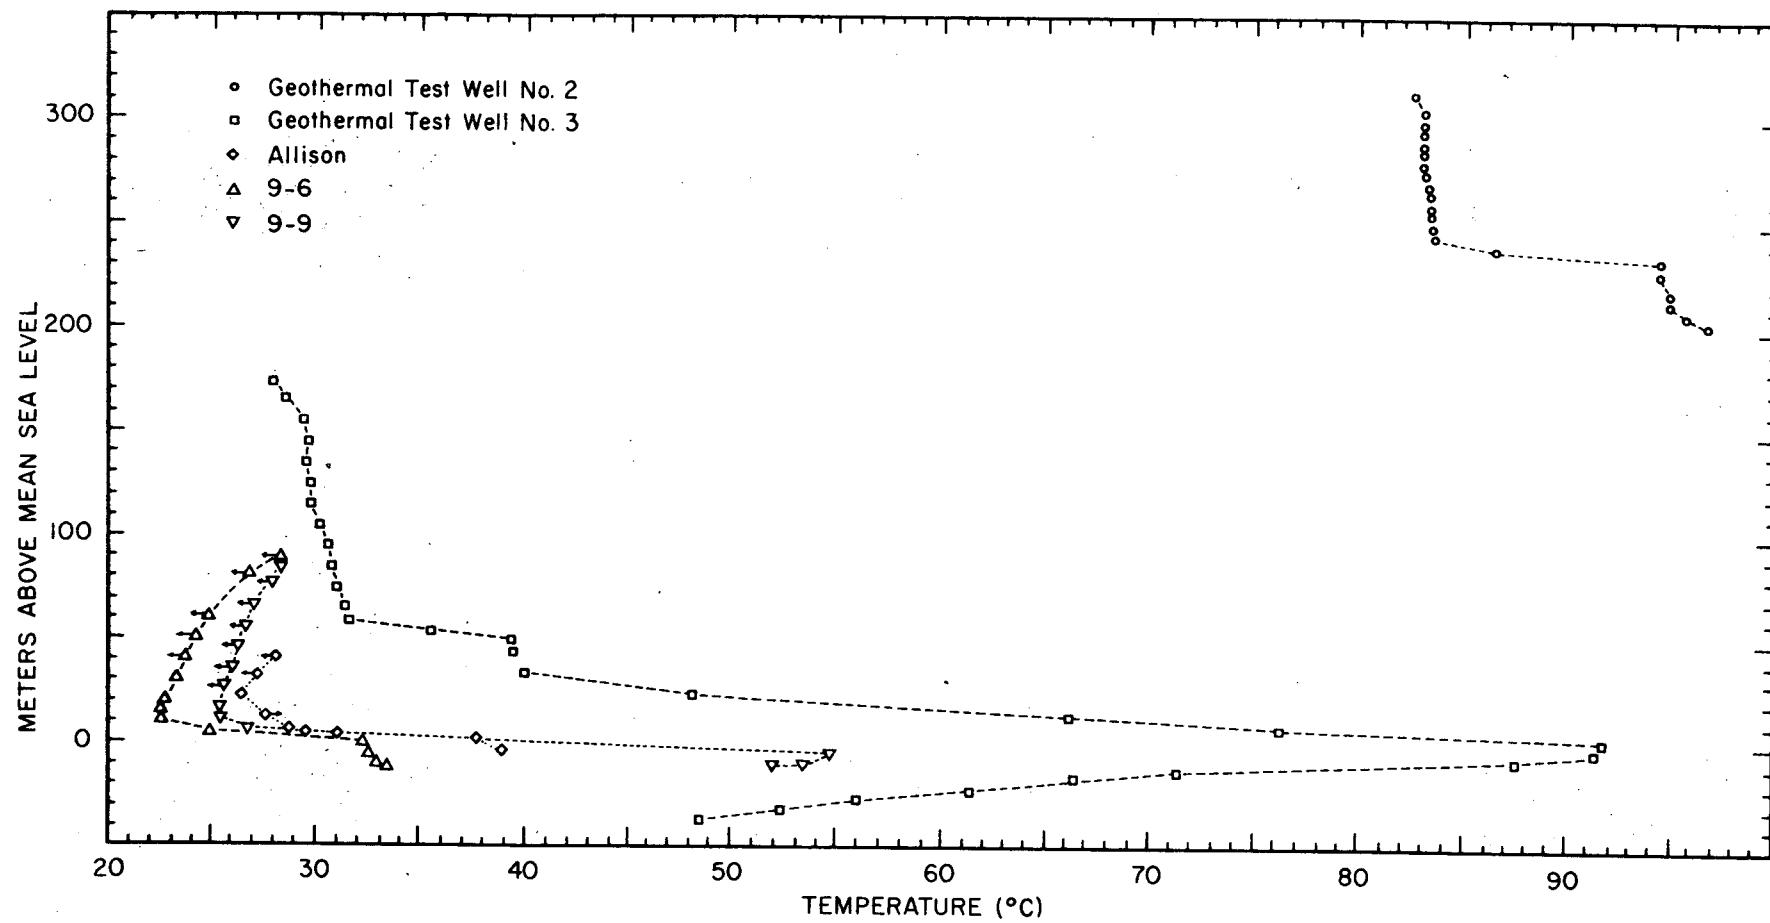


FIGURE 10. TEMPERATURE PROFILES OF FIVE WELLS IN PUNA, ISLAND OF HAWAII

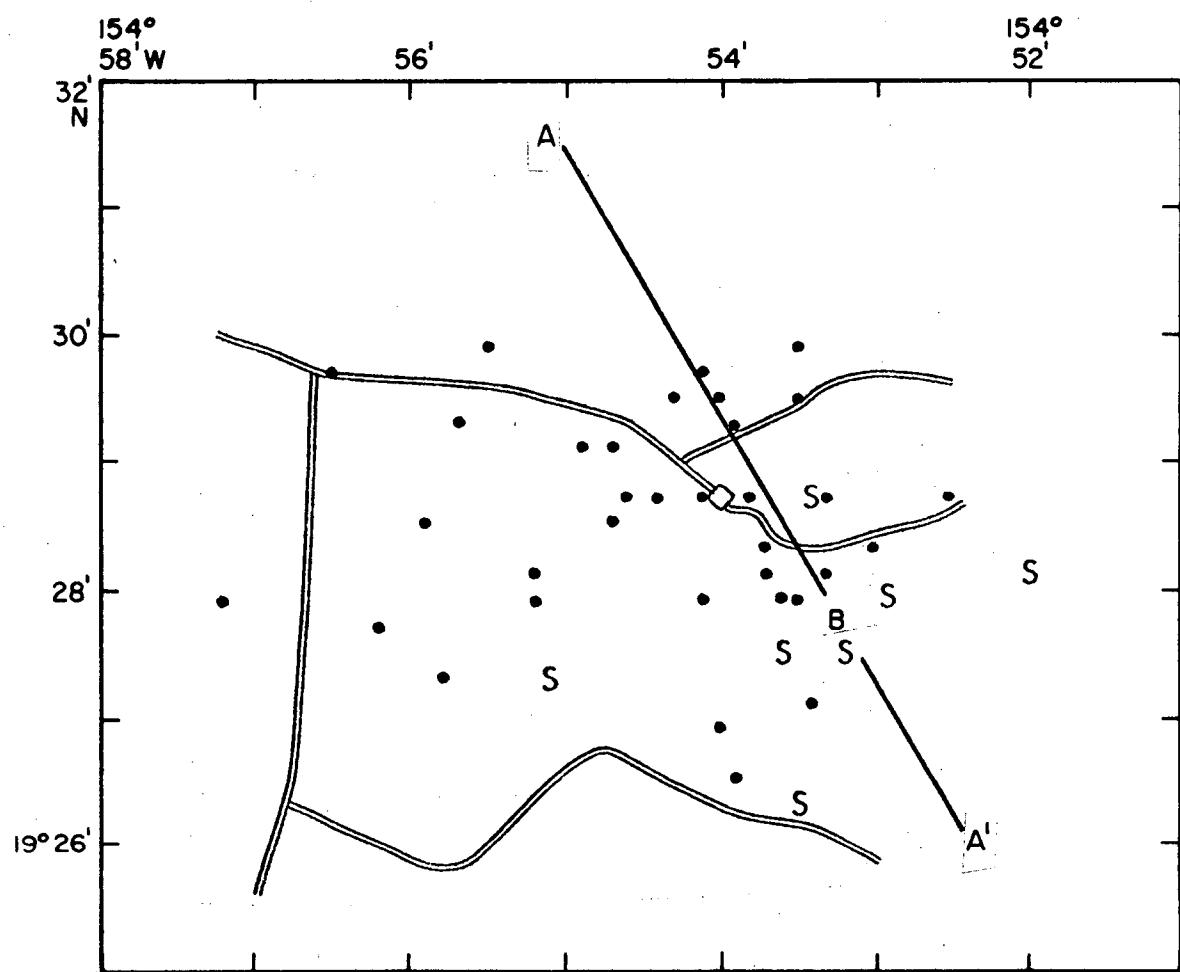


FIGURE 11. EPICENTERS OF OBSERVED EARTHQUAKES. S: SEISMOGRAPH STATIONS; B: BASE STATION

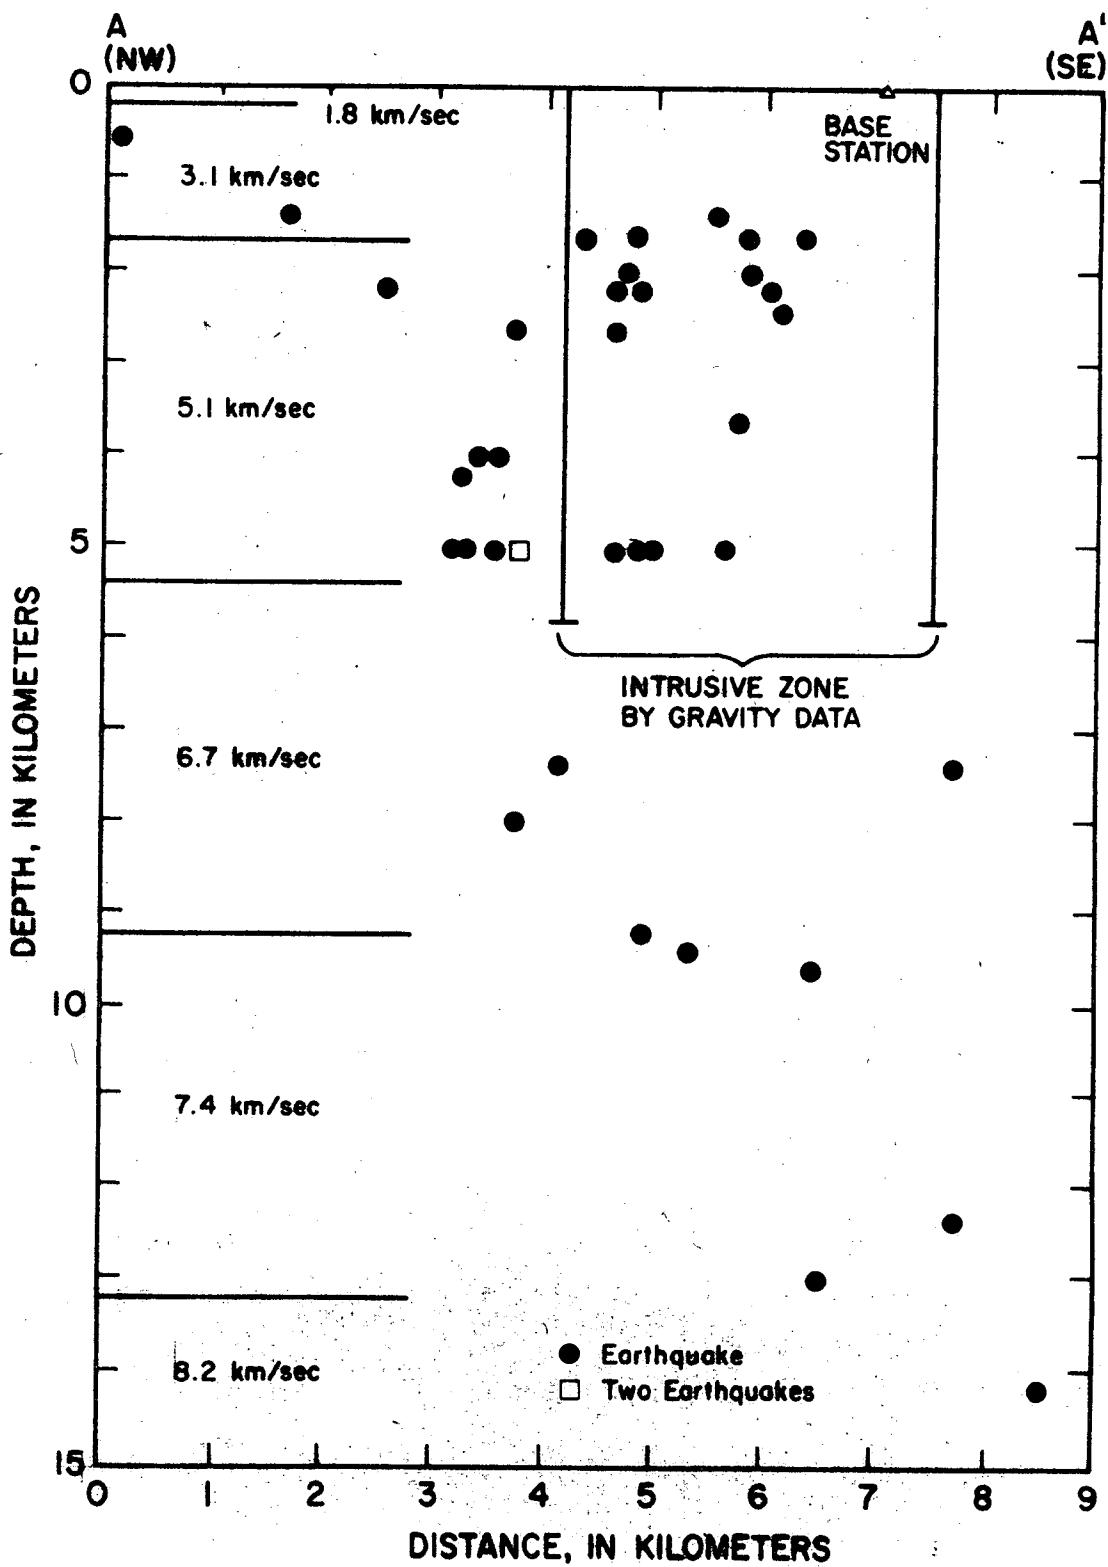


FIGURE 12. DEPTH OF FOCI OF EARTHQUAKES AS PROJECTED ONTO PLANE A-A' SHOWN IN FIGURE 11

Ground Noise Survey

A ground noise survey using a 1-Hz geophone was carried out in August 1974. Recording was done on an FM tape recorder. After taking into consideration such things as diurnal variation, meteorological factors, etc., a ground noise-intensity map centering on 4 Hz was obtained as shown in Figure 13. Other frequency ranges were analysed with similar results.

Geochemical Surveys

Water samples from the wells throughout the Puna area were collected and analysed for oxygen isotope content. Chemical analysis showed that silica content in some of the wells was rather high although the basaltic rock is undersaturated in silica. The significance of the chemical survey is not fully understood at the present time because the use of isotope data as a geothermometer has not been worked out for basaltic rocks. However, this problem is being investigated.

Integration of Geophysical Data

Each of the geophysical tasks contributes its part of the structure of the east rift of Kilauea and the hydrothermal processes associated with it. When the parts are assembled, a composite picture of the thermal processes emerges. However, the picture obtained is not as clear as desired.

The location, shape, and size of the dike complex were determined by gravity and seismic data. Interpretation of magnetic data led to the conclusion that only parts of the dike complex are hot enough to be above the Curie point, but that a hot section can heat up adjacent non-dike rocks to temperatures above the Curie point. The dike complex in Figure 14 is shown in its geographical relation to the line of vents of the east rift and to the electrically anomalous areas. One of the hot sections inferred from magnetic data is also shown in the figure.

The magnetic map (Fig. 15) shows that although the dike complex and the line of vents trend N 65° E, the magnetic lineaments trend east-west. The magnetic data are from the aeromagnetic surveys of Malahoff and Woppard (1965). The east-west trends are probably ancient remnants of the Molokai fracture zone, as mapped by Malahoff and Woppard (1968). These lineaments are disturbed by hot intrusives, a good example of which is the summit area of Kilauea (Fig. 15). The hot area which was found by surface surveys also disturbs the lineaments.

First, let us consider the hot area of Figures 14 and 15 which also corresponds to area B of low electrical resistivity. Keller (1973) calculated that the low resistivity zone here extends from a depth of 700 m to a depth of 2100 m. Keller (personal communication) also found from earthquake data that rocks in this area have a high Poisson ratio, about 0.4, and also that small earthquakes here have fault plane solutions which dip southward at angles from 45° to 70°. A high Poisson ratio is indicative of fractured rocks. Another bit of geophysical data for this area is that of Hill (1969) who, using seismic refraction methods, found a layer with a seismic velocity of 3.1 km/sec at a depth of 700 m, coinciding with the low

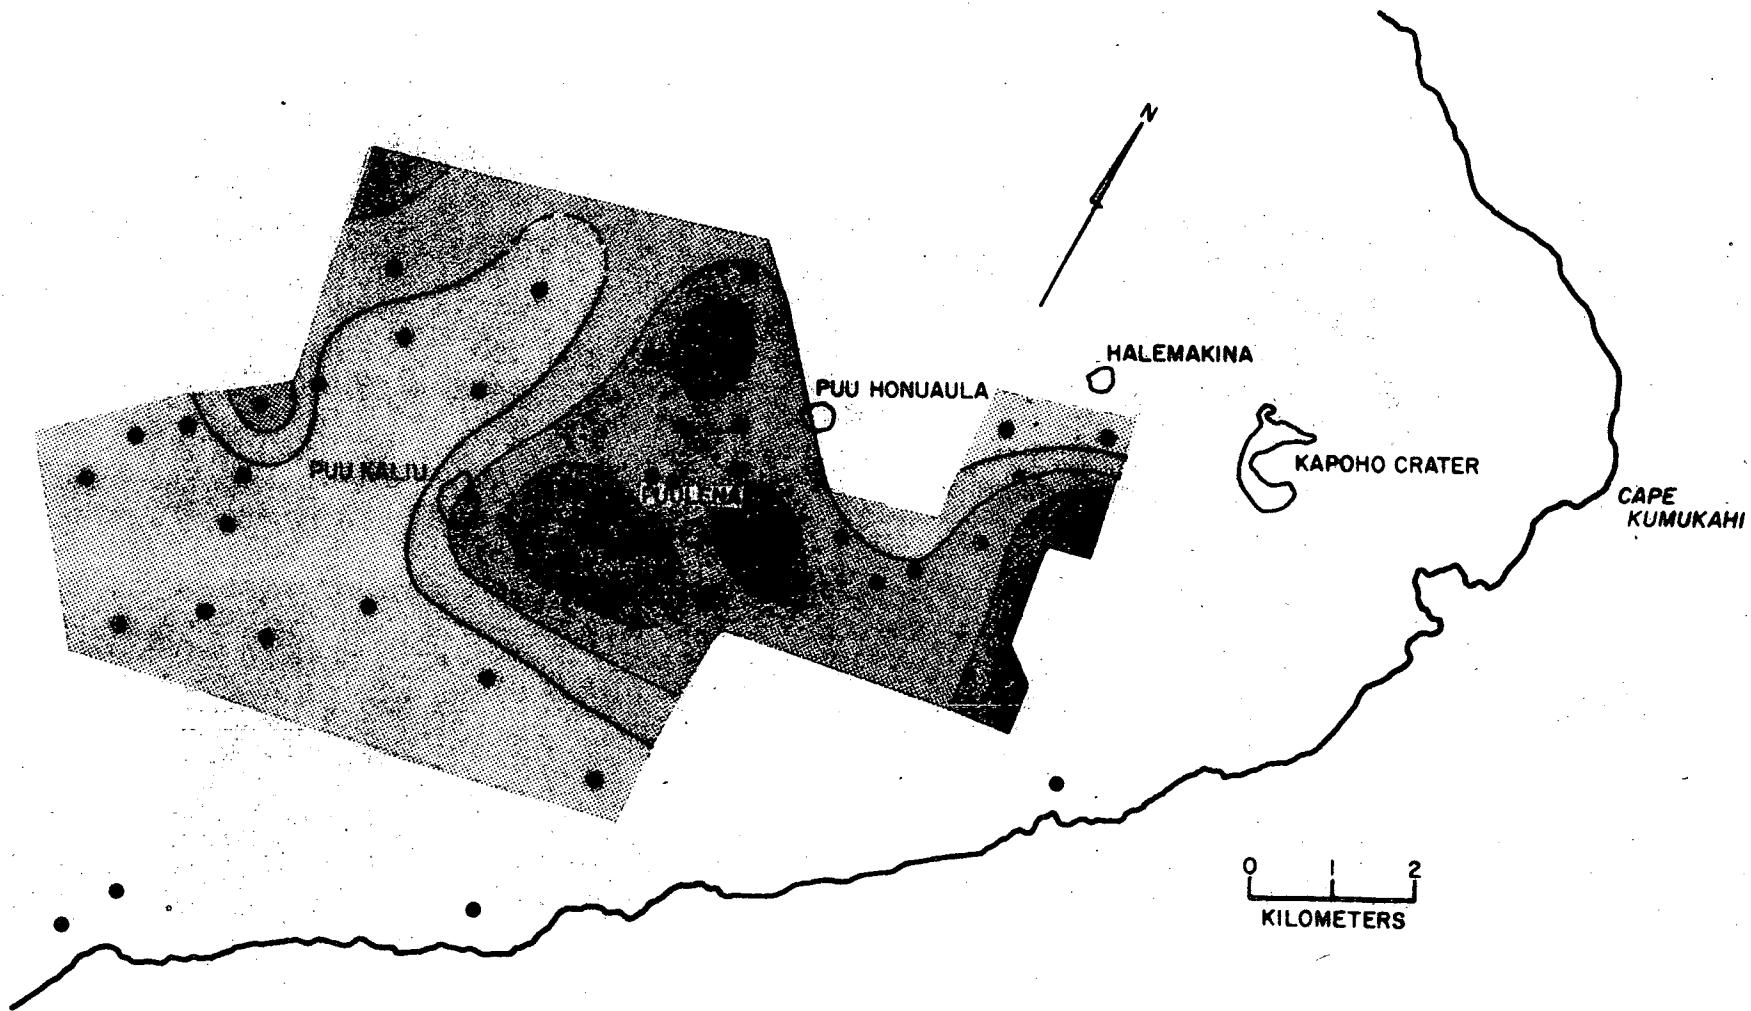


FIGURE 13. GROUND NOISE-INTENSITY MAP, 3-db INTERVAL CONTOURS OF 4 Hz NOISE. NOTE: THE DARKER THE AREA, THE HIGHER THE AMPLITUDE.

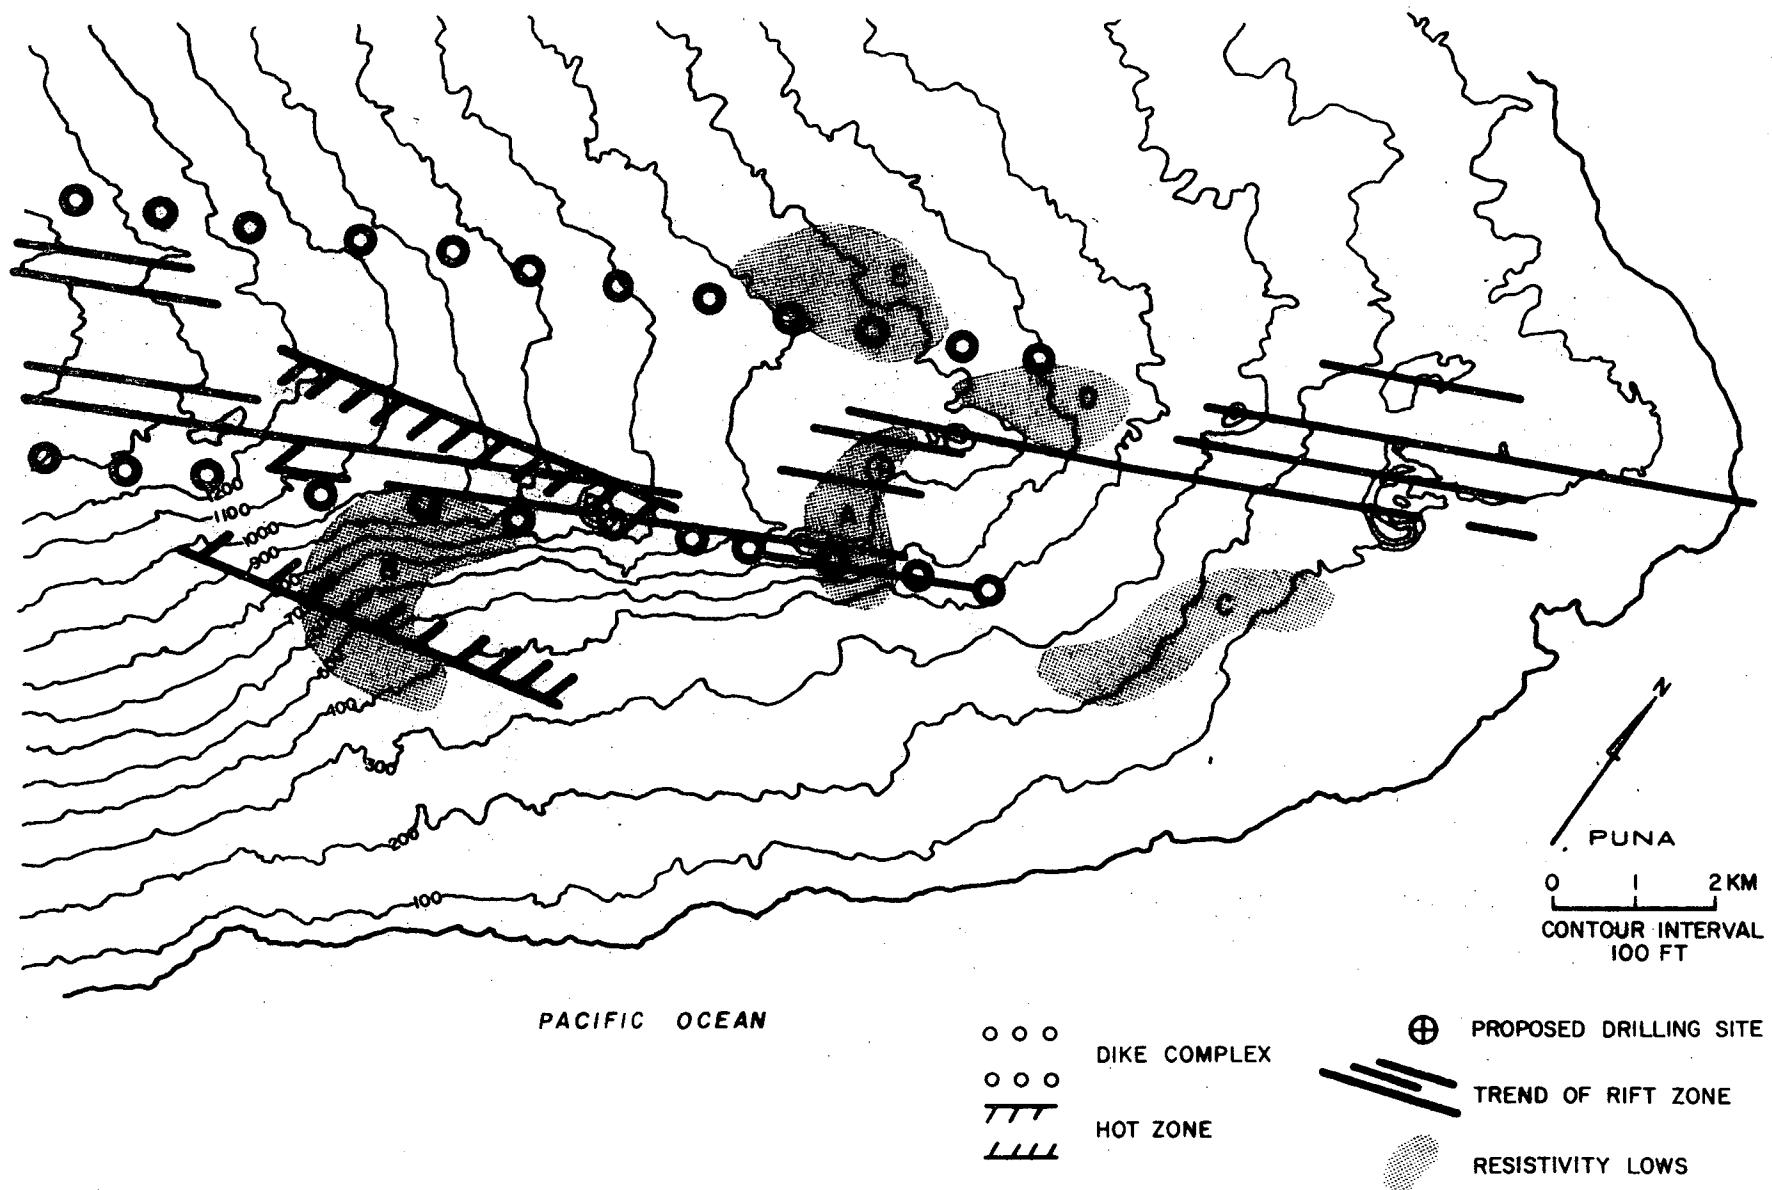


FIGURE 14. LOCATION OF DIKE COMPLEX AND HOT SECTION OF EAST RIFT OF KILAUEA

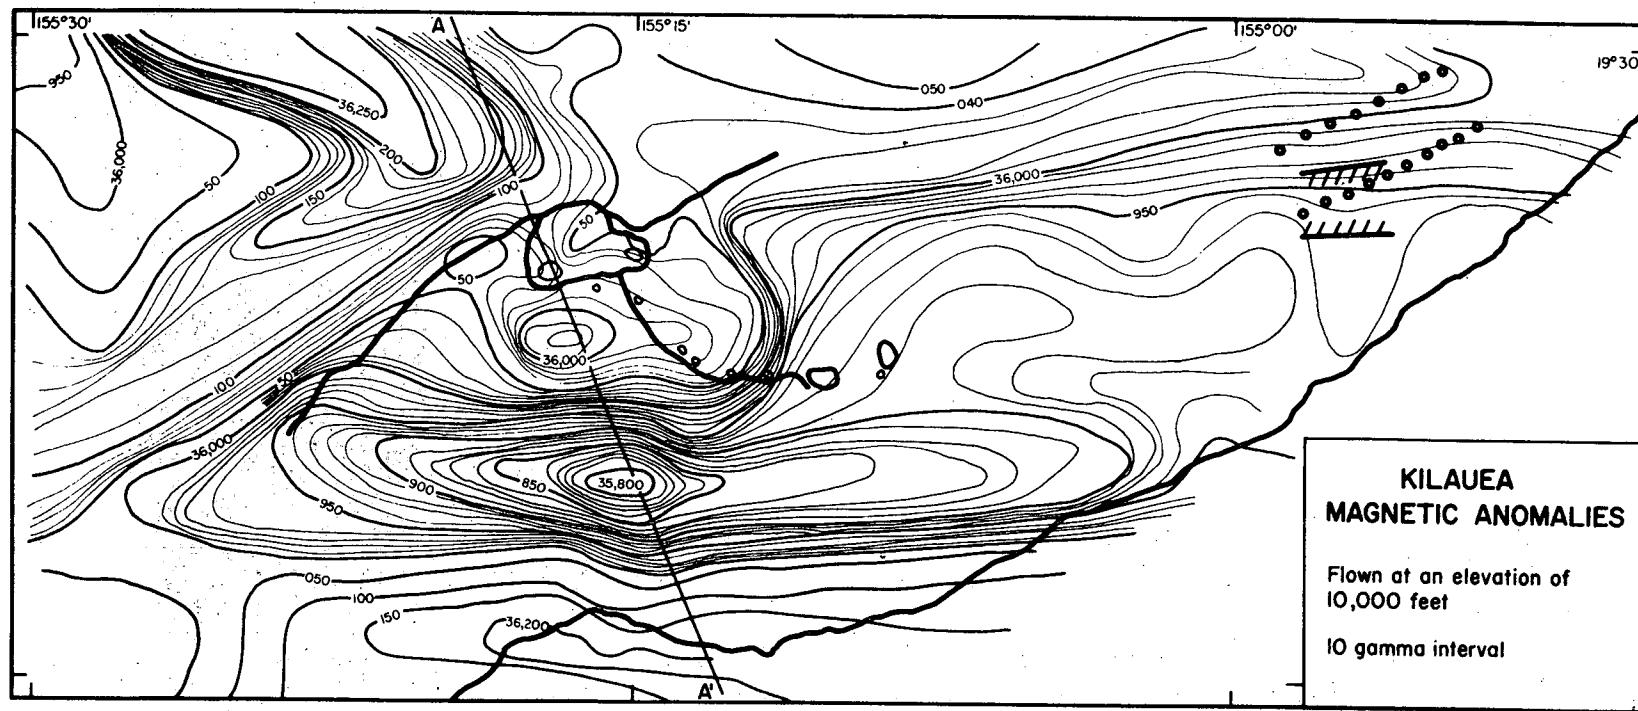


FIGURE 15. MAGNETIC MAP OF KILAUEA AND PUNA AREAS WITH DIKE COMPLEX
AND HOT AREA OF FIGURE 14 SUPERIMPOSED

resistivity layer of Keller.

An attempt will be made here to assemble these seemingly disparate bits of geophysical parameters into a coherent model, as shown in Figure 16. The source of heat for the rift zone is the dike complex, but hot material, whether magma or hot water, leaks off into the southern flank of the rift zone. The fractured rocks have cracks dipping south 45° to 70°, as the fault plane solutions indicate. The hot material heats up brine seeping in from the sea, in the manner of the Ghyben-Herzberg hypothesis. Now if the brine is heated, how can the low resistivity at the 700-m depth be accounted for? It is accounted for by saying that the 3.1 km/sec seismic velocity represents a pore-filled rock layer. The 3.1 km/sec velocity is peculiar in that it cannot be produced by compressing low-velocity surface basalts with pressures equivalent to the 700-m depth. As some other mechanism is needed, it is proposed that the filling of rock pores and crevices by precipitates from the hot brine changed the seismic velocity to 3.1 in analogy to the self-sealing theory of Facca and Tonani (1967). The pore-filled layer then acts as a caprock to confine the hot brine below 700 m. The pore-filled layer is not very thick, perhaps just thick enough to be a wave guide for seismic waves. In brief, a self-sealing geothermal reservoir for area B is proposed.

The model proposed here then accounts for electrical, seismic, magnetic, and gravity data. Admittedly, it is highly speculative; the association of the 3.1-km/sec velocity with a pore-filled layer is the weakest link in the series of arguments. But the self-sealing geothermal reservoir model is compatible with all the data that we have so far gathered over this area.

One hazy point in this model is that it is not known how far it can be extended laterally, since electrical data become diffused because of the proximity of this section to the sea.

There are other low resistivity areas in Figure 14, such as areas A, C, D, and E. Area E can be explained by cultural sources such as sewer pipes and cables, area C is quite similar to area B and may be an extension of area B, and areas A and C are on the dike complex. Area A has been chosen for a drill site by the site selection committee of the geothermal project. Area A has the following favorable geophysical data: a self-potential anomaly, a low resistivity area, ground noise high, and hot water (92° C) in a nearby well. But the drawbacks are several: aeromagnetic and surface magnetic surveys do not indicate hot intrusions; the low resistivity occupies relatively a small area so that even if a hot water or vapor system were present, the volume would not be commercially viable; and the hot water in the nearby well is limited to a thin layer of about 7-m, and, below that, the water temperature drops off considerably. The motivation of the site selection committee seems to be the hope of hitting hot rock or magma, but even this hope may turn out to be in vain, as magnetic data would appear to forecast.

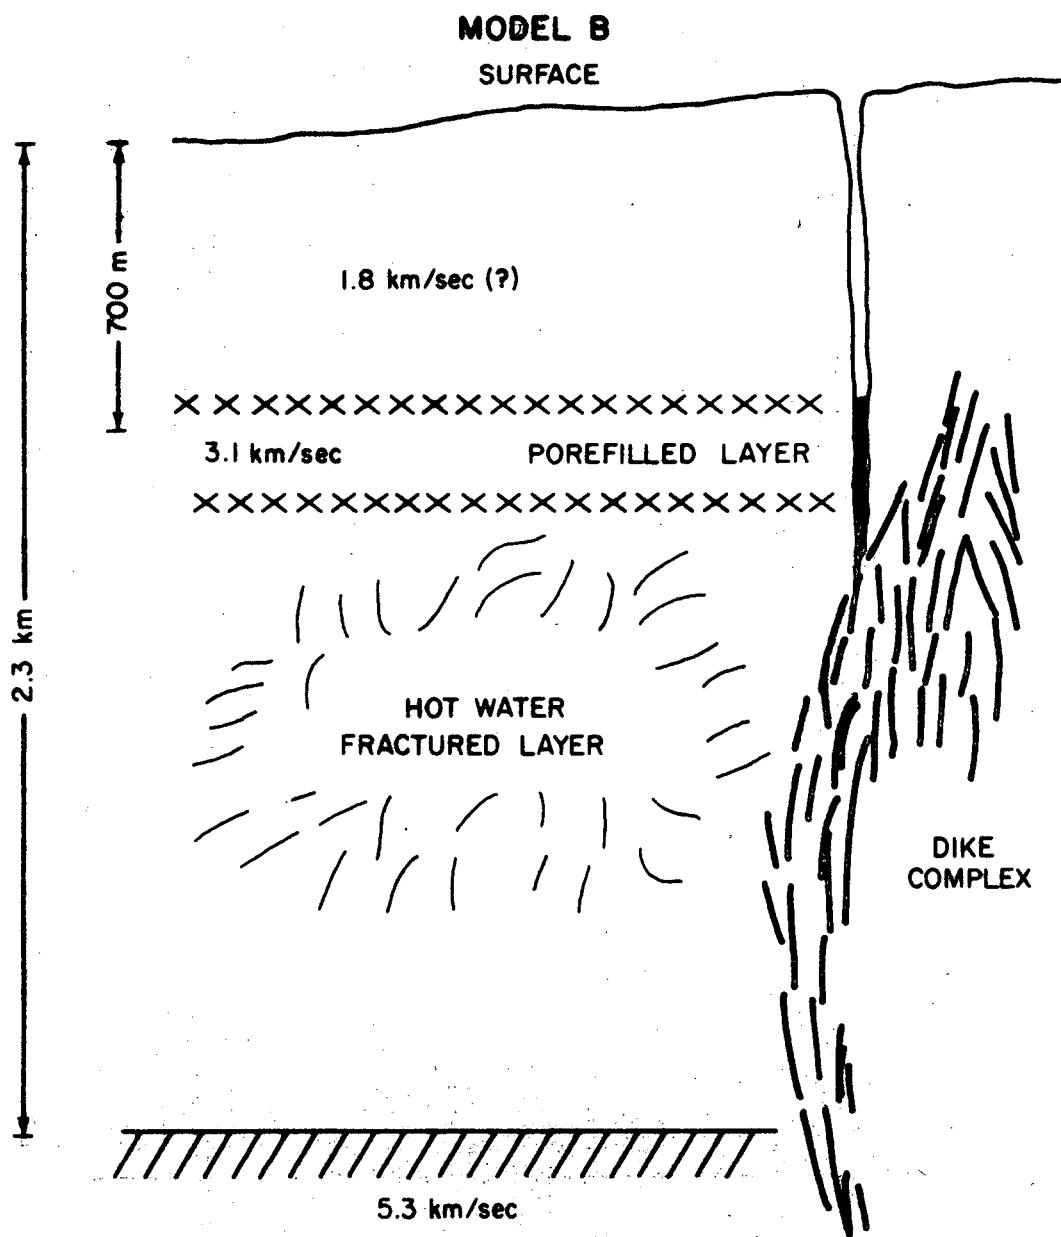


FIGURE 16. HYDROTHERMAL PROCESS OF AREA B.
NOTE: THE MODEL IS VERY CONJECTURAL.

CONCLUSIONS

Electrical methods are generally considered the most powerful tool for geothermal exploration. But for basaltic rocks with high permeability, the nature of low resistivity areas found by electrical methods cannot be determined unless the ultimate source of heat is found. Usually the source is a dike complex or plug, which can be outlined clearly by gravity and seismic methods. The dike complex is not uniformly hot; hot areas occur in patches which can be found by magnetic methods. Surface magnetic surveys are more effective than aeromagnetic surveys.

The value of geochemical data for resource location is still being assessed.

ACKNOWLEDGMENTS

Gratitude is hereby expressed to the project participants: P.F. Fan, D.P. Klein, J. Kauahikaua, W. Suyenaga, R. Norris, and G. McMurtry, who made their data available for this paper. All of the illustrations used in this paper, except Figure 15, have appeared in a final report to the National Science Foundation under Grant GI 38319. The support by this grant is gratefully acknowledged.

REFERENCES

Facca, G., and Tonani, F. 1967. Self-sealing geothermal field. *Bulletin Volcanologique* 30:271-73.

Hill, D. 1969. Crustal structure of the island of Hawaii from seismic refraction measurements. *Bull. Seism. Soc. Am.* 59:101-30.

Keller, G.V. 1973. An electrical resistivity survey of the Puna and Kau Districts. Report submitted by Group 7 to the Research Corporation of the University of Hawaii.

Keller, G.V. 1975. Oral presentation made to the Drilling Site Selection Committee, 1 May 1975.

Kinoshita, W.T. 1965. A gravity survey of the island of Hawaii. *Pacific Science* 19:339-40.

Klein, D.P., and Kauahikaua, J. 1975. Geothermal-geoelectric exploration on Hawaii island, Preliminary Report. HIG 75-6, Hawaii Institute of Geophysics, University of Hawaii.

Malahoff, A., and Woppard, G.P. 1965. Magnetic surveys over the Hawaiian ridge. HIG-65-11, Hawaii Institute of Geophysics, University of Hawaii.

_____. 1968. Magnetic and tectonic trends over the Hawaiian ridge. *Geophysical Monograph* 12, *Amer. Geophys. Union.* pp. 241-76.

Skeels, D.C. 1963. An approximate solution of the island of Hawaii. *Pac. Sci.* 19:339-40.

Strange, W.E.; Woppard, G.P.; and Rose, R.C. 1965. An analysis of gravity field over the Hawaiian Islands in terms of crustal structure. *Pac. Sci.* 19:381-89.