


W. Schiesser

## Method of Lines Solution of the Korteweg-de Vries Equation

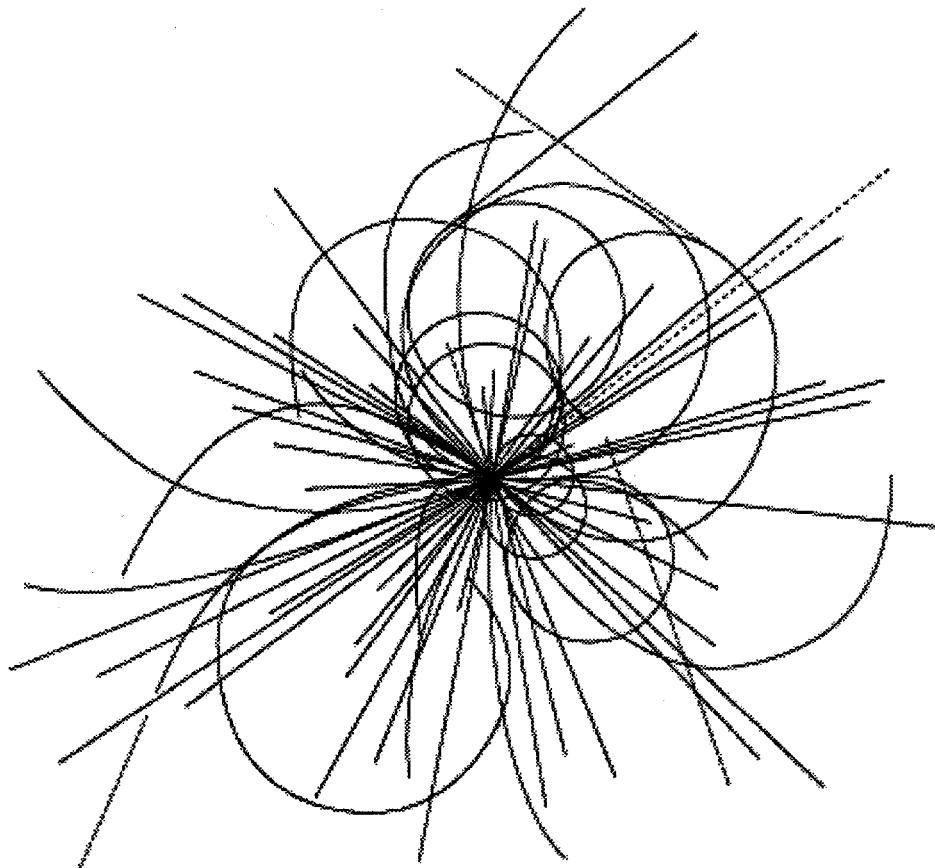

Superconducting Super Collider  
Laboratory

APPROVED FOR RELEASE OR  
PUBLICATION - O.R. PATENT GROUP  
BY ..... DATE 4/3/95

### **Disclaimer Notice**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government or any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

*Superconducting Super Collider Laboratory is an equal opportunity employer.*

## **DISCLAIMER**

**Portions of this document may be illegible  
in electronic image products. Images are  
produced from the best available original  
document.**

## Method of Lines Solution of the Korteweg-de Vries Equation\*

W. Schiesser

Superconducting Super Collider Laboratory<sup>†</sup>  
2550 Beckleymeade Avenue  
Dallas, TX 75237

June 1993

### DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

---

\* To appear in a special issue of *Computers and Mathematics with Applications* entitled "Recent Trends and Applications in the Numerical Solution of Ordinary Differential Equations."

† Operated by the Universities Research Association, Inc., for the U.S. Department of Energy under Contract No. DE-AC35-89ER40486.

# Method of Lines Solution of the Korteweg-de Vries Equation\*

W. E. Schiesser  
Superconducting Super Collider Laboratory<sup>†</sup>  
2550 Beckleymeade Avenue  
Dallas, TX 75237

and

Lehigh University  
111 Research Drive  
Bethlehem, PA 18015

## Abstract

The Korteweg-de Vries equation (KdVE) is a classical nonlinear partial differential equation (PDE) originally formulated to model shallow water flow. In addition to the applications in hydrodynamics, the KdVE has been studied to elucidate interesting mathematical properties. In particular, the KdVE balances front sharpening and dispersion to produce solitons, i.e., traveling waves that do not change shape or speed. In this paper, we compute a solution of the KdVE by the method of lines (MOL) and compare this numerical solution with the analytical solution of the KdVE. In a second numerical solution, we demonstrate how solitons of the KdVE traveling at different velocities can merge and emerge. The numerical procedure described in the paper demonstrates the ease with which the MOL can be applied to the solution of PDEs using established numerical approximations implemented in library routines.

\*To appear in RECENT TRENDS AND APPLICATIONS IN THE NUMERICAL SOLUTION OF ORDINARY DIFFERENTIAL EQUATIONS, special issue of *Computers and Mathematics with Applications*.

<sup>†</sup>Operated by the Universities Research Association, Inc., for the U.S. Department of Energy under Contract No. DE-AC35-89ER40486.

## 1 The KdVE

The classical KdVE is [Strang (1986)]

$$u_t + 6uu_x + u_{xxx} = 0, \quad (1)$$

where subscripts in  $t$  and  $x$  denote partial derivatives with respect to these independent variables, e.g.,  $u_t = \partial u / \partial t$ ,  $u_{xxx} = \partial^3 u / \partial x^3$ ;  $t$  is an initial value variable and  $x$  is a boundary value variable. Therefore, eq. (1) requires one initial condition and three boundary conditions.

Eq. (1) has the exact solution

$$u(x, t) = f(x - ct) = \frac{1}{2}c \operatorname{sech}^2\left\{\frac{1}{2}\sqrt{c}(x - ct)\right\}, \quad (2)$$

which is the equation for a soliton traveling from left to right with velocity  $c$  and height  $\frac{1}{2}c$ .

We take as the initial condition for eq. (1)

$$u(x, 0) = f(x) = \frac{1}{2}c \operatorname{sech}^2\left\{\frac{1}{2}\sqrt{c}(x)\right\}, \quad (3)$$

which follows directly from eq. (2) with  $t = 0$ .

The boundary conditions required by eq. (1) are not used in the calculation of the numerical solution. Rather, we choose an interval in  $x$  that is essentially infinite (but, of course, is finite when used in the computer code). Specifically, we use in place of the infinite interval  $-\infty \leq x \leq \infty$  the finite interval  $-30 \leq x \leq 70$ . Since the computed solitons do not closely approach these finite boundaries, i.e.,  $x = -30$  and  $x = 70$ , the imposition of boundary conditions is not required. (Thus, we have the somewhat unexpected situation that a numerical solution is easier to compute for an infinite interval than for a finite interval.)

## 2 MOL Solution of the KdV

The essential features of a MOL solution of eqs. (1) and (3) are [Schiesser (1991)]:

1. The discretization of the spatial derivatives,  $u_x$  and  $u_{xxx}$ , in eq. (1).
2. The integration of the temporal derivative,  $u_t$ , in eq. (1), which requires the integration of a system of ordinary differential equations (ODEs) in  $t$  as a result of the spatial discretization of feature 1.

We focus attention on feature 1, and accomplish feature 2 with an established ODE integrator, RKF45 [Forsythe, et al (1977)].

The derivative  $u_x$  is computed by finite differences in two ways [Schiesser (1991)]: (1) five-point biased upwind approximations implemented in library subroutine DSS020 and (2) five-point centered approximations

implemented in library subroutine DSS004. The derivative  $u_{xxx}$  is computed from a seven-point centered approximation reported by Fornberg (1992), which is implemented in subroutine UXXX7C.

A subroutine for calculating the MOL ODE temporal derivatives is listed in Program 1:

```

SUBROUTINE DERV
IMPLICIT DOUBLE PRECISION (A-H,O-Z)
PARAMETER (NG=400)
COMMON/T/           T,      NSTOP,      NORUN
1      /Y/    U(0:NG)
2      /F/    UT(0:NG)
3      /S/    UX(0:NG), UXXX(0:NG),   X(0:NG)
4      /C/    XL,          XR,          C,      SRC
5      /I/    IP

C...
C...  U
C...  X
      IF(NORUN.EQ.1)CALL DSS020(XL,XR,NG+1,U,UX,1.0D0)
      IF(NORUN.EQ.2)CALL DSS004(XL,XR,NG+1,U,UX)
C...
C...  U
C...  XXX
      CALL UXXX7C(XL,XR,NG+1,U,UXXX)
C...
C...  ODES
      DO 10 I=0,NG
C...
C...  PDE
      UT(I)=-6.0D0*U(I)*UX(I)-UXXX(I)
10  CONTINUE
      RETURN
      END

```

Program 1: Subroutine DERV for the Calculation of the Temporal Derivatives of Eq. (1)

The following points can be noted about subroutine DERV (reading from top to bottom):

1. The number of spatial intervals in  $x$ , NG, is 400.
2.  $u$  is in array U(0:NG) in COMMON/Y/.
3.  $u_t$  is in array UT(0:NG) in COMMON/F/.
4.  $u_x$  and  $u_{xxx}$  are in arrays UX(0:NG) and UXXX(0:NG), respectively, in COMMON/S/.
5.  $u_x$  is computed by a call to DSS020 for the first solution (NORUN = 1) or a call to DSS004 for the second solution (NORUN = 2).

```

C...
C...  U

```

```

C...  X
      IF(NORUN.EQ.1)CALL DSS020(XL,XR,NG+1,U,UX,1.0D0)
      IF(NORUN.EQ.2)CALL DSS004(XL,XR,NG+1,U,UX)

```

The details of these routines are given elsewhere [Schiesser (1991)].

6.  $u_{xxx}$  is then computed by a call to UXXX7C.

```

C...
C...  U
C...  XXX
      CALL UXXX7C(XL,XR,NG+1,U,UXXX)

```

Subroutine UXXX7C is listed in Appendix A to illustrate: (a) the use of a tabulated finite difference in a MOL differentiation routine; in this case, a seven-point finite difference for  $u_{xxx}$  given by Fornberg (1992), and (b) the programming for an infinite interval in  $x$  that does not require the imposition of specific boundary conditions.

7.  $u_t$  is calculated in DO loop 10.

```

C...
C...  ODES
      DO 10 I=0,NG
C...
C...  PDE
      UT(I)=-6.0D0*U(I)*UX(I)-UXXX(I)
10    CONTINUE

```

This coding illustrates one of the positive features of the MOL, the close resemblance between the PDE(s), in this case eq. (1), and the coding. Also, the coding is very compact considering the complexity and nonlinearity of the PDE.

8. The 401 ODE temporal derivatives are sent to the ODE integrator, RKF45, through COMMON/F/, and the 401-dependent variables are returned to DERV through COMMON/Y/ for use in the programming of the MOL approximation of the PDE.

The numerical and analytical solutions are printed and plotted in an output routine. The plotted output is given in Figure 1 for  $c = 1$  (unit velocity) and NORUN = 1, which shows the solitons traveling left to right for  $t = 0$  (centered at  $x = 0$ ), 5, 10, ..., 35 (centered at  $x = 35$ ). This comparison of the solutions is particularly interesting at the peak of the solitons (for  $x = ct$  in eq. (2)), which, from eq. (2), has the value  $\frac{1}{2}$ . This comparison is given in Table 1, which lists the numerical and analytical solutions at  $x - ct = -0.25, 0, 0.25$  for  $t = 0$  and 30.

DSS020 (NORUN = 1)

I	T	X(I)	X(I)-T	ABS(UN)	ABS(UE)	DIFF
119	0.00	-0.25	-0.250	0.49227	0.49227	0.000D+00
120	0.00	0.00	0.000	0.50000	0.50000	0.000D+00
121	0.00	0.25	0.250	0.49227	0.49227	0.000D+00

CONSERVATION OF MASS = 2.0000  
 CONSERVATION OF ENERGY = 0.3333  
 WHITHAM CONSERVATION = 0.4000

I	T	X(I)	X(I)-T	ABS(UN)	ABS(UE)	DIFF
239	30.00	29.75	-0.250	0.49245	0.49227	0.186D-03
240	30.00	30.00	0.000	0.49923	0.50000	-0.765D-03
241	30.00	30.25	0.250	0.49054	0.49227	-0.172D-02

CONSERVATION OF MASS = 1.9990  
 CONSERVATION OF ENERGY = 0.3323  
 WHITHAM CONSERVATION = 0.3979

DSS004 (NORUN = 2)

I	T	X(I)	X(I)-T	ABS(UN)	ABS(UE)	DIFF
119	0.00	-0.25	-0.250	0.49227	0.49227	0.000D+00
120	0.00	0.00	0.000	0.50000	0.50000	0.000D+00
121	0.00	0.25	0.250	0.49227	0.49227	0.000D+00

CONSERVATION OF MASS = 2.0000  
 CONSERVATION OF ENERGY = 0.3333  
 WHITHAM CONSERVATION = 0.4000

I	T	X(I)	X(I)-T	ABS(UN)	ABS(UE)	DIFF
239	30.00	29.75	-0.250	0.49230	0.49227	0.325D-04
240	30.00	30.00	0.000	0.50020	0.50000	0.196D-03
241	30.00	30.25	0.250	0.49212	0.49227	-0.148D-03

CONSERVATION OF MASS = 2.0000  
 CONSERVATION OF ENERGY = 0.3333  
 WHITHAM CONSERVATION = 0.3999

Table 1: Comparison of the Numerical and Analytical Solutions to Eq. (1) near  $x = ct$ .

We can note the following points about the output in Table 1:

1. At  $t = 0$ , the solution is 0.50000 at  $x = 0$ , as expected (in accordance with eq. (2)). This peak value is then maintained by the solution when  $x = ct$  in accordance with eq. (2), e.g., for  $c = 1$ ,  $x = t = 30$ , the analytical solution is again 0.50000.
2. The solutions of eq. (1) satisfy an infinity of conservation principles. Here we illustrate the calculation of three:
  - (a) Conservation of mass, defined as

$$u_1(t) = \int_{-\infty}^{\infty} u(x, t) dx; \quad (4)$$

(b) Conservation of energy, defined as

$$u_2(t) = \int_{-\infty}^{\infty} \frac{1}{2} u^2(x, t) dx; \quad (5)$$

(c) Conservation proposed by Whitham [Strang (1986)], defined as

$$u_3(t) = \int_{-\infty}^{\infty} 2u^3(x, t) - u_x^2(x, t) dx. \quad (6)$$

Integrals  $u_1(t)$ ,  $u_2(t)$ , and  $u_3(t)$  were evaluated numerically by Simpson's rule. From the numerical output, we see  $u_1(0) = 2$ ,  $u_2(0) = \frac{1}{3}$ , and  $u_3(0) = 0.4$ .

In using the five-point biased upwind approximations in DSS020, errors accumulated with increasing  $t$  so that the three integrals of eqs. (4), (5), and (6) were correct to approximately three figures at  $t = 30$ , i.e.,  $u_1(30) = 1.990$ ,  $u_2(30) = 0.3323$ , and  $u_3(30) = 0.3979$ .

In using the five-point centered approximations in DSS004, errors accumulated with increasing  $t$  so that the three integrals of eqs. (4), (5), and (6) were correct to four figures at  $t = 30$ , i.e.,  $u_1(30) = 2.000$ ,  $u_2(30) = 0.3333$ , and  $u_3(30) = 0.3999$ .

Thus, the centered approximations in this case performed better than the biased upwind approximations, even though the solution of eq. (1) appears to be "strongly convective" as suggested by Figure 1, and therefore one would expect that some upwinding would lead to better results.

3. The better performance of the centered approximations is also evident in the numerical solutions. For the biased upwind approximations, the differences between the numerical solution,  $u_n(x, t)$ , and the analytical solution,  $u_e(x, t)$ , that is  $\Delta(x, t) = u_n(x, t) - u_e(x, t)$ , are

Biased upwind (DSS020):

$$\begin{aligned} \Delta(29.75, 30) &= 0.000186 \\ \Delta(30.00, 30) &= -0.000765 \\ \Delta(30.25, 30) &= -0.00172 \end{aligned}$$

Centered (DSS004):

$$\begin{aligned} \Delta(29.75, 30) &= 0.0000325 \\ \Delta(30.00, 30) &= 0.000196 \\ \Delta(30.25, 30) &= -0.000148. \end{aligned}$$

The centered approximations gave substantially smaller errors than the biased upwind approximations.

A second MOL solution was computed for an initial condition consisting of the sum of two "sech" pulses, i.e., pulses of the form given by eq. (3): (a) a pulse centered at  $x = -15$  with  $c = 2$  and (b) a pulse centered at  $x = 15$  with  $c = 0.5$ , as plotted in Fig. 2a. The left pulse has a higher velocity (and therefore also height) so that it overtakes and merges with the right pulse, as indicated in Figs. 2b and 2c. The faster pulse then emerges to the right of the slower pulse, as indicated in Figs. 2d and 2e. Eventually, the two original pulses (at  $t = 0$ ) reappear, e.g., at  $t = 35$ , as indicated in Fig. 2f, and continue to travel with their original shape.

### 3 Summary

The MOL has been used to compute a solution to the KdVE with modest programming. Different approximations could easily be used by switching between library routines (i.e., DSS020 vs. DSS004). The temporal integration of the 401 ODEs was easily accomplished with a library explicit integrator, RKF45 (although the use of an implicit integrator might generally be required if the ODEs are stiff). Based on this experience and that of many previous studies, we can recommend the MOL as a convenient method for the numerical integration of PDEs.

A complete, documented Fortran code for the solution of the KdVE, including all of the library routines discussed in this paper, is available on request from the author on a DOS-formatted 1.4-mb, 3.5-in. diskette. This code can be used to investigate variants of the KdVE, e.g.,

$$u_t + 6u^n u_x + u_{xxx} = 0, \quad (7)$$

which undergoes substantial changes in the solution for  $n \geq 4$  [Taha, et al. (1993)]. Also, the code can be modified for the solution of other PDEs.

### 4 Bibliography

Fornberg, B., (1992), "Fast Generation of Weights in Finite Difference Formulas," in *Recent Developments in Numerical Methods and Software for ODEs/DAEs/PDEs*, G. D. Byrne and W. E. Schiesser (eds.), World Scientific, River Edge, NJ, Fig. 3, p. 114.

Forsythe, G. E., M. A. Malcolm, and C. B. Moler, (1977), *Computer Methods for Mathematical Computations*, Prentice-Hall, Englewood Cliffs, NJ.

Schiesser, W. E., (1991), *The Numerical Method of Lines Integration of Partial Differential Equations*, Academic Press, San Diego.

Strang, G., (1986), *Introduction to Applied Mathematics*, Wellesley-Cambridge Press, Wellesley, MA, pp. 599–602.

Taha, T., and J. Liaw, (1993), "A Parallel-vector Algorithm for an Investigation of a Self-focusing Singularity of Higher KdV Equations," to appear in *Journal of High Speed Computing*.

### 5 Appendix A - Subroutine UXXX7C

Subroutine UXXX7C is listed below to illustrate how existing approximations for spatial derivatives can be used within the MOL.

```
SUBROUTINE UXXX7C(XL,XU,N,U,UXXX)
C...
C...  DOUBLE PRECISION CODING IS USED
      IMPLICIT DOUBLE PRECISION (A-H,O-Z)
C...
C...  VARIABLE DIMENSION ARRAYS
```

```

DIMENSION U(N), UXXX(N)
C...
C... GRID SPACING, 1/(8*(DX**3))
DX=(XU-XL)/DFLOAT(N-1)
R8DX=1.0D0/(8.0D0*(DX**3))
C...
C... COMPUTE THIRD SPATIAL DERIVATIVE
DO 1 I=1,N
C...
C...      AT THE LEFT END, UXXX = 0
IF(I.LT.4)THEN
  UXXX(I)=0.0D0
C...
C...      AT THE RIGHT END, UXXX = 0
ELSE
+ IF(I.GT.(N-3))THEN
  UXXX(I)=0.0D0
C...
C...      INTERIOR POINTS (SEVEN POINT CENTERED APPROXIMATION; SEE FORNBERG,
C...      B, "FAST GENERATION OF WEIGHTS IN FINITE DIFFERENCE FORMULAS", IN
C...      RECENT DEVELOPMENTS IN NUMERICAL METHODS AND SOFTWARE FOR ODES/
C...      DAES/PDES, G. D. GYRNE AND W. E. SCHIESSER (EDS.), WORLD SCIENT-
C...      IFIC, RIVER EDGE, NJ, 1992, FIG. 3, P114.
ELSE
  UXXX(I)=R8DX*
  1  ( 1.D+00    *U(I-3)
  2  -8.D+00    *U(I-2)
  3  +13.D+00   *U(I-1)
  4  +0.D+00    *U(I  )
  5  -13.D+00   *U(I+1)
  6  +8.D+00    *U(I+2)
  6  -1.D+00    *U(I+3))
END IF
C...
C... NEXT GRID POINT
1  CONTINUE
RETURN
END

```

**Fig. 1: MOL Solution to Eq. (1) with Initial Condition Eq. (3)**

**Fig. 2a: Two-pulse Initial Condition for Eq. (1)**

**Fig. 2b: Two-pulse Solution at  $t = 10$**

**Fig. 2c: Two-pulse Solution at  $t = 15$**

**Fig. 2d: Two-pulse Solution at  $t = 20$**

**Fig. 2e: Two-pulse Solution at  $t = 25$**

**Fig. 2f: Two-pulse Solution at  $t = 35$**

Fig. 1: MOL Solution to Eq. (1) with Initial Condition Eq. (3)

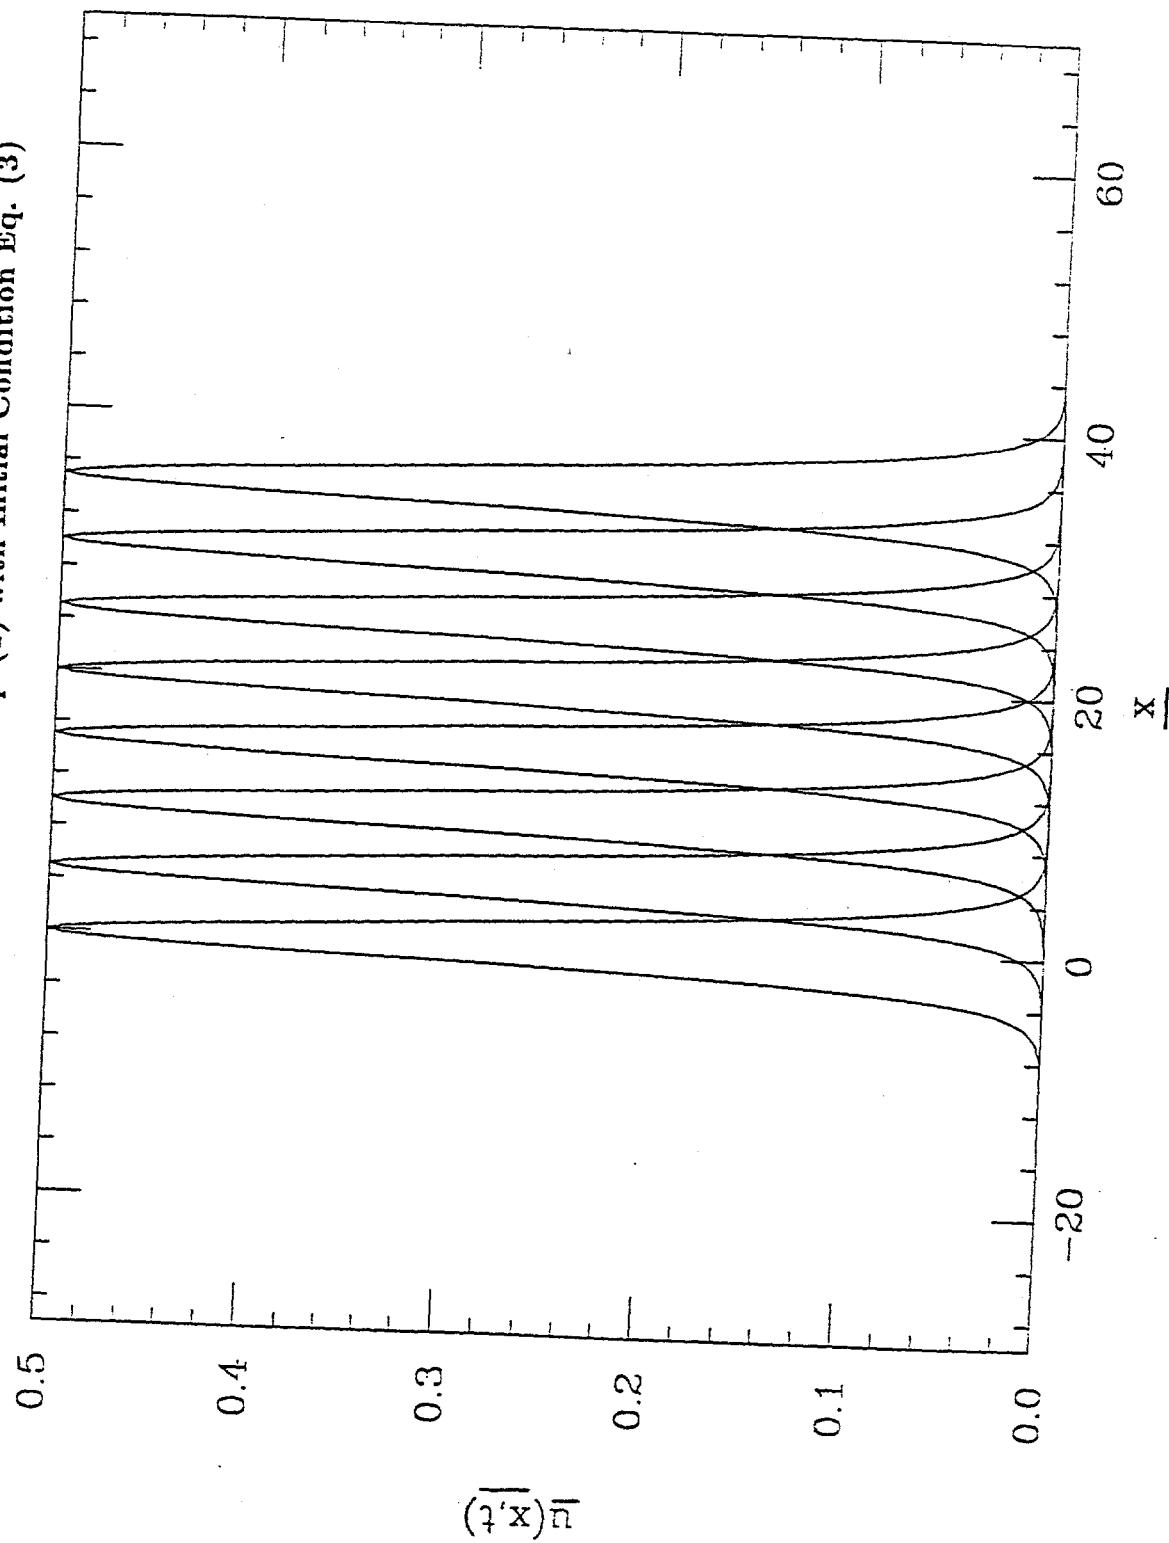


Fig. 2a: Two-pulse Initial Condition for Eq. (1)

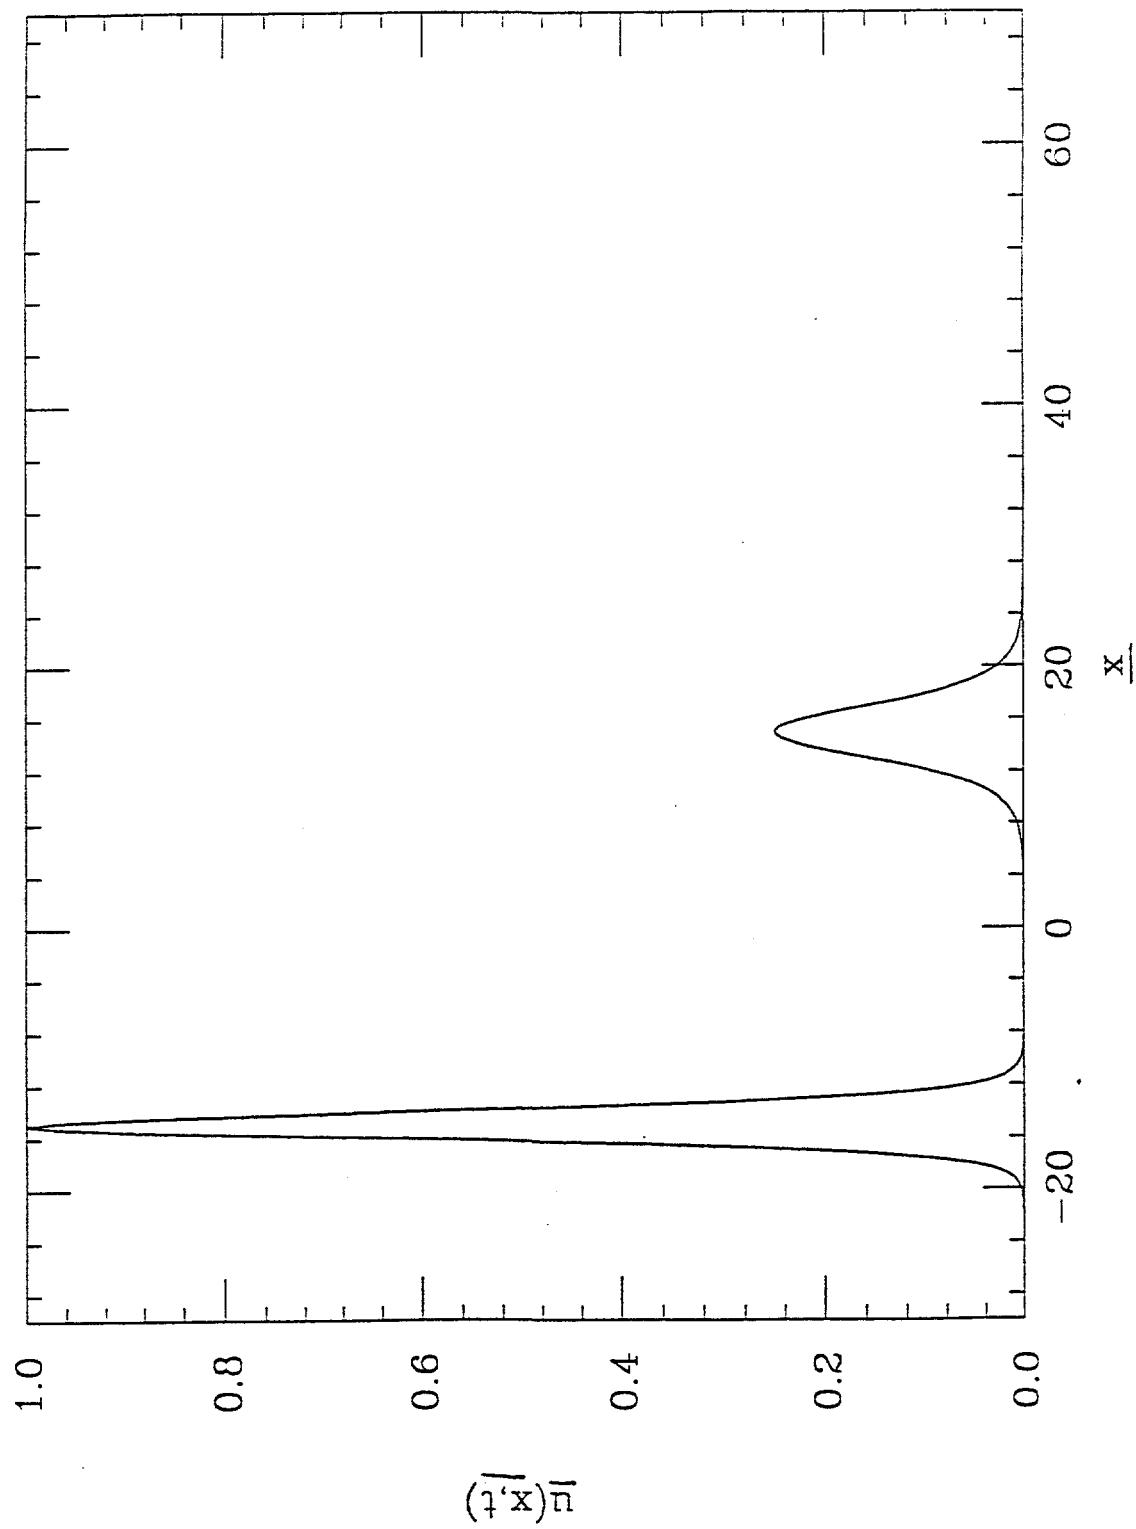


Fig. 2b: Two-pulse Solution at  $t = 10$

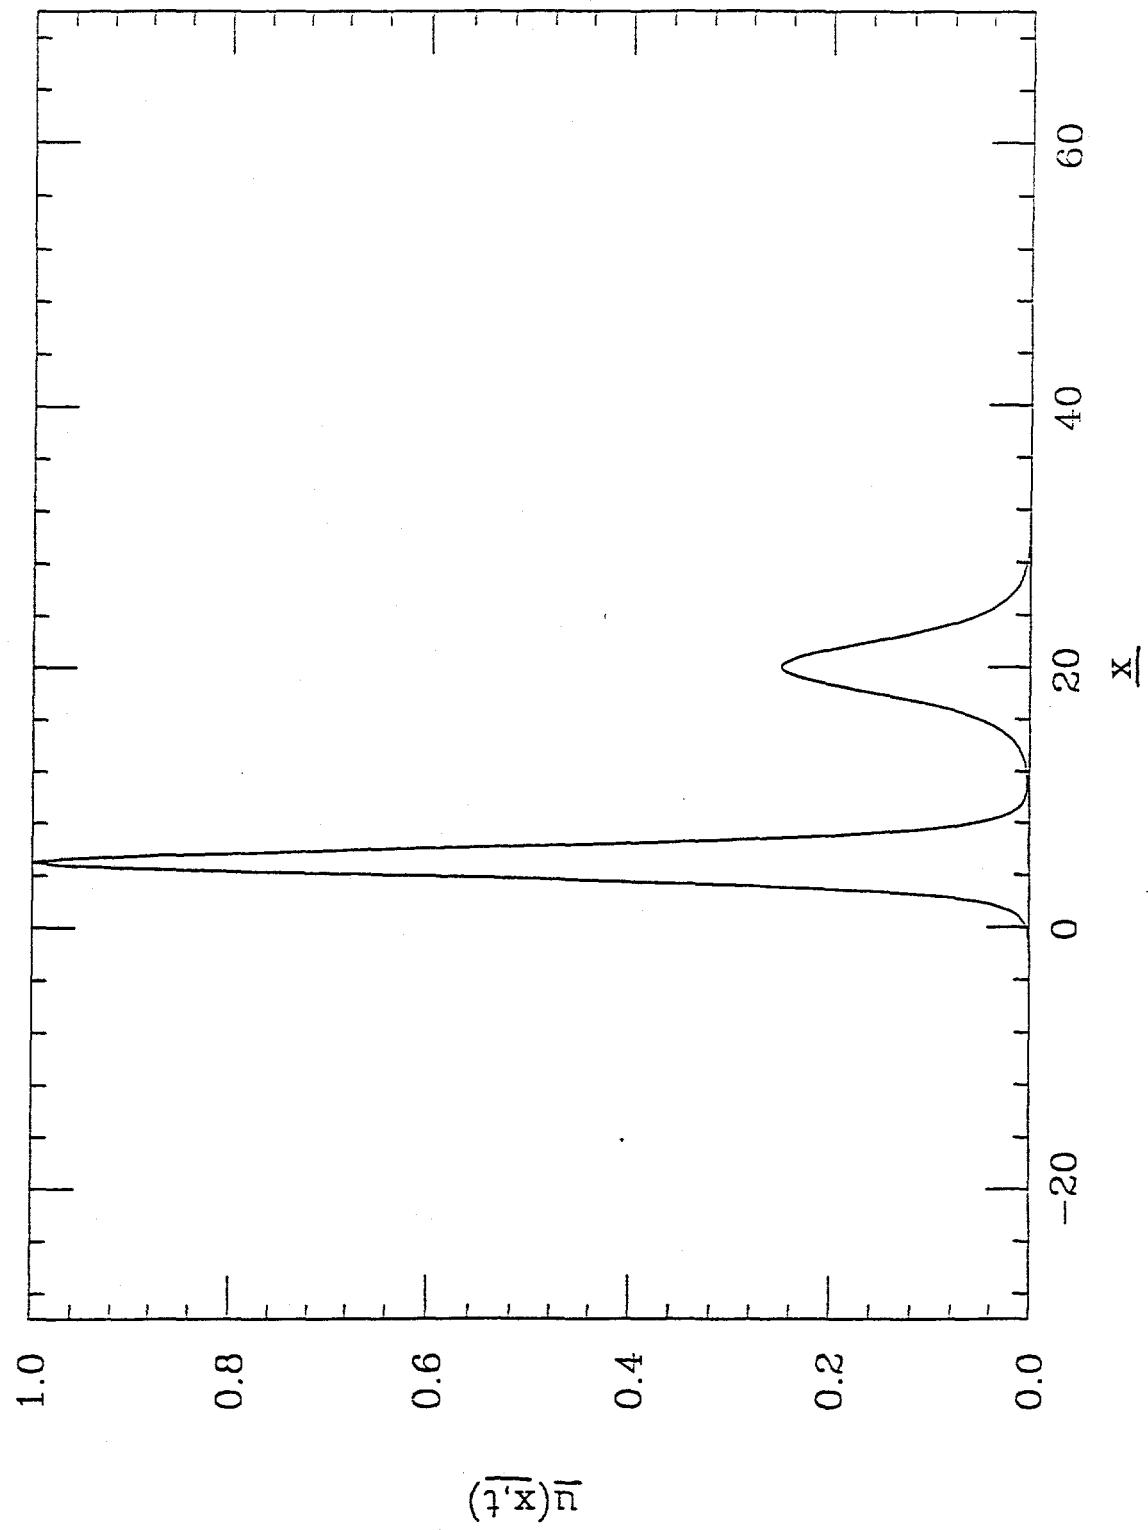


Fig. 2c: Two-pulse Solution at  $t = 15$

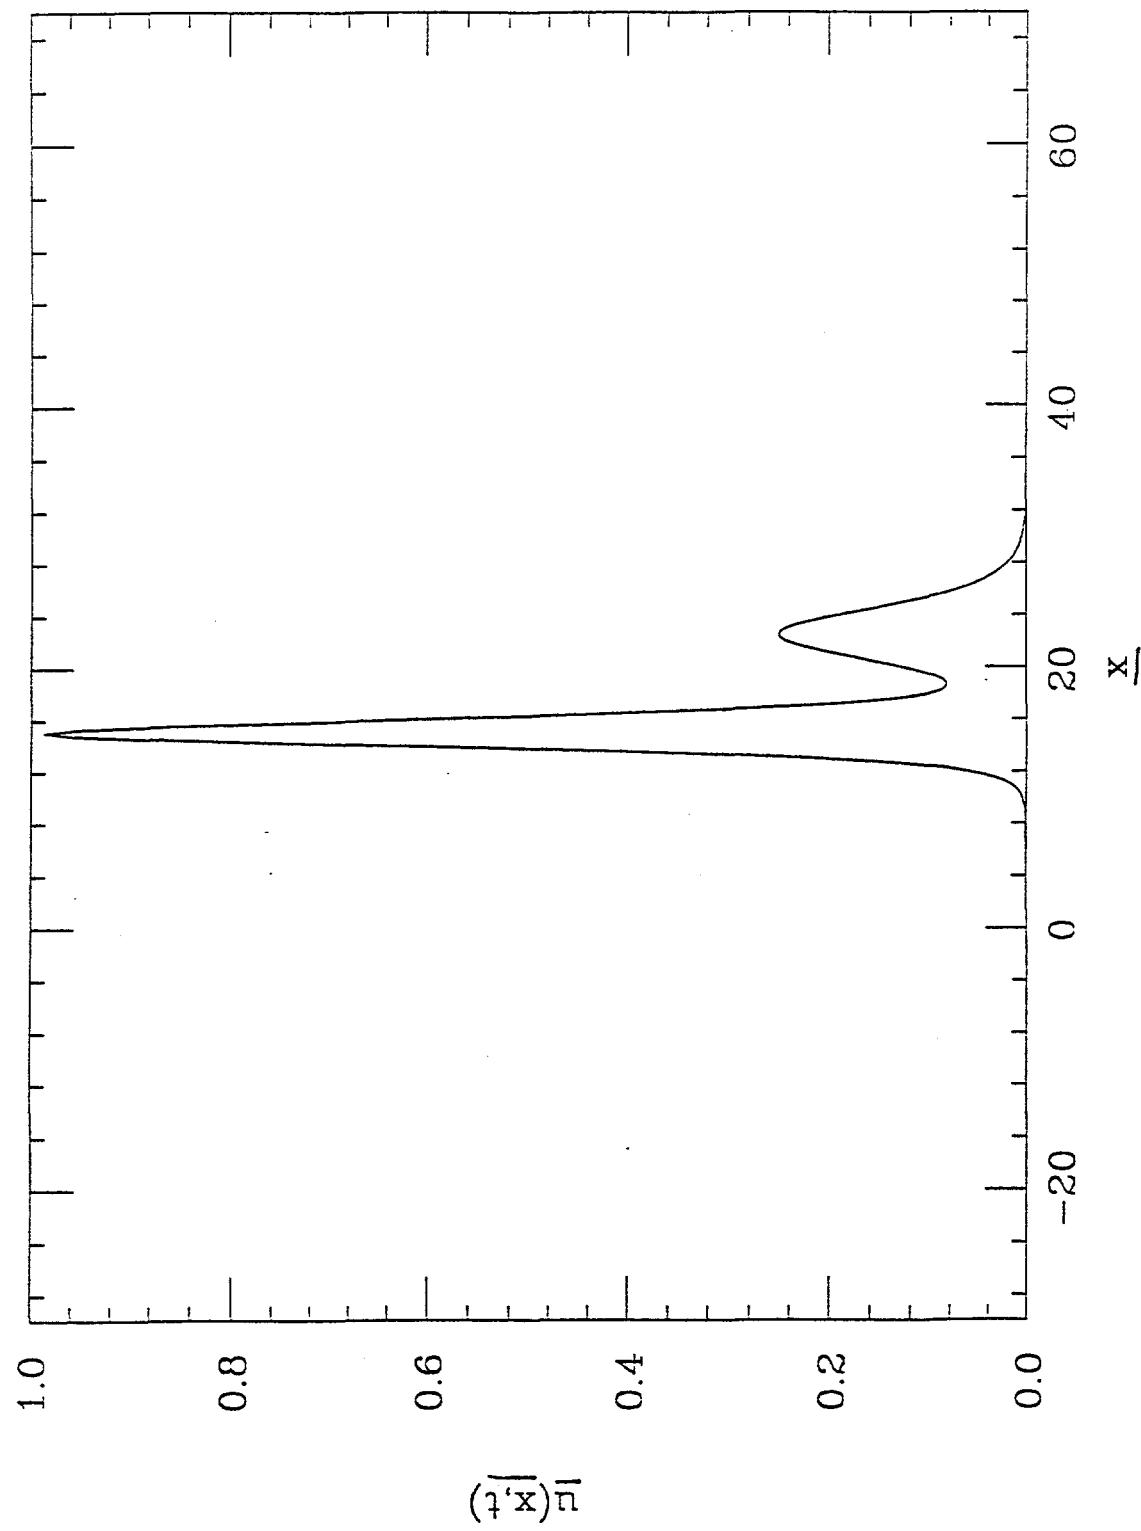


Fig. 2d: Two-pulse Solution at  $t = 20$

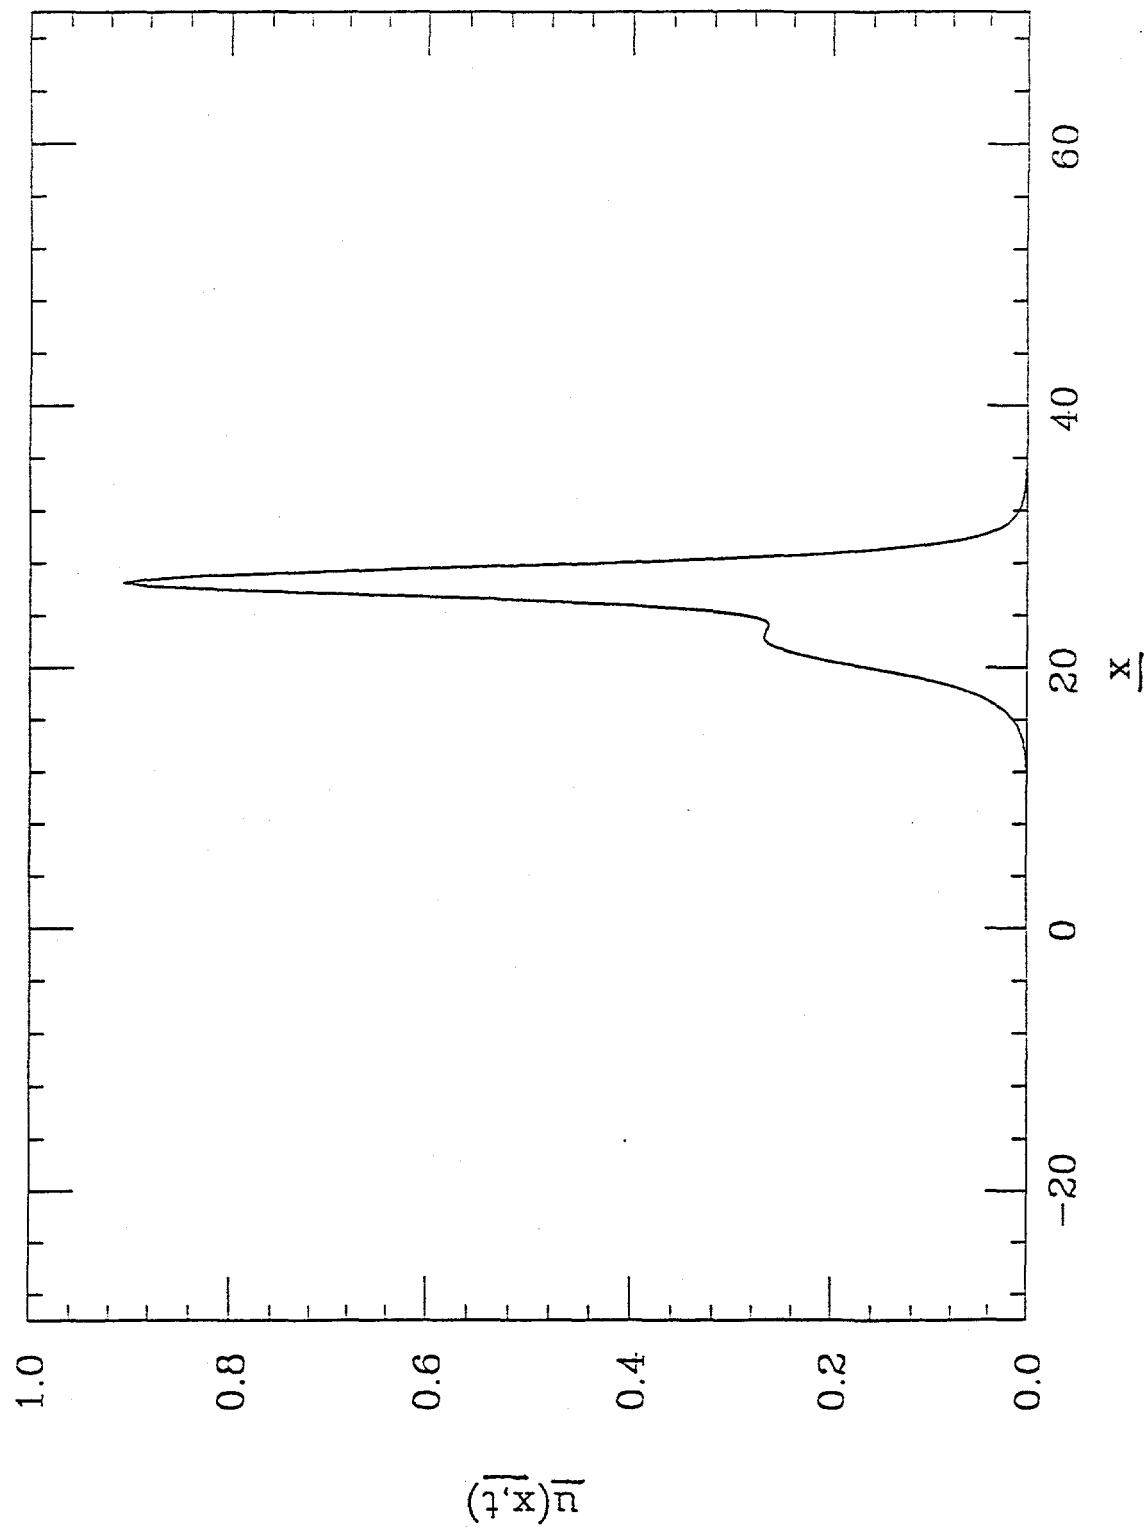


Fig. 2e: Two-pulse Solution at  $t = 25$

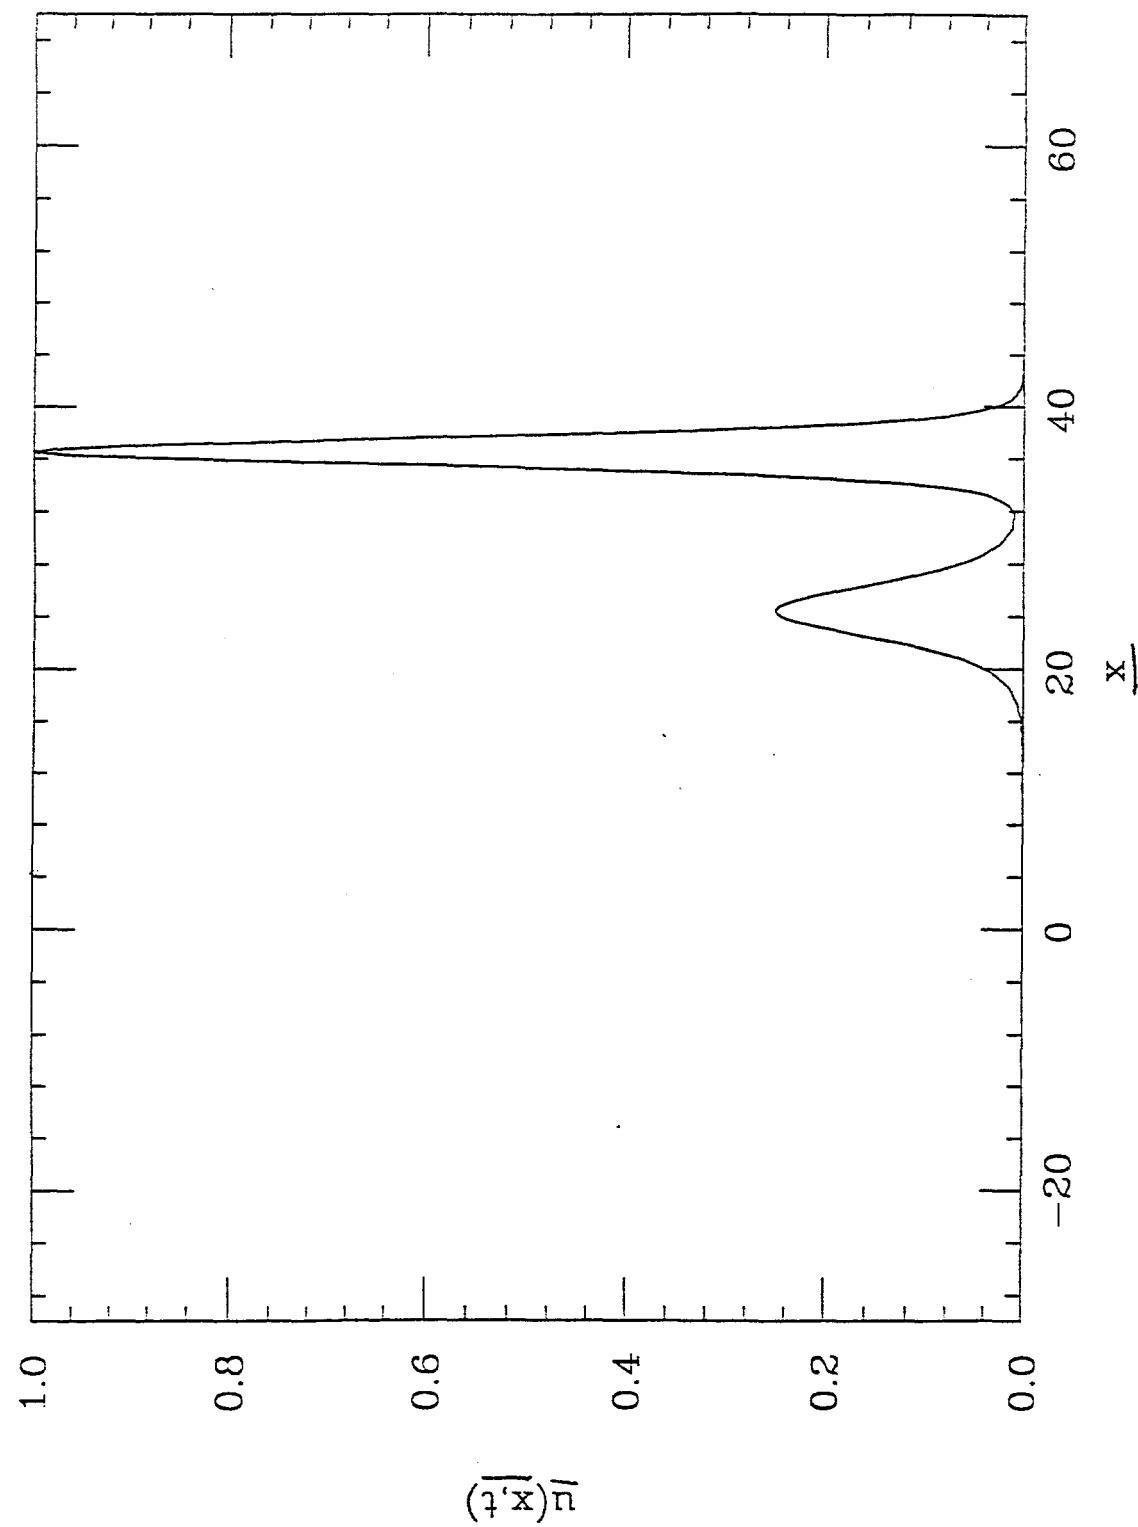


Fig. 2f: Two-pulse Solution at  $t = 35$

