

CONF-980713--

To be presented at Microscopy & Microanalysis '98, Atlanta, Georgia,  
July 12-16, 1998 and published in *Proceedings*

## Direct Observations of Defect Structures in Optoelectronic Materials by Z-Contrast STEM

RECEIVED

MAR 30 1998

OSTI

Y. Xin,<sup>1,2</sup> N. D. Browning,<sup>1</sup> S. J. Pennycook,<sup>2</sup> P. D. Nellist,<sup>3</sup> Y. P. Chen,<sup>1</sup>  
S. Rujirawat,<sup>1</sup> S. Sivananthan,<sup>1</sup> F. Omnes,<sup>4</sup> B. Beaumont,<sup>4</sup>  
J.-P. Faurie,<sup>1,4</sup> and P. Gibart<sup>4</sup>

<sup>1</sup>Department of Physics, University of Illinois at Chicago  
Chicago, IL 60607-7059

<sup>2</sup>Solid State Division, Oak Ridge National Laboratory  
P.O. Box 2008, Oak Ridge, Tennessee 37831-6030

<sup>3</sup>Cavendish Laboratory, Cambridge University  
Madingley Road, Cambridge CB3 0HE, United Kingdom

<sup>4</sup>CRHEA-CNRS, rue Bernard Gregory  
06560 Valbonne, France

19980529  
036

"The submitted manuscript has been authored  
by a contractor of the U.S. Government under  
contract No. DE-AC05-96OR22464.  
Accordingly, the U.S. Government retains a  
nonexclusive, royalty-free license to publish or  
reproduce the published form of this  
contribution, or allow others to do so, for U.S.  
Government purposes."

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

MASTER

prepared by

SOLID STATE DIVISION  
OAK RIDGE NATIONAL LABORATORY

Managed by

LOCKHEED MARTIN ENERGY RESEARCH CORP.  
under

Contract No. DE-AC05-96OR22464

with the

U.S. DEPARTMENT OF ENERGY  
Oak Ridge, Tennessee

DTIC QUALITY INSPECTED 1

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

# DIRECT OBSERVATIONS OF DEFECT STRUCTURES IN OPTOELECTRONIC MATERIALS BY Z-CONTRAST STEM

Y. Xin<sup>1,2</sup>, N.D. Browning<sup>1</sup>, S.J. Pennycook<sup>2</sup>, P.D. Nellist<sup>3</sup>, Y.P. Chen<sup>1</sup>, S. Rujirawat<sup>1</sup>, S. Sivananthan<sup>1</sup>, F. Omnes<sup>4</sup>, B. Beaumont<sup>4</sup>, J-P Faurie<sup>1,4</sup> and P. Gibart<sup>4</sup>

<sup>1</sup>Department of Physics, University of Illinois at Chicago, Chicago, IL 60607-7059, USA.

<sup>2</sup>Solid State Division, Oak Ridge National Laboratory, Oak Ridge, TN 37831-6031, USA

<sup>3</sup>Cavendish Laboratory, Cambridge University, Madingley Road, Cambridge CB3 0HE, UK

<sup>4</sup>CRHEA-CNRS, rue Bernard Gregory, 06560 Valbonne, France.

Optoelectronic semiconductor materials have wide and important technological applications. For example, wide gap nitride semiconductors have attracted significant attention recently due to their promising performance as short-wavelength light emitting diodes (LEDs) and blue lasers, while HgCdTe II-VI semiconductors are the most promising candidates for applications as infrared detectors, or large array x-ray or r-ray detectors. In this paper, two examples are given to show that high-resolution Z-contrast imaging is an effective technique to determine the atomic structures of defects in these complex semiconductor materials.

One interesting issue concerning GaN is that the material is relatively insensitive to the presence of a density of dislocations which is six orders of magnitude higher than that for III-V arsenide and phosphide based LEDs. To develop a fundamental understanding of the properties of the dislocations in GaN, the core structures are determined here by atomic-resolution Z-contrast imaging in a VG Microscopes 300kV HB603 scanning transmission electron microscope (STEM) with a resolution of 0.13nm. Figure 1a shows a high resolution Z-contrast image along  $\langle 0001 \rangle$  of a threading edge dislocation in GaN. As the Z-contrast image is a convolution between the probe intensity profile and the specimen object function, it is possible to obtain detailed information on the atomic column positions through maximum entropy analysis (Fig. 1b). (The maximum entropy technique produces the 'most likely' object function consistent with the image). As can be clearly seen in Fig. 1b, the core structure is just an 8-fold ring, indicated by the numbers 1 to 8 in Fig. 2c. Such a structure is not expected to have deep levels in the band gap and therefore should be electrically inactive[1].

For a sphalerite semiconductor, polarity is an important issue, as the asymmetry of the structure gives rise to different physical and chemical properties. Here we show that high resolution Z-contrast imaging could be used as an effective method to determine the polarity of II-VI semiconductors without referring to reference samples or image simulations. Fig.2a is a Z-contrast image of the interface region between CdTe and HgCdTe at lower magnification down  $\langle 110 \rangle$ . Fig.2b and Fig. 2c are enlargements from the CdTe substrate and the HgCdTe layer. As the intensity of atomic columns is proportional to the mean square atomic number ( $Z$ ), it is very clear that the CdTe has the  $\{111\}B$  polarity (ie, is Te-terminated). In the alloy, it is known that Hg replaces Cd atoms with a Hg content of 22.4%, the mixed atomic columns of Cd(Hg) image brighter than the Te columns. Therefore the epilayer maintains the same sublattice polarity as the substrate.

## References:

1. J. Elsner, R. Jones, P.K. Sitch, V.D. Porezag, M. Elstner, Th. Frauenheim, M.I. Heggie, S. Oberg and P.R. Briddon, Phys. Rev. Lett., **79** (1997) 3672
2. Research sponsored by DOE under grant number DOE DE-GF02-96ER45610 and contract DE-AC05-96OR22464 with Lockheed Martin Energy Research Corporation, and by an appointment to the ORNL Postdoctoral Research Program administered jointly by ORNL and ORISE.








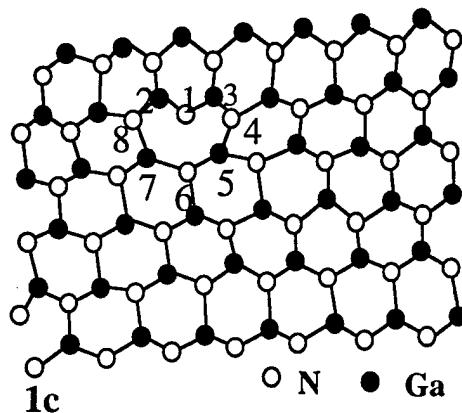


Fig.1(a) High-resolution Z-contrast image of a threading edge dislocation looking down  $<0001>$ .  
 (b) Maximum entropy image of (a) showing most probable column positions.  
 (c) Sketch of the core structure determined from the experimental data.

Fig.2 (a) High resolution Z-contrast image of interface (indicated) region of CdTe/HgCdTe down [110]. Enlargements from CdTe substrate (b) and from epilayer (c) showing the polarity.

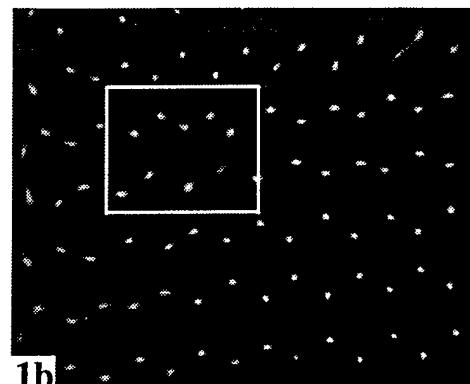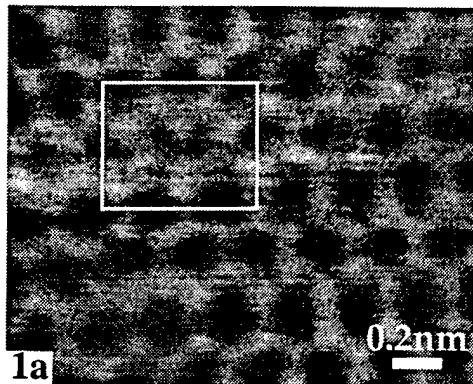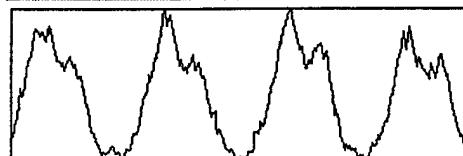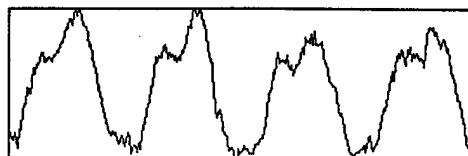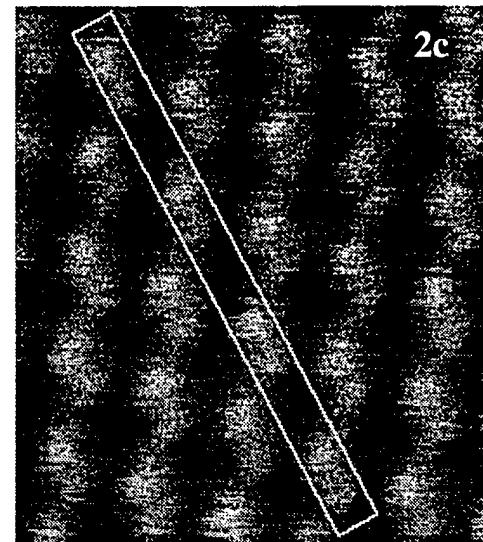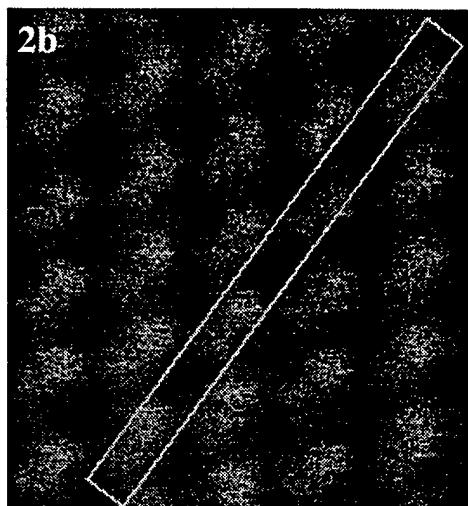

M98004963

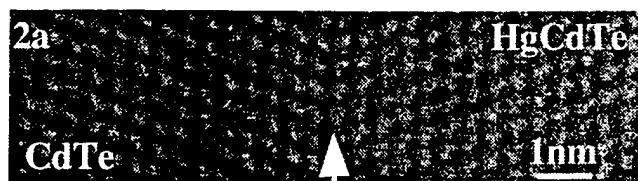

Report Number (14) ORNL/CP--97026  
CONF-980713--

Publ. Date (11) 199802  
Sponsor Code (18) DOE/ER, XF  
UC Category (19) UC-404, DOE/ER

DOE