

MASTER

**PWR Blowdown Heat Transfer Separate-Effects
Program—Thermal-Hydraulic Test Facility
Experimental Data Report for Test 158**

V. D. Clemons
R. A. Hedrick
M. D. White

Prepared for the U.S. Nuclear Regulatory Commission
Office of Nuclear Regulatory Research
Under Interagency Agreements DOE 40-551-75 and 40-552-75

OAK RIDGE NATIONAL LABORATORY
OPERATED BY UNION CARBIDE CORPORATION • FOR THE DEPARTMENT OF ENERGY

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

DISCLAIMER

Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.

Printed in the United States of America. Available from
National Technical Information Service
U.S. Department of Commerce
5285 Port Royal Road, Springfield, Virginia 22161

This report was prepared as an account of work sponsored by the United States Government. Neither the United States nor any of its employees, nor any of its contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness or usefulness of any information, apparatus, product or process disclosed, or represents that its use would not infringe privately owned rights

NUREG/CR-0378
ORNL/NUREG/TM-249
Dist. Category R2

Contract No. W-7405-eng-26

Engineering Technology Division

PWR BLOWDOWN HEAT TRANSFER SEPARATE-EFFECTS PROGRAM —
THERMAL-HYDRAULIC TEST FACILITY EXPERIMENTAL
DATA REPORT FOR TEST 158

V. D. Clemons R. A. Hedrick M. D. White

Manuscript Completed — October 4, 1978
Date Published — November 1978

NOTICE: This document contains information of a preliminary nature. It is subject to revision or correction and therefore does not represent a final report.

Prepared for the
U.S. Nuclear Regulatory Commission
Office of Nuclear Regulatory Research
Under Interagency Agreements DOE 40-551-75 and 40-552-75

NRC FIN No. B0125

Prepared by the
OAK RIDGE NATIONAL LABORATORY
Oak Ridge, Tennessee 37830
operated by
UNION CARBIDE CORPORATION
for the
DEPARTMENT OF ENERGY

— NOTICE —
This report was prepared as an account of work sponsored by the United States Government. Neither the United States nor the United States Department of Energy, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness or usefulness of any information, apparatus, product or process disclosed, or represents that its use would not infringe privately owned rights.

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

CONTENTS

	<u>Page</u>
ACKNOWLEDGMENTS	xix
ABSTRACT	1
I. INTRODUCTION	1
II. SYSTEM, PROCEDURES, CONDITIONS, AND EVENTS FOR TEST 158	2
1. System Configuration and Test Procedure	2
2. Initial Test Conditions and Sequence of Events	4
III. DATA PRESENTATION	7
TABLES	
1. Desired vs actual prerupture conditions	4
2. Prerupture primary-coolant temperature and pressure distribution — test 158	5
3. Sequence of events during test 158	5
4. Precision of experimental measurements for test 158	12
5. Data presentation for test 158	13
FIGURES	
1. Thermal-Hydraulic Test Facility (THTF)	3
2. Prerupture loop energy balance	6
3. Prerupture primary side heat exchanger summary	6
4. Prerupture secondary side heat exchanger summary	7
5. Identification of THTF heater rod and subchannel locations in bundles 1 and 2	8
6. Location of thermocouples in THTF bundle 1	9
7. THTF instrument identification and location	10
 <u>[Figures 8 through 507 have no page numbers assigned in micro- fiche edition of this report.]</u>	
8. TE-301AD, sheath thermocouple, rod 1, level D	30
9. TE-304AD, sheath thermocouple, rod 4, level D	30
10. TE-309AD, sheath thermocouple, rod 9, level D	31
11. TE-310AD, sheath thermocouple, rod 10, level D	31
12. TE-312AD, sheath thermocouple, rod 12, level D	32
13. TE-313AD, sheath thermocouple, rod 13, level D	32
14. TE-317AD, sheath thermocouple, rod 17, level D	33

	<u>Page</u>
15. TE-318AD, sheath thermocouple, rod 18, level D	33
16. TE-320AD, sheath thermocouple, rod 20, level D	34
17. TE-322AD, sheath thermocouple, rod 22, level D	34
18. TE-323AD, sheath thermocouple, rod 23, level D	35
19. TE-325AD, sheath thermocouple, rod 25, level D	35
20. TE-326AD, sheath thermocouple, rod 26, level D	36
21. TE-331AD, sheath thermocouple, rod 31, level D	36
22. TE-338AD, sheath thermocouple, rod 38, level D	37
23. TE-339AD, sheath thermocouple, rod 39, level D	37
24. TE-341AD, sheath thermocouple, rod 41, level D	38
25. TE-349AD, sheath thermocouple, rod 49, level D	38
26. TE-301AE, sheath thermocouple, rod 1, level E	39
27. TE-304AE, sheath thermocouple, rod 4, level E	39
28. TE-309AE, sheath thermocouple, rod 9, level E	40
29. TE-312AE, sheath thermocouple, rod 12, level E	40
30. TE-313AE, sheath thermocouple, rod 13, level E	41
31. TE-317AE, sheath thermocouple, rod 17, level E	41
32. TE-318AE, sheath thermocouple, rod 18, level E	42
33. TE-320AE, sheath thermocouple, rod 20, level E	42
34. TE-322AE, sheath thermocouple, rod 22, level E	43
35. TE-323AE, sheath thermocouple, rod 23, level E	43
36. TE-324AE, sheath thermocouple, rod 24, level E	44
37. TE-325AE, sheath thermocouple, rod 25, level E	44
38. TE-326AE, sheath thermocouple, rod 26, level E	45
39. TE-331AE, sheath thermocouple, rod 31, level E	45
40. TE-333AE, sheath thermocouple, rod 33, level E	46
41. TE-338AE, sheath thermocouple, rod 38, level E	46
42. TE-339AE, sheath thermocouple, rod 39, level E	47
43. TE-341AE, sheath thermocouple, rod 41, level E	47
44. TE-349AE, sheath thermocouple, rod 49, level E	48
45. TE-301BF, sheath thermocouple, rod 1, level F	48
46. TE-304BF, sheath thermocouple, rod 4, level F	49
47. TE-309BF, sheath thermocouple, rod 9, level F	49
48. TE-310BF, sheath thermocouple, rod 10, level F	50

	<u>Page</u>
49. TE-312BF, sheath thermocouple, rod 12, level F	50
50. TE-313BF, sheath thermocouple, rod 13, level F	51
51. TE-317BF, sheath thermocouple, rod 17, level F	51
52. TE-320BF, sheath thermocouple, rod 20, level F	52
53. TE-322BF, sheath thermocouple, rod 22, level F	52
54. TE-323BF, sheath thermocouple, rod 23, level F	53
55. TE-324BF, sheath thermocouple, rod 24, level F	53
56. TE-325BF, sheath thermocouple, rod 25, level F	54
57. TE-326BF, sheath thermocouple, rod 26, level F	54
58. TE-331BF, sheath thermocouple, rod 31, level F	55
59. TE-333BF, sheath thermocouple, rod 33, level F	55
60. TE-338BF, sheath thermocouple, rod 38, level F	56
61. TE-341BF, sheath thermocouple, rod 41, level F	56
62. TE-349BF, sheath thermocouple, rod 49, level F	57
63. TE-301BG, sheath thermocouple, rod 1, level G	57
64. TE-304BG, sheath thermocouple, rod 4, level G	58
65. TE-309BG, sheath thermocouple, rod 9, level G	58
66. TE-310BG, sheath thermocouple, rod 10, level G	59
67. TE-312BG, sheath thermocouple, rod 12, level G	59
68. TE-313BG, sheath thermocouple, rod 13, level G	60
69. TE-317BG, sheath thermocouple, rod 17, level G	60
70. TE-318BG, sheath thermocouple, rod 18, level G	61
71. TE-320BG, sheath thermocouple, rod 20, level G	61
72. TE-322BG, sheath thermocouple, rod 22, level G	62
73. TE-323BG, sheath thermocouple, rod 23, level G	62
74. TE-325BG, sheath thermocouple, rod 25, level G	63
75. TE-326BG, sheath thermocouple, rod 26, level G	63
76. TE-331BG, sheath thermocouple, rod 31, level G	64
77. TE-333BG, sheath thermocouple, rod 33, level G	64
78. TE-338BG, sheath thermocouple, rod 38, level G	65
79. TE-339BG, sheath thermocouple, rod 39, level G	65
80. TE-341BG, sheath thermocouple, rod 41, level G	66
81. TE-349BG, sheath thermocouple, rod 49, level G	66
82. TE-301CH, sheath thermocouple, rod 1, level H	67

	<u>Page</u>
83. TE-302AH, sheath thermocouple, rod 2, level H	67
84. TE-303AH, sheath thermocouple, rod 3, level H	68
85. TE-304CH, sheath thermocouple, rod 4, level H	68
86. TE-305AH, sheath thermocouple, rod 5, level H	69
87. TE-306AH, sheath thermocouple, rod 6, level H	69
88. TE-307AH, sheath thermocouple, rod 7, level H	70
89. TE-308AH, sheath thermocouple, rod 8, level H	70
90. TE-309CH, sheath thermocouple, rod 9, level H	71
91. TE-310CH, sheath thermocouple, rod 10, level H	71
92. TE-311AH, sheath thermocouple, rod 11, level H	72
93. TE-312CH, sheath thermocouple, rod 12, level H	72
94. TE-313CH, sheath thermocouple, rod 13, level H	73
95. TE-314AH, sheath thermocouple, rod 14, level H	73
96. TE-315AH, sheath thermocouple, rod 15, level H	74
97. TE-316AH, sheath thermocouple, rod 16, level H	74
98. TE-317CH, sheath thermocouple, rod 17, level H	75
99. TE-318CH, sheath thermocouple, rod 18, level H	75
100. TE-320CH, sheath thermocouple, rod 20, level H	76
101. TE-321AH, sheath thermocouple, rod 21, level H	76
102. TE-322CH, sheath thermocouple, rod 22, level H	77
103. TE-323CH, sheath thermocouple, rod 23, level H	77
104. TE-324CH, sheath thermocouple, rod 24, level H	78
105. TE-325CH, sheath thermocouple, rod 25, level H	78
106. TE-326CH, sheath thermocouple, rod 26, level H	79
107. TE-327AH, sheath thermocouple, rod 27, level H	79
108. TE-331CH, sheath thermocouple, rod 31, level H	80
109. TE-333CH, sheath thermocouple, rod 33, level H	80
110. TE-336AH, sheath thermocouple, rod 36, level H	81
111. TE-337AH, sheath thermocouple, rod 37, level H	81
112. TE-338CH, sheath thermocouple, rod 38, level H	82
113. TE-339CH, sheath thermocouple, rod 39, level H	82
114. TE-341CH, sheath thermocouple, rod 41, level H	83
115. TE-342AH, sheath thermocouple, rod 42, level H	83
116. TE-343AH, sheath thermocouple, rod 43, level H	84

	<u>Page</u>
117. TE-344AH, sheath thermocouple, rod 44, level H	84
118. TE-345AH, sheath thermocouple, rod 45, level H	85
119. TE-346AH, sheath thermocouple, rod 46, level H	85
120. TE-348AH, sheath thermocouple, rod 48, level H	86
121. TE-349CH, sheath thermocouple, rod 49, level H	86
122. TE-301CI, sheath thermocouple, rod 1, level I	87
123. TE-302AI, sheath thermocouple, rod 2, level I	87
124. TE-303AI, sheath thermocouple, rod 3, level I	88
125. TE-304CI, sheath thermocouple, rod 4, level I	88
126. TE-305AI, sheath thermocouple, rod 5, level I	89
127. TE-306AI, sheath thermocouple, rod 6, level I	89
128. TE-307AI, sheath thermocouple, rod 7, level I	90
129. TE-308AI, sheath thermocouple, rod 8, level I	90
130. TE-309CI, sheath thermocouple, rod 9, level I	91
131. TE-310CI, sheath thermocouple, rod 10, level I	91
132. TE-311AI, sheath thermocouple, rod 11, level I	92
133. TE-312CI, sheath thermocouple, rod 12, level I	92
134. TE-313CI, sheath thermocouple, rod 13, level I	93
135. TE-314AI, sheath thermocouple, rod 14, level I	93
136. TE-315AI, sheath thermocouple, rod 15, level I	94
137. TE-316AI, sheath thermocouple, rod 16, level I	94
138. TE-317CI, sheath thermocouple, rod 17, level I	95
139. TE-318CI, sheath thermocouple, rod 18, level I	95
140. TE-320CI, sheath thermocouple, rod 20, level I	96
141. TE-321AI, sheath thermocouple, rod 21, level I	96
142. TE-322CI, sheath thermocouple, rod 22, level I	97
143. TE-323CI, sheath thermocouple, rod 23, level I	97
144. TE-324CI, sheath thermocouple, rod 24, level I	98
145. TE-325CI, sheath thermocouple, rod 25, level I	98
146. TE-326CI, sheath thermocouple, rod 26, level I	99
147. TE-327AI, sheath thermocouple, rod 27, level I	99
148. TE-328AI, sheath thermocouple, rod 28, level I	100
149. TE-331CI, sheath thermocouple, rod 31, level I	100
150. TE-333CI, sheath thermocouple, rod 33, level I	101

	<u>Page</u>
151. TE-336AI, sheath thermocouple, rod 36, level I	101
152. TE-337AI, sheath thermocouple, rod 37, level I	102
153. TE-338CI, sheath thermocouple, rod 38, level I	102
154. TE-339CI, sheath thermocouple, rod 39, level I	103
155. TE-341CI, sheath thermocouple, rod 41, level I	103
156. TE-342AI, sheath thermocouple, rod 42, level I	104
157. TE-343AI, sheath thermocouple, rod 43, level I	104
158. TE-344AI, sheath thermocouple, rod 44, level I	105
159. TE-345AI, sheath thermocouple, rod 45, level I	105
160. TE-346AI, sheath thermocouple, rod 46, level I	106
161. TE-348AI, sheath thermocouple, rod 48, level I	106
162. TE-349CI, sheath thermocouple, rod 49, level I	107
163. TE-301DJ, sheath thermocouple, rod 1, level J	107
164. TE-302CJ, sheath thermocouple, rod 2, level J	108
165. TE-304DJ, sheath thermocouple, rod 4, level J	108
166. TE-305CJ, sheath thermocouple, rod 5, level J	109
167. TE-306CJ, sheath thermocouple, rod 6, level J	109
168. TE-307CJ, sheath thermocouple, rod 7, level J	110
169. TE-308CJ, sheath thermocouple, rod 8, level J	110
170. TE-309DJ, sheath thermocouple, rod 9, level J	111
171. TE-310DJ, sheath thermocouple, rod 10, level J	111
172. TE-312DJ, sheath thermocouple, rod 12, level J	112
173. TE-313DJ, sheath thermocouple, rod 13, level J	112
174. TE-314CJ, sheath thermocouple, rod 14, level J	113
175. TE-316CJ, sheath thermocouple, rod 16, level J	113
176. TE-317DJ, sheath thermocouple, rod 17, level J	114
177. TE-318DJ, sheath thermocouple, rod 18, level J	114
178. TE-320DJ, sheath thermocouple, rod 20, level J	115
179. TE-321CJ, sheath thermocouple, rod 21, level J	115
180. TE-322DJ, sheath thermocouple, rod 22, level J	116
181. TE-323DJ, sheath thermocouple, rod 23, level J	116
182. TE-324DJ, sheath thermocouple, rod 24, level J	117
183. TE-325DJ, sheath thermocouple, rod 25, level J	117
184. TE-326DJ, sheath thermocouple, rod 26, level J	118

	<u>Page</u>
185. TE-327CJ, sheath thermocouple, rod 27, level J	118
186. TE-328CJ, sheath thermocouple, rod 28, level J	119
187. TE-331DJ, sheath thermocouple, rod 31, level J	119
188. TE-333DJ, sheath thermocouple, rod 33, level J	120
189. TE-336CJ, sheath thermocouple, rod 36, level J	120
190. TE-337CJ, sheath thermocouple, rod 37, level J	121
191. TE-338DJ, sheath thermocouple, rod 38, level J	121
192. TE-339DJ, sheath thermocouple, rod 39, level J	122
193. TE-340CJ, sheath thermocouple, rod 40, level J	122
194. TE-341DJ, sheath thermocouple, rod 41, level J	123
195. TE-342CJ, sheath thermocouple, rod 42, level J	123
196. TE-343CJ, sheath thermocouple, rod 43, level J	124
197. TE-344CJ, sheath thermocouple, rod 44, level J	124
198. TE-345CJ, sheath thermocouple, rod 45, level J	125
199. TE-346CJ, sheath thermocouple, rod 46, level J	125
200. TE-349DJ, sheath thermocouple, rod 49, level J	126
201. TE-301DK, sheath thermocouple, rod 1, level K	126
202. TE-304DK, sheath thermocouple, rod 4, level K	127
203. TE-309DK, sheath thermocouple, rod 9, level K	127
204. TE-310DK, sheath thermocouple, rod 10, level K	128
205. TE-312DK, sheath thermocouple, rod 12, level K	128
206. TE-313DK, sheath thermocouple, rod 13, level K	129
207. TE-317DK, sheath thermocouple, rod 17, level K	129
208. TE-318DK, sheath thermocouple, rod 18, level K	130
209. TE-320DK, sheath thermocouple, rod 20, level K	130
210. TE-322DK, sheath thermocouple, rod 22, level K	131
211. TE-323DK, sheath thermocouple, rod 23, level K	131
212. TE-324DK, sheath thermocouple, rod 24, level K	132
213. TE-325DK, sheath thermocouple, rod 25, level K	132
214. TE-326DK, sheath thermocouple, rod 26, level K	133
215. TE-331DK, sheath thermocouple, rod 31, level K	133
216. TE-333DK, sheath thermocouple, rod 33, level K	134
217. TE-338DK, sheath thermocouple, rod 38, level K	134
218. TE-339DK, sheath thermocouple, rod 39, level K	135

	<u>Page</u>
219. TE-341DK, sheath thermocouple, rod 41, level K	135
220. TE-349DK, sheath thermocouple, rod 49, level K	136
221. TE-301EL, sheath thermocouple, rod 1, level L	136
222. TE-302CL, sheath thermocouple, rod 2, level L	137
223. TE-303CL, sheath thermocouple, rod 3, level L	137
224. TE-304EL, sheath thermocouple, rod 4, level L	138
225. TE-305CL, sheath thermocouple, rod 5, level L	138
226. TE-306CL, sheath thermocouple, rod 6, level L	139
227. TE-307CL, sheath thermocouple, rod 7, level L	139
228. TE-308CL, sheath thermocouple, rod 8, level L	140
229. TE-309EL, sheath thermocouple, rod 9, level L	140
230. TE-310EL, sheath thermocouple, rod 10, level L	141
231. TE-311CL, sheath thermocouple, rod 11, level L	141
232. TE-312EL, sheath thermocouple, rod 12, level L	142
233. TE-313EL, sheath thermocouple, rod 13, level L	142
234. TE-316CL, sheath thermocouple, rod 16, level L	143
235. TE-317EL, sheath thermocouple, rod 17, level L	143
236. TE-318EL, sheath thermocouple, rod 18, level L	144
237. TE-320EL, sheath thermocouple, rod 20, level L	144
238. TE-321CL, sheath thermocouple, rod 21, level L	145
239. TE-322EL, sheath thermocouple, rod 22, level L	145
240. TE-323EL, sheath thermocouple, rod 23, level L	146
241. TE-324EL, sheath thermocouple, rod 24, level L	146
242. TE-325EL, sheath thermocouple, rod 25, level L	147
243. TE-326EL, sheath thermocouple, rod 26, level L	147
244. TE-327CL, sheath thermocouple, rod 27, level L	148
245. TE-328CL, sheath thermocouple, rod 28, level L	148
246. TE-331EL, sheath thermocouple, rod 31, level L	149
247. TE-333EL, sheath thermocouple, rod 33, level L	149
248. TE-336CL, sheath thermocouple, rod 36, level L	150
249. TE-337CL, sheath thermocouple, rod 37, level L	150
250. TE-338EL, sheath thermocouple, rod 38, level L	151
251. TE-339EL, sheath thermocouple, rod 39, level L	151
252. TE-341EL, sheath thermocouple, rod 41, level L	152

	<u>Page</u>
253. TE-342CL, sheath thermocouple, rod 42, level L	152
254. TE-343CL, sheath thermocouple, rod 43, level L	153
255. TE-344CL, sheath thermocouple, rod 44, level L	153
256. TE-345CL, sheath thermocouple, rod 45, level L	154
257. TE-346CL, sheath thermocouple, rod 46, level L	154
258. TE-348CL, sheath thermocouple, rod 48, level L	155
259. TE-349EL, sheath thermocouple, rod 49, level L	155
260. TE-301EM, sheath thermocouple, rod 1, level M	156
261. TE-304EM, sheath thermocouple, rod 4, level M	156
262. TE-309EM, sheath thermocouple, rod 9, level M	157
263. TE-325EM, sheath thermocouple, rod 25, level M	157
264. TE-301FN, sheath thermocouple, rod 1, level N	158
265. TE-304FN, sheath thermocouple, rod 4, level N	158
266. TE-325FN, sheath thermocouple, rod 25, level N	159
267. TE-301FO, sheath thermocouple, rod 1, level O	159
268. TE-304FO, sheath thermocouple, rod 4, level O	160
269. TE-309FO, sheath thermocouple, rod 9, level O	160
270. TE-310EO, sheath thermocouple, rod 10, level O	161
271. TE-312EO, sheath thermocouple, rod 12, level O	161
272. TE-317EO, sheath thermocouple, rod 17, level O	162
273. TE-318EO, sheath thermocouple, rod 18, level O	162
274. TE-320EO, sheath thermocouple, rod 20, level O	163
275. TE-322EO, sheath thermocouple, rod 22, level O	163
276. TE-323EO, sheath thermocouple, rod 23, level O	164
277. TE-324EO, sheath thermocouple, rod 24, level O	164
278. TE-325FO, sheath thermocouple, rod 25, level O	165
279. TE-326EO, sheath thermocouple, rod 26, level O	165
280. TE-331EO, sheath thermocouple, rod 31, level O	166
281. TE-333EO, sheath thermocouple, rod 33, level O	166
282. TE-338EO, sheath thermocouple, rod 38, level O	167
283. TE-339EO, sheath thermocouple, rod 39, level O	167
284. TE-341EO, sheath thermocouple, rod 41, level O	168
285. TE-349EO, sheath thermocouple, rod 49, level O	168
286. TE-301ME, middle thermocouple, rod 1, level E	169

	<u>Page</u>
287. TE-304ME, middle thermocouple, rod 4, level E	169
288. TE-318ME, middle thermocouple, rod 18, level E	170
289. TE-322ME, middle thermocouple, rod 22, level E	170
290. TE-326ME, middle thermocouple, rod 26, level E	171
291. TE-331ME, middle thermocouple, rod 31, level E	171
292. TE-338ME, middle thermocouple, rod 38, level E	172
293. TE-349ME, middle thermocouple, rod 49, level E	172
294. TE-301MF, middle thermocouple, rod 1, level F	173
295. TE-304MF, middle thermocouple, rod 4, level F	173
296. TE-322MF, middle thermocouple, rod 22, level F	174
297. TE-326MF, middle thermocouple, rod 26, level F	174
298. TE-338MF, middle thermocouple, rod 38, level F	175
299. TE-349MF, middle thermocouple, rod 49, level F	175
300. TE-301MG, middle thermocouple, rod 1, level G	176
301. TE-310MG, middle thermocouple, rod 10, level G	176
302. TE-313MG, middle thermocouple, rod 13, level G	177
303. TE-317MG, middle thermocouple, rod 17, level G	177
304. TE-318MG, middle thermocouple, rod 18, level G	178
305. TE-322MG, middle thermocouple, rod 22, level G	178
306. TE-323MG, middle thermocouple, rod 23, level G	179
307. TE-325MG, middle thermocouple, rod 25, level G	179
308. TE-326MG, middle thermocouple, rod 26, level G	180
309. TE-338MG, middle thermocouple, rod 38, level G	180
310. TE-349MG, middle thermocouple, rod 49, level G	181
311. TE-304MH, middle thermocouple, rod 4, level H	181
312. TE-309MH, middle thermocouple, rod 9, level H	182
313. TE-318MH, middle thermocouple, rod 18, level H	182
314. TE-322MH, middle thermocouple, rod 22, level H	183
315. TE-338MH, middle thermocouple, rod 38, level H	183
316. TE-301MJ, middle thermocouple, rod 1, level J	184
317. TE-310MJ, middle thermocouple, rod 10, level J	184
318. TE-317MJ, middle thermocouple, rod 17, level J	185
319. TE-323MJ, middle thermocouple, rod 23, level J	185
320. TE-324MJ, middle thermocouple, rod 24, level J	186

	<u>Page</u>
321. TE-326MJ, middle thermocouple, rod 26, level J	186
322. TE-338MJ, middle thermocouple, rod 38, level J	187
323. TE-162, test section inlet line thermocouple	187
324. TE-150, test section bottom flange thermocouple	188
325. TE-151, test section bottom flange thermocouple	188
326. TE-152, test section bottom flange thermocouple	189
327. TE-153, test section bottom flange thermocouple	189
328. TE-175, bundle shroud thermocouple, .142L/LMAX	190
329. TE-176, bundle shroud thermocouple, .142L/LMAX	190
330. TE-177, bundle shroud thermocouple, .142L/LMAX	191
331. TE-178, bundle shroud thermocouple, .142L/LMAX	191
332. TE-179, bundle shroud thermocouple, .388L/LMAX	192
333. TE-180, bundle shroud thermocouple, .388L/LMAX	192
334. TE-181, bundle shroud thermocouple, .388L/LMAX	193
335. TE-182, bundle shroud thermocouple, .388L/LMAX	193
336. TE-183, bundle shroud thermocouple, .633L/LMAX	194
337. TE-184, bundle shroud thermocouple, .633L/LMAX	194
338. TE-185, bundle shroud thermocouple, .633L/LMAX	195
339. TE-186, bundle shroud thermocouple, .633L/LMAX	195
340. TE-187, bundle shroud thermocouple, .875L/LMAX	196
341. TE-189, bundle shroud thermocouple, .875L/LMAX	196
342. TE-190, bundle shroud thermocouple, .875L/LMAX	197
343. TE-212, test section outlet line thermocouple	197
344. TE-30B, heat exchanger A outlet thermocouple	198
345. TE-32B, heat exchanger B outlet thermocouple	198
346. TE-34B, heat exchanger C outlet thermocouple	199
347. TE-520B, RBT 4-in. demineralized water header thermocouple	199
348. TE-5B, heat exchanger D outlet thermocouple	200
349. TE-1, pressurizer tank top thermocouple	200
350. TE-2, pressurizer tank exit thermocouple	201
351. TE-29, inlet blowdown plenum thermocouple	201
352. TE-45, outlet blowdown plenum thermocouple	202
353. TE-4B, base primary steady-state temperature, RTD	202

	<u>Page</u>
354. FE-620, HX B secondary cooling-water flow	203
355. FE-720, HX C secondary cooling-water flow	203
356. FE-550, HX D secondary cooling-water flow	204
357. FE-1A, primary side pump flow	204
358. FE-19, turbine flowmeter, horizontal inlet spool piece	205
359. DE-20, gamma densitometer, horizontal inlet spool piece	205
360. PE-26, transient pressure, horizontal inlet spool piece	206
361. FMFE-22, drag disk, horizontal inlet spool piece	206
362. PDE-21, transient DP, horizontal inlet spool piece	207
363. TE-24, thermocouple, horizontal inlet spool piece	207
364. FE-166, turbine flow meter, vertical inlet spool piece	208
365. DE-168, gamma densitometer, vertical inlet spool piece	208
366. PE-174, transient pressure, vertical inlet spool piece	209
367. FMFE-170, drag disk, vertical outlet spool piece	209
368. PDE-167, transient DP, vertical inlet spool piece	210
369. TE-172, thermocouple, vertical inlet spool piece	210
370. FE-216, turbine flowmeter, vertical outlet spool piece	211
371. DE-218, gamma densitometer, vertical outlet spool piece	211
372. PE-224, transient pressure, vertical outlet spool piece	212
373. FMFE-220, drag disk, vertical outlet spool piece	212
374. PDE-217, transient DP, vertical outlet spool piece	213
375. TE-222, thermocouple, vertical outlet spool piece	213
376. FE-34, turbine flowmeter, horizontal outlet spool piece	214
377. DE-36, gamma densitometer, horizontal outlet spool piece ...	214
378. PE-42, transient pressure, horizontal outlet spool piece ...	215
379. FMFE-38, drag disk, horizontal outlet spool piece	215
380. PDE-35, transient DP, horizontal outlet spool piece	216
381. TE-40, thermocouple, horizontal outlet spool piece	216
382. PE-156, test section inlet plenum transient pressure	217
383. PE-201, test section outlet plenum transient pressure	217
384. PE-44, upstream main HX transient pressure	218
385. PE-76, primary pump suction transient pressure	218
386. PT-102, pressurizer steady-state pressure	219
387. PE-106, pressurizer vapor transient pressure	219

	<u>Page</u>
388. PE-412, pressure suppression receiver transient pressure ...	220
389. TE-615, demineralized water 6-in. header steady-state temp.	220
390. PDT-199, test section shroud box steady-state DP	221
391. PDE-200, test bundle transient DP	221
392. TE-627, HX B secondary discharge steady-state temp., RTD ...	222
393. PDT-48, main HX steady-state DP	222
394. PDE-78, primary pump transient DP	223
395. PE-425, PSS inlet blowdown line transient pressure	223
396. PE-427, PSS outlet blowdown line transient pressure	224
397. TE-727, HX C secondary discharge steady-state temp., RTD ...	224
398. TE-28B, main HX mixing tee steady-state temp., RTD	225
399. PDE-46, main HX bypass transient DP	225
400. PE-526, HX A secondary inlet pressure	226
401. PE-16, downstream HCV-2 transient pressure	226
402. PE-27, test section inlet plenum bottom transient pressure	227
403. PE-43, test section outlet plenum bottom transient pressure	227
404. PDT-30, test section steady-state DP	228
405. PT-32, test section outlet steady-state pressure	228
406. SE-72, primary pump speed	229
407. XM-4000I, breakwire detector, inlet break	229
408. XM-4000Ø, breakwire detector, outlet break	230
409. LT-100, steady state pressurizer liquid level	230
410. FE-522, HX A secondary cooling-water flow	231
411. TE-557, HX D secondary discharge steady-state temp., RTD ...	231
412. TE-525, HX A secondary discharge steady-state temp., RTD ...	232
413. TE-210A, test section outlet line steady-state temp., RTD ..	232
414. EIM-1001B, RTD power supply current	233
415. EIE-11S6, rod 1 heater current	233
416. EIE-12S6, rod 2 heater current	234
417. EIE-11S7, rod 3 heater current	234
418. EIE-12S7, rod 4 heater current	235

	<u>Page</u>
419. EIE-9S6, rod 5 heater current	235
420. EIE-9S8, rod 6 heater current	236
421. EIE-9S5, rod 7 heater current	236
422. EIE-11S5, rod 8 heater current	237
423. EIE-11S8, rod 9 heater current	237
424. EIE-12S8, rod 10 heater current	238
425. EIE-9S7, rod 11 heater current	238
426. EIE-9S4, rod 12 heater current	239
427. EIE-9S3, rod 13 heater current	239
428. EIE-9S11, rod 14 heater current	240
429. EIE-11S4, rod 15 heater current	240
430. EIE-11S9, rod 16 heater current	241
431. EIE-12S5, rod 17 heater current	241
432. EIE-9S9, rod 18 heater current	242
433. EIE-9S10, rod 19 heater current	242
434. EIE-9S2, rod 20 heater current	243
435. EIE-9S12, rod 21 heater current	243
436. EIE-11S11, rod 22 heater current	244
437. EIE-11S10, rod 23 heater current	244
438. EIE-11S3, rod 24 heater current	245
439. EIE-9S13, rod 25 heater current	245
440. EIE-10S6, rod 26 heater current	246
441. EIE-9S1, rod 27 heater current	246
442. EIE-10S7, rod 28 heater current	247
443. EIE-11S2, rod 29 heater current	247
444. EIE-11S12, rod 30 heater current	248
445. EIE-12S2, rod 31 heater current	248
446. EIE-12S1, rod 32 heater current	249
447. EIE-10S12, rod 33 heater current	249
448. EIE-10S5, rod 34 heater current	250
449. EIE-10S8, rod 35 heater current	250
450. EIE-11S1, rod 36 heater current	251
451. EIE-12S4, rod 37 heater current	251
452. EIE-12S3, rod 38 heater current	252

	<u>Page</u>
453. EIE-12S12, rod 39 heater current	252
454. EIE-10S11, rod 40 heater current	253
455. EIE-10S10, rod 41 heater current	253
456. EIE-10S9, rod 42 heater current	254
457. EIE-12S9, rod 43 heater current	254
458. EIE-12S10, rod 44 heater current	255
459. EIE-12S11, rod 45 heater current	255
460. EIE-10S1, rod 46 heater current	256
461. EIE-10S2, rod 47 heater current	256
462. EIE-10S3, rod 48 heater current	257
463. EIE-10S4, rod 49 heater current	257
464. EIE-9, generator 9 current	258
465. EIE-10, generator 10 current	258
466. EIE-11, generator 11 current	259
467. EIE-12, generator 12 current	259
468. EEE-9, generator 9 voltage	260
469. EEE-10, generator 10 voltage	260
470. EEE-11, generator 11 voltage	261
471. EEE-12, generator 12 voltage	261
472. Zero calibration input, channels 0-127	262
473. Zero calibration input, channels 128-255	262
474. Zero calibration input, channels 256-383	263
475. Zero calibration input, channels 384-511	263
476. Full-scale calibration input, channels 0-127	264
477. Full-scale calibration input, channels 128-255	264
478. Full-scale calibration input, channels 256-383	265
479. Full-scale calibration input, channels 384-511	265
480. TE-S1, subchannel 1 thermocouple	266
481. TE-S2, subchannel 2 thermocouple	266
482. TE-S3, subchannel 3 thermocouple	267
483. TE-S5, subchannel 5 thermocouple	267
484. TE-S9, subchannel 9 thermocouple	268
485. TE-S10, subchannel 10 thermocouple	268

	<u>Page</u>
486. TE-S11, subchannel 11 thermocouple	269
487. TE-S14, subchannel 14 thermocouple	269
488. TE-S16, subchannel 16 thermocouple	270
489. TE-S33, subchannel 33 thermocouple	270
490. TE-S34, subchannel 34 thermocouple	271
491. TE-S36, subchannel 36 thermocouple	271
492. TE-S38, subchannel 38 thermocouple	272
493. TE-S39, subchannel 39 thermocouple	272
494. TE-S40, subchannel 40 thermocouple	273
495. TE-S41, subchannel 41 thermocouple	273
496. TE-S42, subchannel 42 thermocouple	274
497. TE-S44, subchannel 44 thermocouple	274
498. TE-S45, subchannel 45 thermocouple	275
499. TE-S49, subchannel 49 thermocouple	275
500. TE-S50, subchannel 50 thermocouple	276
501. TE-S51, subchannel 51 thermocouple	276
502. TE-S54, subchannel 54 thermocouple	277
503. TE-S55, subchannel 55 thermocouple	277
504. TE-S57, subchannel 57 thermocouple	278
505. TE-S59, subchannel 59 thermocouple	278
506. TE-S63, subchannel 63 thermocouple	279
507. TE-S64, subchannel 64 thermocouple	279

ACKNOWLEDGMENTS

In the conduct of a large experimental and analytical program, there are always a great many individuals whose contributions should be recognized. The dedicated efforts of the entire BDHT program staff are reflected in this report. The authors express their appreciation to the following personnel:

M. C. Adair	C. A. Gifford	H. R. Payne
W. E. Baucum	R. H. Greene	W. Ragan, Jr.
J. L. Bartley	R. C. Hagar	J. L. Redford
R. E. Bohanan	R. E. Helms	M. J. Roberts
S. B. Cliff	C. R. Hyman	L. I. Schlemper
W. G. Craddick	P. A. Jallouk	A. N. Smith
R. D. Dabbs	A. F. Johnson	R. D. Stulting
C. E. Davis	D. M. Leon	R. E. Textor
E. D. Drennen	G. S. Massengill	D. G. Thomas
B. G. Eads	G. M. Maxwell	K. G. Turnage
G. G. Fee	C. B. Mullins	J. D. White
D. J. Fraysier	L. J. Ott	J. E. Wolfe
R. M. Flanders		

PWR BLOWDOWN HEAT TRANSFER SEPARATE-EFFECTS PROGRAM —
THERMAL-HYDRAULIC TEST FACILITY EXPERIMENTAL
DATA REPORT FOR TEST 158

V. D. Clemons R. A. Hedrick M. D. White

ABSTRACT

Reduced instrument responses are presented for Thermal-Hydraulic Test Facility (THTF) test 158, which is part of the ORNL Pressurized-Water Reactor (PWR) Blowdown Heat Transfer Separate-Effects Program. The objective of the program is to investigate the thermal-hydraulic phenomenon governing the energy transfer and transport processes that occur during a loss-of-coolant accident in a PWR system.

Test 158 was conducted to obtain CHF information in the THTF bundle 1 operating at nominal power, containing four unpowered rods, having significant outlet subcooling, and utilizing a 30%–70% break ratio.

The primary purpose of this report is to make the reduced instrument responses during test 158 available. The responses are presented in graphical form in engineering units and have been analyzed only to the extent necessary to assure reasonableness and consistency.

I. INTRODUCTION

The Oak Ridge National Laboratory Pressurized-Water Reactor (ORNL-PWR) Blowdown Heat Transfer Program is a separate-effects study of the relations among the principal variables that can alter the rate of blowdown, the presence of flow reversal and rereversal, time delay to critical heat flux (CHF), the rate at which dryout progresses, and similar time- and space-related functions that are important in loss-of-coolant accident (LOCA) analyses. Primary test results are obtained from the Thermal-Hydraulic Test Facility (THTF), a large nonnuclear pressurized-water loop incorporating a 49-rod electrically heated bundle in a 7×7 geometry.

THTF test 158 (conducted April 28, 1977) was the fifteenth test conducted in the facility with bundle 1 in place. This test was performed to obtain CHF information in the bundle while operating at nominal power with four rods unpowered, significant outlet subcooling, and a 30%–70% break ratio.

The purpose of this report is to provide the reduced instrument responses during test 158 in a readily usable form to the nuclear community in advance of detailed analyses and interpretations. These data are presented on microfiche attached to the back cover of the report. The program and the experimental facilities are described in Ref. 1.

II. SYSTEM, PROCEDURES, CONDITIONS, AND EVENTS FOR TEST 158

1. System Configuration and Test Procedure

The Thermal-Hydraulic Test Facility (THTF), shown in Fig. 1, consists of a test section with a 49-rod, 3.66-m-long (12-ft) electrically heated core; a circulation loop comprised of three parallel heat exchangers with bypass, a pressurizer, a pump with bypass, and associated control valves; two rupture assemblies; and a pressure-suppression system. For test 158 the break configuration was 30% inlet-70% outlet with a total break area of 12.54 cm^2 (0.0135 ft^2). The THTF experimental system is described further in Ref. 1.

The electric core was taken to the preblowdown power (100 kW/rod) in ~ 20 -kW/rod steps to provide steady-state calibration information. The main heat exchangers were operated to match the core power input. The primary coolant pump was tripped coincident with break initiation, but the electric core was operated at the preblowdown power for ~ 2 sec into the transient and then the power was decayed with a time constant of ~ 0.45 sec. Rods 19, 24, 39, and 47 were unpowered. Closure of the secondary side main heat exchanger valves was initiated at the trip from 100 kW/rod.

In preparation for the test, the loop was filled with demineralized water and the system pressure checked. Instrumentation and data acquisition checks were performed. During the warmup, data were taken for use in flow and pressure calibrations.

During the test, the THTF was successfully subjected to a double-ended pipe break through the rupture assemblies containing the orifice

1. *Project Description: ORNL-PWR Blowdown Heat Transfer Separate-Effects Program - Thermal-Hydraulic Test Facility (THTF)*, ORNL/NUREG/TM-2 (February 1976).

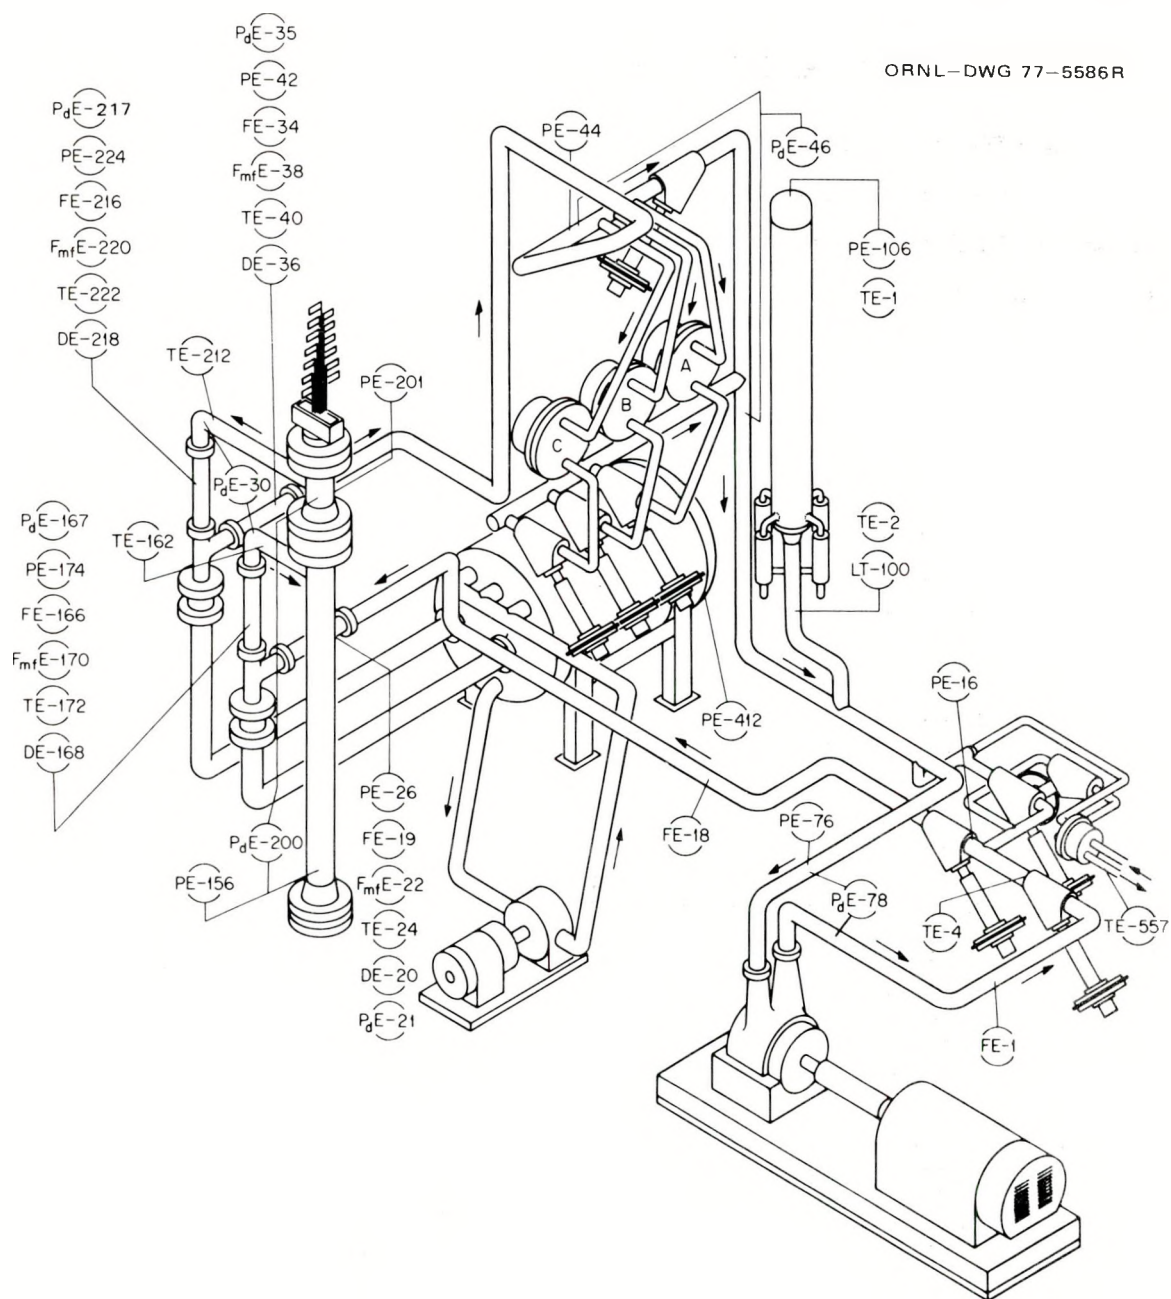


Fig. 1. Thermal-Hydraulic Test Facility (THTF).

plates. The effluent from the primary system was injected into the pressure-suppression system, which was maintained at atmospheric pressure.

2. Initial Test Conditions and Sequence of Events

The THTF conditions immediately preceding rupture are given in Tables 1 and 2. The prerupture steady-state primary and secondary energy balances are shown in Figs. 2 through 4. The sequence of events relative to the rupture is given in Table 3.

Table 1. Desired vs actual prerupture conditions

Parameters	Instrument	Desired ^a	Actual ^b
System pressure	PE-201		
MN/m ²		15.858	16.050
psig		2300	2328
Core power	EIE-9, EIE-10, EIE-11, EIE-12, EEE-9, EEE-10, EEE-11, EEE-12	4.500	4.486
MW			
Number of unpowered rods		4	4
Core volumetric flow rate	FE-19		
m ³ /s		0.0331	0.0324
gpm		525	514
Test section inlet temperature	TE-162		
K		558.2	558.3
°F		545	545
Test section outlet temperature	TE-212		
K		588.7	590.3
°F		600	603
Pressurizer pressure	PE-106		
MN/m ²		15.444	15.441
psig		2240	2239
Mass liquid water			
kg		54.88	76.61
lb _m		121	169
Coolant pump speed	SE-72		
rps		60.33	60.30
rpm		3620	3618
Pressure differential	P _d E-78		
MN/m ²		4.509	4.686
psid		654	680
Pressure between HCV-2 and FCV-18	PE-16		
MN/m ²		17.209	17.929
psig		2496	2600
Pressure differential across main heat exchangers	P _d E-46		
MN/m ²		0.331	0.328
psid		48	47.6

^aDesired prerupture conditions are based on programmatic requirements.

^bActual prerupture conditions are based on instrument signals recorded within 10 sec of primary system rupture.

Table 2. Prerupture primary-coolant temperature and pressure distribution^a test 158

Location	Instrument	Temperature [K (°F)]	Pressure [MN/m ² (psig)]
Vertical inlet spool piece	TE-172	558.3 (545)	
Vertical inlet spool piece	PE-174		16.369 (2374)
Test section inlet	TE-162	558.3 (545)	
Lower plenum	TE-150	559.7 (548)	
Lower plenum	PE-156		16.475 (2389)
Upper plenum	PE-201		16.050 (2328)
Test section outlet	TE-212	590.3 (603)	
Vertical outlet spool piece	TE-222	589.8 (602)	
Vertical outlet spool piece	PE-224		15.947 (2313)
Heat exchanger inlet header	PE-44		15.742 (2283)
Mixed mean temperature downstream heat exchangers	TE-28B	562.3 (552)	
Pressurizer surge line	TE-2	614.2 (646)	
Pressurizer	PE-106		15.441 (2239)
Primary pump suction	PE-76		15.421 (2237)
Between main control valves HCV-2, FCV-18	TE-4B	556.3 (542)	
Between main control valves HCV-2, FCV-18	PE-16		17.929 (2600)

^aPrerupture distribution is based on instrument signals recorded within 10 sec of primary system rupture.

Table 3. Sequence of events during test 158

Event	Time relative to rupture (sec)
Core power level established	-3015
Core temperature rise established	-2775
Analog tapes and CCDAS fast scan started	-15
Blowdown initiated	0
Pump power tripped	0
Heat exchanger secondary valves closure initiated	+2
Core power tripped to decay	+2
Core power tripped	+3.4

PRE-BLOWDOWN NO. 158 STEADY-STATE POINTS 4/28/77

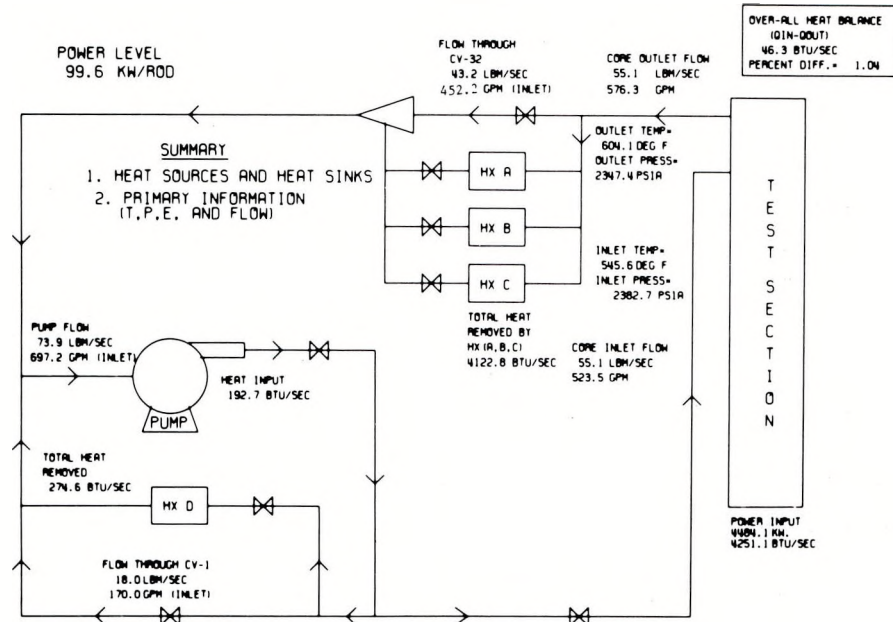


Fig. 2. Prerupture loop energy balance.

PRE-BLOWDOWN NO. 158 STEADY-STATE POINTS 4/28/77

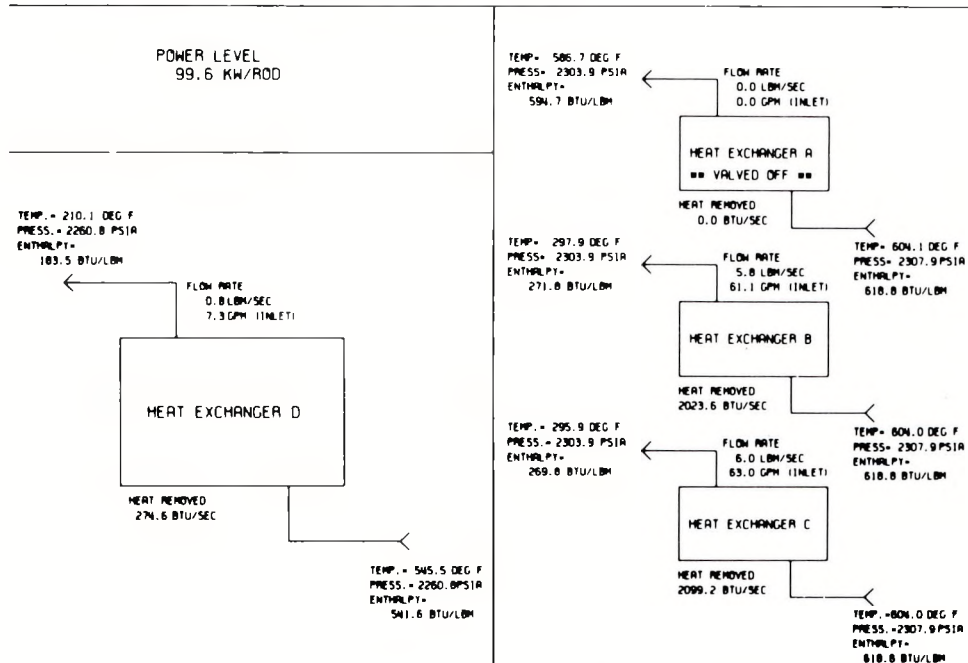


Fig. 3. Prerupture primary side heat exchanger summary.

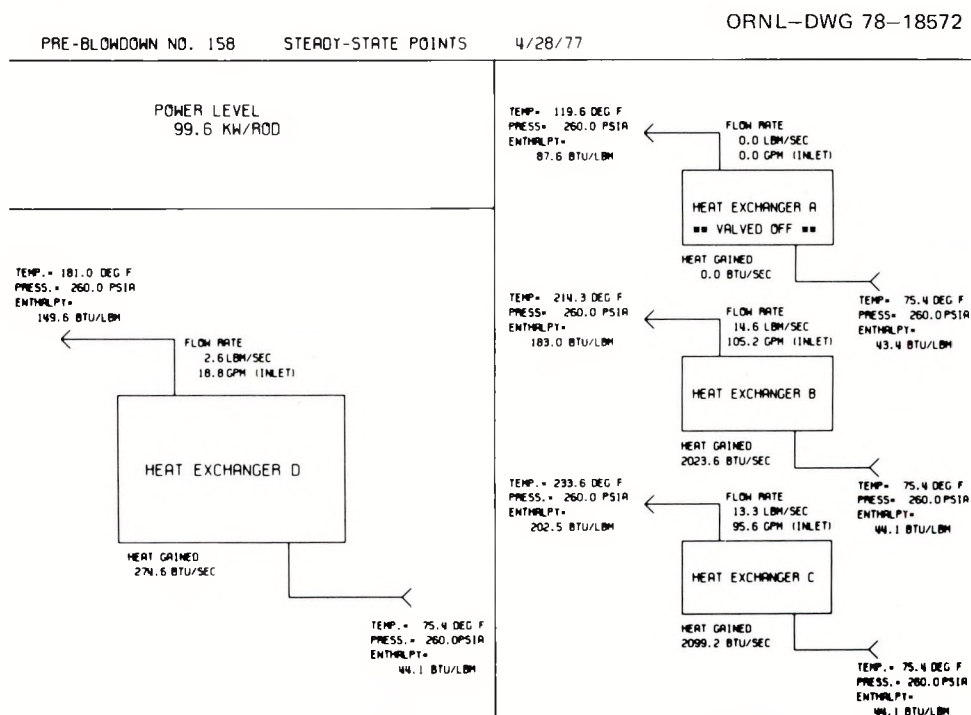


Fig. 4. Prerupture secondary side heat exchanger summary.

III. DATA PRESENTATION

The recorded instrument responses for THTF test 158 have been processed only to the extent necessary to obtain appropriate engineering units and to ensure reasonableness and consistency. In converting the instrument responses to engineering units, a homogeneous fluid has been assumed. Therefore, interpretation or analysis of the data must account for the fact that the instruments may have been subjected to nonhomogeneous fluid conditions during the transient.

The reduced instrument responses presented in this report were recorded by a computer-controlled digital data acquisition system (CCDAS). Further information on this system may be found in Ref. 1.

Figures 5 through 7 provide supportive information for the instrument responses and indicate the relative locations of the detectors in the THTF. Table 4 gives the precision of the recorded instrument responses, and Table 5 groups the measurements by location and provides brief comments regarding the detectors and the recorded responses. Time zero on all graphs is the time of break initiation.

ORNL-DWG 76-19894

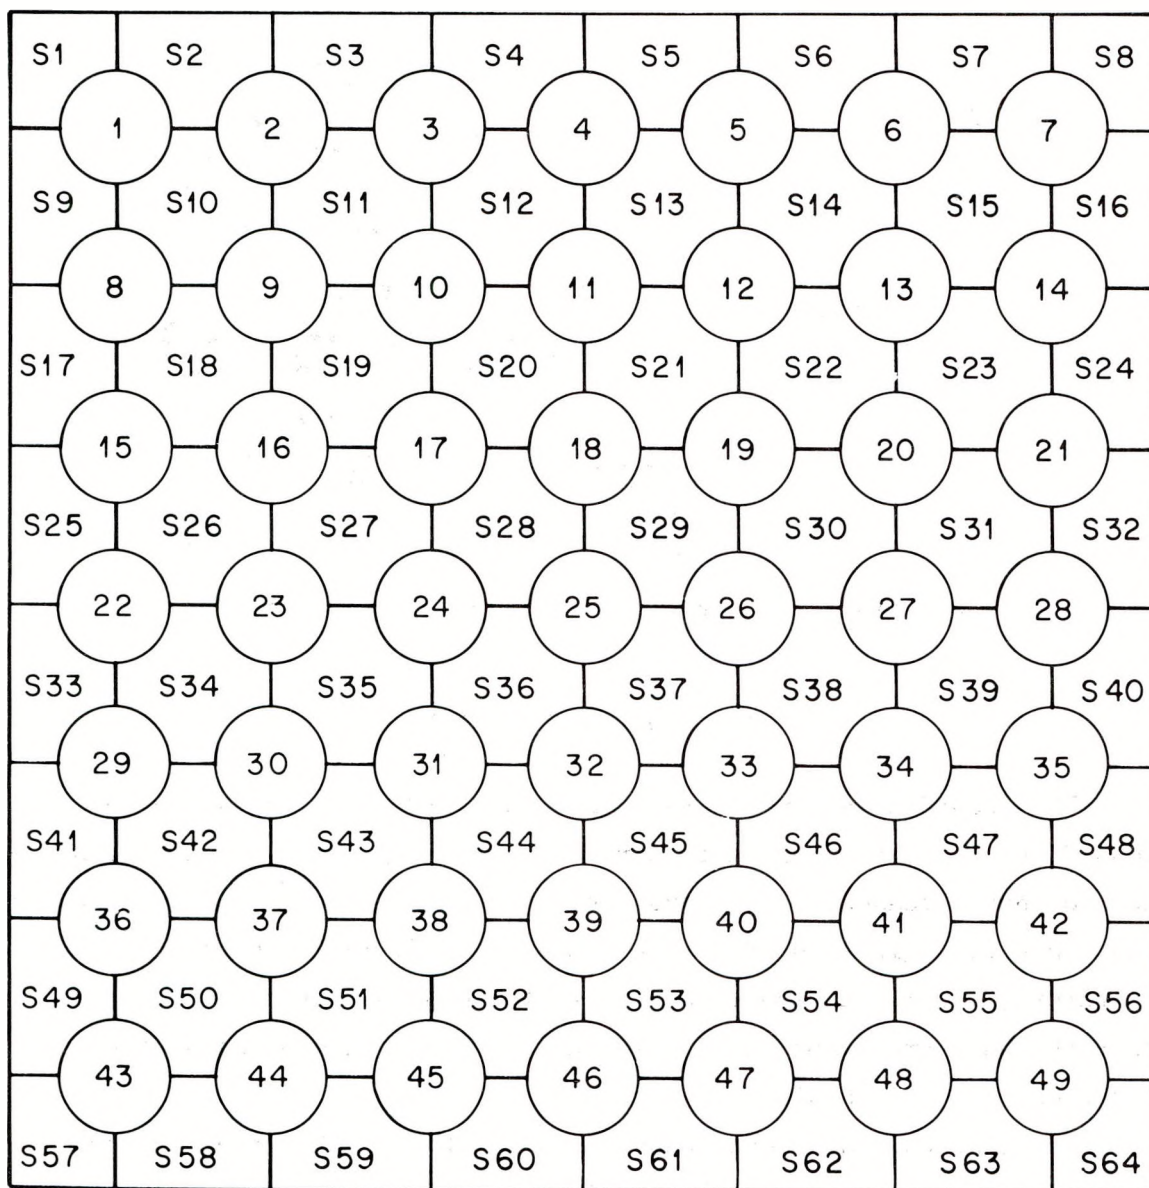


Fig. 5. Identification of THTF heater rod and subchannel locations in bundles 1 and 2.

ORNL-DWG 76-3868R

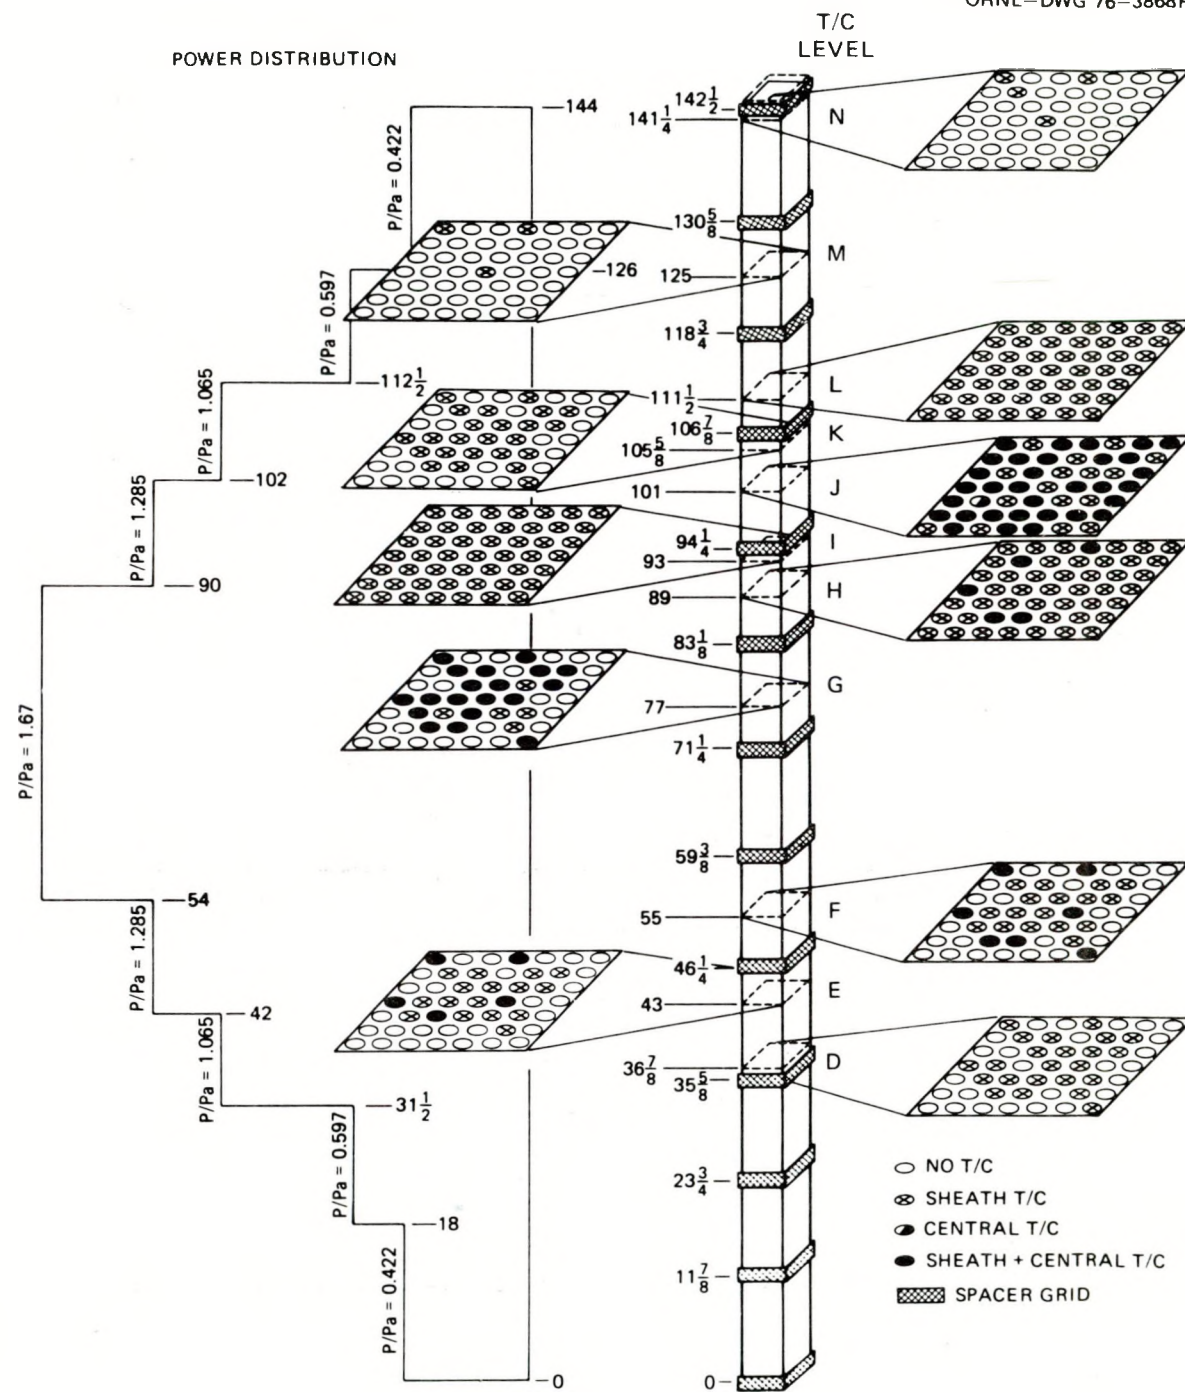


Fig. 6. Location of thermocouples in THTF bundle 1.

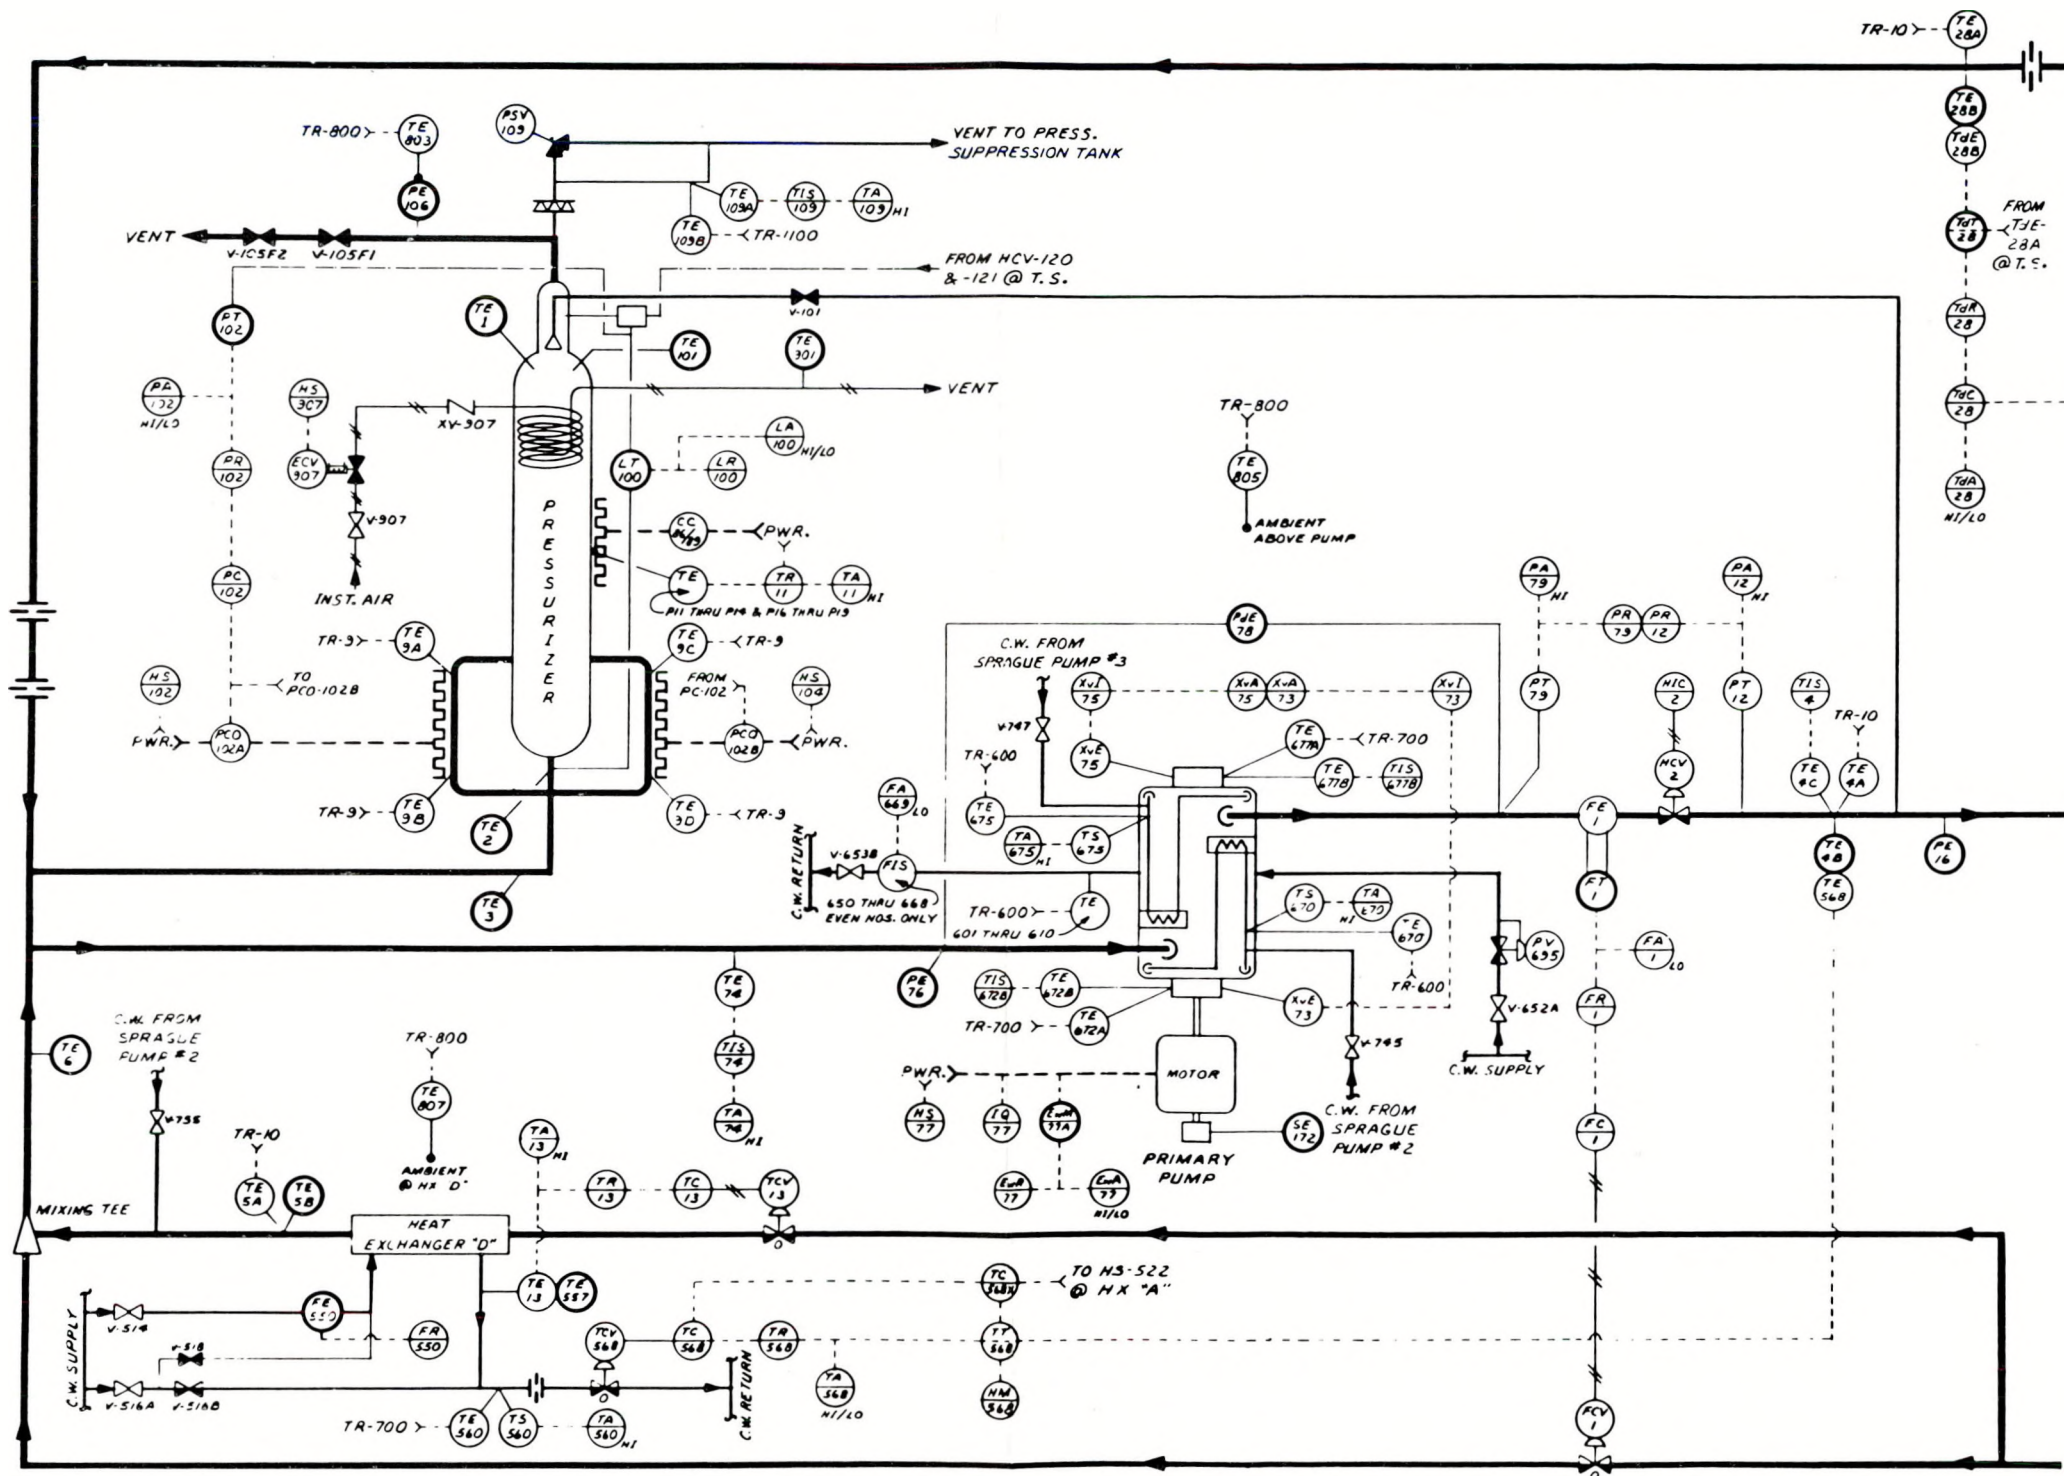


Fig. 7. THTF instrument identification and location.

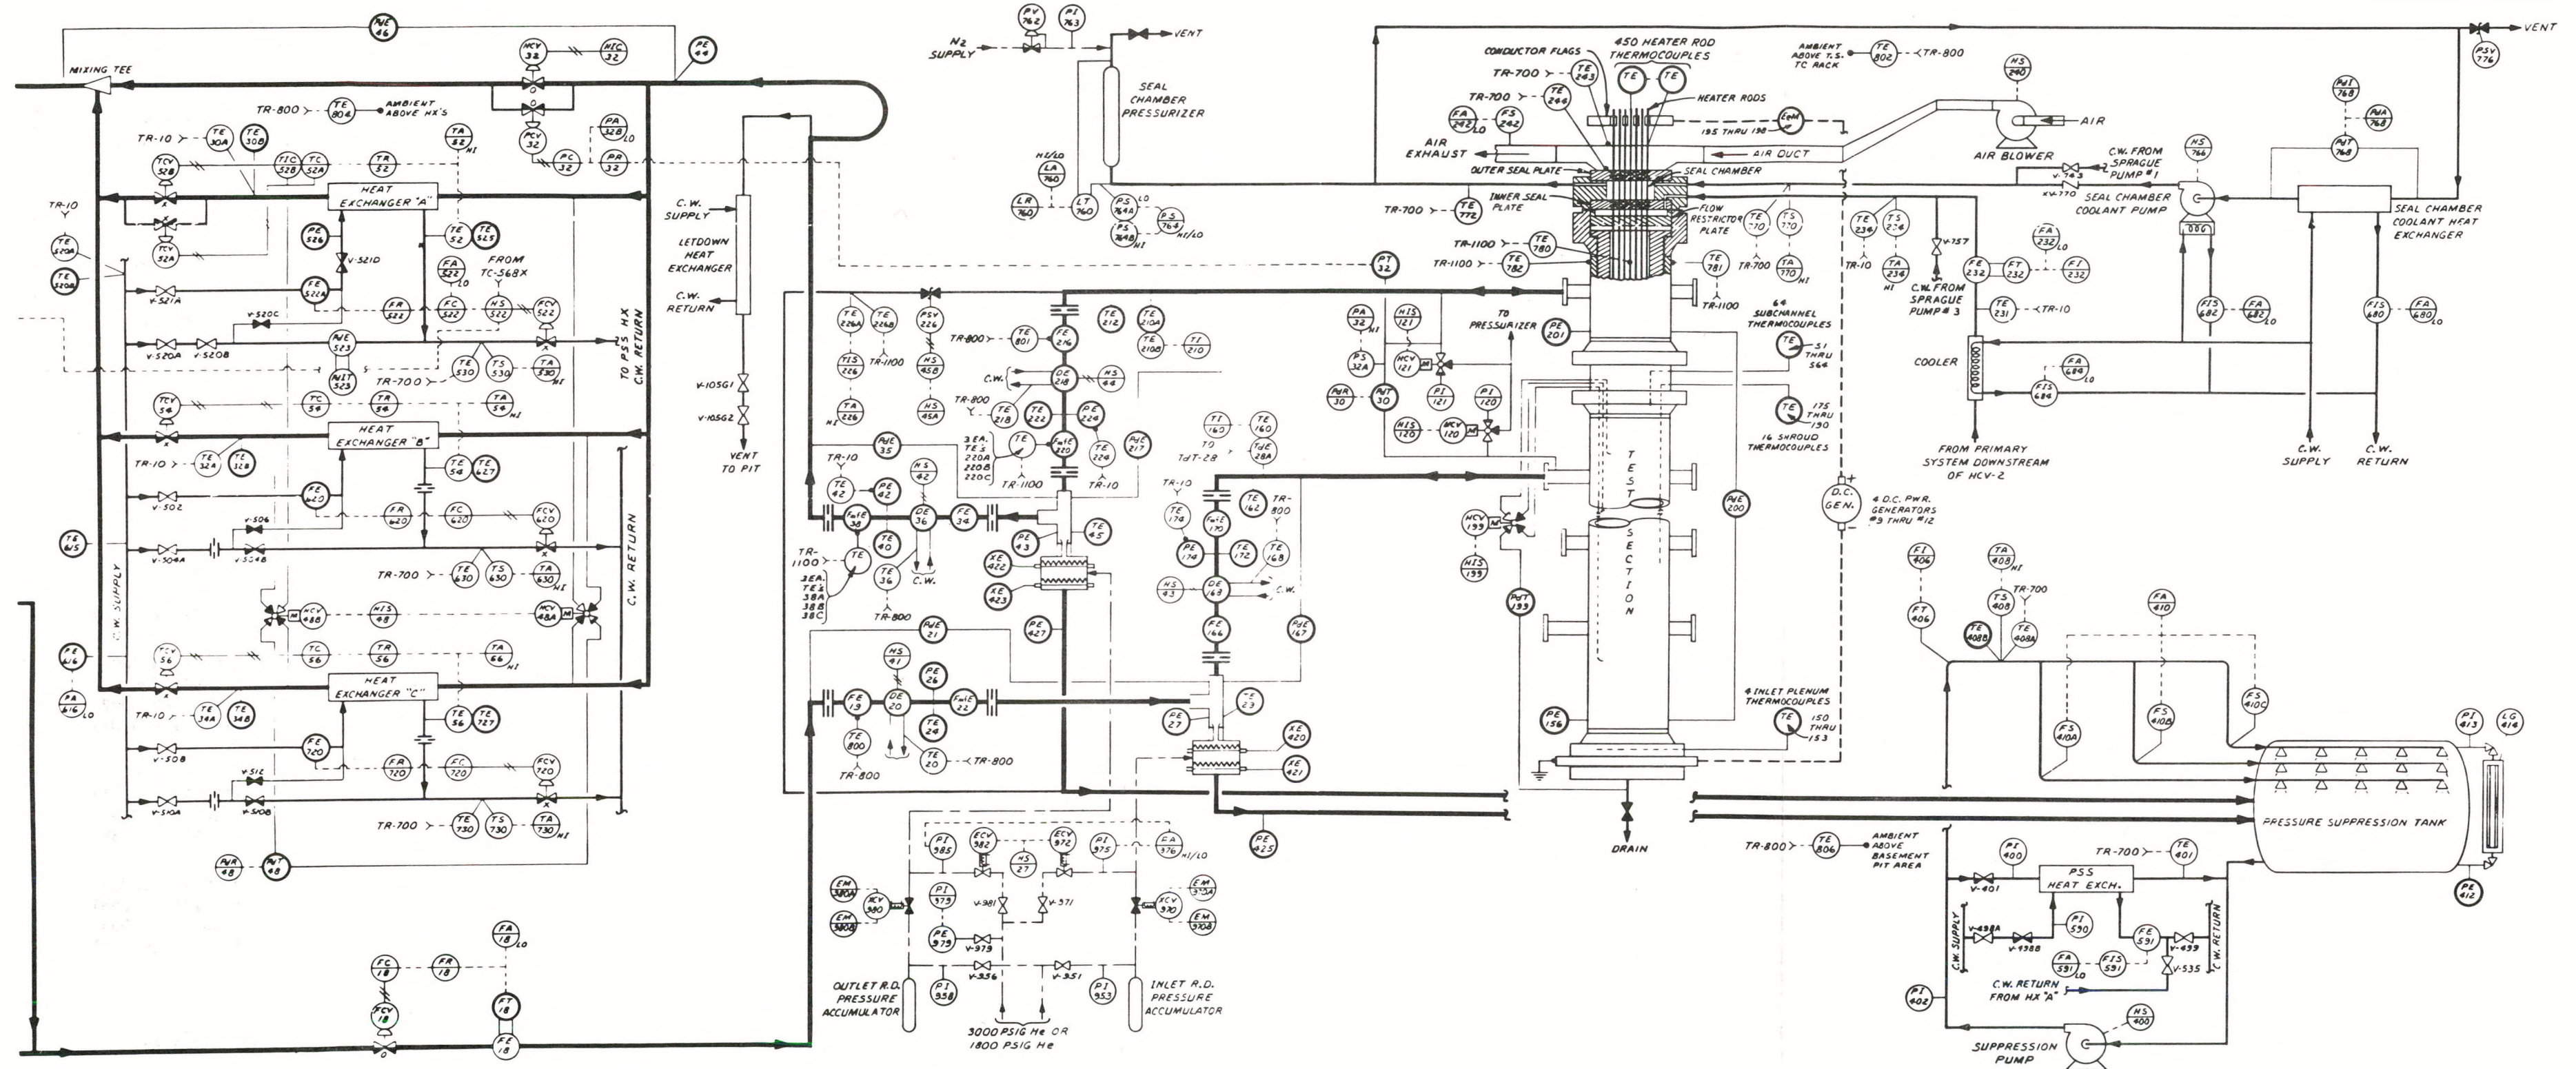


Fig. 7 (continued)

Table 4. Precision of experimental measurements for test 158

System	Standard deviation
Pressure measurement, MN/m ² (psig)	
CCDAS	0.185 (26.8)
Analog tape system	0.197 (28.5)
Pressure difference measurement, MN/m ² (psid)	
CCDAS	
6.89-MN/m ² (1000-psid) span	0.025 (3.6)
1.38-MN/m ² (200-psid) span	0.005 (0.72)
0.34-MN/m ² (50-psid) span	0.001 (0.18)
Analog tape system	
6.89-MN/m ² (1000-psid) span	0.033 (4.8)
1.38-MN/m ² (200-psid) span	0.007 (0.95)
0.34-MN/m ² (50-psid) span	0.002 (0.24)
Temperature measurement, K (°F)	2.4 (4.3)
Electric core power measurement	
Rod current, A	0.877
Rod voltage, V	0.304
Flow measurement, m ³ /sec (gpm)	
FE-19	
Forward	+0.0009 -0.0002 (+13.97) (-2.90)
Reverse	+0.0011 -0.0004 (+16.77) (-5.70)
FE-166	
Forward	+0.0011 -0.0004 (+17.49) (-6.43)
Reverse	+0.0009 -0.0002 (+14.14) (-3.07)
FE-216	
Forward	+0.0008 -0.0001 (+12.88) (-1.81)
Reverse	+0.0009 -0.0002 (+14.46) (-3.39)
FE-34	
Forward	+0.0019 -0.0005 (+30.71) (-8.58)
Reverse	+0.0019 -0.0005 (+29.54) (-7.41)
Momentum flux measurement, kg/m-sec ² (lb _m /ft-sec ²)	
CCDAS	2264 (1522)
Analog tape system	2554 (1716)
Density measurement @ 961 kg/m ³ (60 lb _m /ft ³), kg/m ³ (lb _m /ft ³)	12.9 (0.81)

Table 5. Data presentation for test 158

Measurement	Location and comments	Range		Figure	Measurement comments
		Detector	Data acquisition system		
BUNDLE TEMPERATURE	Chromel-Alumel thermocouples	+32 to +1897°F (all)	-0.0027 to +0.0400 V (all)		
<u>Heater Rod Sheath</u>					
	LEVEL D				
TE-301AD	Rod 1			8	Instrument failed
TE-304AD	Rod 4			9	
TE-309AD	Rod 9			10	
TE-310AD	Rod 10			11	
TE-312AD	Rod 12			12	
TE-313AD	Rod 13			13	
TE-317AD	Rod 17			14	
TE-318AD	Rod 18			15	
TE-320AD	Rod 20			16	
TE-322AD	Rod 22			17	
TE-323AD	Rod 23			18	
TE-325AD	Rod 25			19	
TE-326AD	Rod 26			20	
TE-331AD	Rod 31			21	
TE-338AD	Rod 38			22	
TE-339AD	Rod 39			23	
TE-341AD	Rod 41			24	
TE-349AD	Rod 49			25	
	LEVEL E				
TE-301AE	Rod 1			26	Instrument failed
TE-304AE	Rod 4			27	
TE-309AE	Rod 9			28	
TE-312AE	Rod 12			29	
TE-313AE	Rod 13			30	
TE-317AE	Rod 17			31	
TE-318AE	Rod 18			32	
TE-320AE	Rod 20			33	
TE-322AE	Rod 22			34	
TE-323AE	Rod 23			35	
TE-324AE	Rod 24			36	
TE-325AE	Rod 25			37	
TE-326AE	Rod 26			38	
TE-331AE	Rod 31			39	
TE-333AE	Rod 33			40	
TE-338AE	Rod 38			41	

Table 5 (continued)

Measurement	Location and comments	Range		Figure	Measurement comments
		Detector	Data acquisition system		
BUNDLE TEMPERATURE (continued)					
LEVEL E (continued)					
TE-339AE	Rod 39			42	Unpowered rod
TE-341AE	Rod 41			43	Small spurious spike
TE-349AE	Rod 49			44	Small spurious spike
LEVEL F					
TE-301BF	Rod 1			45	Spurious spike
TE-304BF	Rod 4			46	
TE-309BF	Rod 9			47	
TE-310BF	Rod 10			48	Spurious spike
TE-312BF	Rod 12			49	
TE-313BF	Rod 13			50	
TE-317BF	Rod 17			51	
TE-320BF	Rod 20			52	
TE-322BF	Rod 22			53	
TE-323BF	Rod 23			54	Unpowered rod
TE-324BF	Rod 24			55	
TE-325BF	Rod 25			56	
TE-326BF	Rod 26			57	Instrument failed
TE-331BF	Rod 31			58	
TE-333BF	Rod 33			59	
TE-338BF	Rod 38			60	
TE-341BF	Rod 41			61	
TE-349BF	Rod 49			62	
LEVEL G					
TE-301BG	Rod 1			63	Instrument failed
TE-304BG	Rod 4			64	
TE-309BG	Rod 9			65	
TE-310BG	Rod 10			66	
TE-312BG	Rod 12			67	
TE-313BG	Rod 13			68	
TE-317BG	Rod 17			69	
TE-318BG	Rod 18			70	
TE-320BG	Rod 20			71	
TE-322BG	Rod 22			72	
TE-323BG	Rod 23			73	
TE-325BG	Rod 25			74	

Table 5 (continued)

Measurement	Location and comments	Range		Figure	Measurement comments
		Detector	Data acquisition system		
BUNDLE TEMPERATURE (continued)					
LEVEL G (continued)					
TE-326BG	Rod 26			75	
TE-331BG	Rod 31			76	
TE-333BG	Rod 33			77	
TE-338BG	Rod 38			78	
TE-339BG	Rod 39			79	Unpowered rod
TE-341BG	Rod 41			80	
TE-349BG	Rod 49			81	Erratic prior to BD
LEVEL H					
TE-301CH	Rod 1			82	
TE-302AH	Rod 2			83	
TE-303AH	Rod 3			84	
TE-304CH	Rod 4			85	
TE-305AH	Rod 5			86	
TE-306AH	Rod 6			87	
TE-307AH	Rod 7			88	
TE-308AH	Rod 8			89	
TE-309CH	Rod 9			90	
TE-310CH	Rod 10			91	
TE-311AH	Rod 11			92	
TE-312CH	Rod 12			93	
TE-313CH	Rod 13			94	
TE-314AH	Rod 14			95	
TE-315AH	Rod 15			96	Instrument failed
TE-316AH	Rod 16			97	Spurious spike
TE-317CH	Rod 17			98	
TE-318CH	Rod 18			99	
TE-320CH	Rod 20			100	
TE-321AH	Rod 21			101	Small spurious spike
TE-322CH	Rod 22			102	Spurious spikes
TE-323CH	Rod 23			103	
TE-324CH	Rod 24			104	Unpowered rod
TE-325CH	Rod 25			105	
TE-326CH	Rod 26			106	
TE-327AH	Rod 27			107	
TE-331CH	Rod 31			108	
TE-333CH	Rod 33			109	Spurious spikes, questionable
TE-336AH	Rod 36			110	
TE-337AH	Rod 37			111	
TE-338CH	Rod 38			112	Spurious spike

Table 5 (continued)

Measurement	Location and comments	Range		Figure	Measurement comments
		Detector	Data acquisition system		
BUNDLE TEMPERATURE (continued)					
LEVEL H (continued)					
TE-339CH	Rod 39			113	Unpowered rod, spurious spikes
TE-341CH	Rod 41			114	Spurious spikes
TE-342AH	Rod 42			115	Spurious spikes
TE-343AH	Rod 43			116	
TE-344AH	Rod 44			117	Small spurious spike
TE-345AH	Rod 45			118	Spurious spike
TE-346AH	Rod 46			119	Spurious spike
TE-348AH	Rod 48			120	Spurious spikes
TE-349CH	Rod 49			121	Spurious spikes
LEVEL I					
TE-301CI	Rod 1			122	Spurious spike
TE-302AI	Rod 2			123	
TE-303AI	Rod 3			124	Spurious spike
TE-304CI	Rod 4			125	
TE-305AI	Rod 5			126	
TE-306AI	Rod 6			127	
TE-307AI	Rod 7			128	
TE-308AI	Rod 8			129	Small spurious spikes
TE-309CI	Rod 9			130	
TE-310CI	Rod 10			131	Small spurious spikes
TE-311AI	Rod 11			132	
TE-312CI	Rod 12			133	Spurious spike
TE-313CI	Rod 13			134	Spurious spike
TE-314AI	Rod 14			135	Spurious spike
TE-315AI	Rod 15			136	Spurious spike
TE-316AI	Rod 16			137	Spurious spikes
TE-317CI	Rod 17			138	
TE-318CI	Rod 18			139	
TE-320CI	Rod 20			140	
TE-321AI	Rod 21			141	
TE-322CI	Rod 22			142	
TE-323CI	Rod 23			143	
TE-324CI	Rod 24			144	Unpowered rod
TE-325CI	Rod 25			145	Small spurious spike
TE-326CI	Rod 26			146	
TE-327AI	Rod 27			147	
TE-328AI	Rod 28			148	
TE-331CI	Rod 31			149	
TE-333CI	Rod 33			150	Spurious spikes

Table 5 (continued)

Measurement	Location and comments	Range		Figure	Measurement comments
		Detector	Data acquisition system		
BUNDLE TEMPERATURE (continued)					
LEVEL I (continued)					
TE-336AI	Rod 36			151	
TE-337AI	Rod 37			152	
TE-338CI	Rod 38			153	Spurious spike
TE-339CI	Rod 39			154	Unpowered rod, somewhat erratic
TE-341CI	Rod 41			155	
TE-342AI	Rod 42			156	Small spurious spike
TE-343AI	Rod 43			157	Spurious spike
TE-344AI	Rod 44			158	
TE-345AI	Rod 45			159	
TE-346AI	Rod 46			160	
TE-348AI	Rod 48			161	
TE-349CI	Rod 49			162	Spurious spike
LEVEL J					
TE-301DJ	Rod 1			163	Spurious spike
TE-302CJ	Rod 2			164	
TE-304DJ	Rod 4			165	
TE-305CJ	Rod 5			166	
TE-306CJ	Rod 6			167	
TE-307CJ	Rod 7			168	
TE-308CJ	Rod 8			169	
TE-309DJ	Rod 9			170	
TE-310DJ	Rod 10			171	
TE-312DJ	Rod 12			172	
TE-313DJ	Rod 13			173	
TE-314CJ	Rod 14			174	
TE-316CJ	Rod 16			175	
TE-317DJ	Rod 17			176	
TE-318DJ	Rod 18			177	
TE-320DJ	Rod 20			178	
TE-321CJ	Rod 21			179	
TE-322DJ	Rod 22			180	
TE-323DJ	Rod 23			181	
TE-324DJ	Rod 24			182	Unpowered rod
TE-325DJ	Rod 25			183	
TE-326DJ	Rod 26			184	
TE-327CJ	Rod 27			185	Spurious spike
TE-328CJ	Rod 28			186	Small spurious spike
TE-331DJ	Rod 31			187	
TE-333DJ	Rod 33			188	Spurious spike

Table 5 (continued)

Measurement	Location and comments	Range		Figure	Measurement comments
		Detector	Data acquisition system		
BUNDLE TEMPERATURE (continued)					
LEVEL J (continued)					
TE-336CJ	Rod 36			189	
TE-337CJ	Rod 37			190	
TE-338DJ	Rod 38			191	Spurious spike
TE-339DJ	Rod 39			192	Unpowered rod, spurious spike
TE-340CJ	Rod 40			193	Spurious spike
TE-341DJ	Rod 41			194	Small spurious spike
TE-342CJ	Rod 42			195	Small spurious spike
TE-343CJ	Rod 43			196	Spurious spikes, reads low before BD
TE-344CJ	Rod 44			197	Spurious spikes
TE-345CJ	Rod 45			198	Spurious spikes
TE-346CJ	Rod 46			199	Spurious spikes
TE-349DJ	Rod 49			200	Spurious spikes
LEVEL K					
TE-301DK	Rod 1			201	Spurious spikes
TE-304DK	Rod 4			202	
TE-309DK	Rod 9			203	Spurious spikes
TE-310DK	Rod 10			204	Spurious spikes
TE-312DK	Rod 12			205	Spurious spikes
TE-313DK	Rod 13			206	Small spurious spikes
TE-317DK	Rod 17			207	Spurious spikes
TE-318DK	Rod 18			208	
TE-320DK	Rod 20			209	
TE-322DK	Rod 22			210	
TE-323DK	Rod 23			211	
TE-324DK	Rod 24			212	Unpowered rod
TE-325DK	Rod 25			213	
TE-326DK	Rod 26			214	
TE-331DK	Rod 31			215	
TE-333DK	Rod 33			216	Spurious spike
TE-338DK	Rod 38			217	Spurious spike
TE-339DK	Rod 39			218	Unpowered rod, spurious spikes
TE-341DK	Rod 41			219	Spurious spikes
TE-349DK	Rod 49			220	Spurious spike

Table 5 (continued)

Measurement	Location and comments	Range		Figure	Measurement comments
		Detector	Data acquisition system		
BUNDLE TEMPERATURE (continued)					
	LEVEL L				
TE-301EL	Rod 1			221	Spurious spike
TE-302CL	Rod 2			222	Spurious spike
TE-303CL	Rod 3			223	Spurious spike
TE-304EL	Rod 4			224	Spurious spike
TE-305CL	Rod 5			225	
TE-306CL	Rod 6			226	
TE-307CL	Rod 7			227	
TE-308CL	Rod 8			228	
TE-309EL	Rod 9			229	Questionable
TE-310EL	Rod 10			230	Spurious spike early in transient
TE-311CL	Rod 11			231	
TE-312EL	Rod 12			232	
TE-313EL	Rod 13			233	
TE-316CL	Rod 16			234	
TE-317EL	Rod 17			235	
TE-318EL	Rod 18			236	
TE-320EL	Rod 20			237	
TE-321CL	Rod 21			238	
TE-322EL	Rod 22			239	Reads low
TE-323EL	Rod 23			240	
TE-324EL	Rod 24			241	Unpowered rod
TE-325EL	Rod 25			242	
TE-326EL	Rod 26			243	
TE-327CL	Rod 27			244	
TE-328CL	Rod 28			245	
TE-331EL	Rod 31			246	
TE-333EL	Rod 33			247	
TE-336CL	Rod 36			248	
TE-337CL	Rod 37			249	
TE-338EL	Rod 38			250	Spurious spike
TE-339EL	Rod 39			251	Unpowered rod
TE-341EL	Rod 41			252	
TE-342CL	Rod 42			253	Small spurious spike
TE-343CL	Rod 43			254	Small spurious spike
TE-344CL	Rod 44			255	
TE-345CL	Rod 45			256	Small spurious spike
TE-346CL	Rod 46			257	
TE-348CL	Rod 48			258	Small spurious spike
TE-349EL	Rod 49			259	

Table 5 (continued)

Measurement	Location and comments	Range		Figure	Measurement comments
		Detector	Data acquisition system		
BUNDLE TEMPERATURE (continued)					
	LEVEL M				
TE-301EM	Rod 1			260	
TE-304EM	Rod 4			261	Spurious spike
TE-309EM	Rod 9			262	
TE-325EM	Rod 25			263	
	LEVEL N				
TE-301FN	Rod 1			264	Spurious spike
TE-304FN	Rod 4			265	
TE-325FN	Rod 25			266	
	LEVEL O				
TE-301FO	Rod 1			267	Spurious spikes
TE-304FO	Rod 4			268	Small spurious spike
TE-309FO	Rod 9			269	Spurious spikes
TE-310EO	Rod 10			270	Spurious spikes
TE-312EO	Rod 12			271	Small spurious spike
TE-317EO	Rod 17			272	Spurious spike
TE-318EO	Rod 18			273	
TE-320EO	Rod 20			274	
TE-322EO	Rod 22			275	
TE-323EO	Rod 23			276	
TE-324EO	Rod 24			277	Unpowered rod
TE-325FO	Rod 25			278	
TE-326EO	Rod 26			279	
TE-331EO	Rod 31			280	
TE-333EO	Rod 33			281	Spurious spike
TE-338EO	Rod 38			282	Spurious spikes
TE-339EO	Rod 39			283	Small spurious spikes
TE-341EO	Rod 41			284	Small spurious spikes
TE-349EO	Rod 49			285	Small spurious spikes
<u>Heater Rod Center</u>					
	LEVEL E				
TE-301ME	Rod 1			286	Spurious spike
TE-304ME	Rod 4			287	Spurious spike early in transient
TE-318ME	Rod 18			288	Small spurious spike
TE-322ME	Rod 22			289	Spurious spikes

Table 5 (continued)

Measurement	Location and comments	Range		Figure	Measurement comments
		Detector	Data acquisition system		
BUNDLE TEMPERATURE (continued)					
<u>Heater Rod Center</u> (continued)					
	LEVEL E (continued)				
TE-326ME	Rod 26			290	Spurious spike
TE-331ME	Rod 31			291	
TE-338ME	Rod 38			292	Small spurious spike
TE-349ME	Rod 49			293	Small spurious spike
	LEVEL F				
TE-301MF	Rod 1			294	
TE-304MF	Rod 4			295	
TE-322MF	Rod 22			296	Spurious spikes
TE-326MF	Rod 26			297	Spurious spike
TE-338MF	Rod 38			298	Spurious spike
TE-349MF	Rod 49			299	Spurious spike
	LEVEL G				
TE-301MG	Rod 1			300	Spurious spike
TE-310MG	Rod 10			301	
TE-313MG	Rod 13			302	
TE-317MG	Rod 17			303	Instrument failed
TE-318MG	Rod 18			304	
TE-322MG	Rod 22			305	
TE-323MG	Rod 23			306	
TE-325MG	Rod 25			307	
TE-326MG	Rod 26			308	
TE-338MG	Rod 38			309	
TE-349MG	Rod 49			310	
	LEVEL H				
TE-304MH	Rod 4			311	
TE-309MH	Rod 9			312	Spurious spike
TE-318MH	Rod 18			313	Small spurious spike
TE-322MH	Rod 22			314	Spurious spike
TE-338MH	Rod 38			315	Spurious spike

Table 5 (continued)

Measurement	Location and comments	Range		Figure	Measurement comments
		Detector	Data acquisition system		
BUNDLE TEMPERATURE (continued)					
	LEVEL J				
TE-301MJ	Rod 1			316	Unpowered rod
TE-310MJ	Rod 10			317	
TE-317MJ	Rod 17			318	
TE-323MJ	Rod 23			319	
TE-324MJ	Rod 24			320	
TE-326MJ	Rod 26			321	
TE-338MJ	Rod 38			322	
SPOOL PIECE INSTRUMENTS					
<u>Temperature</u>	Chromel-Alumel thermocouples	+32 to +1897°F	-0.0027 to +0.0400 V		
TE-24	Horizontal inlet			363	
TE-172	Vertical inlet			369	
TE-222	Vertical outlet			375	
TE-40	Horizontal outlet			381	
<u>Pressure</u>		0 to +3000 psig	0.0 to +5.0 V		
PE-26	Horizontal inlet			360	
PE-174	Vertical inlet			366	
PE-224	Vertical outlet			372	
PE-42	Horizontal outlet			378	
<u>Pressure Drop</u>		-200 to +200 psid	-5.0 to +5.0 V		
PDE-21	Horizontal inlet			362	
PDE-167	Vertical inlet			368	
PDE-217	Vertical outlet			374	
PDE-35	Horizontal outlet			380	
<u>Flow</u>					
FE-19	Horizontal inlet	-2000 to +2000 gpm	-5.0 to +5.0 V	358	
FE-166	Vertical inlet	-2000 to +2000 gpm	-5.0 to +5.0 V	364	
FE-216	Vertical outlet	-2000 to +2000 gpm	-5.0 to +5.0 V	370	
FE-34	Horizontal outlet	-4000 to +4000 gpm	-5.0 to +5.0 V	376	

Table 5 (continued)

Measurement	Location and comments	Range		Figure	Measurement comments
		Detector	Data acquisition system		
SPOOL PIECE INSTRUMENTS (continued)					
<u>Momentum Flux</u>		-250,000 to +250,000 lb _m /ft-sec ²	-5.0 to +5.0 V		
FMFE-22	Horizontal inlet			361	Erratic
FMFE-170	Vertical inlet			367	Zero shifted, erratic
FMFE-220	Vertical outlet			373	Erratic
FMFE-38	Horizontal outlet			379	Erratic
<u>Fluid Density</u>		0 to +62.4 lb _m /ft ³	0.0 to +10.0 V		
DE-20	Horizontal inlet			359	
DE-168	Vertical inlet			365	
DE-218	Vertical outlet			371	
DE-36	Horizontal outlet			377	
TEST SECTION TEMPERATURE	Chromel-Alumel thermocouples	+32 to +1897°F	-0.0027 to +0.0400 V		
<u>Bundle Shroud</u>					
TE-175	0.142L/LMAX			328	Instrument failed
TE-176	0.142L/LMAX			329	Instrument failed
TE-177	0.142L/LMAX			330	Instrument failed
TE-178	0.142L/LMAX			331	
TE-179	0.388L/LMAX			332	Noisy and spurious spikes
TE-180	0.388L/LMAX			333	Noisy and spurious spikes
TE-181	0.388L/LMAX			334	Erratic
TE-182	0.388L/LMAX			335	Slightly noisy
TE-183	0.633L/LMAX			336	Erratic before BD
TE-184	0.633L/LMAX			337	Erratic
TE-185	0.633L/LMAX			338	Slightly noisy and spurious spikes
TE-186	0.633L/LMAX			339	Erratic before BD
TE-187	0.875L/LMAX			340	Spurious spikes
TE-189	0.875L/LMAX			341	Slightly noisy, spurious spikes
TE-190	0.875L/LMAX			342	Noisy, erratic, spurious spikes

Table 5 (continued)

Measurement	Location and comments	Range		Figure	Measurement comments
		Detector	Data acquisition system		
TEST SECTION TEMPERA- TURE (continued)					
<u>Bundle Subchannel</u>					
TE-S1	Subchannel 1			480	Small spurious spike
TE-S2	Subchannel 2			481	
TE-S3	Subchannel 3			482	
TE-S5	Subchannel 5			483	Instrument failed
TE-S9	Subchannel 9			484	Small spike
TE-S10	Subchannel 10			485	Spurious spike
TE-S11	Subchannel 11			486	
TE-S14	Subchannel 14			487	Instrument failed
TE-S16	Subchannel 16			488	
TE-S33	Subchannel 33			489	Inst. disconnected
TE-S34	Subchannel 34			490	Inst. disconnected
TE-S36	Subchannel 36			491	Inst. disconnected
TE-S38	Subchannel 38			492	Spurious spike
TE-S39	Subchannel 39			493	
TE-S40	Subchannel 40			494	
TE-S41	Subchannel 41			495	Inst. disconnected
TE-S42	Subchannel 42			496	Inst. disconnected
TE-S44	Subchannel 44			497	Inst. disconnected
TE-S45	Subchannel 45			498	
TE-S49	Subchannel 49			499	
TE-S50	Subchannel 50			500	
TE-S51	Subchannel 51			501	
TE-S54	Subchannel 54			502	
TE-S55	Subchannel 55			503	
TE-S57	Subchannel 57			504	
TE-S59	Subchannel 59			505	
TE-S63	Subchannel 63			506	Instrument failed
TE-S64	Subchannel 64			507	Instrument failed
<u>Test Section</u>					
TE-162	Inlet line T/C			323	
TE-150	Bottom flange T/C			324	
TE-151	Bottom flange T/C			325	
TE-152	Bottom flange T/C			326	
TE-153	Bottom flange T/C			327	
TE-212	Outlet line T/C			343	
TE-210A	Outlet line RTD (steady state)	+32 to +800°F	+0.2 to +0.52 V	413	

Table 5 (continued)

Measurement	Location and comments	Range		Figure	Measurement comments
		Detector	Data acquisition system		
TEST SECTION					
PRESSURE					
PE-156	Inlet plenum	0 to +3000 psig	0.0 to +5.0 V	382	
PE-201	Outlet plenum	0 to +3000 psig	0.0 to +5.0 V	383	
PE-27	Inlet plenum bottom	0 to +3000 psig	0.0 to +5.0 V	402	
PE-43	Outlet plenum bottom	0 to +3000 psig	0.0 to +5.0 V	403	
PT-32	Outlet steady state	+500 to +2500 psig	+1.0 to +5.0 V	405	
TEST SECTION					
PRESSURE DROP					
PDT-199	Shroud box steady-state differential pressure	0 to +50 psid	+1.0 to +5.0 V	390	
PDE-200	Bundle transient differential pressure	-200 to +200 psid	-5.0 to +5.0 V	391	
PDT-30	Test section steady-state differential pressure	0 to +50 psid	+1.0 to +5.0 V	404	
PRESSURIZER					
INSTRUMENTS					
<u>Temperature</u>					
TE-1	Tank top T/C	+32 to +1897°F	-0.0027 to +0.0400 V	349	
TE-2	Tank exit T/C	+32 to +1897°F	-0.0027 to +0.0400 V	350	
<u>Pressure</u>					
PT-102	Steady-state pressure	+500 to +2500 psig	+1.0 to +5.0 V	386	
PE-106	Vapor transient pressure	0 to +3000 psig	0 to +5.0 V	387	
<u>Level</u>					
LT-100	Steady-state liquid level	0 to +150 in.	+1.0 to +5.0 V	409	
HEATER ROD POWER					
<u>Heater Current</u>		0 to +800 A	0.0 to +5.0 V		
EIE-11S6	Rod 1			415	
EIE-12S6	Rod 2			416	
EIE-11S7	Rod 3			417	
EIE-12S7	Rod 4			418	
EIE-9S6	Rod 5			419	
EIE-9S8	Rod 6			420	
EIE-9S5	Rod 7			421	

Table 5 (continued)

Measurement	Location and comments	Range		Figure	Measurement comments
		Detector	Data acquisition system		
HEATER ROD POWER (continued)					
<u>Heater Current</u> (continued)					
EIE-11S5	Rod 8			422	
EIE-11S8	Rod 9			423	
EIE-12S8	Rod 10			424	
EIE-9S7	Rod 11			425	
EIE-9S4	Rod 12			426	
EIE-9S3	Rod 13			427	
EIE-9S11	Rod 14			428	
EIE-11S4	Rod 15			429	
EIE-11S9	Rod 16			430	
EIE-12S5	Rod 17			431	
EIE-9S9	Rod 18			432	
EIE-9S10	Rod 19			433	Unpowered rod
EIE-9S2	Rod 20			434	
EIE-9S12	Rod 21			435	
EIE-11S11	Rod 22			436	
EIE-11S10	Rod 23			437	
EIE-11S3	Rod 24			438	Unpowered rod
EIE-9S13	Rod 25			439	
EIE-10S6	Rod 26			440	
EIE-9S1	Rod 27			441	
EIE-10S7	Rod 28			442	
EIE-11S2	Rod 29			443	
EIE-11S12	Rod 30			444	
EIE-12S2	Rod 31			445	
EIE-12S1	Rod 32			446	
EIE-10S12	Rod 33			447	
EIE-10S5	Rod 34			448	
EIE-10S8	Rod 35			449	
EIE-11S1	Rod 36			450	
EIE-12S4	Rod 37			451	
EIE-12S3	Rod 38			452	
EIE-12S12	Rod 39			453	Unpowered rod
EIE-10S11	Rod 40			454	
EIE-10S10	Rod 41			455	
EIE-10S9	Rod 42			456	
EIE-12S9	Rod 43			457	
EIE-12S10	Rod 44			458	
EIE-12S11	Rod 45			459	
EIE-10S1	Rod 46			460	
EIE-10S2	Rod 47			461	Unpowered rod, erratic signal
EIE-10S3	Rod 48			462	
EIE-10S4	Rod 49			463	

Table 5 (continued)

Measurement	Location and comments	Range		Figure	Measurement comments
		Detector	Data acquisition system		
GENERATOR POWER					
<u>Generator Current</u>		0 to +10,000 A	0.0 to +5.0 V		
EIE-9	Generator 9 current			464	Small spurious spike
EIE-10	Generator 10 current			465	Small spurious spikes
EIE-11	Generator 11 current			466	Small spurious spikes
EIE-12	Generator 12 current			467	Small spurious spikes
<u>Generator Voltage</u>		0 to +285 V	0.0 to +10.0 V		
EEE-9	Generator 9 voltage			468	
EEE-10	Generator 10 voltage			469	
EEE-11	Generator 11 voltage			470	
EEE-12	Generator 12 voltage			471	
HEAT EXCHANGER INSTRUMENTS					
<u>Primary Side</u>	Outlet Line Thermocouples	+32 to +1897°F	-0.0027 to +0.0400 V		
TE-30B	Heat exchanger A			344	
TE-32B	Heat exchanger B			345	
TE-34B	Heat exchanger C			346	Slightly noisy
TE-5B	Heat exchanger D			348	
TE-28B	Main HX mixing tee steady-state temp., RTD	+32 to +800°F	+0.032 to +0.800 v	398	Small spurious spike
<u>Secondary Side</u>	Secondary discharge steady-state temp., RTD	+32 to +500°F	+0.2 to +0.4 V		
TE-525	Heat exchanger A			412	
TE-627	Heat exchanger B			392	Slightly noisy and spurious spikes
TE-727	Heat exchanger C			397	Slightly noisy and spurious spikes
TE-557	Heat exchanger D			411	
<u>Heat Exchanger Secondary Flow</u>					
FE-522	Heat exchanger A	0 to +150 gpm	+0.2 to +1.0 V	410	Valved off
FE-620	Heat exchanger B	0 to +150 gpm	+0.2 to +1.0 V	354	
FE-720	Heat exchanger C	0 to +150 gpm	+0.2 to +1.0 V	355	
FE-550	Heat exchanger D	0 to +50 gpm	+0.2 to +1.0 V	356	
<u>Heat Exchanger Pressure</u>					
PE-44	Upstream main HX transient pressure	0 to +3000 psig	0.0 to +5.0 V	384	
PE-526	HX A secondary inlet pressure	0 to +350 psig	0.0 to +5.0 V	400	

Table 5 (continued)

Measurement	Location and comments	Range		Figure	Measurement comments
		Detector	Data acquisition system		
HEAT EXCHANGER INSTRUMENTS (continued)					
<u>Pressure Drop</u>					
PDT-48	Main HX steady-state pressure drop	0 to +24 psid	+1.0 to +5.0 V	393	
PDE-46	Main HX bypass transient pressure drop	-200 to +200 psid	-5.0 to +5.0 V	399	
PRIMARY PUMP INSTRUMENTS					
FE-1A	Primary side pump flow	0 to +800 gpm	+1.0 to +5.0 V	357	
PE-76	Pump suction transient pressure	0 to +3000 psig	0 to +5.0 V	385	
PDE-78	Primary pump transient pressure drop	-1000 to +1000 psid	-5.0 to +5.0 V	394	
SE-72	Primary pump speed	+100 to +5400 rpm	0 to +5.0 V	406	
TE-4B	Base primary steady-state temp., RTD	+32 to +800°F	+0.2 to +0.52 V	353	
PE-16	Downstream HCV-2 transient pressure	0.0 to +3000 psig	0.0 to +5.0 V	401	
PRESSURE SUPPRESSION SYSTEM INSTRUMENTS					
PE-412	Pressure suppression receiver transient pressure	0 to +200 psig	0 to +5.0 V	388	
PE-425	PSS inlet blowdown line transient pressure	0 to +3000 psig	0 to +5.0 V	395	Inoperative
PE-427	PSS outlet blowdown line transient pressure	0 to +3000 psig	0 to +5.0 V	396	
TE-29	Inlet blowdown plenum T/C	+32 to +1897°F	-0.0027 to +0.0400 V	351	
TE-45	Outlet blowdown plenum T/C	+32 to +1897°F	-0.0027 to +0.0400 V	352	
DEMINERALIZED WATER SYSTEM					
TE-520B	RBT 4-in. demineralized water header T/C	+32 to +1897°F	-0.0027 to +0.0400 V	347	
TE-615	Demineralized water 6-in. header steady-state temp., RTD	+32°F to +500°F	+0.2 to +0.4 V	389	
GENERAL INSTRUMENTATION (ELECTRICAL)					
<u>Breakwire Detectors</u>					
XM-4000I	Inlet break	0.0 to +5.0 V	0.0 to +5.0 V	407	
XM-4000O	Outlet break	0.0 to +5.0 V	0.0 to +5.0 V	408	

Table 5 (continued)

Measurement	Location and comments	Range		Figure	Measurement comments
		Detector	Data acquisition system		
GENERAL INSTRUMENTA-TION (ELECTRICAL) (continued)					
<u>RTD Power</u>					
EIM-1001B	RTD power supply current	2.0 mA	0.400 V	414	
<u>Data Acquisition</u>					
<u>Calibration Signals</u>					
Zero cal. input	Channels 0-127	0.0 mV	0.0 mV	472	
Zero cal. input	Channels 128-255	0.0 mV	0.0 mV	473	
Zero cal. input	Channels 256-383	0.0 mV	0.0 mV	474	
Zero cal. input	Channels 384-511	0.0 mV	0.0 mV	475	
Full-scale cal. input	Channels 0-127	35.00 mV	35.00 mV	476	
Full-scale cal. input	Channels 128-255	35.00 mV	35.00 mV	477	Spike
Full-scale cal. input	Channels 256-383	35.00 mV	35.00 mV	478	Spike
Full-scale cal. input	Channels 384-511	35.00 mV	35.00 mV	479	Spike

Internal Distribution

- | | |
|-----------------------|--------------------------------------|
| 1. T. M. Anklam | 19. C. B. Mullins |
| 2. M. Bender | 20. F. R. Mynatt |
| 3. R. E. Bohanan | 21. L. J. Ott |
| 4. V. D. Clemons | 22. H. Postma |
| 5. S. B. Cliff | 23-24. M. R. Sheldon |
| 6. S. K. Combs | 25. A. N. Smith |
| 7. W. B. Cottrell | 26. R. E. Textor |
| 8. W. G. Craddick | 27. D. G. Thomas |
| 9. R. D. Dabbs | 28. H. E. Trammell |
| 10. H. L. Falkenberry | 29. D. B. Trauger |
| 11. R. M. Flanders | 30. B. J. Veazie |
| 12. M. H. Fontana | 31-32. J. D. White |
| 13. R. C. Hagar | 33. M. D. White |
| 14. R. A. Hedrick | 34. Patent Office |
| 15. H. W. Hoffman | 35-36. Central Research Library |
| 16. C. R. Hyman | 37. Document Reference Section |
| 17. A. F. Johnson | 38-40. Laboratory Records Department |
| 18. G. M. Maxwell | 41. Laboratory Records (RC) |

External Distribution

- 42-43. Director, Division of Reactor Safety Research, Nuclear Regulatory Commission, Washington, D.D. 20555
44. Director, Research and Technical Support Division, DOE, ORO
- 45-359. Given distribution as shown in category R2 (TIC-2, NTIS-25)