

S
ENGINEERING CHANGE NOTICE

Page 1 of 2

1. ECN 638714
Proj. ECN

<p>2. ECN Category (mark one)</p> <p>Supplemental <input type="radio"/></p> <p>Direct Revision <input checked="" type="radio"/></p> <p>Change ECN <input type="radio"/></p> <p>Temporary <input type="radio"/></p> <p>Standby <input type="radio"/></p> <p>SuperscEDURE <input type="radio"/></p> <p>Cancel/Void <input type="radio"/></p>				<p>3. Originator's Name, Organization, MSIN, and Telephone No.</p> <p>D. L. Scott FDNW, B4-47, 376-7693</p>		<p>4. USQ Required?</p> <p><input type="radio"/> Yes <input checked="" type="radio"/> No</p>	<p>5. Date</p> <p>5/27/99</p>
<p>6. Project Title/No./Work Order No.</p> <p>SX Tank Farm</p>		<p>7. Bldg./Sys./Fac. No.</p> <p>N/A</p>		<p>8. Approval Designator</p> <p>N/A</p>			
<p>9. Document Numbers Changed by this ECN (includes sheet no. and rev.)</p> <p>HNF-4542, Rev. 0</p>		<p>10. Related ECN No(s).</p> <p>N/A</p>		<p>11. Related PO No.</p> <p>N/A</p>			
<p>12a. Modification Work</p> <p><input type="radio"/> Yes (fill out Blk. 12b)</p> <p><input checked="" type="radio"/> No (NA Blks. 12b, 12c, 12d)</p>		<p>12b. Work Package No.</p> <p>N/A</p>	<p>12c. Modification Work Completed</p> <p>N/A Design Authority/Cog. Engineer Signature & Date</p>		<p>12d. Restored to Original Condition (Temp. or Standby ECNs only)</p> <p>N/A Design Authority/Cog. Engineer Signature & Date</p>		
<p>13a. Description of Change</p> <p>13b. Design Baseline Document? <input checked="" type="radio"/> Yes <input type="radio"/> No</p> <p>Corrections incorporated to existing pages.</p> <p style="text-align: center;">PLS 5-27</p>							
<p>14a. Justification (mark one)</p> <p>Criteria Change <input type="radio"/></p> <p>Design Improvement <input type="radio"/></p> <p>Environmental <input type="radio"/></p> <p>Facility Deactivation <input type="radio"/></p> <p>As-Found <input checked="" type="radio"/></p> <p>Facilitate Const. <input type="radio"/></p> <p>Const. Error/Omission <input type="radio"/></p> <p>Design Error/Omission <input type="radio"/></p>		<p>14b. Justification Details</p> <p>Corrections to text, table and calculations.</p>					
<p>15. Distribution (Include name, MSIN, and no. of copies)</p> <p>See distribution list.</p>						<p>RELEASE STAMP</p> <p>MAY 27 1999</p> <p>DATE: MAY 27 1999</p> <p>STA: 15</p> <p>HANFORD RELEASE</p> <p>ID: 15</p>	

ENGINEERING CHANGE NOTICE

Page 2 of 2

1. ECN (use no. from pg. 1)

638714

16. Design Verification Required

17. Cost Impact

ENGINEERING

CONSTRUCTION

Yes

Additional

\$

Additional

\$

No

Savings

\$

Savings

\$

18. Schedule Impact (days)

Improvement

Delay

19. Change Impact Review: Indicate the related documents (other than the engineering documents identified on Side 1) that will be affected by the change described in Block 13. Enter the affected document number in Block 20.

SDD/DD	<input type="checkbox"/>	Seismic/Stress Analysis	<input type="checkbox"/>	Tank Calibration Manual	<input type="checkbox"/>
Functional Design Criteria	<input type="checkbox"/>	Stress/Design Report	<input type="checkbox"/>	Health Physics Procedure	<input type="checkbox"/>
Operating Specification	<input type="checkbox"/>	Interface Control Drawing	<input type="checkbox"/>	Spares Multiple Unit Listing	<input type="checkbox"/>
Criticality Specification	<input type="checkbox"/>	Calibration Procedure	<input type="checkbox"/>	Test Procedures/Specification	<input type="checkbox"/>
Conceptual Design Report	<input type="checkbox"/>	Installation Procedure	<input type="checkbox"/>	Component Index	<input type="checkbox"/>
Equipment Spec.	<input type="checkbox"/>	Maintenance Procedure	<input type="checkbox"/>	ASME Coded Item	<input type="checkbox"/>
Const. Spec.	<input type="checkbox"/>	Engineering Procedure	<input type="checkbox"/>	Human Factor Consideration	<input type="checkbox"/>
Procurement Spec.	<input type="checkbox"/>	Operating Instruction	<input type="checkbox"/>	Computer Software	<input type="checkbox"/>
Vendor Information	<input type="checkbox"/>	Operating Procedure	<input type="checkbox"/>	Electric Circuit Schedule	<input type="checkbox"/>
OM Manual	<input type="checkbox"/>	Operational Safety Requirement	<input type="checkbox"/>	ICRS Procedure	<input type="checkbox"/>
FSAR/SAR	<input type="checkbox"/>	IEFD Drawing	<input type="checkbox"/>	Process Control Manual/Plan	<input type="checkbox"/>
Safety Equipment List	<input type="checkbox"/>	Cell Arrangement Drawing	<input type="checkbox"/>	Process Flow Chart	<input type="checkbox"/>
Radiation Work Permit	<input type="checkbox"/>	Essential Material Specification	<input type="checkbox"/>	Purchase Requisition	<input type="checkbox"/>
Environmental Impact Statement	<input type="checkbox"/>	Fac. Proc. Samp. Schedule	<input type="checkbox"/>	Tickler File	<input type="checkbox"/>
Environmental Report	<input type="checkbox"/>	Inspection Plan	<input type="checkbox"/>	None	<input checked="" type="checkbox"/>
Environmental Permit	<input type="checkbox"/>	Inventory Adjustment Request	<input type="checkbox"/>		

20. Other Affected Documents: (NOTE: Documents listed below will not be revised by this ECN.) Signatures below indicate that the signing organization has been notified of other affected documents listed below.

Document Number/Revision

Document Number/Revision

Document Number/Revision

N/A

21. Approvals

Signature

Date

Signature

Date

Design Authority

Cog. Eng. D. L. Scott D. L. Scott B4-47

5/27/99

Cog. Mgr. B. E. Hey B. E. Hey B4-47

5/27/99

QA

Safety

Environ.

Other

Design Agent

PE

QA

Safety

Design

Environ.

Other

DEPARTMENT OF ENERGY

Signature or a Control Number that tracks the Approval Signature

ADDITIONAL

DISTRIBUTION SHEET

Calculation of Unmitigated Release From Reverse Circulation Drilling of a Borehole Three Meters South of Borehole 41-15-09 Near SST 241-SX-115

D. L. Scott

Fluor Daniel Northwest, Inc.

Richland, WA 99352

U.S. Department of Energy Contract DE-AC06-96RL13200

EDT/ECN: 638714

UC: 510

Org Code: 403

Charge Code: 813230CA40 HN920601

B&R Code: EW3120071

Total Pages: *17 18*

Key Words: drilling, TWRS, tank farms, dose calculations, unmitigated release, vadose zone, soil sampling


Abstract: To more fully characterize the vadose zone near Single Shell Tank 241-SX-115, another borehole will be drilled and sampled by using reverse circulation drilling equipment. Compressed air propels the drill and sweeps out cuttings. Dose calculations in this document are performed for an unmitigated airborne release from the drill string. Doses were found not to exceed TWRS risk guideline values.

TRADEMARK DISCLAIMER. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors.

Printed in the United States of America. To obtain copies of this document, contact: Document Control Services, P.O. Box 950, Mailstop H6-08, Richland WA 99352, Phone (509) 372-2420; Fax (509) 376-4989.

Janis Aardal
Release Approval

5-27-99
Date

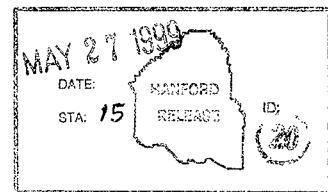

Release Stamp

Approved For Public Release

**CALCULATION OF UNMITIGATED RELEASE FROM REVERSE
CIRCULATION DRILLING OF A BOREHOLE THREE METERS
SOUTH OF BOREHOLE 41-15-09 NEAR SST 241-SX-115**

Prepared by:
Fluor Daniel Northwest, Inc.

For:
Lockheed Martin Hanford Co.

Date Published
May 1999

This page intentionally left blank.

TABLE OF CONTENTS

1.0	INTRODUCTION AND PURPOSE	1
2.0	PROCESS DESCRIPTION	1
3.0	METHODOLOGY	1
4.0	INPUT DATA AND ASSUMPTIONS	4
4.1	Estimate of Radionuclide Concentration in Soils at Drywell 15-07 in SX Tank Farm	5
4.2	Calculations to Estimate Radionuclide Concentrations in the Soil	6
4.3	Additional Input Data	8
5.0	CALCULATION OF INHALATION UNIT DOSE	8
6.0	RESULTS - CALCULATION OF ONSITE AND OFFSITE INHALATION DOSES	9
7.0	CONCLUSIONS.....	10
8.0	REFERENCES	10

LIST OF TABLES

1	Estimated Radionuclide Concentrations	8
2	Calculation of Inhalation Unit Dose	9

LIST OF FIGURES

1	Process Flow Diagram	3
---	----------------------------	---

LIST OF TERMS

ARF	airborne release fraction
Bq	bacquerel
Ci	curie
DR	damage ratio
HEDOP	Hanford Environmental Dose Overview Panel
HEPA	high efficiency particulate air
L	liter
LANL	Los Alamos National Laboratory
LPF	leak path factor
MAR	material at risk
R	breathing rate
rem	roentgen equivalent man
RF	respirable fraction
Sv	seivert
TWRS	Tank Waste Remediation System
UD	inhalation unit dose

Calculation of Unmitigated Release from Reverse Circulation Drilling of a Borehole Three Meters South of Borehole 41-15-09 Near SST 241-SX-115

1.0 INTRODUCTION AND PURPOSE

It is known that underground, single shell tank (SST) 241-SX-115 leaked 50,000 gallons of contaminated liquid to the soil. Now there is a campaign to more fully characterize the plume from that leak. To determine radionuclide concentrations in the vadose zone, boring into the soil and collecting samples of it are needed. It was decided to bore a new hole 3 m (9.8 ft) from existing borehole number 41-15-09, located near the south edge of the tank. Drilling and sampling will be done with the use of reverse circulation drilling, which uses compressed air to power the drill bit and sweep out drillings into separation and sampling equipment.

2.0 PROCESS DESCRIPTION

A process flow diagram for reverse circulation drilling is shown in Figure 1. Arrows show the flow direction of air and air-solids streams. Air supplied by a compressor enters the drill string through an annulus. The drill bit cuttings are suspended by air and are blown through the center of the drill string into a cyclone separator and a Torit (a registered trademark of Donaldson Co., Inc., Minneapolis, MN), which are housed in a containment structure. Solids are collected in drums and periodically removed. The drums will be labeled to allow correlation of material with the depth from which it was removed in the borehole. A solids sample is collected in a sample sock for subsequent chemical and radiochemical analyses. With the aid of an exhaust fan, process air is HEPA filtered before it is exhausted to the atmosphere.

3.0 METHODOLOGY

It was decided that an analysis of an unmitigated release from the drilling operation is the best way to show upper-bound risk. An unmitigated release is defined here as a release where no credit is taken for air-solid separation equipment. Aerodynamically entrained contaminated soil is released directly to the atmosphere as if the piping connection from the drill to the separation equipment were completely severed or disconnected.

Airborne particles having a diameter of 10 microns or less are considered respirable by humans. Onsite and offsite individuals inhaling radioactive particles in the respirable size range would be at risk. As presented in *Airborne Release Fractions/Rates and Respirable Fractions for Nonreactor Nuclear Facilities* (DOE 1994), the airborne source term is typically estimated by the following formula:

$$\text{Source term (Q)} = \text{MAR} \times \text{DR} \times \text{ARF} \times \text{RF} \times \text{LPF}$$

Where:

MAR = material at risk,
 DR = damage ratio,
 ARF = airborne release fraction,
 RF = respirable fraction, and
 LPF = leak path factor.


After the source term has been calculated, the doses from inhalation pathways are calculated. The dose formula, as provided in *Tank Waste Compositions and Atmospheric Dispersion Coefficients for Use in Safety Analysis Consequence Assessments* (Van Keuren 1996), is:

$$D(Sv) = Q (m^3) \times \chi/Q'(s/m^3) \times R(m^3/s) \times UD(Sv/m^3)$$

Where:

D = dose due to inhalation (Sv),
 Q = respirable source term (m^3) calculated above,
 χ/Q' = atmospheric dispersion coefficient (s/m^3),
 R = breathing rate of receptor ($3.3E-04 m^3/s$), and
 UD = inhalation unit dose (Sv/m^3).

For the onsite dose, the Hanford Tank Waste Remediation System (TWRS) risk evaluation guideline value, 0.5 rem, for an anticipated event was used. For offsite dose the risk evaluation guideline value of 0.1 rem was used (BIO 1999, Table 5.3.1-2).

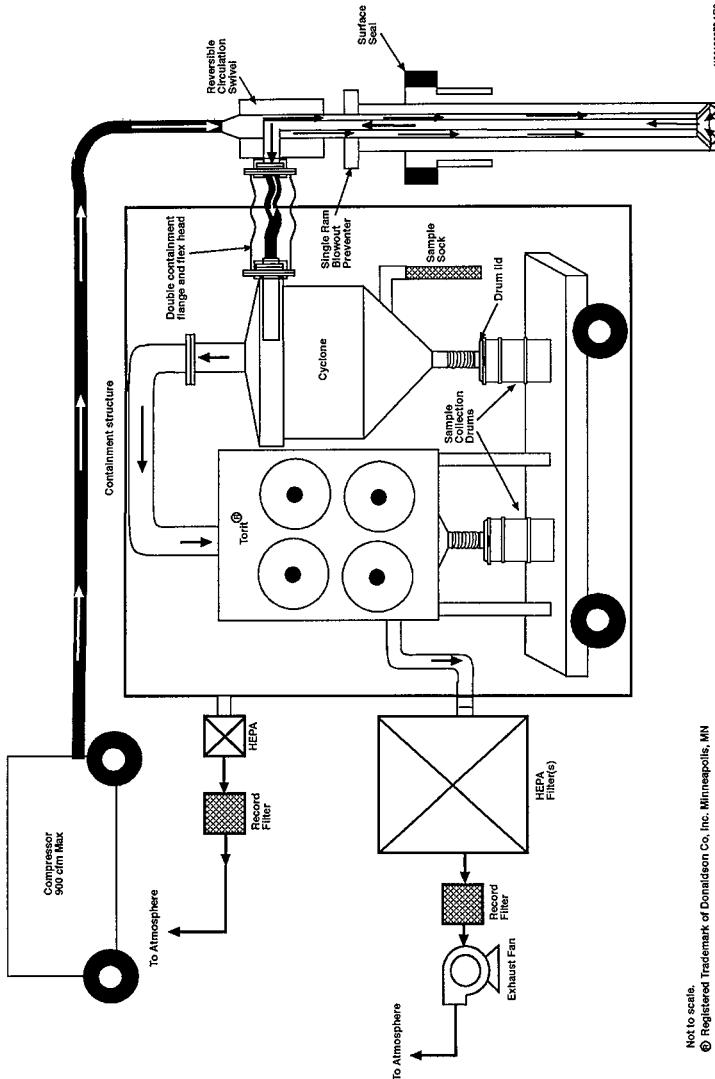

Note to seal.

© Registered Trademark of Donaldson Co. Inc. Minneapolis, MN

HNF-4542-1.196

Figure 1. Process Flow Diagram

4.0 INPUT DATA AND ASSUMPTIONS

The material at risk (MAR) was taken as the volume of contaminated material intersected by the borehole at its maximum diameter, 10 inches (0.254 m), with an incremental borehole depth of 5 ft (1.524 m), since this amount is removed each time before sampling. Therefore the MAR was calculated as follows:

$$\begin{aligned} \text{MAR} &= [(\pi/4)(\text{max. diameter})^2](\text{borehole depth}) \\ &= [(\pi/4)(0.254 \text{ m})^2](1.524 \text{ m}) \\ &= 0.0772 \text{ m}^3 \end{aligned}$$

The damage ratio (DR) is the fraction of the material actually impacted by the accident. In this case, an unmitigated release is postulated, wherein no credit is taken for containment or filtration equipment, and all material is effected. Therefore:

$$\text{DR} = 1.$$

The ARF is that part of the material released which would actually become airborne. The stream of compressed air entrains all the MAR and ejects it in a finely divided state into the atmosphere at an elevation of at least 10 ft (3.048 m) above ground level; therefore,

$$\text{ARF} = 1.$$

The respirable fraction (RF) is the portion of the MAR that is less than or equal to 10 microns. The drilling process will remove the material small enough to be lifted by the air stream. Larger particles are broken up until they will be lifted. Even though grinding large particles by the drilling process would add some to the 10-micron fraction, the respirable contamination is not expected to be significantly larger because contamination is a surface phenomenon. For an equivalent mass, the surface area of the larger particles is relatively small when compared with the surface area of small particles. Analysis of Hanford site soils (Serne 1993) indicates that the sandy material is composed of 89% sand, 7% silt, and 4% clay. The analysis of this material indicates that 8% of the sandy material is composed of particles 10 microns or less. The drilling process would increase this value somewhat. A conservative number would be doubling the value; therefore,

$$\text{RF} = 0.16$$

The leak path factor (LPF) is the fraction of the material transported through the leak path taking into account any confinement deposition or filtration mechanism. In this case, the leak path will not provide any impedance of the material release; therefore,

$$\text{LPF} = 1$$

The source term Q is calculated as follows:

$$\begin{aligned}
 Q &= \text{MAR} \times \text{DR} \times \text{ARF} \times \text{RF} \times \text{LPF} \\
 &= (0.0772 \text{ m}^3)(1)(1)(0.16)(1) \\
 &= 0.0124 \text{ m}^3
 \end{aligned}$$

4.1 ESTIMATE OF RADIONUCLIDE CONCENTRATION IN SOILS AT DRYWELL 15-07 IN SX TANK FARM

The radionuclide concentrations in the most contaminated region of the soil column at Drywell 15-07 were estimated using recent spectral gamma logging results. Agnew's estimates of radionuclide concentrations in SX tank farm boiling waste tanks during the time period the tanks were thought to have leaked, and historical analytical data from the supernatant that leaked from SX-115. The concentration of Cs-137 in the supernatant that leaked from Tank SX-115 in March 1965 is reported in Raymond and Shdo (1966) to be 0.763 Ci/gallon. Spectral gamma logging on Drywell 15-07 in 1996 detected Cs-137 at a concentration of ~10 pCi/g at a depth of 58 feet (DOE-GJO, 1996). Cs-137 contamination was limited to a narrow region between 55 and 60 feet below ground surface. No other radionuclides were identified during the gamma logging of this drywell.

Steve Agnew, LANL, developed a leak volume estimate for four boiling waste tanks in the SX tank farm (Agnew 1998). As part of this effort, the chemical and radionuclide contents of four Tanks (SX-108, -109, -111, and -112) were estimated using the HDW model. The estimate of Tank SX-108 waste composition was used as a basis for the following calculations. (The ratios of radionuclides coming out of the Agnew estimates are based on ORIGEN code calculations for specific fuel batches processed at the REDOX Plant.)

For estimating radionuclide concentrations in soils at Drywell 15-07 the following assumptions were made:

- 1) The ratio of radionuclides estimated to be in Tank SX-108 at the time of the leak would reflect the radionuclide ratios in SX-115 at the time it leaked. Both tanks received similar REDOX high-level waste.
- 2) The composition of the supernatant leaked from Tank SX-115 is identical with the tank composition estimate.
- 3) Except for Tc-99, the ratios of radionuclides in the vadose zone at Drywell 15-07 (near Tank SX-115) are identical with the estimated waste composition in Tank SX-115 at the time of the leak.
- 4) The composition of the waste in Tank SX-115 at the time it leaked can be ratioed to Agnew's estimate of Tank SX-108 composition and the measured Cs-137 concentration in leaked Tank SX-115 supernatant reported in Raymond and Shdo (1966).

- 5) Agnew Tank SX-108 radionuclide concentrations are decayed to 1/1/94. Raymond and Shdo's Cs-137 supernatant analysis data were not decay-corrected.
- 6) Tc-99 at Drywell 15-07 was assumed to be the same concentration as that in the original plume resulting from the 50,000-gallon leak from Tank SX-115.

The major assumption associated with these calculations is that all radionuclides, with the exception of Tc-99, are attenuated to the same extent as Cs-137 through sorption on the soil. Tc-99 is assumed to be non-sorbed on the soil thus there is no mechanism for retardation or concentration in the soil. The "worst case" estimate for Tc-99 is that a plume would be encountered that contained the same concentration as that produced from the original 50,000 gallon leak. This Tc-99 concentration is based on a soil porosity of 30% and a specific gravity of 1.8 (Raymond and Shdo 1966).

4.2 CALCULATIONS TO ESTIMATE RADIONUCLIDE CONCENTRATIONS IN THE SOIL

- 1) The Cs-137 curie concentration in Tank SX-115 supernatant is converted from Ci/gal to Ci/L as follows:

$$(0.763 \text{ Ci/gal}) / (3.7854 \text{ L/gal}) = 0.2016 \text{ Ci/L}$$

Please realize that by not decay correcting the Raymond and Shdo Cs-137 data from Tank SX-115 supernatant, the estimated concentrations of radionuclides in the vadose zone at Drywell 15-07 are high (conservative) by a factor of approximately 2.

- 2) An equation is developed for estimating sorbing radionuclides in the soil column at Drywell 15-07 as follows:

$$\begin{aligned} \text{Rad conc in soil} &= \frac{[\text{SX-108 rad conc, Ci/L}]}{[\text{Cs-137 in SX-108 supernatant}]} \times [\text{of Cs-137 conc in soil, Ci/g}] \\ &= \frac{(\text{SX-108 rad conc, Ci/L})}{[0.349 \text{ Ci/L}]} \times (1\text{E}-11 \text{ Ci/g}) \\ &= (\text{SX-108 rad conc, Ci/L}) [(2.8648E-11 \text{ Ci/g}) / (\text{Ci/L})] \end{aligned}$$

Now an example calculation for Sr-90 shows how the equation is used. From Table 1 the Sr-90 concentration in Tank SX-108 is 7.31E-02 Ci/L. Substituting this value into the above equation gives:

$$\begin{aligned}\text{Sr-90 conc in soil} &= (7.31\text{E-02}) (2.8648\text{E-11}) \\ &= 2.094\text{E-12 Ci/g}\end{aligned}$$

Except for Tc-99, similar calculations were used to calculate the curie concentration of each radionuclide in the soil (see Table 1).

3) A conservative estimate of the Tc-99 curie concentration in the soil column at Drywell 15-07 is deduced as follows:

$$\begin{aligned}\text{Tc-99 lost from Tank SX-115} &= 6.18\text{E-05 Ci/L} \times 50,000 \text{ gal} \times 3.785 \text{ L/gal} \\ &= 11.7 \text{ Ci Tc-99}\end{aligned}$$

At 30% porosity, 2.24 gallons of liquid saturates 1 cubic foot of soil (Raymond and Shdo 1966); therefore, $50,000 \text{ gal} / 2.24 \text{ gal/ft}^3 = 22,321 \text{ ft}^3$ of soil is saturated by the 50,000 gal leak. The soil volume is converted to units of cm^3 as follows:

$$(22,321 \text{ ft}^3) [(2.54 \text{ cm/in})(12 \text{ in/ft})]^3 = 6.32\text{E+8 cm}^3$$

Given a soil specific gravity of 1.8, the soil volume is converted to soil mass:

$$6.32\text{E+08 cm}^3 \times 1.8 \text{ g/cm}^3 = 1.14\text{E+09 g}$$
 of soil is saturated by the 50,000 gallon leak.

$11.7 \text{ Ci Tc-99} / 1.14\text{E+09 g} = 1.03\text{E-08 Ci/g Tc-99}$ is in the original plume from the Tank SX-115 leak event.

Table 1. Estimated Radionuclide Concentrations

<u>Radionuclide</u>	Tank SX-108 Concentration (Ci/L)	Tank SX-115 Concentration (Ci/L)	Drywell 15-07 Concentration (Ci/g)
Sr-90	7.31E-02	4.22E-02	2.09E-12
Y-90	7.31E-02	4.22E-02	2.09E-12
Tc-99	1.07E-04	6.18E-05	1.03E-08*
Cs-137	3.49E-01	2.02E-01	1.00E-11
Pu-239	1.90E-05	1.10E-05	5.44E-16
Pu-241	2.28E-05	1.32E-05	6.53E-16
Am-241	3.69E-05	2.13E-05	1.06E-15

*The Tc-99 concentration in Drywell 15-07 was estimated by assuming at a worst case that the Tc-99 could be the same as the Tc-99 concentration in the soil saturated by the 50,000 gallon leak. As suggested by Raymond and Shdo (1966), a soil porosity of 30% and a specific gravity of 1.8 was used in the calculation.

4.3 ADDITIONAL INPUT DATA

Dose conversion factors (EPA 1988) for each radionuclide in the soil are shown in Table 2, 4th column.

Drilling out an incremental 5-ft borehole length is not expected to take more than 8 hours. A release for this duration is considered acute and is used as a basis for selecting atmospheric dispersion coefficients. The atmospheric dispersion coefficient for a 200-Area Tank Farm onsite receptor at 100 m is 3.41E-02 s/m³ (Van Keuren 1996, Table 4). For the offsite receptor (at the site boundary) the atmospheric dispersion coefficient is 2.83E-05 s/m³ (Van Keuren 1996, Table 5). Both of these values are for an acute release without plume meander.

5.0 CALCULATION OF INHALATION UNIT DOSE

Excel spreadsheet software (version 5.0), a product of Microsoft Corporation, was used to calculate individual unit doses and the total inhalation unit dose (UD) as shown in Table 2. The following example calculation for Sr-90 illustrates how the individual unit dose values were calculated. First, the curie concentration for Sr-90 was converted to the appropriate units by multiplying by soil density.

$$(2.09E-12 \text{ Ci/g})(1.8E+6 \text{ g/m}^3) = 3.76E-06 \text{ Ci/m}^3$$

Next, the Sr-90 unit dose was calculated as follows:

$$\begin{aligned} UD_{Sr-90} &= (3.76E-06 \text{ Ci/m}^3)(3.7E+10 \text{ Bq/Ci})(6.47E-08 \text{ Sv/Bq}) \\ &= 9.00E-03 \text{ Sv/m}^3 \end{aligned}$$

The sum of the individual unit doses, of course, gives the total inhalation unit dose, 1.57E+00 Sv/m³.

Table 2. Calculation of Inhalation Unit Dose

Radionuclide	Curie Concentration in Soil (Ci/g)	Curie Concentration in Soil (Ci/m ³)	Conversion Factor** (Sv/Bq)	Unit Dose (Sv/m ³)
Sr-90	2.09E-12	3.76E-06	6.47E-08	9.00E-03
Y-90	2.09E-12	3.76E-06	2.28E-09	3.17E-04
Tc-99	1.03E-08	1.85E-02	2.25E-09	1.54E+00
Cs-137	1.00E-11	1.80E-05	8.63E-09	5.75E-03
Pu-239	5.44E-16	9.80E-10	1.16E-04	4.21E-03
Pu-241	6.53E-16	1.18E-09	2.23E-06	9.74E-05
Am-241	1.06E-15	1.90E-09	1.20E-04	8.45E-03
Total inhalation unit dose UD =				1.57E+00

**These values are taken from reference EPA 1988.

6.0 RESULTS - CALCULATION OF ONSITE AND OFFSITE INHALATION DOSES

The onsite dose is calculated as follows:

$$\begin{aligned} D_{onsite} &= Q \times (\gamma/Q')_{onsite} \times R \times UD \\ &= (0.0124 \text{ m}^3)(3.41E-02 \text{ s/m}^3)(3.3E-04 \text{ m}^3/\text{s})(1.57 \text{ Sv/m}^3) \\ &= 2.19E-07 \text{ Sv} \text{ or } 2.19E-05 \text{ rem} \end{aligned}$$

The offsite dose is calculated as follows:

$$\begin{aligned} D_{offsite} &= Q \times (\gamma/Q')_{offsite} \times R \times UD \\ &= (0.0124 \text{ m}^3)(2.83E-05 \text{ s/m}^3)(3.3E-04 \text{ m}^3/\text{s})(1.57 \text{ Sv/m}^3) \\ &= 1.82E-10 \text{ Sv} \text{ or } 1.82E-08 \text{ rem} \end{aligned}$$

7.0 CONCLUSIONS

For onsite dose, the TWRS risk evaluation guideline value is 0.5 rem for an anticipated accident. The onsite dose for dispersion of a 5-ft borehole depth increment, 2.18E-05 rem, is well below the risk guideline value. For offsite dose, the risk evaluation guideline value is 0.1 rem. The offsite dose, 1.81E-08 rem, is well below the risk guideline value. If material from a 20-ft depth of borehole were dispersed, the dose values would be 4 times greater; that is, 8.72E-05 rem onsite; 7.24E-08 rem offsite, which are also well below the risk evaluation guideline values. Furthermore, even with a respirable fraction of 1 and a release of a 20-ft borehole depth, the dose is less than risk evaluation guideline values. It is therefore concluded that no safety class or safety significant equipment is needed for this accident sequence.

8.0 REFERENCES

Agnew, S.F., and R.A. Corbin, 1998, *Analysis of SX Farm Leak Histories-Historical Leak Model (HLM)*, LA-UR-96-3537, Chemical Technology Division, Los Alamos National Laboratory, Los Alamos, New Mexico.

BIO, 1999, *Tank Waste Remediation System Basis for Interim Operation*, HNF-SD-WM-BIO-001, Rev. 1-C, Fluor Daniel Hanford, Inc., Richland, Washington.

DOE, 1994, *DOE Handbook Airborne Release Fractions/Rates and Respirable Fraction for Nonreactor Nuclear Facilities*, DOE-HDBK-3010-94, U.S. Department of Energy, Richland, Washington.

DOE-GJO, 1996, *Vadose Zone Characterization Project at the Hanford Tank Farms, SX Tank Farm Report*, GJ-HAN-DOE/ID/12584-268 (GJPO-HAN-4), U.S. Department of Energy, Grand Junction Office, Grand Junction, Colorado.

EPA, 1988, *Limiting Values of Radionuclide Intake and Air Concentration and Dose Conversion Factors for Inhalation, Submersion, and Ingestion*, EPA-520/1-88-020, Federal Guidance Report No. 11, U.S. Environmental Protection Agency, Washington, DC.

Raymond, J.R. and E.J. Shdo, 1966, *Characterization of Subsurface Contamination in the SX Tank Farm*, BNWL-CC-701, Pacific Northwest National Laboratory, Richland, Washington.

Serne, R.J. et al, 1993, *Solid Waste Leach Characteristics and Contaminant-Sediment Interactions*, PNL-8889 Volume 1, Pacific Northwest Laboratory, Richland, Washington.

Van Keuren, J.C., 1996, *Tank Waste Compositions and Atmospheric Dispersion Coefficients for Use in Safety Analysis Consequence Assessments*, WHC-SD-WM-SARR-016, Rev. 2, Westinghouse Hanford Company, Richland, Washington.

FLUOR DANIEL NORTHWEST

TECHNICAL PEER REVIEWS

CHECKLIST FOR TECHNICAL PEER REVIEW

Document Reviewed: HNF-4542 Rev. 1
 Title: Calculation of Unmitigated Release from Reverse Circulation Drilling of a Borehole Three Meters South of Borehole 41-25-09 Near SST 241-SX-115
 Author: David L. Scott
 Date: May 21, 1999
 Scope of Review: Entire Document

<u>Yes</u>	<u>No*</u>	<u>NA</u>	
<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> **	Previous reviews complete and cover analysis, up to scope of this review, with no gaps.
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Problem completely defined.
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Accident scenarios developed in a clear and logical manner.
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Necessary assumptions explicitly stated and supported.
<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Computer codes and data files documented.
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Data used in calculations explicitly stated in document.
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Data checked for consistency with original source information as applicable.
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Mathematical derivations checked including dimensional consistency of results.
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Models appropriate and used within range of validity or use outside range of established validity justified.
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Hand calculations checked for errors. Spreadsheet results should be treated exactly the same as hand calculations.
<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Software input correct and consistent with document reviewed.
<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Software output consistent with input and with results reported in document reviewed.
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Limits/criteria/guidelines applied to analysis results are appropriate and referenced.
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Limits/criteria/guidelines checked against references.
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Safety margins consistent with good engineering practices.
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Conclusions consistent with analytical results and applicable limits.
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Results and conclusions address all points required in the problem statement.
<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> **	Review calculations, comments, and/or notes are attached.
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Traceability
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Document approved (i.e., the reviewer affirms the technical accuracy of the document).

James C. Williams
 Reviewer: (Printed and Signed)

James C. Williams 5/27/99
 Date

* All "NO" responses must be explained below or on an additional page.

** Any calculations, comments, or notes generated as part of this review should be signed, dated and attached to this checklist. Such material should be labeled and recorded in such a manner as to be intelligible to a technically qualified third party.

FLUOR DANIEL NORTHWEST

TECHNICAL PEER REVIEWS

HEDOP REVIEW CHECKLIST

Document Reviewed: *HNF-4542 Rev. 1, Calculation of Unmitigated Release from Reverse Circulation Drilling of a Borehole three Meters South of Borehole 41-15-09 Near SST 341-SX-115*
Title: *Reverse Circulation Drilling of a Borehole three Meters South of Borehole 41-15-09 Near SST 341-SX-115*
Author: *David L. Scott*
Date: *May 27, 1999*
Scope of Review: *Entire Document*

Yes No* NA

[] [] 1. A detailed technical review and approval of the environmental transport and dose calculation portion of the analysis has been performed and documented.

[] [] 2. Detailed technical review(s) and approval(s) of scenario and release determinations have been performed and documented.

[] [] [] 3. HEDOP-approved code(s) were used.

[] [] [] 4. Receptor locations were selected according to HEDOP recommendations.

[] [] [] 5. All applicable environmental pathways and code options were included and are appropriate for the calculations.

[] [] 6. Hanford site data were used.

[] [] 7. Model adjustments external to the computer program were justified and performed correctly.

[] [] [] 8. The analysis is consistent with HEDOP recommendations.

[] [] [] 9. Supporting notes, calculations, comments, comment resolutions, or other information is attached. (Use the "Page 1 of X" page numbering format and sign and date each added page.)

[] [] 10. Approval is granted on behalf of the Hanford Environmental Dose Overview Panel.

* All "no" responses must be explained below or on an additional sheet.


D.A. Himes
HEDOP-Approved Reviewer (printed name and signature)

5/27/99
Date

COMMENTS (add additional signed and dated page if necessary):