

A combined saline formation and gas reservoir CO₂ injection pilot in Northern California

Robert Trautz¹, Larry Myer^{*1}, Sally Benson¹,
Curt Oldenburg¹, Thomas Daley¹, Ed Seeman²

¹ Earth Sciences Division
Lawrence Berkeley National Laboratory
Berkeley CA 94720

² Rosetta Resources Inc
Denver CO 80202

Abstract

A geologic sequestration pilot in the Thornton gas field in Northern California, USA involves injection of up to 4000 tons of CO₂ into a stacked gas and saline formation reservoir. Lawrence Berkeley National Laboratory (LBNL) is leading the pilot test in collaboration with Rosetta Resources, Inc. and Calpine Corporation under the auspices of the U.S. Department of Energy and California Energy Commission's WESTCARB, Regional Carbon Sequestration Partnership. The goals of the pilot include: 1) Demonstrate the feasibility of CO₂ storage in saline formations representative of major geologic sinks in California; 2) Test the feasibility of Enhanced Gas Recovery associated with the early stages of a CO₂ storage project in a depleting gas field; 3) Obtain site-specific information to improve capacity estimation, risk assessment, and performance prediction; 4) Demonstrate and test methods for monitoring CO₂ storage in saline formations and storage/enhanced recovery projects in gas fields; and 5) Gain experience with regulatory permitting and public outreach associated with CO₂ storage in California. Test design is currently underway and field work begins in August 2006.

Keywords: CO₂, geologic sequestration, pilot, field, testing

CO₂ Storage Capacity in California Gas Fields

The Central Valley of California, composed of the Sacramento River basin in the north and San Joaquin River basin in the south, contains numerous saline formations and oil and gas reservoirs that could be used for geologic storage of CO₂. The reservoir rocks in the Central Valley consist of alternating layers of sands and shales deposited in deltaic and marine environments. The saline formations alone are estimated to have a storage capacity of 120 to 500 Gigatonnes (Gt) of CO₂, representing a potential CO₂ sink equal to or greater than 500 years of California's current large point-source CO₂ emissions [1]. In addition to being representative of very large sinks, there are over 11 Megatonnes (Mt)/year of CO₂ emissions within the southern Sacramento River basin near the proposed pilot site.

The proposed field site for the pilot test is in a small-depleted and abandoned gas field located north of Thornton, California in the southern Sacramento Valley (Figure 1). Gas production began in the mid 1940s and continued through the late 1980s, producing nearly $1.52 \times 10^9 \text{ m}^3$ (53.6 billion cubic feet, Bcf) of natural gas from 14 wells with a heating value of 35.7 to 36.7 MegaJoules/m³ (960 to 985 Btu/cf) [2]. Natural gas was produced from the top of the upper cretaceous Mokelumne River

* Corresponding Author: lrmyer@lbl.gov, 510-486-6456.

sand formation (referred to locally as the Capital or McCormick sandstone), which forms an East-West trending anticline or dome-like structure, creating the Thornton Gas Field (Figure 2). Gas was also produced from a thin sand lens in the overlying Capay Shale (Figure 3).

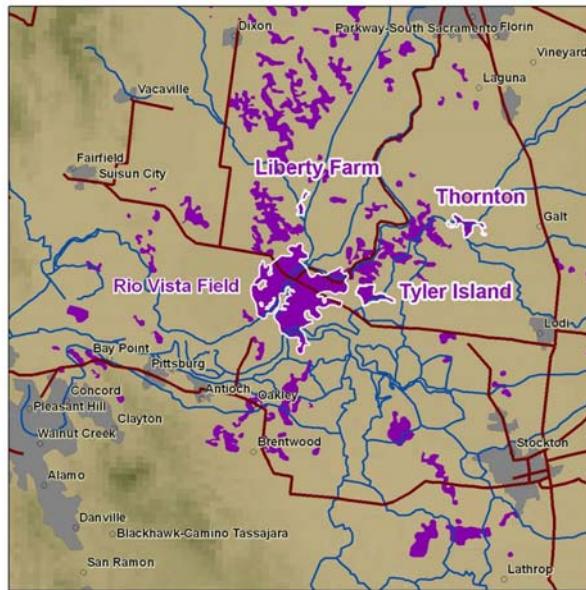


Figure 1. Gas-field locations in the southern Sacramento Valley region.

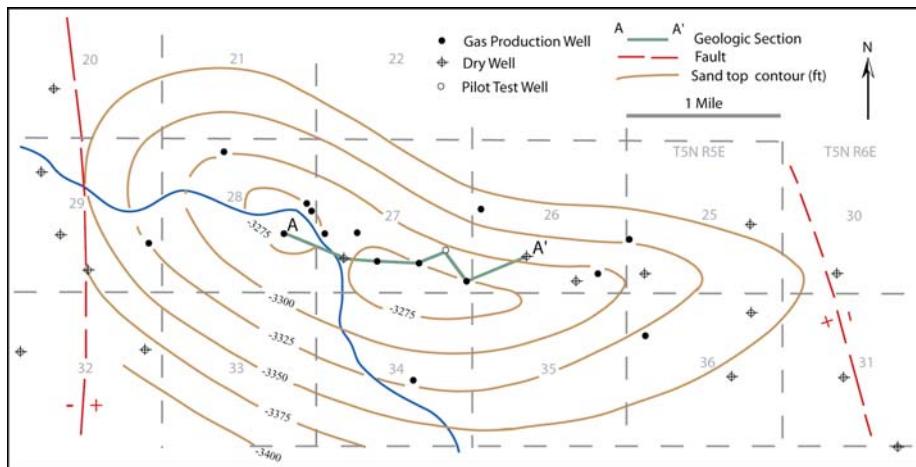


Figure 2. Contours of depth (ft) to top of the gas-producing McCormick Sand unit at the Thornton Gas Field. Proposed pilot test location is shown as an open circle on the section line A-A'.

The Thornton Gas Field is an excellent geologic analog to the much larger Rio Vista Gas Field located a few miles away near Rio Vista, California. The Rio Vista Gas Field is the largest onshore gas field in California and consists of an elongated dome-shaped structure extending over a 12 km (7.5 mi) by 15 km (9.4 mi) area. Since 1936, the Rio Vista Gas Field has produced over 9.3×10^{10} m³ (3.3 Tcf) of natural gas from 365 wells. The formations at Thornton and Rio Vista are representative of dozens of gas-producing fields in California, the cumulative storage capacity of which is estimated at 1.7 Gt. CO₂. Storage capacity of Rio Vista is estimated to be over 300 Mt CO₂, sufficient to accommodate CO₂ emissions for over 80 years from a nearby 650-MW gas-fired power plant.

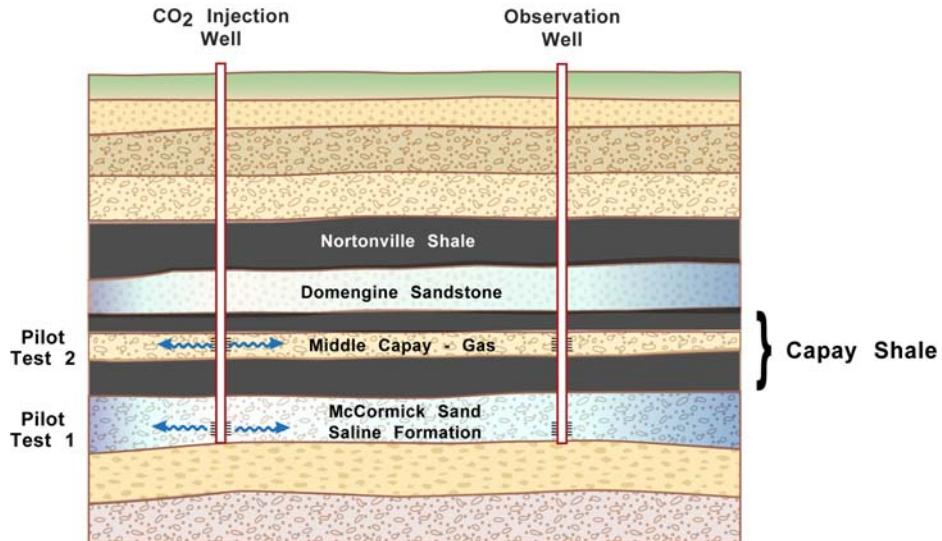


Figure 3. Idealized stratigraphic section (not to scale) showing the injection depths for the stacked reservoir pilot tests to be performed in the middle Capay Shale (depleted gas) and McCormick Sand (saline).

Enhanced Gas Recovery

In addition to evaluating the feasibility of injecting CO₂ into depleted gas reservoirs and large regionally extensive saline aquifers, the pilot test will be the first field-scale test used to demonstrate CO₂ Storage with Enhanced Gas Recovery (CSEGR). Depleted petroleum reservoirs are especially promising targets for CO₂ storage because of the potential to use CO₂ to extract additional oil or natural gas. The benefit of enhanced oil recovery (EOR) using injected CO₂ to swell and mobilize oil from the reservoir toward a production well is well known. CSEGR involves a similar CO₂ injection process, but relies on sweep and methane displacement and has received far less attention ([3], [4], [5]). Depleted natural gas reservoirs are not entirely devoid of methane, therefore, CO₂ injection may enhance methane production by reservoir repressurization or pressure maintenance. Based on the favorable results of numerous CSEGR modeling studies, we sought out and selected the Thornton Gas Field for the dual purpose of demonstrating safe injection of CO₂ into a deep saline aquifer, coupled with a second injection into a depleted gas reservoir to demonstrate safety and to study CSEGR processes. Depleted natural gas reservoirs are attractive targets for sequestration of CO₂ because of their demonstrated ability to trap gas, proven record of gas recovery (i.e., sufficient permeability), existing infrastructure of wells and pipelines, and land use history of gas production and transportation.

Pilot Test Methodology

Two pilot tests involving CO₂ injection will be performed at the Rosetta-Calpine CO₂ Storage project site located in the Thornton Gas Field. The first experiment will involve injecting up to 2000 tons of CO₂ into a brine-filled zone in the McCormick sand, a very fine to medium grained, quartzitic sandstone (Figure 3). Two wells, a CO₂ injector and an observation well, will be installed in a saline zone located beneath the gas trap in the McCormick sand. Our current best estimate for the target depth of the saline test is 1067 to 1098 m (3500 to 3600 ft). Both wells will be drilled to approximately the same depth and the casing will initially be perforated in the saline zone. CO₂ injection will commence after logging and testing the wells.

The second experiment will involve injecting up to 2000 tons of CO₂ into a depletion-drive, depleted gas reservoir located within the Middle Capay shale at a depth of approximately 928 m

(3044 feet). The Capay shale represents a regionally extensive reservoir cap (Figure 3), containing pockets of natural gas in thin interbedded sand lenses. The top of the McCormick sand (Figure 2), a depleted water-drive reservoir at a slightly greater depth of 1003-1021 m, is an alternative location if the Capay sand stringer is absent at the location of the new wells. The casing will be perforated in the gas zone after completing the first experiment and cementing the well perforations shut in the lower saline zone. The second experiment will consist of injecting CO₂ into the depleted gas zone to assess the nature and extent of reservoir pressurization and displacement of methane by CO₂. CO₂ will be purchased from a local supplier and trucked to the pilot site.

A comprehensive set of monitoring techniques will be evaluated and deployed as part of the pilot, aimed at monitoring CO₂ movement in the storage formation as well as detecting any leakage outside the primary storage formation. Candidate geophysical techniques include a combination of surface seismic reflection, Vertical Seismic Profiling (VSP), and cross-well seismic imaging. Use of surface to borehole electromagnetics will be evaluated. A comprehensive suite of wireline logs will augment these geophysical measurements. Injection rates, wellhead and downhole pressures and temperatures will be continuously monitored during injection. Fluid and gas samples will be collected and analyzed during CO₂ injection to evaluate the chemical composition of the fluids. A multilevel fluid sampling system will be utilized to track migration and allow careful evaluation of flow and transport processes that affect success of CSEGR.

Preliminary Modeling Results in Support of Test Design

Preliminary computer simulations were conducted using TOUGH2/EOS7C ([6], [7]) in support of the pilot tests at the conceptual design level. The questions addressed at the conceptual design level include the following:

1. How much CO₂ should be injected and at what rate?
2. What are the expected pressure and temperature changes in the reservoir associated with the injection?
3. What kind of monitoring and sampling should be conducted in the observation well?

Using preliminary estimates of formation properties (permeability 10^{-12} m² and porosity 35%), and boundary and initial conditions, preliminary simulations showed that breakthrough of supercritical CO₂ will occur during the saline test within 10 days at an observation well located 39 m from the injector (Figure 4). Approximately 1800 tonnes of CO₂ injected at a rate of 2 kg/s into the uppermost 4 m of the McCormick Sand is required to produce this result. In contrast, breakthrough of CO₂ gas will occur in the 2-3 m thick Capay Shale interval at the same 39 m distance within a couple of days (Figure 5) using far less CO₂ (1000 tonnes injected at a rate of 1.2 kg/s). Pressure changes caused by injection are small in both cases and temperature effects are minimal. A multilevel sampler placed in the observation well (containing a minimum of three pressure and temperature monitoring intervals) is needed in order to observe fluid density effects.

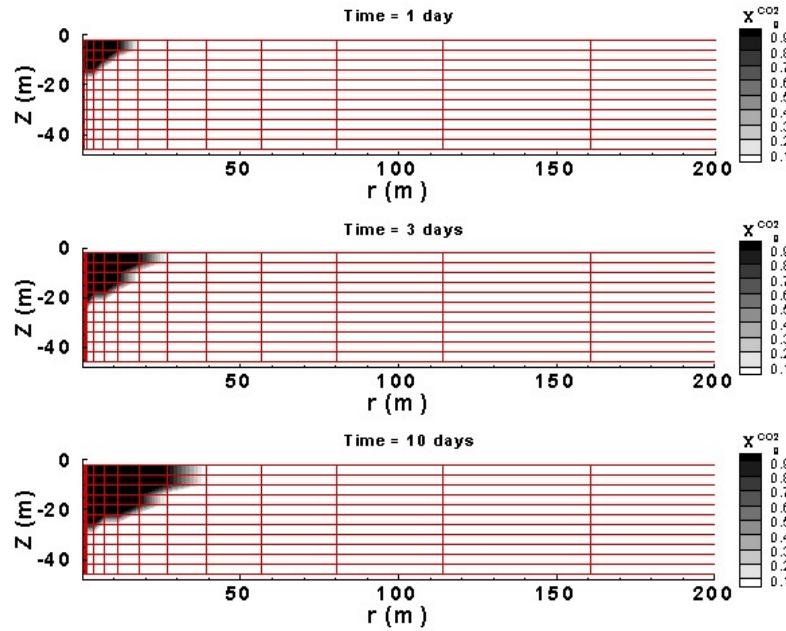


Figure 4. Mass fraction of CO_2 in the gas ($X_g^{\text{CO}_2}$) at three times after injection into the upper-most 4 m of the McCormick Sand at a rate of 2 kg/s, assuming radial symmetry.

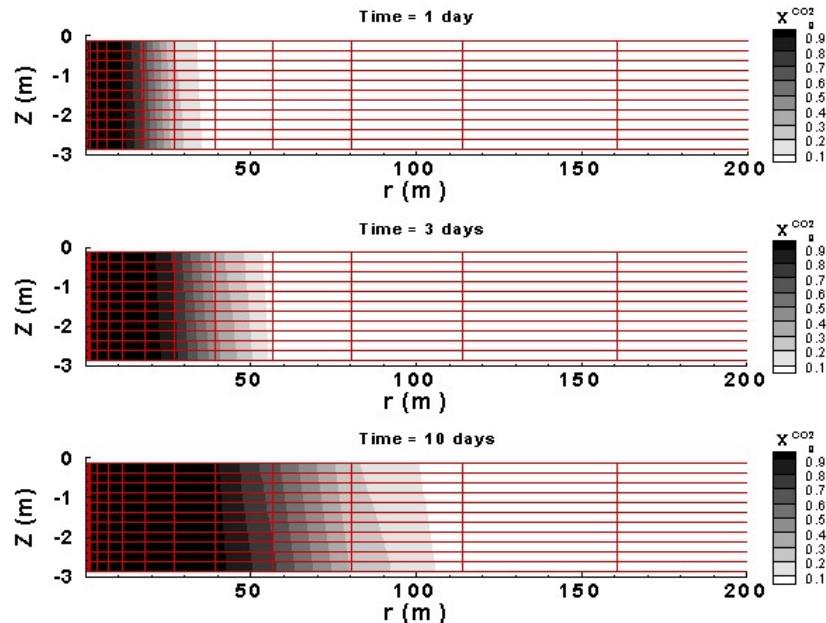


Figure 5. Two-dimensional r - z results showing CO_2 mass fraction in the gas phase ($X_g^{\text{CO}_2}$) at three times for injection into the gas interval, assuming radial symmetry.

Conclusion

A detailed project management plan and schedule have been developed describing the proposed pilot tests and defining the sequence of test activities. Implementation of the field program will begin in August 2006 starting with site preparation activities including road and well pad construction. Well installation is scheduled for completion by late October 2006, followed by baseline sampling and geophysical surveys. Injection of CO₂ into the saline zone will begin in Spring 2007 and injection into the depleted gas zone is scheduled for Fall 2007. A public outreach program is under development and will be implemented throughout the three-year program.

Acknowledgments

This work was supported in part by WESTCARB through the Assistant Secretary for Fossil Energy, Office of Coal and Power Systems, through the National Energy Technologies Laboratory (NETL), and Lawrence Berkeley National Laboratory, under Department of Energy Contract No. DE-AC02-05CH11231.

References

- [1] Myer L, Benson S, Clikenbeard J, Downey C, Zhang H, and Herzog H. "An Assessment of the Geologic Storage Capacity of California Sedimentary Basins." Proceedings of Fourth Annual Conference on Carbon Capture and Sequestration. Department of Energy/ National Energy Technology Laboratory. Alexandria, VA, May 2-5, 2005.
- [2] California Department of Conservation. California Oil & Gas Fields: Volume III (Northern California). Division of Oil, Gas, & Geothermal Resources, 337 p., 1982.
- [3] Oldenburg CM, Pruess K, and Benson SM. Process modeling of CO₂ injection into natural gas reservoirs for carbon sequestration and enhanced gas recovery. *Energy & Fuels*, 2001; 15, 293–298.
- [4] Oldenburg CM. Carbon dioxide as cushion gas for natural gas storage. *Energy & Fuels*, 2003; 17(1), 240–246.
- [5] Oldenburg CM, Stevens SH, and Benson SM. Economic feasibility of carbon sequestration with enhanced gas recovery (CSEGR). *Energy*, 2004; 29, 1413–1422.
- [6] Pruess K, Oldenburg C, Moridis G. TOUGH2 User's Guide, Version 2.0. Lawrence Berkeley Laboratory Report *LBNL-43134*; Berkeley, California, 1999.
- [7] Oldenburg CM, Moridis GJ, Spycher N, and Pruess K. EOS7C Version 1.0: TOUGH2 Module for Carbon Dioxide or Nitrogen in Natural Gas (Methane) Reservoirs. Lawrence Berkeley Laboratory Report *LBNL-56589*; Berkeley, California, 2004.