

RECEIVED BY TIC AUG 26 1980

NRL Memorandum Report 4180

# Ion Beam Propagation in a Filamented Channel

P. F. OTTINGER AND S. A. GOLDSTEIN

*JAYCOR*  
*Alexandria, VA 22304*

AND

D. MOSHER

*Plasma Technology Branch*  
*Plasma Physics Division*

**MASTER**

March 3, 1980



NAVAL RESEARCH LABORATORY  
Washington, D.C.

Approved for public release; distribution unlimited.

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED.

## **DISCLAIMER**


**This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.**

---

## **DISCLAIMER**

**Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.**

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NRL Memorandum Report 4180	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) ION BEAM PROPAGATION IN A FILAMENTED CHANNEL	5. TYPE OF REPORT & PERIOD COVERED Interim report on a continuing NRL problem.	
	6. PERFORMING ORG. REPORT NUMBER	
7. AUTHOR(s) P. F. Ottinger*, S. A. Goldstein* and D. Mosher	8. CONTRACT OR GRANT NUMBER(s)	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Research Laboratory Washington, DC 20375	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS NRL Problem 67-0879-0-0 ES-77-A-01-6021	
11. CONTROLLING OFFICE NAME AND ADDRESS Department of Energy Washington, DC 20545	12. REPORT DATE March 3, 1980	
	13. NUMBER OF PAGES 12	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	15. SECURITY CLASS. (of this report) UNCLASSIFIED	
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report)  Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES *JAYCOR, Alexandria, VA 22304 This research was sponsored by the U.S. Department of Energy, Project Number DOE 67-0879-0-0.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)  Ion beam propagation Filamented channel Single particle orbits Radial confinement of beam		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)  The production of intense focused ion beams has led to the consideration of using z-discharge plasma channels to transport them several meters to inertial fusion targets. Analysis has shown that current bunching will occur in the channel during transport. In this report ion beam propagation in a filamented channel is investigated in order to determine the effects on radial beam containment in channels and on the radial beam density profile.		

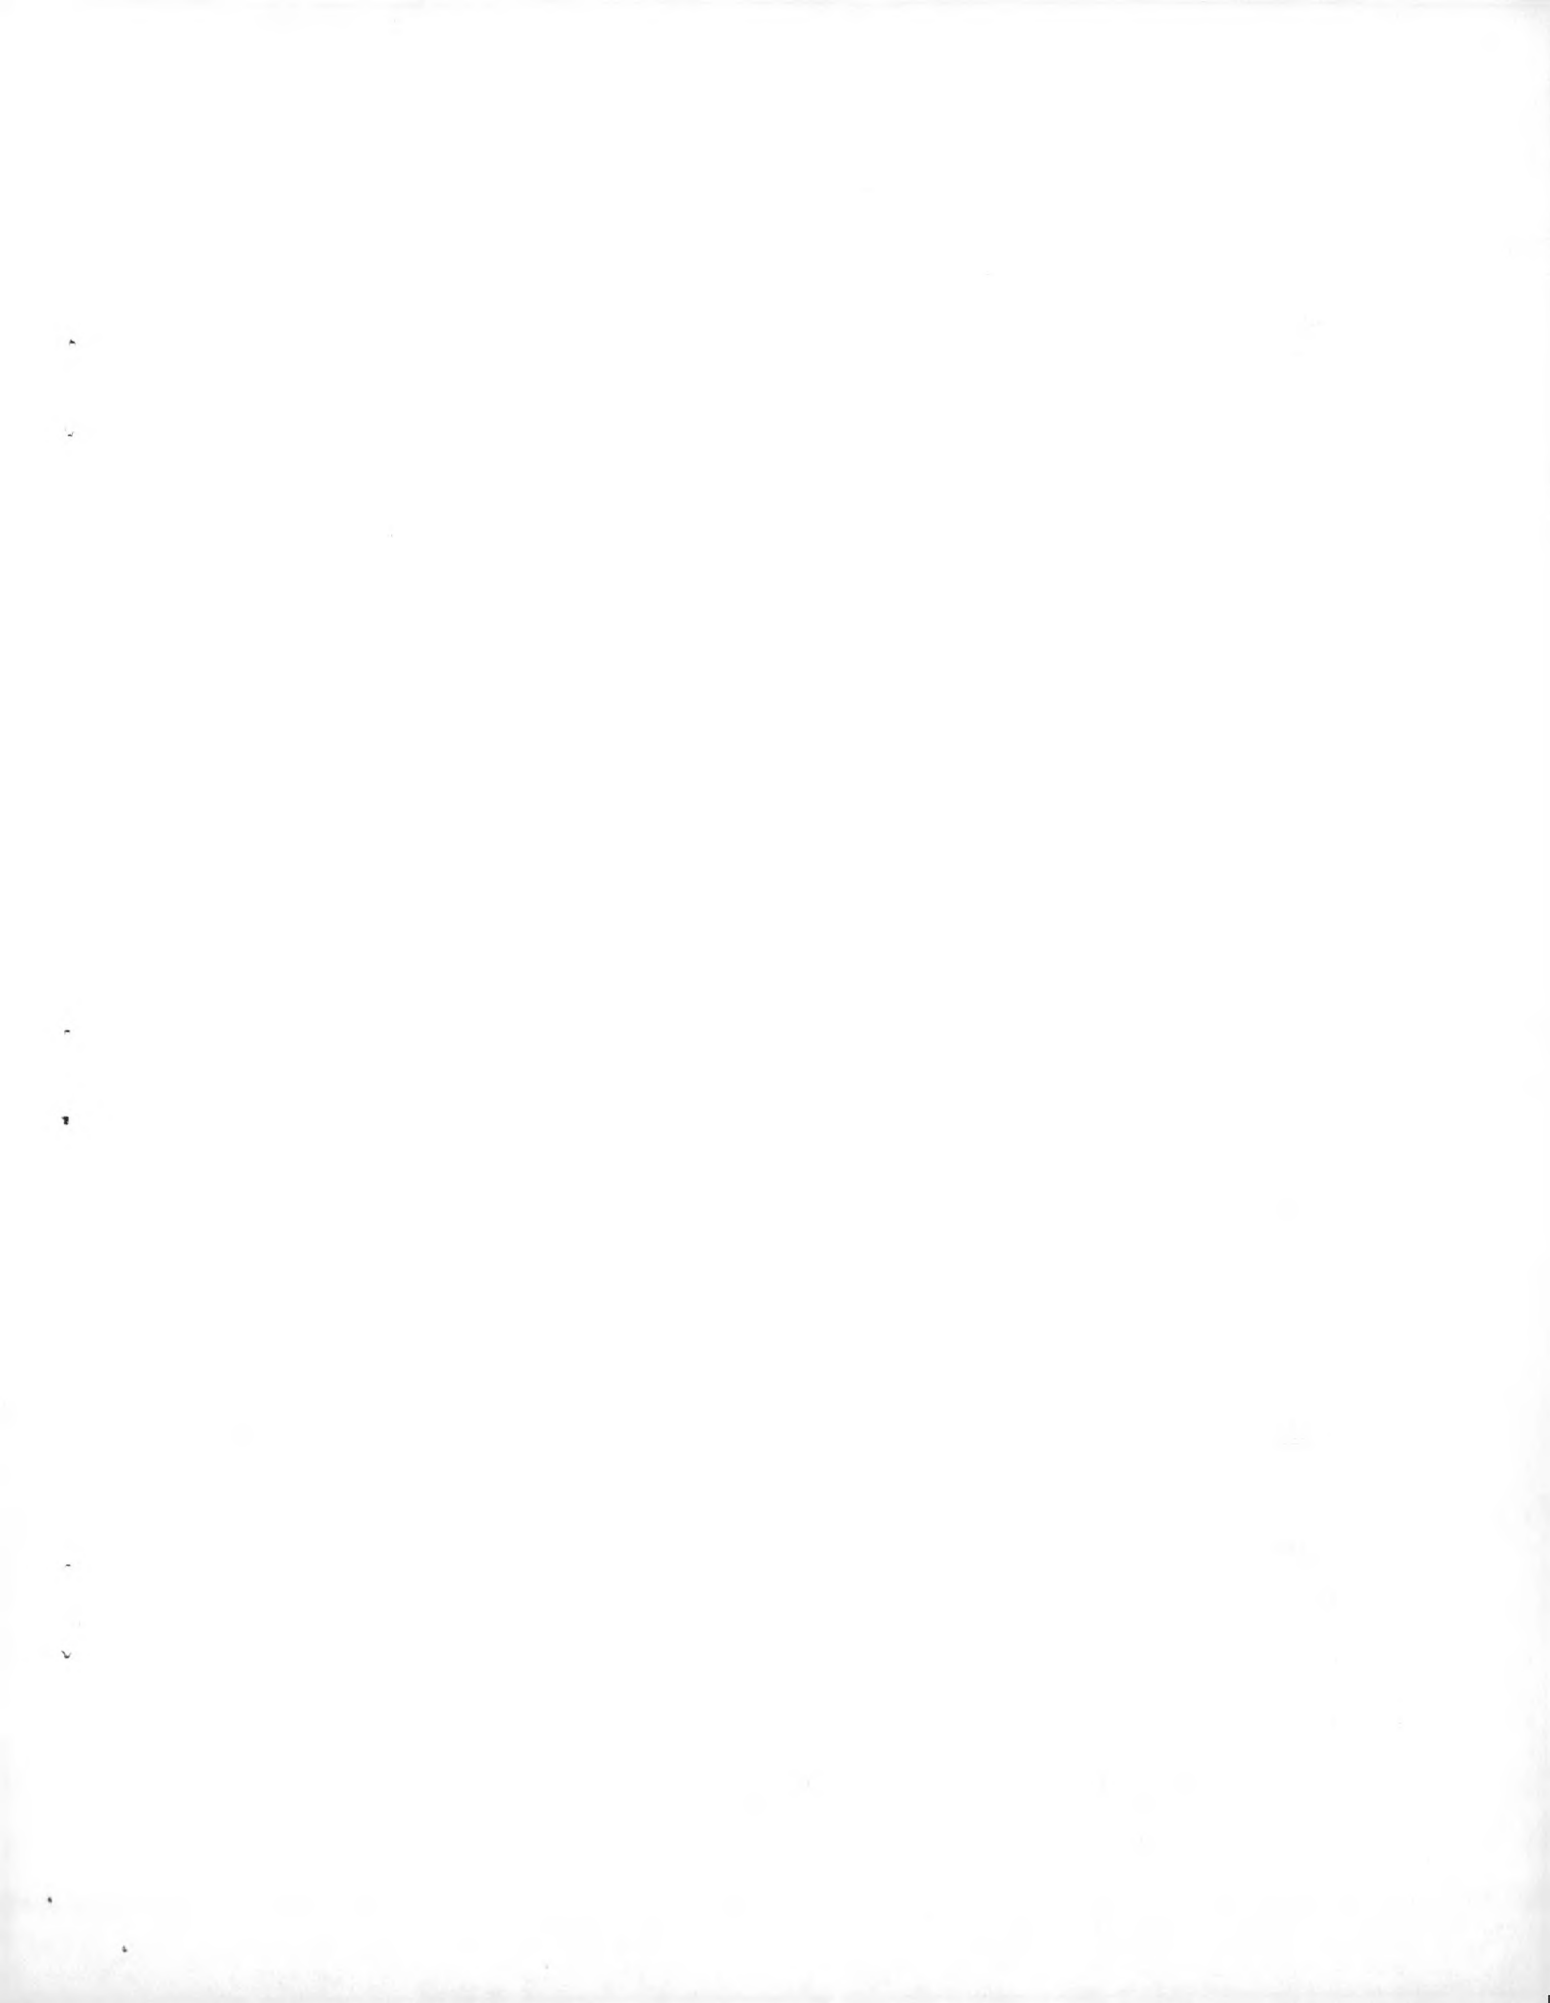

CONTENTS

I. INTRODUCTION . . . . . 1

II. RADIAL CURRENT BUNCHING IN THE CHANNEL . . . . . 1

III. AZIMUTHAL CURRENT BUNCHING IN THE CHANNEL. . . . . 5

IV. CONCLUSIONS. . . . . 9

V. REFERENCES . . . . . 10

DISCLAIMER

This book was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Fig

## ION BEAM PROPAGATION IN A FILAMENTED CHANNEL

### I. INTRODUCTION

The production of intense focused ion beams<sup>1</sup> has led to the consideration of using z-discharge plasma channels to transport them several meters to inertial fusion targets<sup>2</sup>. Analysis has shown that although electrostatic beam-plasma streaming modes are stable<sup>3</sup>, electromagnetic microinstabilities will occur during transport in such channels<sup>4</sup>. The fastest growing mode produces current bunching of the electrons in the channel. In this report ion beam propagation in a filamented channel is investigated in order to determine the effects on radial beam containment in channels and on the radial beam density profile.

In Sec. II, radial current bunching in the channel is considered and in Sec. III, azimuthal current bunching is considered. Finally the results of this work are summarized in Sec. IV.

### II. RADIAL CURRENT BUNCHING IN THE CHANNEL

If  $\underline{k} = k \hat{e}_r$ , then radial current bunching occurs in the channel and the net current density can be modeled by

$$\underline{j} = \left[ \bar{j}(r) + j_1 H(r-r_b) J_0(kr) \right] \hat{e}_z, \quad (1)$$

where

$$H(r-r_b) = \left\{ \begin{array}{ll} 1, & 0 \leq r \leq r_b \\ 0, & r > r_b \end{array} \right\},$$

$r_b$  is the beam radius and  $J_0$  is the zero order Bessel function which satisfies the wave equation in cylindrical coordinates. For

Note: Manuscript submitted January 2, 1980.

a channel of radius  $r_c$

$$I_o = 2 \pi \int_0^{r_c} j(r) r dr = 2 \pi \int_0^{r_c} \bar{j}(r) r dr$$

is the channel current which confines the ion beam. Here  $k \equiv a_{1\ell}/r_b$  was used, where  $a_{1\ell}$  is the  $\ell^{\text{th}}$  zero of first order Bessel function  $J_1$ . The second term on the right hand side of Eq. (1) is then the residual current density arising from the bunched electron current superimposed on the unbunched ion beam current. Since  $j(r)$  is established in an initially cold plasma and is driven by a capacitor bank on a time scale much longer than the beam pulse duration, when the beam is injected into the now highly conducting plasma the total net current resists change. Thus, in the absence of bunching

$$\underline{j} = \underline{j}_e + \underline{j}_b = \bar{j}(r) \hat{e}_z, \text{ where } \bar{j} \ll j_b.$$

The magnetic field which determines the ion motion in a filamented channel is then found from

$$\frac{1}{r} \frac{\partial}{\partial r} (r B_\theta) = \frac{4\pi}{c} \left[ \bar{j}(r) + j_1 J_0(kr) \right], \quad r \leq r_b. \quad (2)$$

Assuming  $\bar{j}(r) = j_o (r/r_c)^{s-1}$  inside the channel ( $s \geq 1$ ),

$$B_\theta = \frac{4\pi j_o r^s}{(s+1) c r_c^{s-1}} + \frac{4\pi j_1}{kc} J_1(kr), \quad r \leq r_b, \quad (3)$$

where  $r_c > r_b$ . The parameter  $s$  is a magnetic field shaping factor which is equal to one at the front of the beam and increases as one moves toward the tail of the beam. The beam heated plasma in the channel at the tail of the beam expands radially carrying the channel current with it. This decreases the magnetic field (increases  $s$ ) near the center of the beam and produces a sharply rising magnetic field at the edge of the

beam.<sup>5</sup>

The total energy  $H$ , the axial cononical momentum  $P_z$ , and the canonical angular momentum  $P_\theta$  are all constants of the motion for the ions.

From  $A_z = -\int B_\theta dr$  and Eq. (3),  $P_z$  is found to be

$$\frac{P_z}{m_i} = \dot{z} - \frac{2\omega_{cb}r_c}{(s+1)} \left(\frac{r}{r_c}\right)^{s+1} - \frac{2\omega_{cb}(s+1)j_1}{k^2 r_c j_0} \left[1 - J_0(kr)\right], \quad (4)$$

where  $\omega_{cb} = 2\pi e r_c j_0 / m_i c^2 (s+1)$ . When  $j_1/j_0 > 0$ , it is clear that the beam ion orbits are radially confined since  $1 - J_0(kr) \geq 0$  and  $r^{s+1}$  is monotonically increasing. When  $j_1/j_0 < 0$ , the ion orbits are also radially confined if  $|j_1/j_0|$  is sufficiently small since  $\left[1 - J_0(kr)\right] \leq \left[1 - J_0(a_{11})\right] \approx 1.4$  and  $r^{s+1}$  is a monotonically increasing function of radius.

Now consider this result in more detail. Since  $P_\theta = 0^6$ , the minimum axial canonical momentum is given by

$$P_z^0 = m_i \left[ V_o \cos \alpha_o - \frac{2\omega_{cb}r_c}{(s+1)} \left(\frac{r_s}{r_c}\right)^{s+1} \right], \quad (5)$$

when  $j_1 = 0$ . Here  $\alpha_o$  is the maximum ion injection angle,  $V_o = (2H/m_i)^{1/2}$  and  $r_s$  is the beam focal spot size at the point of injection into the channel. The beam envelop radius is then

$$r_b^o = r_c \left[ \frac{(s+1)}{2\omega_{cb}r_c} \left( V_o - \frac{P_z^o}{m_i} \right) \right]^{\frac{1}{s+1}} \quad (6)$$

where  $r = r_b^o$  when  $\dot{z} = V_o$  for an ion injected with  $P_z = P_z^o$ . When  $s = 1$  the usual result is recovered<sup>6</sup>

$$r_b^o = r_c \left[ \frac{V_o}{\omega_{cb}r_c} \left( 1 - \frac{P_z^o}{m_i V_o} \right) \right]^{1/2} \quad (7)$$

When  $j_1 \neq 0$ , the minimum axial canonical momentum is given by

$$P_z^1 = P_z^0 - \frac{2m_i j_1 \omega_{cb} (s+1)}{j_o k^2 r_c} \left[ 1 - J_o(kr_s) \right], \quad (8)$$

where this result only strictly applies for  $|j_1/j_o| < kr_c (r_s/r_c)^s / (s+1)$ .

In this case the beam envelope radius is found from

$$\frac{2}{(s+1)} \left( \frac{r_b}{r_c} \right)^{s+1} + \frac{2j_1 (s+1)}{j_o k^2 r_c^2} \left[ 1 - J_o(kr_b) \right] = \frac{V_o}{\omega_{cb} r_c} \left( 1 - \frac{P_z^1}{m_i V_o} \right). \quad (9)$$

For  $|j_1/j_o| \ll 1$  this reduces to

$$r_b \approx r_b^o \left( 1 - \frac{j_1}{j_o} \frac{(s+1)}{(kr_b^o)^2} \left( \frac{r_c}{r_b^o} \right)^{s-1} \left[ 2 - J_o(kr_b^o) - J_o(kr_s) \right] \right), \quad (10)$$

so that for  $j_1 < 0$  the beam radius expands, whereas for  $j_1 > 0$  the beam radius decreases. For larger  $|j_1/j_o|$  Eq. (9) must be solved numerically.

When  $j_1 < 0$ , beam ions can be magnetically trapped and prevented from reaching the axis if  $|j_1/j_o|$  is sufficiently large. Thus the density profile could be depressed on axis. For a given ion injected into the channel at a radius  $r_o$  and at an injection angle  $\alpha$  trapping occurs if

$$\left| \frac{j_1}{j_o} \right| > \frac{k^2 r_c^2}{\left[ 1 - J_o(kr_o) \right]} \left[ \frac{V_o (1 - \cos \alpha)}{2 \omega_{cb} r_c (s+1)} + \frac{(r_o/r_c)^{s+1}}{(s+1)^2} \right]. \quad (11)$$

When  $s = 1$  and  $\alpha \ll 1$ , this reduces to

$$\left| \frac{j_1}{j_o} \right| > \frac{k^2 r_c^2 / 4}{\left[ 1 - J_o(kr_o) \right]} \left[ \frac{V_o \alpha^2}{2 \omega_{cb} r_c} + \left( \frac{r_o}{r_c} \right)^2 \right] \geq 1, \quad (12)$$

so that trapping begins when the bunched current density exceeds the magnitude of the channel current density which is required to confine the beam. Furthermore, Eq. (9) shows that the equilibrium beam radius is

also significantly modified if  $|j_1/j_0| > 1$ .

Thus when radial current bunching occurs in the channel, good beam propagation is still expected unless  $|j_1/j_0|$  exceeds unity. If  $|j_1/j_0| > 1$ , the beam will be expelled from the center of the channel when  $j_1 < 0$  or the beam will pinch when  $j_1 > 0$ . If  $r_b$  becomes larger than  $r_c$  the analysis breaks down and a more sophisticated analysis is required, however, it has been established here that it is desirable to maintain  $|j_1/j_0| < 1$ . For  $j_1 \approx j_n \exp(\gamma \tau_b)$ , good beam propagation requires  $j_n < j_0 \exp(-\gamma \tau_b)$ . Here  $\gamma$  is the growth rate of the instability,  $\tau_b$  is the beam pulse duration and  $j_n$  is the initial level of noise in the electron current. Since the predominate source of  $j_n$  is the nonuniformities in the radial profile of the ion beam current density (remember  $j_e = j_b + \bar{j}$ ), jitter in the ion beam current density must be kept below

$$\frac{j_{bn}}{j_b} < \frac{j_0}{j_b} \exp(-\gamma \tau_b). \quad (13)$$

Typically  $\gamma \tau_b \sim 1.0 - 2.0$  and  $j_0/j_b \sim 0.1$  for proposed fusion systems.<sup>4</sup> Thus the jitter in the beam current density must be kept below 1 - 4%. Since the filamentation instability is nonconvective<sup>4</sup>, these results only apply at the tail of the beam. At the front of the beam the limit on  $j_{bn}/j_b$  stated in Eq. (13) is less severe and can be found by replacing  $\gamma \tau_b$  by  $\gamma \tau_b x/x_b$  where  $x$  is the distance from the front of the beam for a beam of length  $x_b$ .

### III. AZIMUTHAL CURRENT BUNCHING IN THE CHANNEL

If  $\vec{k} = k \hat{e}_\theta$  then azimuthal current bunching occurs in the channel and the net current density can be modeled by

$$\underline{j} = (\bar{j}(r) + j_1 H(r-r_b) \sin m\theta) \hat{e}_z, \quad (14)$$

where  $m = 3, 4, 5, \dots$  will be considered. Special treatment is required for  $m = 1, 2$  which is not considered here since  $m \approx 3-7$  in typical cases.<sup>4</sup>

Again

$$I_o = \int j(r, \theta) r dr = 2\pi \int \bar{j}(r) r dr$$

is the channel current which confines the ion beam and  $j_1 \sin m\theta$  is the residual current density arising from the bunched electron current superimposed on the unbunched ion beam current. The magnetic field which determines the ion motion in a filamented channel is then

$$B_\theta = \frac{4\pi j_o r^s}{(s+1) c r_c^{s-1}} - \frac{8\pi j_1 r}{c(m^2-4)} \sin m\theta, \quad r \leq r_b, \quad (15)$$

$$B_r = \frac{4\pi j_1 r}{c(m^2-4)} \cos m\theta, \quad r \leq r_b \quad (16)$$

where again  $\bar{j}(r) = j_o (r/r_c)^{s-1}$  was assumed.

In this case  $H$  and  $P_z$  are constants of the motion but  $P_\theta$  is not.

From Eq. (15)  $P_z$  is found to be

$$\frac{P_z}{m_i} = z - \frac{2\omega_{cb} r_c}{(s+1)^2} \left(\frac{r}{r_c}\right)^{s+1} + \frac{2\omega_{cb} r_c^2 j_1 \sin m\theta}{r_c (m^2-4) j_o}, \quad r \leq r_b. \quad (17)$$

Solving Eq. (17) for  $\dot{z}$  shows that as long as

$$\left| \frac{j_1}{j_o} \right| \ll \frac{m^2-4}{(s+1)^2}, \quad (18)$$

where  $r_c \geq r_b$ , all ion orbits are confined within the channel. For larger  $|j_1/j_o|$  ions can escape from the channel and the beam density is

gradually depleted.

Even for small  $|j_1/j_0|$  the beam density on axis decreases in time since  $|P_\theta|$  increases in time for most ions. In fact  $P_\theta$  is constant only for those few ions which are injected at  $\theta_0 = n\pi/m$  ( $n = 1, 2, 3, \dots, 2m$ ).

For  $|j_1/j_0| \ll 1$

$$(R^2 \theta')' = -R(R'' - R\theta'^2) \left( \frac{2mj_1 \cos m\theta}{j_0(m^2-4)} \right), \quad (19)$$

where  $R = Kr$ ,  $\tau = \Omega t$ ,  $K^2 = m_i \omega_{cb} / P_z r_c$ ,  $\Omega^2 = P_z \omega_{cb} / m_i r_c$  and a prime signifies differentiation with respect to  $\tau$ . Thus, to zero order in the small parameter  $|j_1/j_0|$

$$(R^2 \theta')_0 = K^2 P_\theta / \Omega = \text{const.} \quad (20)$$

If  $P_\theta$  is initially zero and  $R_0 \approx A \cos(\tau + \Phi)$  (implying small injection angles,<sup>6</sup> i.e.  $\alpha \ll 1$ ) the time averaged increase in  $|P_\theta|$  can be expressed as

$$\frac{\langle |P_\theta| \rangle}{r_0 V_0 \alpha} = t/\tau, \quad (21)$$

where  $r_0 V_0 \alpha \approx r(z=0) \dot{r}(z=0)$  and

$$\tau = \frac{r_0 \alpha (m^2-4) |j_0/j_1|}{m V_0 \cos m\theta_0} \left( \alpha^2 + \frac{r_0^2 \omega_{cb}}{V_0 r_c} \right)^{-1}. \quad (22)$$

Thus in a time  $\tau$ ,  $|P_\theta|$  increases from zero to  $r_0 V_0 \alpha$ . For the average ion

$\langle |\cos m\theta_0| \rangle = 2/\pi$ ,  $r_0 \approx r_b/2$ ,  $\alpha \approx \alpha_0/2$  and

$$\bar{\tau} = \frac{\pi r_b \alpha_0 (m^2-4) |j_0/j_1|}{2m V_0} \left( \alpha_0^2 + \frac{r_b^2 \omega_{cb}}{V_0 r_c} \right)^{-1}. \quad (23)$$

Typically  $r_b \approx 0.4$  cm,  $\alpha_o \approx 0.2$  rad,  $m \approx 5$ ,  $V_o \approx 3.1 \times 10^9$  cm/sec and  $\omega_{cb} \approx 4 \times 10^8$  sec<sup>-1</sup> so that

$$\bar{\tau} \approx 2.3 \times 10^{-9} \left| j_o/j_1 \right| \text{ sec.} \quad (24)$$

Thus the beam hollows out on a time scale of  $\bar{\tau}$  even for small  $\left| j_1/j_o \right|$ , although the beam is still confined within the channel. In order to prevent this hollowing out from occurring during beam propagation one needs  $\tau_t < \bar{\tau}$  or

$$j_n < \frac{\pi r_b \alpha_o (m^2-4) j_o}{2mL} \left( \alpha_o^2 + \frac{r_b^2 \omega_{cb}}{V_o r_c} \right)^{-1} \exp(-\gamma \tau_b) \quad , \quad (25)$$

where  $\tau_b = L/V_o$  is the beam transit time in a channel of length  $L$  and again  $j_n$  is the initial noise level in the electron current. Thus as argued at the end of Sec. II this implies that the jitter in the ion beam current density must be kept below

$$\frac{j_{bn}}{j_b} < \frac{\pi r_b \alpha_o (m^2-4)}{2mL} \frac{j_o}{j_b} \left( \alpha_o^2 + \frac{r_b^2 \omega_{cb}}{V_o r_c} \right)^{-1} \exp(-\gamma \tau_b) \quad . \quad (26)$$

Typically this is found to be  $j_{bn}/j_b \sim 1 - 5 \times 10^{-4}$  for proposed fusion systems. Since this low level of noise is probably not achievable, some hollowing out of the beam is likely if current bunching occurs, however the beam will still be confined in the channel for small  $\left| j_1/j_o \right|$ . This effect will be most pronounced at the tail of the beam where largest growth of the nonconvective filamentation instability occurs.<sup>4</sup>

For  $\left| j_1/j_o \right| \geq (m^2-4)/(s+1)^2$  the beam density is gradually depleted as increasingly more ions become unconfined. This depletion will occur in addition to the hollowing out of the beam and also occurs predominately at the tail of beam. In order to prevent this beam density depletion

one needs

$$\frac{j_{bn}}{j_b} < \frac{(m^2-4)}{(s+1)^2} \frac{j_o}{j_b} \exp(-\gamma\tau_b) \quad (27)$$

For  $m \sim 5$ ,  $s \sim 4$ ,  $j_o/j_b \sim 0.1$  and  $\gamma\tau_b \sim 1 - 2$  at the tail of the beam,  $j_{bn}/j_b \leq 1 - 4\%$  is required. At the front of the beam the condition is much less severe with  $\gamma\tau_b$  replaced by  $\gamma\tau_b x/x_b$  where  $x$  is the distance from the front of the beam for a beam of length  $x_b$ . Eq. (26) can be similarly modified for the front portion of the beam.

#### IV. CONCLUSIONS

From the analysis presented here it can be concluded that good beam transport in a filamented z-discharge channel is possible as long as the current bunching remains below certain levels. For radial current bunching it was found that  $|j_1/j_o|$  should not exceed unity, which implies that  $j_n < j_o \exp(-\gamma\tau_b)$ . If  $|j_1/j_o|$  exceeds unity, the beam will be expelled from the center of the channel when  $j_1 < 0$  or the beam will pinch when  $j_1 > 0$ .

For aximuthal current bunching the beam hollows out on a time scale  $\bar{\tau}$  defined in Eq. (23). This hollowing out occurs for all values of  $|j_1/j_o|$  but will not reach a significant level if  $\tau_t < \bar{\tau}$  (see Eq. (25)). For  $|j_1/j_o| \geq \frac{m^2-4}{(s+1)^2}$  the beam density is also gradually depleted as increasingly more ions become unconfined.

These results set limits on the level of  $j_{bn}$  which can be tolerated without seriously affecting beam transport due to current bunching effects.

V. REFERENCES

1. S. J. Stephanakis, G. Cooperstein, Shyke A. Goldstein, D. Mosher, F. W. Oliphant, F. L. Sandel and F. C. Young, in IEEE Conference Record-Abstracts, 1979 IEEE International Conference on Plasma Science, Montreal, Quebec, Canada (IEEE, New York, 1979) p.79.
2. Shyke A. Goldstein, D. Mosher, P. F. Ottinger and W. W. Hsing, in Inertial Confinement Fusion (Optical Society of America, San Diego, CA, 1978) p. WB7-1.
3. P. F. Ottinger, D. Mosher and Shyke A. Goldstein, Phys. Fluids 22, 332 (1979).
4. P. F. Ottinger, D. Mosher and Shyke A. Goldstein Bull. Am. Phys. Soc. 23, 800 (1978); manuscript submitted to Phys. Fluids.
5. D. G. Colombant, Shyke A. Goldstein and D. Mosher, in IEEE Conference Record-Abstracts, 1979 IEEE International Conference on Plasma Science, Montreal, Quebec, Canada (IEEE, New York, 1979) p. 105.
6. P. F. Ottinger, D. Mosher and Shyke A. Goldstein, in IEEE Conference Record-Abstracts, 1979 IEEE International Conference on Plasma Science, Montreal, Quebec, Canada (IEEE, New York, 1979) p. 105.