

**“In-Situ Sampling and Characterization of Naturally  
Occurring Marine Methane Hydrate Using the  
D/V JOIDES Resolution.”**

**TECHNICAL PROGRESS REPORT #15**  
**Type of Report: Quarterly**

Reporting Period Start Date: April 1, 2005  
Reporting Period End Date: June 30, 2005

Principal Author: Dr. Frank R. Rack

Date Report Issued: August 2005

**COOPERATIVE AGREEMENT DE-FC26-01NT41329**

Frank R. Rack (Joint Oceanographic Institutions; 1201 New York Ave., NW; Suite 400; Washington, DC, 20005; Tel: (202) 232-3900, ext. 1608;  
Email: [frack@joiscience.org](mailto:frack@joiscience.org))

**DISCLAIMER**

**This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness or any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency therof. The views and opinions of authors expressed herein do not necessarily reflect those of the United States Government or any agency thereof.**

**Any opinions, findings, and conclusions or recommendations expressed in this report are those of the author(s) and do not necessarily reflect the views of the National Science Foundation, the participating agencies, Joint Oceanographic Institutions, Inc., Texas A&M University, or Texas A&M Research Foundation.**

## ABSTRACT

The primary accomplishments of the JOI Cooperative Agreement with DOE/NETL in this quarter were to refine budgets and operational plans for Phase 2 of this cooperative agreement based on the scheduling of a scientific ocean drilling expedition to study marine methane hydrates along the Cascadia margin, in the NE Pacific as part of the Integrated Ocean Drilling Program (IODP) using the R/V JOIDES Resolution.

The proposed statement of work for Phase 2 will include three primary tasks: (1) research management oversight, provided by JOI; (2) mobilization, deployment and demobilization of pressure coring and core logging systems, through a subcontract with Geotek Ltd., who will work with Fugro and Lawrence Berkeley National Laboratory to accomplish some of the subtasks; and, (3) mobilization, deployment and demobilization of a refrigerated container van that will be used for degassing of the Pressure Core Sampler and density logging of these pressure cores, through a subcontract with the Texas A&M Research Foundation (TAMRF). More details about these tasks are provided in the following sections of this report.

The appendices to this report contain a copy of the scientific prospectus for the upcoming IODP Expedition 311 (Cascadia Margin Hydrates), which provides details of operational and scientific planning for this expedition.

**TABLE OF CONTENTS**

<b>Disclaimer</b>	<b>2</b>
<b>Abstract</b>	<b>3</b>
<b>Table of Contents</b>	<b>4</b>
<b>Introduction</b>	<b>5</b>
<b>Executive Summary</b>	<b>6</b>
<b>Experimental</b>	<b>8</b>
<b>Results and Discussion</b>	<b>12</b>
<b>Conclusion</b>	<b>13</b>
<b>List of Acronyms and Abbreviations</b>	<b>14</b>
<b>APPENDIX A</b>	<b>A-0</b>
<b>APPENDIX B</b>	<b>B-0</b>

## INTRODUCTION

The primary accomplishments of the JOI Cooperative Agreement with DOE/NETL in this quarter were to refine budgets and operational plans for Phase 2 of this cooperative agreement based on the scheduling of a scientific ocean drilling expedition to study marine methane hydrates along the Cascadia margin, in the NE Pacific as part of the Integrated Ocean Drilling Program (IODP) using the R/V JOIDES Resolution.

The proposed statement of work for Phase 2 will include three primary tasks: (1) research management oversight, provided by JOI; (2) mobilization, deployment and demobilization of pressure coring and core logging systems, through a subcontract with Geotek Ltd., who will work with Fugro and Lawrence Berkeley National Laboratory to accomplish some of the subtasks; and, (3) mobilization, deployment and demobilization of a refrigerated container van that will be used for degassing of the Pressure Core Sampler and density logging of these pressure cores, through a subcontract with the Texas A&M Research Foundation (TAMRF). More details about these tasks are provided in the following sections of this report.

The appendices to this report contain a copy of the scientific prospectus for the upcoming IODP Expedition 311 (Cascadia Margin Hydrates), which provides details of operational and scientific planning for this expedition.

## EXECUTIVE SUMMARY

The primary accomplishments of the JOI Cooperative Agreement with DOE/NETL in this quarter were to refine budgets and operational plans for Phase 2 of this cooperative agreement based on the scheduling of a scientific ocean drilling expedition to study marine methane hydrates along the Cascadia margin, in the NE Pacific as part of the Integrated Ocean Drilling Program (IODP) using the R/V JOIDES Resolution. These plans are outlined below for Phase 2 of this cooperative agreement.

### Task 1-0 – Research Management Oversight

Under this task, the Recipient shall provide management oversight of all subcontracts for various tasks as defined in the Statement of Project Objectives. The Recipient shall also manage two sole-source subcontracts to provide appropriate equipment and the technical and engineering staff to deploy HYACINTH pressure coring systems and subsystems on IODP Expedition 311.

The Recipient shall provide the required statements of work for all subcontracted work, conduct oversight of all tasks, and prepare progress reports, annual reports, talks and other presentations for DOE/NETL, as appropriate. The Recipient shall also conduct sub-recipient site visits to ensure that work is being carried out according to plans.

### Task 2-0 – Pressure Coring and Pressure Core Logging Systems

Under this task, the Recipient will establish a primary subcontracts with Geotek Ltd., who will work with Fugro (Subtask 2-1) to mobilize and deploy the HYACINTH pressure coring systems and associated core logging subsystems aboard the JOIDES Resolution for IODP Expedition 311 (Cascadia Margin Hydrates) and provide adequate engineering and technical support to operate these coring tool and measurement systems; and will work with Lawrence Berkeley National Laboratory (Dr. Barry Freifeld; Subtask 2-2) to provide the capability for X-ray linear scanning of pressure cores and post-expedition X-ray computed tomography of samples, as appropriate. Additional detailed information is provided in the Budget Justification appendix.

Geotek, Ltd. will also (Subtask 2-3) work with Texas A&M University technical staff to provide an enhanced infrared thermal imaging track for core measurements on the catwalk core processing area of the JOIDES Resolution. This joint activity will utilize the existing FLIR infrared thermal imaging cameras provided by the Recipient (as part of the Phase I equipment inventory). Additional detailed information is provided in the Budget Justification appendix.

### Task 3-0 – PCS Core Logging and Infrared Thermal Imaging Measurements

Under this task, which is related to equipment and activities described in Task 2-0, the Recipient will establish a second subcontract with Texas A&M Research Foundation

(TAMRF) to procure, outfit and deploy a refrigerated van that will house pressure core logging equipment (provided by Geotek, Ltd. under the previously described subcontract) and degassing equipment used in the analysis and characterization of pressure cores.

## EXPERIMENTAL

The primary accomplishments of the JOI Cooperative Agreement with DOE/NETL in this quarter were to refine budgets and operational plans for Phase 2 of this cooperative agreement based on the scheduling of a scientific ocean drilling expedition to study marine methane hydrates along the Cascadia margin, in the NE Pacific as part of the Integrated Ocean Drilling Program (IODP) using the R/V JOIDES Resolution. These plans are outlined below for Phase 2 of this cooperative agreement.

### **TASK 1-0: Research Management Oversight - JOI**

Under this task, the Recipient shall provide management oversight of all subcontracts for various tasks as defined in the Statement of Project Objectives and as justified below. The Recipient shall provide the required statements of work for all subcontracted work, conduct oversight of all tasks, and prepare progress reports, annual reports, talks and other presentations for DOE/NETL, as appropriate. The Recipient shall also conduct subcontractor site visits to ensure that work is being carried out according to plans.

The Recipient will issue two sole-source subcontracts to provide the appropriate equipment and technical or engineering staff on IODP Expedition 311 as described in Task 2-0 and 3-0 below.

### **TASK 2-0: Deployment and Use of Pressure Coring and Core Logging Systems and Subsystems aboard the JOIDES Resolution and Onshore – GEOTEK**

Under this task, the Recipient will establish a primary subcontracts with Geotek Ltd., who will work with Fugro (Subtask 2-1) to mobilize and deploy the HYACINTH pressure coring systems and associated core logging subsystems aboard the JOIDES Resolution for IODP Expedition 311 (Cascadia Margin Hydrates) and provide adequate engineering and technical support to operate these coring tool and measurement systems; and will work with Lawrence Berkeley National Laboratory (Dr. Barry Freifeld; Subtask 2-2) to provide the capability for X-ray linear scanning of pressure cores and post-expedition X-ray computed tomography of samples, as appropriate.

#### **Subtask 2-1: HYACINTH Pressure Core Logging Systems**

##### ***Subtask 2-1-1: Deployment and Use of HYACINTH Pressure Coring Tools***

Geotek, Ltd. (working with Fugro) will mobilize and use both the HYACINTH wireline pressure coring tools, the FPC and HRC aboard the JOIDES Resolution during IODP Expedition 311. Both these tools enable core to be recovered and retained up to a maximum pressure of 250 bar (3,625 psi) using specially designed flap valves and, coupled with the use of the IODP PCS system, will ensure maximum flexibility for obtaining pressure cores depending on the technical, logistical and geological constraints that prevail.

**Fugro Pressure Corer (FPC).** The FPC was designed and built by Fugro Engineers BV in The Netherlands. It is a percussion corer, which uses a water hammer driven by the fluid circulation to drive the core barrel into the sediment up to 1 m ahead of the roller cone bit, and is suitable for sampling unlithified sediments ranging from soft or stiff clays to sandy and gravelly material. It acquires a core 57 mm in diameter and up to 1 m in length in a plastic liner whose OD is 63 mm.

**HYACE Rotary Corer (HRC).** The HRC was designed and built by the Technical University of Clausthal and the Technical University of Berlin in Germany. It uses a downhole motor driven by the fluid circulation to cut a core up to 1 m ahead of the roller cone bit in consolidated sediment, lithified sediment or rock. It acquires a core 51 mm in diameter and up to 1 m in length in a plastic liner whose OD is 56 mm.

#### ***Subtask 2-1-2: HYACINTH Core Handling and Logging and Analysis***

For pressure core analysis, Geotek (working with Fugro) will supply a complete range of equipment that will enable the pressure cores to be transferred from the autoclaves into storage chambers for subsequent analysis. On board they will be able to measure P wave velocity and gamma density using the MSCL-P as well as X-Ray linear scans (in collaboration with Barry Friefeld at LBNL; Subtask 2-2).

All the pressure core handling/transfer and core logging will be performed in a 20 ft chilled van that we will supply for the purpose. Aluminium storage chambers will be provided for work with X-Rays, either onboard or subsequently on shore.

Immediately following the Expedition, the equipment (the core handling transfer van and the chambers containing pressure core) will be made available for subsequent work at the Pacific Geoscience Center (PGC) north of Victoria, British Columbia, Canada. This work might include further logging of pressure cores using X-Ray CT scanning (LBNL) or other devices (see Subtask 2-2). Geotek (working with Fugro) will make this equipment available for a period of at least 10 days. In addition, they will supply staff to operate this equipment or train others for a similar period immediately following the Expedition.

#### ***Subtask 2-1-3: Deployment of MSCL-V System***

Geotek will deploy the MSCL-V (multi-sensor core logger – vertical) system and manufacture the necessary clamps to hold the Pressure Core Sampler (PCS) tool during core logging. The MSCL-V system will be installed in a second 20 ft refrigerated van, to be supplied and retained by IODP-TAMU (see Subtask 2-3), along with the PCS degassing equipment.

#### ***Subtask 2-1-4: IR Imaging Track Enhancements***

Geotek will also deploy an enhanced IR thermal imaging track system, with a number of modifications for use on the JOIDES Resolution, which will integrate

with the use of the FLIR IR thermal imaging cameras provided by JOI. Track system enhancements will provide improved thermal shielding for the sensors, improved calibration procedures, enhancements to the user interface allowing increased speed of operation, and software modification controlling data output and post processing functions.

### **Subtask 2-2: X-ray (linear and CT) scanning of hydrates and pressure cores.**

The Berkeley Lab x-ray Computed Tomography system offers the capability to rapidly and non-invasively provide sediment textural information in addition to assessing the quantity and spatial distribution of hydrates contained within a whole-round core on location and immediately after coring. Using the Fugro pressure coring system with a modified storage chamber, cores will be recovered and x-ray imaged while hydrates are kept within their stability region. The information collected from the x-ray CT is complementary to the information obtained using the multi-sensor core logger and will be fully integrated into the planned core analysis program. Post-cruise analysis will look at petrophysical properties of recovered core and kinetic rates of dissociation for selected hydrate-bearing core samples.

#### ***Subtask 2-2-1: Preparation for Field Operations.***

Prepare the x-ray system for scanning pressure cores on the JOIDES Resolution. This task will involve modifications so that x-ray images can be acquired as part of the MSCL-P logging of Hyacinth Pressure Cores. This work will be conducted in close cooperation with Geotek, Ltd, which is responsible for the design and preparation of the MSCL-P system. Berkeley Lab will be responsible for the engineering and development of the x-ray portion of the MSCL-P system.

#### ***Subtask 2-2-2: Port-Call Activities.***

A Berkeley lab scientist will attend the Astoria port call and assist in set-up and installation of the MSCL-P/x-ray system on the JOIDES Resolution. This includes tuning and calibration of the system as well as performing final radiation safety surveys.

#### ***Subtask 2-2-3: Demobilization and Data Interpretation and Reporting.***

Demobilize equipment back to Berkeley Laboratory. Perform analysis of collected data, including reporting results of baseline core imaging and interpretation of dissociation experiments. Comparisons between the x-ray data and other available logs and core measurements will be performed. A peer-reviewed publication will be prepared based on the data collected and the observations.

#### ***Subtask 2-2-4: Fabrication of PCS x-ray transparent core barrels.***

Working with engineers at IODP-TAMU, fabricate three pressure core barrels that will permit x-raying PCS pressure cores. This will include testing and certification of the vessels at Berkeley Lab. This work includes modifications of

the MSCL-P system to accommodate both the Hyacinth pressure cores as well as x-ray imaging the PCS cores.

**TASK 3-0: Deployment of Refrigerated Van for PCS Core Logging aboard the JOIDES Resolution – TAMRF/TAMU**

Under this task, which is related to equipment and activities described in Task 2-0, the Recipient will establish a second subcontract with Texas A&M Research Foundation (TAMRF) to procure, outfit and deploy a refrigerated van that will house pressure core logging equipment (provided by Geotek, Ltd. under the previously described subcontract) and degassing equipment used in the analysis and characterization of pressure cores. These costs include purchase of the refrigerated van, outfitting and installation of electrical, safety and laboratory infrastructure, and shipping costs related to deployment aboard the JOIDES Resolution for IODP Expedition 311.

## RESULTS AND DISCUSSION

The primary accomplishments of the JOI Cooperative Agreement with DOE/NETL in this quarter were to refine budgets and operational plans for Phase 2 of this cooperative agreement based on the scheduling of a scientific ocean drilling expedition to study marine methane hydrates along the Cascadia margin, in the NE Pacific as part of the Integrated Ocean Drilling Program (IODP) using the R/V JOIDES Resolution.

The proposed statement of work for Phase 2 will include three primary tasks: (1) research management oversight, provided by JOI; (2) mobilization, deployment and demobilization of pressure coring and core logging systems, through a subcontract with Geotek Ltd., who will work with Fugro and Lawrence Berkeley National Laboratory to accomplish some of the subtasks; and, (3) mobilization, deployment and demobilization of a refrigerated container van that will be used for degassing of the Pressure Core Sampler and density logging of these pressure cores, through a subcontract with the Texas A&M Research Foundation (TAMRF). More details about these tasks are provided in the following sections of this report.

The appendices to this report contain a copy of the scientific prospectus for the upcoming IODP Expedition 311 (Cascadia Margin Hydrates), which provides details of operational and scientific planning for this expedition.

## CONCLUSION

The primary objectives of the JOI Phase 2 proposal to DOE/NETL, as part of Cooperative Agreement #DE-FC26-01NT41329, are to sample and characterize methane hydrates using the systems and capabilities of the D/V *JOIDES Resolution* during IODP Expedition 311, to enable scientists the opportunity to establish the mass and distribution of naturally occurring gas and gas hydrate at all relevant spatial and temporal scales, and to contribute to the DOE methane hydrate research and development effort. The goal of the work is to provide expanded measurement capabilities on the *JOIDES Resolution* for a dedicated hydrate cruise to the Cascadia continental margin off Vancouver Island, British Columbia, Canada (IODP Expedition 311) so that hydrate deposits in this region are well characterized and technology development continues for hydrate research.

The primary accomplishments of the JOI Cooperative Agreement with DOE/NETL in this quarter were to refine budgets and operational plans for Phase 2 of this cooperative agreement based on the scheduling of a scientific ocean drilling expedition to study marine methane hydrates along the Cascadia margin, in the NE Pacific as part of the Integrated Ocean Drilling Program (IODP) using the R/V *JOIDES Resolution*.

The proposed statement of work for Phase 2 will include three primary tasks: (1) research management oversight, provided by JOI; (2) mobilization, deployment and demobilization of pressure coring and core logging systems, through a subcontract with Geotek Ltd., who will work with Fugro and Lawrence Berkeley National Laboratory to accomplish some of the subtasks; and, (3) mobilization, deployment and demobilization of a refrigerated container van that will be used for degassing of the Pressure Core Sampler and density logging of these pressure cores, through a subcontract with the Texas A&M Research Foundation (TAMRF). More details about these tasks are provided in the following sections of this report.

The appendices to this report contain a copy of the scientific prospectus for the upcoming IODP Expedition 311 (Cascadia Margin Hydrates), which provides details of operational and scientific planning for this expedition.

## LIST OF ACRONYMS AND ABBREVIATIONS

APC	Advanced Piston Corer
APC-M	Advanced Piston Corer-methane tool
APC-T	Advanced Piston Corer-temperature tool
BHA	Bottom Hole Assembly
BSR	Bottom Simulating Reflector
DOE	Department of Energy
DVTP	Davis Villinger Temperature Probe
DVTP-P	Davis Villinger Temperature Probe with Pressure
FMMG	Fugro-McClelland Marine Geosciences
FPC	Fugro Pressure Corer
GHSZ	Gas Hydrate Stability Zone
HR	Hydrate Ridge
HRC	HYACE Rotary Corer
HYACE	Hydrate Autoclave Coring Equipment
HYACINTH	Deployment of HYACE tools In New Tests on Hydrates
IR-TIS	Infrared Thermal Imaging System
JOI	Joint Oceanographic Institutions
JOIDES	Joint Oceanographic Institutions for Deep Earth Sampling
LDEO	Lamont Doherty Earth Observatory (Columbia University)
L/L	Liters per Liter
LTC	Laboratory Transfer Chamber
LWD	Logging While Drilling
MBRF	Meters Below Rig Floor
MBSF	Meters Below Sea Floor
MH	Methane Hydrate
MPa	Mega-Pascals
MSCL-V	Multi-Sensor Core Logger - Vertical
NETL	National Energy Technology Laboratory
NSF	National Science Foundation
ODP	Ocean Drilling Program
ODP-LC	Ocean Drilling Program – Logging Chamber
PCS	Pressure Core Sampler
PSI	Pounds per Square Inch
RAB	Resistivity at the Bit
RAB-c	Resistivity at the Bit with Coring
RCB	Rotary Core Barrel
R/V	Research Vessel
TAMU	Texas A&M University
XCB	Extended Core Barrel

## APPENDIX A

### IODP Expedition 311 Cascadia Margin Hydrates Scientific Prospectus Addendum

Appendix-A, 65 pages

*In-Situ Sampling and Characterization of Naturally Occurring Marine Methane Hydrate  
Using the D/V JOIDES Resolution.*

# **Integrated Ocean Drilling Program**

## **Expedition 311 Scientific Prospectus**

### **Cascadia Margin Gas Hydrates**

Michael Riedel  
Co-Chief Scientist  
Pacific Geoscience Centre  
Geological Survey of Canada  
9860 West Saanich Road  
PO Box 6000  
Sidney BC V8L 4B2  
Canada

Timothy S. Collett  
Co-Chief Scientist  
U.S. Geological Survey  
Energy Resources Program  
Denver Federal Center  
Box 25046, MS 939  
Denver CO 80225  
USA

Mitchell J. Malone  
Staff Scientist/Expedition Project Manager  
Integrated Ocean Drilling Project  
Texas A&M University  
1000 Discovery Drive  
College Station TX 77845-9547  
USA

## **PUBLISHER'S NOTES**

Material in this publication may be copied without restraint for library, abstract service, educational, or personal research purposes; however, this source should be appropriately acknowledged.

### Citation:

Collett, T.S., Riedel, M., Malone, M.J., and the Expedition 311 Project Team, 2005. Cascadia margin gas hydrates. *IODP Sci. Prosp.*, 311. <http://iodp.tamu.edu/publications/SP/311SP/311SP.PDF>.

### Distribution:

Electronic copies of this series may be obtained from the Integrated Ocean Drilling Program (IODP) Publication Services homepage on the World Wide Web at [iodp.tamu.edu/publications](http://iodp.tamu.edu/publications).

This publication was prepared by the Integrated Ocean Drilling Program U.S. Implementing Organization (IODP-USIO): Joint Oceanographic Institutions, Inc., Lamont-Doherty Earth Observatory of Columbia University, and Texas A&M University, as an account of work performed under the international Integrated Ocean Drilling Program, which is managed by IODP Management International (IODP-MI), Inc. Funding for the program is provided by the following agencies:

European Consortium for Ocean Research Drilling (ECORD)

Ministry of Education, Culture, Sports, Science and Technology (MEXT) of Japan

Ministry of Science and Technology (MOST), People's Republic of China

U.S. National Science Foundation (NSF)

## **DISCLAIMER**

Any opinions, findings, and conclusions or recommendations expressed in this publication are those of the author(s) and do not necessarily reflect the views of the participating agencies, IODP Management International, Inc., Joint Oceanographic Institutions, Inc., Lamont-Doherty Earth Observatory of Columbia University, Texas A&M University, or Texas A&M Research Foundation.

This IODP Scientific Prospectus is based on precruise Science Advisory Structure panel discussions and scientific input from the designated Co-Chief Scientists on behalf of the drilling proponents. During the course of the cruise, actual site operations may indicate to the Co-Chief Scientists and the Operations Superintendent that it would be scientifically or operationally advantageous to amend the plan detailed in this prospectus. It should be understood that any proposed changes to the science deliverables outlined in the plan presented here are contingent upon the approval of the IODP-USIO Science Services, TAMU, Deputy Director of Science Services in consultation with IODP-MI.

## ABSTRACT

Integrated Ocean Drilling Program (IODP) Expedition 311 has been designed to further constrain models for the formation of marine gas hydrate in subduction zone accretionary prisms. The objectives include characterizing the deep origin of the methane, its upward transport, its incorporation in gas hydrate, and its subsequent loss to the seafloor. The main attention of this expedition is on the widespread sea-floor-parallel layer of dispersed gas hydrate located just above the base of the predicted stability field. In a gas hydrate formation model, methane is carried upward through regional sediment or small-scale fracture permeability, driven by the tectonic consolidation of the accretionary prism. The upward-moving methane is incorporated into the gas hydrate clathrate as it enters the methane hydrate stability zone. Also important is the focusing of a portion of the upward methane flux into localized plumes or channels to form concentrations of near-seafloor gas hydrate. The amount of gas hydrate in local concentrations near the seafloor is especially important for understanding the response of marine gas hydrate to climate change. The expedition includes coring and downhole measurements at a transect of five sites across the Northern Cascadia accretionary prism. The sites will track the history of methane in an accretionary prism from (1) its production by mainly microbiological processes over a thick sediment vertical extent, (2) its upward transport through regional or locally focused fluid flow, (3) its incorporation in the regional hydrate layer above the bottom-simulating reflector (BSR) or in local concentrations at or near the seafloor, (4) methane loss from the hydrate by upward diffusion, and (5) methane oxidation and incorporation in seafloor carbonate, or expulsion to the ocean.

This expedition builds on the previous Cascadia margin gas hydrate drilling of Ocean Drilling Program (ODP) Leg 146 and more recent ODP Leg 204 off Oregon. Important experiments for this proposal include (1) logging-while-drilling, (2) wireline logging, (3) intensive coring and subsampling, and (4) pressure core sampling (PCS/HYACINTH) of gas hydrate and fluid recovery under in situ conditions. For this expedition, we plan to carry out logging-while-drilling/measuring-while-drilling operations prior to coring operations.

## SCHEDULE FOR EXPEDITION 311

Expedition 311 is based on a “light” or “slim” version of Integrated Ocean Drilling Program (IODP) drilling proposal number 553-Full2 ([www.iodp-mi-sapporo.org/active\\_2.html](http://www.iodp-mi-sapporo.org/active_2.html)). Following ranking by the IODP Scientific Advisory Structure, the ex-



pedition was scheduled by the IODP Operations Committee for the research vessel *JOIDES Resolution*, operating under contract with the U.S. Implementing Organization (USIO). The expedition is currently scheduled to begin in Balboa, Panama, on 24 August 2005, departing after a 4 day port call (or when ready). The science party is scheduled to board the ship on 10 September 2005 during a 1 day port call in Astoria, Oregon (USA). The expedition officially concludes in Victoria, British Columbia (Canada) on 7 October 2005 (for the current detailed schedule, see [iodp.tamu.edu/scienceops/](http://iodp.tamu.edu/scienceops/)). A total of 22 days will be available for the drilling, coring, and downhole measurements described in this report. Further details on the *JOIDES Resolution* can be found at [iodp.tamu.edu/publicinfo/drillship.html](http://iodp.tamu.edu/publicinfo/drillship.html).

## INTRODUCTION

The primary objective of IODP Expedition 311, on the northern Cascadia margin, is to constrain geologic models for the formation of gas hydrate in subduction zone accretionary prisms. Natural gas hydrate occurs in marine continental slope and on-shore Arctic permafrost environments. The Arctic occurrences can exhibit very high gas hydrate concentrations but appear to contain less total gas than marine gas hydrate occurrences. Recent studies have indicated that the largest occurrences of gas hydrate may lie in nearly horizontal layers several hundred meters beneath the sea-floor of continental slopes, especially in the large subduction zone accretionary sedimentary prisms. Gas hydrate and underlying free gas produce the ubiquitous bottom simulating reflectors (BSRs) along numerous continental margins of the world. Gas hydrates do occur on passive margins, but they are less common and appear to usually contain lower concentrations.

The two marine gas hydrate areas that have received the most detailed scientific study, including previous drilling during the Ocean Drilling Program (ODP), are the Blake Ridge region off the east coast of the United States (a passive margin setting) and the Cascadia margin off the coast of Oregon and Vancouver Island (subduction zone accretionary prism). Important new information on Arctic gas hydrate occurrences have been obtained from the Mallik-1998 and Mallik-2002 drilling projects in northern Canada (Dallimore et al., 1999, 2002). If our conclusions for the occurrence and distribution of gas hydrate in nature are correct, gas hydrate formed within accretionary prisms is the most important both for the long-term energy potential of gas hydrate and for the role that natural gas hydrate plays in climate change. Within accretionary prisms, the largest amount of gas hydrate appears to occur in a very

widespread layer located just above the BSR. However, also important is the focusing of a portion of the upward methane flux into localized migration conduits or channels to form concentrated near-seafloor gas hydrate accumulations. The amount of gas hydrate in the widespread layer above the BSR, compared to that in local concentrations near the seafloor, is especially important for understanding the response of marine gas hydrate to climate change. Near-seafloor gas hydrate accumulations will respond much more quickly to ocean temperature changes compared to gas hydrate several hundred meters below the seafloor. For the region of ODP Site 889/890, Taylor et al. (2002) calculated that a 30 m thick hydrate deposit lying at the base of the stability field would dissociate due to seabed warming in approximately 8000 years. However, near-seafloor hydrate could dissociate much more quickly and be much more responsive to human-induced global warming (e.g., Wood et al., 2002).

Off Vancouver Island a gas hydrate-related BSR occurs in a 30 km wide band parallel to the coast beneath much of the continental slope (Fig. F1). Gas hydrate is believed to be concentrated in a layer 50–100 m thick, just above the base of the gas hydrate stability field, which is located 200–300 m below the seafloor (mbsf). The gas hydrate concentrations, estimated from downhole logging data collected during Leg 146, may reach ~30% of pore space. The surveys and studies that have been carried out and the evidence for the presence and content of gas hydrate are summarized in two recent comprehensive review articles (Hyndman et al., 2001; Spence et al., 2000).

## **Models for Formation of Widespread Gas Hydrate Layer**

A general model for deep-sea gas hydrate formation by removal of methane from upwardly expelled fluids was developed earlier for the Expedition 311 area (Fig. F2) (Hyndman and Davis, 1992). Mainly microbial methane, inferred to be produced over a thick sediment section, migrates vertically to form gas hydrate when it enters the stability field. The gas hydrate concentration is predicted to be greatest just above the BSR. A model has also been proposed for how free gas and the resulting BSR will be formed as the base of the gas hydrate stability moves upward due to post-Pleistocene seafloor warming, uplift, and sediment deposition (e.g., Paull and Ussler, 1997; von Huene and Pecher, 1998). In addition, physical and mathematical models have been developed for the formation of gas hydrate involving from upward methane advection and diffusion (e.g., Xu and Ruppel, 1999).

Testing these models and determining the appropriate model parameters requires

- Accurate definition of the vertical distribution of gas hydrate and free gas;

- Accurate formation temperatures to define the base of the stability field;
- Physical and fluid chemical data and downhole measurements that define the vertical advection rates of fluids including methane;
- Calibration of the effect of gas hydrate and gas concentrations on velocity, resistivity, and other physical parameters for interpretation of both downhole data and seafloor measurements and surveys; and
- Determination of the sediment pore pressure and permeability that control the upward advection.

Recently, evidence for focused fluid/gas flow and gas hydrate formation has been identified on the Vancouver margin. The most studied site is an active cold vent field associated with near-surface gas hydrate occurrences close to ODP Site 889/890 (e.g., Riedel et al., 2002). Studies include high-resolution bottom profiling, three-dimensional (3-D) seismic surveys, piston coring, and ocean-bottom video surveying and sampling with the remotely operated vehicle *ROPOS*. These vents represent fault-related conduits for focused fluid and/or gas migration associated with massive gas hydrate formation within the fault zone and represent, therefore, the opposite mechanism to the widespread fluid flow. It is thus far unknown how important these cold vents are in the total budget of fluid flow in an accretionary prism. Drilling at the vent field will help constrain the significance of fault-related fluid and/or gas flow.

## **Coring Transect**

During Expedition 311, a series of five holes will be drilled along a margin-perpendicular transect (Figs. [F3](#), [F4](#)) representing different stages in the evolution of the gas hydrate stability field. Proposed Site CAS-04B is situated in the deep Cascadia Basin. Next is proposed Site CAS-03B, located on top of the first uplifted ridge, followed by proposed Site CAS-02C located in the first slope-sediment basin. The fourth proposed Site CAS-01B is located near ODP Leg 146 Site 889. The fifth site of the transect (CAS-05D) represents the eastward limit of the gas hydrate occurrence on the margin.

One additional site is located at an active cold vent (proposed Site CAS-06A). An alternate site for this cold-vent location is proposed Site CAS-06B, which is an inactive vent location.

## **Shortened Expedition Approach**

The original proposal 553-Full2 “Cascadia Gas Hydrate” included long-term monitoring experiments using Circulation Obviation Retrofit Kit (CORK)-II, Advanced CORK (ACORK), modular formation dynamic testing (MDT), and distributed temperature sensing (DTS). An extra site for a dual-hole hydrogeologic ACORK experiment was proposed near Site 889 (proposed Site CAS-01C). With this shortened expedition approach the long-term monitoring experiments were postponed until the second expedition of this proposal.

Other components of the original proposal that had to be deferred included coring, wireline, and logging-while-drilling operations at proposed Sites CAS-04B and CAS-05B, walk-away and constant-offset vertical seismic profiling (VSP) at Site CAS-01B.

## **BACKGROUND**

### **Geological Setting**

The area of this investigation is on the accretionary prism of the Cascadia subduction zone (Fig. F1). The Juan de Fuca plate converges nearly orthogonally to the North American plate at a present rate of ~45 mm/y (e.g., Riddihough, 1984). Seaward of the deformation front, the Cascadia Basin consists of pre-Pleistocene hemipelagic sediments overlain by a rapidly deposited Pleistocene turbidite for a total sediment thickness of ~2500 m. Most of the incoming sediment is scraped off the oceanic crust and folded and thrust upward to form elongated anticlinal ridges with elevations as high as 700 m above the adjacent basin. The thrust faults near the deformation front penetrate nearly the entire sediment section (Davis and Hyndman, 1989).

### **ODP Leg 146 Results**

During Leg 146 three sites (Fig. F1) were drilled that are of significance to Expedition 311. Site 888 was drilled in the deep Cascadia Basin and is near the proposed location of Site CAS-04B and served as a reference site for a “non-gas-hydrate” environment. Sites 889 and 890 were drilled midslope over a strong BSR. These two sites are most relevant to the proposed Expedition 311 Sites CAS-01B and CAS-01C. The following descriptions were taken from the Leg 146 *Initial Results* volume (Westbrook, Carson, Musgrave, et al., 1994).

### ***Site 888 (Relevant for Proposed Site CAS-04B)***

Site 888 lies in an outer part of the Nitinat Fan, 7 km seaward of the toe of the accretionary wedge. This site provides a reference for the type, age, and physical properties of sediment in the sedimentary section that is stripped from the ocean crust to form the accretionary wedge. The three holes at Site 888 penetrated into the top 600 m of the sedimentary section, which is 2.5 km thick at this location. Three lithostratigraphic units were recognized.

- Unit I (0–175.1 meters below seafloor [mbsf]): Holocene to upper Pleistocene interbedded clayey silts and fine- to medium-grained sands, with some thin beds containing pebbles, volcaniclastic fragments, and pieces of wood. Between Unit I and Unit II there is a transition zone (175.1–193.0 mbsf) in which there is a gradual increase with depth in the proportion of massive sand.
- Unit II (193.0–457.0 mbsf): upper Pleistocene thick beds of massive fine- to medium grained sand with interbeds of clayey silt.
- Unit III (457.0–566.9 mbsf): upper Pleistocene clayey silt and silt, finely laminated with interbeds of fine to coarse sand and gravel.

Magnetic polarity analyses and biostratigraphy indicate that the entire cored section at Site 888 is younger than 600 ka.

The geothermal gradient has been established as 68°C/km. Thermal conductivity increases in value downward through the uppermost 200 mbsf to a mean value of 1.23 W/m·K for the section below that depth.

Measurements of porosity and shear strength indicate that sediments in the cored section are underconsolidated. Wireline density and neutron porosity logs show that the minimum porosity of the section lies at 300 mbsf. The downward increase in porosity shown in the logs beneath 300 mbsf may be an artifact of poor hole condition. However, porosity measurements conducted on the cored material show a downward decrease beneath 300 mbsf.

The general state of undercompaction indicated by the logs and physical property measurements may be attributed to rapid deposition, especially of the sandy section in Unit II. The rate of sedimentation in the upper 100 mbsf has been close to 1 m/k.y., and sedimentation rates in the remainder of the cored section have at least matched that rate and were probably greater.

The pore water geochemistry in the section varies downward in response to bacterial sulfate reduction, carbonate diagenesis, and fluid flow within some intervals. Pore water chlorinity varies only between 543 and 571 mM. However, small-scale variation in the section may be indicative of fluid flow to maintain observed pronounced minima.

Overall, the organic carbon is at a low concentration (0.2–0.4 wt%). Concentration of methane in the upper 200 mbsf is below 5 ppmv. Ethane, propane, and butane are present only in trace amounts ( $C_1/C_2 > 1000$ ), indicating that methane is of bacterial origin.

### ***Sites 889/890 (Relevant to Proposed Site CAS-01B/C)***

Sites 889/890 are located on the mid-continental slope off Vancouver Island at water depths of 1315 and 1326 m, respectively (Fig. F5). Coring began in bedded slope-basin sediments and at Site 889 extended into underlying deformed sediments of the accretionary wedge. Site 890 was cored to only 50 mbsf to sample the near-seafloor sediments. A major objective of this site was to investigate the BSR at a depth of 225 mbsf. Holes 889A, 889B, and 889C penetrated the BSR.

Sediments at Sites 889/890 range in age from late Quaternary to late Pliocene. A hiatus in the record is present at 87 mbsf, separating upper Quaternary from lower Pleistocene deposits. Three lithostratigraphic units were determined.

Unit I includes clayey silts, fine sand, and diagenetic carbonates. It extends from the surface to a depth of 128 mbsf. Unit I comprises slope and slope basin sediments that are hemipelagites, turbidites, and mass flow deposits.

Unit II is similar to Unit I, but it is noticeably more consolidated than the overlying unit and is highly fractured. Diagenetic carbonates were observed throughout the entire section. Unit II is thought to consist of abyssal plain silts and clays that were post-depositionally fractured during accretion. Unit II extends to 301.5 mbsf, beneath which the glauconite content increases sharply at the top of Unit III. The sediments of Unit III appear to be abyssal plain deposits like those in Unit II above, but the abundant authigenic glauconite suggests deposition under suboxic conditions.

The downhole variation in consolidation is clearly shown in the distribution of bulk density and porosity. Unit I is characterized by normally consolidated deposits in which porosity declines regularly with increasing depth. Between 128 and 260 mbsf

(upper Unit II), the porosity decreases rapidly and the sediments become overconsolidated to the base of Unit II. There are distinct excursions from the general porosity decrease with depth that correlate with variations in the diagenetic carbonate cementation and organic geochemistry (organic carbon content, methane, N, and S concentrations). The position of the BSR falls within one of these excursions, but it is not unique. Unit III exhibits an apparently anomalous increase in porosity with increasing depth.

The inorganic chemistry of the pore waters defines two zones: within lithostratigraphic Unit I, sulfate declines to 0 at 10 mbsf, accompanied by an increase in alkalinity, and as a result  $\text{Ca}^{2+}$  and  $\text{Mg}^{2+}$  concentrations decrease rapidly from 0 to 60 mbsf. Chloride concentration declines from 550 mM at the sediment/water interface to 363 mM at the base of chemical Zone 1 (130 mbsf).

Chemical Zone 2 (130–386.5 mbsf) shows nearly constant  $\text{Cl}^-$  concentration of 370 mM. The concentration of  $\text{Na}^+$ ,  $\text{Mg}^{2+}$ , and phosphate are also nearly constant, indicating that the low  $\text{Cl}^-$  concentration is a dilution effect.

Lithostratigraphic Unit I yielded elevated methane concentrations (60,000–80,000 ppmv) below the sulfate reduction zone. Methane declines to 30,000 ppmv at the base of Unit I. Over this same interval, ethane and propane were essentially absent, and the  $\text{C}_1/\text{C}_2$  ratio was  $> 1000$ , indicating a microbial methane source. A small spike in the ethane concentration (33 ppmv) at 129 mbsf (associated with the  $\text{Cl}^-$  minimum) suggests a deeper source for fluids at that level.

Gas composition changes markedly in the interval 130–247 mbsf, with headspace (HS) samples containing 30,000–77,000 ppmv methane, 5–35 ppmv ethane, and 0.5–3.4 ppmv propane. Below 250 mbsf the methane concentrations become highly variable. Ethane increases markedly below 300 mbsf, and propane increases rapidly below 360 mbsf. Within this interval, the  $\text{C}_1/\text{C}_2$  ratio declines from values of  $\sim 2000$  to  $< 100$ , indicating a mixture of thermogenic and bacterially derived gas. There is no evidence in either the logs or the cores for the accumulation of gas hydrate in massive form, but the temperature of  $-1.4^\circ\text{C}$  measured in a core at 220 mbsf could have been produced by the dissociation of gas hydrate.

Six *in situ* temperature determinations were made with the Water Sampling Temperature Probe and Adara tools. Temperature increases linearly with depth, with a gradient of  $54^\circ\text{C}/\text{km}$ .

The BSR at Sites 889/890 is situated 276 ms two-way traveltime below the seafloor. Time-depth curves derived from the vertical seismic profile (VSP) and sonic log indicate that the BSR is located at 225 mbsf (Hole 889B). Although the acoustic log does not exhibit a substantial decrease in velocity across the BSR, the VSP data define a rise in velocity just above the BSR with a distinct low-velocity zone beneath it. Velocities are lower than those of seawater and are typical of the presence of small amounts of free gas. The discrepancy between VSP and acoustic log results may be attributed to drilling disturbance, which could deplete the gas phase in the immediate vicinity of the drill hole.

### **Gas Hydrate Occurrence**

Gas hydrate concentrations were previously estimated from the downhole acoustic and resistivity logs, multichannel seismic (MCS) core analysis, and VSP velocities and from pore water freshening (e.g., Yuan et al., 1996, 1999; Hyndman et al., 1999). Gas hydrate concentrations from the different methods vary slightly but were estimated to be on average 20%–35% of the pore space over a 100 m thick interval above the BSR.

These are high gas hydrate concentrations for a marine gas hydrate occurrence, and are not observed on other margins. ODP drilling and logging at the Blake Ridge offshore South Carolina (passive margin environment) showed gas hydrate concentrations that were on average lower than 10% (Paull, Matsumoto, Wallace, et al., 1996). Results from Leg 204 at southern Hydrate Ridge located on the southern Cascadia margin offshore Oregon, with a very similar tectonic environment to offshore Vancouver Island, showed very low gas hydrate concentrations of <5% except for the unusual summit of Hydrate Ridge (Trehu et al., 2004). An earlier approach by Ussler and Paull (2001) for interpreting chlorinity data from Leg 146 by using a smooth chlorinity baseline suggested lower gas hydrate concentrations at Sites 889/890, but were in an apparent contradiction to other geophysical results using electrical resistivity and seismic velocity.

In preparation for Expedition 311, the gas hydrate concentrations along the northern Cascadia margin were recalculated using Leg 146 acoustic/electrical resistivity logs and pore water chlorinity/salinity data (Riedel et al., in press a). New estimates show that the concentrations could alternatively be between 5% and 10% on average of the pore volume from ~130 mbsf to the BSR (at ~230 mbsf) if different baselines are used in the individual calculations.

No conclusive decision can be made on the chlorinity baseline without additional pore water chemistry data (lithium and strontium data) to confirm that the model by Torres et al. (2004) derived from Leg 204 results is also valid for the Sites 889/890. Therefore, the gas hydrate concentrations along the northern Cascadia margin based on chlorinity data may either be as low as a few percent, as suggested earlier by Ussler and Paull (2001), or as high as 40%, previously suggested by Hyndman et al. (1999).

Gas hydrate concentrations were calculated from the resistivity data using Archie's law. Archie's law consists of several empirical parameters (referred to as  $a$ ,  $m$ , and  $n$ ), which were determined to be  $a = 1.4$ ,  $m = 1.76$ , and  $n = 1.0$  by Hyndman et al. (1999) using the Leg 146 core data at Sites 888 and 889/890. However, Collett (2000) redefined these parameters to  $a = 1.0$ ,  $m = 2.8$ , and  $n = 1.9$  by using the Site 889 resistivity and neutron porosity logs. The differences in these empirical parameters result in highly different estimated gas hydrate concentrations. The Leg 146 logging data are of relatively poor quality and neither the new parameters nor the previous analyses fit all data well, and a large uncertainty remains in the results. However, results from Leg 204, obtained from a tectonically similar environment, suggest that the Archie parameters by Collett (2000) may be preferable.

Finally, new velocity references were calculated from the Site 889 porosities using various published empirical relations between porosity and velocity (Jarrard et al., 1995; Hyndman et al., 1993) and the Lee et al. (1993) weighted equation. All the newly proposed baselines are significantly shifted toward higher seismic velocities relative to the former baseline defined by Yuan et al. (1996) and Hyndman et al. (2001). Thus, they result in gas hydrate concentrations that are only between 5% and 10% of the pore volume. However, significant uncertainty remains in the applicability of the empirical parameters for each of the individual equations.

If the model by Torres et al. (2004) proposed for Hydrate Ridge (Leg 204) is applicable to Site 889 and if the Archie parameters by Collett (2000) are correct, these two methods (although individually very uncertain) confirm results from the acoustic velocity analyses of Lee et al. (1993). Thus, the total gas hydrate concentration at Sites 889/890 may be much lower than previously assumed.

## **Seismic Studies/Site Survey Data**

Extensive site survey data exist on the Cascadia margin to support the operations of Expedition 311:

- Conventional MCS reflection: a regional survey in 1985 and site survey lines for Leg 146 in 1989; summaries are given in Hyndman et al. (1994) and Hyndman (1995). Seismic velocities and porosities were studied by Yuan et al. (1994) and detailed seismic studies of the hydrate and BSR by Yuan et al. (1996, 1999).
- Three-dimensional (3-D) seismic surveys: a regional MCS 3-D seismic survey was conducted in 1999 around Sites 889/890, and four high-resolution 3-D single-channel seismic (SCS) grids were acquired over the vent field (Riedel et al., 2002). Other high-resolution SCS and short-offset MCS surveys were conducted (e.g., Fink and Spence, 1999).
- Three ocean-bottom seismic (OBS) surveys were carried out in 1996 and 1997 and as part of the 1999 3-D survey.
- DTAGS deep-towed MCS system survey carried out by the Naval Research Laboratory (NRL) in 1997 in the area of ODP Sites 889/890 (Gettrust et al., 1999).
- Presite survey in 1999 with MCS, SCS, and 3.5 kHz seismic data collection over proposed sites.
- Extensive piston coring associated with physical property and geochemical data analyses (Solem et al., 2002; Novosel, 2002).
- Heat flow studies (Riedel et al., in press b).
- Seafloor video observations and sampling (Riedel et al., in press b).

## **SCIENTIFIC OBJECTIVES**

This expedition follows the goals for gas hydrate drilling as proposed by the ODP Gas Hydrates Program Planning Group:

- Study the formation of natural gas hydrate in marine sediments.
- Determine the mechanism of development, nature, magnitude, and global distribution of gas hydrate reservoirs.
- Investigate the gas transport mechanism, and migration pathways through sedimentary structures, from site of origin to reservoir.
- Examine the effect of gas hydrate on the physical properties of the enclosing sediments, particularly as it relates to the potential relationship between gas hydrates and slope stability.
- Investigate the microbiology and geochemistry associated with hydrate formation and dissociation.

The objectives of this expedition are to test gas hydrate formation models and constrain model parameters, especially models of hydrate concentration through upward fluid and methane transport. These objectives require (1) high-quality data on the vertical concentration distributions of gas hydrate and free gas and variation landward in the accretionary prism and (2) estimates of the vertical fluid and methane fluxes through the sediment section as a function of landward distance from the deformation front.

The study will concentrate on the contrast between dispersed pervasive upward flow and focused flow of fluid and methane in fault zones. The pervasive permeability may be on a grain scale, on a centimeter scale (the scaly fabric observed in previous ODP clastic accretionary prism cores), or in closely spaced faults. Strong and continuous BSRs may occur only in coarser clastic accretionary prisms (i.e., muddy silt or coarser) where grain or other small-scale permeability allows pervasive upward expulsion. In muddy, low-permeability sediments, fluid expulsion may be focused in discrete faults so hydrate does not form a continuous layer.

## **Geochemistry**

Geochemical measurements of gas hydrate, pore fluids, and sediments within and below the gas hydrate stability zone are essential to meet the outlined objectives. In addition to characterizing gas hydrate and free gas depth distribution and geochemistry, critical chemical and isotopic measurements summarized below will provide information on conditions of gas hydrate formation, relation to organic matter content and type, and the nature and temperature of fluid-rock reactions. The chemical and isotopic data are necessary for the understanding of (a) the origin of the methane and other hydrate forming gases, (b) the mode of formation of the methane hydrate, and (c) the source of the fluids carrying the gases sequestered in the gas hydrates, and if more than one source the ratio of sources, and testing which of the hypotheses of gas hydrate formation outlined in the proposal applies to this region. Representative samples will be recovered under in situ conditions with the ODP Pressure Core Sampler (PCS) and the HYACINTH pressure corer (depending on funding availability) to quantify gas concentrations in the gas-hydrate-bearing zone and below the BSR.

Based on previous geochemical studies, especially since ODP Leg 146, the most critical measurements include the following:

- Chloride concentrations and isotope ratios in the gas hydrates and pore fluids to determine the mode and rate of formation of gas hydrate and the fluid source from

greater depths or from the in situ pore fluid (Ransom et al., 1995; Spivack et al., 2002),

- Two to three geothermometers (e.g., Fournier and Potter, 1979; Kharaka and Mariner, 1989),
- Carbon isotope ratios of dissolved inorganic carbonate along with oxygen and hydrogen isotopes of the gas hydrate structural water and pore water (e.g., Kastner et al., 1998),
- Chemical and isotopic compositions of the hydrocarbons in the hydrate and of the dissolved and free gases,
- Pore fluid pH and sulfate, sulfide, ammonium, and alkalinity concentrations (e.g., Borowski et al. 1997) and minor and trace elements concentrations and corresponding isotope ratios characteristic of fluids from a deeper source such as Li, B, and Sr (e.g., Kastner et al., 1995a, 1995b),
- Sediment mineralogy and geochemistry, and
- Amount and type of organic matter.

## **Microbiology**

Microbiologists participating in ODP for the past decade have demonstrated that more than  $10^5$  cells/cm<sup>3</sup> consistently exist in the subsurface marine sediments even at depths of ~1000 mbsf. On the basis of these efforts, the subseafloor environment has been proposed to have the largest biomass potentials on Earth, exceeding the biomass in terrestrial and oceanic environments. However, recent data from pore water chemistry such as sulfate and methane in ODP and Deep Sea Drilling Project (DSDP) core sediments suggest that most of the microbial metabolic activity may occur in the narrow and shallow zone near the continents and that most of the deep subseafloor microorganisms are likely either inactive or adapted for extraordinarily low (or slow) metabolic activity in open ocean. Although it is currently unverified from sufficient microbiological characterizations, if it is true, the inactivity of the subseafloor microbiota is ubiquitous and is likely explained by a combination of low-temperature and low-porosity conditions coupled with the extremely slow energy and fluid fluxes conveying inorganic and organic nutrients.

Not all the deep ocean is characterized by low metabolic activity. Regions located in the subduction zones of the continental margin, often bearing a great amount of subseafloor gas hydrate deposits, are considered to be among the places for the prosperity of functionally active, metabolically diverse microbial communities. Indeed, most of

the biogenic and mixed type methane hydrate is distributed around continental margins on subduction zones where the organic matter is supplied from continents and active fluid circulation is present (Cascadia margin, Nankai Trough, Black Ridge, Guatema, Peru margin, etc.). To know which microbes specifically are responsible for producing biogenic methane and how and where they are making it is one of the most exciting challenges for subsurface microbiologists.

There have been several microbiological studies for the subsurface biosphere of biogenic methane hydrate-bearing sediments with culture-dependent or -independent techniques. Based on the vertical characterization of the biomass and activity of methanogens in the methane hydrate-bearing sediments from Blake Ridge, North Hydrate Ridge of Cascadia margin, and Nankai Trough, anomalies both in biomass and activity were observed at the methane hydrate-bearing layers in Blake Ridge and Cascadia margin. However, no satisfactory explanation has been offered for these microbiologic anomalies. The molecular phylogenetic analyses of deep subseafloor sediments in the presence or absence of methane hydrate deposits in Cascadia margin and Nankai Trough have demonstrated the potential microbial community structures inferred from ribosomal ribonucleic acid (rRNA) genes, but the relationship between the microbial community structure and the distribution of methane hydrate is still unclear because of the low analysis frequencies. Thus, the origin of the biogenic methane and the microbial processes in generation, transportation, and accumulation are still resolved.

Microbiological investigation will be conducted by interdisciplinary cooperation with geochemists, mineralogists, geophysicists, and geologists. Major microbiological objectives are (1) to obtain direct evidence of the existence of functionally active methanogens associated with formation of subseafloor methane hydrate deposit on the Cascadia margin and (2) to clarify the controversial hypotheses where and how the biogenic methane is originally produced: deep hot zones far below the present hydrate layers by hyperthermophilic methanogens from  $H_2$  and  $CO_2$  versus shallow cold sediments above the present hydrate layers by mesophilic methanogens from organics.

Addressing these microbiological objectives will require the following:

- High-resolution characterization of biomass, diversity, structure, and function of microorganisms at the community and population levels at different depths,

- High-resolution characterization of composition, dynamics, kinetics, and isotopic features of inorganic and organic fluid and gas chemical components at different depths, and
- Clarification of the relationship between the distribution of the microbial community and the formation of the complex subseafloor hydrogeologic structure controlling the transportation and accumulation of methane.

### **Strategy**

Almost all the microbiological characterizations will be carried out as described below. The drilling core samples are basically collected using advanced piston corer (APC) and extended core barrel (XCB) coring. In the case that APC/XCB coring yields exceptionally poor recovery, we may attempt rotary core barrel (RCB) coring. To prevent possible external microbial contamination during sampling or preservation, the samples for microbiology and fluid and gas geochemistry will be cut into whole round cores (WRCs) according to standard protocol. The procedure for subcoreing should be performed in a cool environment (~4°C). Microbial contamination from drilling fluid will be evaluated by using microfluorescent beads and perfluorocarbon as described in Smith et al. (2000). The recovered WRC will be put into a sterilized anaerobic bag filled with nitrogen and stored at less than -80°C or in liquid nitrogen prior to molecular analyses. The innermost core samples will be used for preparation of a variety of slurries for cultivation, chemical fixation of the slurries for optical and electron microscopic observation, nucleic acids extraction, and lipid and biomarker extractions. The following geomicrobiological experiments are considered.

### **Culture-Dependent Analyses**

Quantitative cultivation experiments (most probable number [MPN] or serial dilution method) and enrichment analyses will be carried out to enumerate the viable population of microorganisms. Homogenized slurry samples will be inoculated into prepared media and then diluted in a series of liquid media. The results of cultivation show the potential population of viable cells that can grow in designed media for various types of chemolithoautotrophic, carboxydrophic, methanotrophic, and chemolithoorganotrophic microorganisms under various pH and temperature conditions. The most intensively targeted phenotypes and metabolisms are hyperthermophilic or mesophilic methanogens using H<sub>2</sub> + CO<sub>2</sub> or organics such as acetate, methylamines, and methanols. Other phenotypes and metabolisms such as H<sub>2</sub>-oxidizing chemolithoautrophs and anoxic methane oxidizers (AMO) will also be targeted. Growing cells will be purified by the extinction and dilution method as quantitatively domi-

nant viable cells, and physiological characteristics will be examined in home laboratories according to previous reports.

### **Molecular Ecological Analyses**

To characterize the microbial community structure in a given habitat, a combined use of several molecular ecological techniques is the most reliable evaluation. Using nucleic acid and biomarker extracts from the innermost WRC samples, several molecular ecological analyses will be conducted. We will employ the following well-defined and reliable techniques for microbiological investigations in the proposed project:

- Fluorescence in situ hybridization-direct count (FISH-DC) will be performed on board or on shore to estimate the biomass of the total microbial population and targeted phylogroups of microorganisms in the core samples by fluorescence microscopy.
- Quantitative polymerase chain reaction (qPCR), a modification of the classical PCR, is essentially a fluorogenic assay used to quantity the number of target genes and cells in a given environmental sample. During this expedition, we will use qPCR to estimate the population ratio between the domains Bacteria and Archaea using the specific primers and fluorogenic probes for each domain and to estimate the metabolic activity using functional genes of key enzymes such as dissimilatory sulfate reductase (dsr), particulate methane mono-oxygenase (pmmo), methyl co-enzyme M reductase (mcr), and other carbon-fixation enzymes (RuBisco, adenosine triphosphate [ATP]-citrate lyase, etc.).
- Gene sequencing provides the primary sequence of specific genes needed for both phylogenetic analysis and identification. Genes to be sequenced include 16S r-DNA genes as well as other functional genes described above.
- Lipid analysis associated with stable carbon isotope characterization will provide a great deal of information for identifying the energy and carbon metabolisms of the uncultured majority organisms not identified in elaborate cultivation tests. Bacterial fatty acids composition and archaeal glycerol dialkyl glycerol diether (GDGD) and glycerol dialkyl glycerol tetraether (GDGT) compositions will reinforce the deoxyribonucleic acid (DNA)-based microbial community characterization and make it possible to estimate the biomass of the specific phylotypes or physiotypes of the subseafloor microorganisms.

## **Gas Hydrate Concentrations and Physical Properties**

Calibration of regional estimates of hydrate and free gas volumes based on remote geophysical surveying is of critical importance toward estimating the concentration of gas hydrate and evaluating its role in climate change and resource potential. Recent experience during Legs 146, 164, and 204 underlined the complexity of this issue (see also Riedel et al., *in press a*). During Expedition 311, we will drill through gas hydrates in a variety of sedimentological settings with different seismic characteristics and measure the physical properties of the gas hydrate-bearing sediments and underlying free gas zones through downhole logging and pressure coring. The downhole logging data will be complemented by visual core description and other core studies.

## **Gas Hydrates and Slope Stability**

Because gas hydrates can be destabilized by pressure and temperature changes, they are potential seafloor geohazards. The formation and dissociation of gas hydrate has a significant influence on the mechanical properties of marine sediments. Replacement of pore water by gas hydrate increases the shear strength as well as reduces the porosity and permeability of sediments (Paull et al., 2000). In turn, during gas hydrate dissociation, free gas and water are released, decreasing the shear strength and making the sediment more prone to failure. The process of gas hydrate decomposition also affects the pore pressure of the sediments (Kayen and Lee, 1993). During gas hydrate dissociation in sediments having pore fluids saturated with methane, the water and free gas released into the pore space will usually exceed the volume that was previously occupied by the hydrate. The net effect is either an increase in pressure (if the sediments are well sealed by a low-permeability cap) or an increase in volume (if the additional pressure can escape by fluid flow). Gas hydrate dissociation can occur due to changes in the pressure/temperature conditions, as outlined above, or due to continued sedimentation. The associated increase in pore pressure, expansion of sediment volume, and the development of free gas bubbles all have the potential to weaken the sediment. Failure could be triggered by gravitational loading (continued sedimentation) or seismic disturbances (earthquakes), yielding slumps, debris flows, and slides. The possible connection between gas hydrate occurrence and submarine slides was first recognized by McIver (1982). Many authors have later related major slumps on continental margins to instability associated with the breakdown of hydrates, including surficial slides and slumps on the continental slope and rise of Southwest Africa (Summerhayes et al., 1979), slumps on the U.S. Atlantic continental slope (Carpenter, 1981), large submarine slides on the Norwegian margin (Jansen et

al., 1987), and massive bedding-plane slides and rotational slumps on the Alaska Beaufort Sea continental margin (Kayen and Lee, 1993). Expedition 311 will provide critical information for testing the hypothesis that the presence of gas hydrate may lead to instability of the underlying material by constraining mechanical and hydrological properties of the gas hydrate-bearing sediments.

## **Cold Vents and Formation (Stability) of Near-Surface Massive Gas Hydrates**

Recently, evidence for focused fluid/gas flow and gas hydrate formation has been identified on the Vancouver margin. Several seismic blank zones were observed in the seismic data (Fig. F6) over a frequency range from 20 to 4 kHz, where the degree of blanking increases with seismic frequency. The blank zones range from 80 m to several 100 m in width. The most studied site is an active cold vent field associated with near-surface hydrate close to ODP Sites 889/890 (e.g., Riedel et al., 2002). Studies include high-resolution bottom profiling, 3-D seismic surveys, piston coring, and ocean-bottom video surveying and sampling with the remotely operated vehicle *ROPOS*. These vents represent fault-related conduits for focused fluid and/or gas migration associated with massive hydrate formation within the fault zone and represent therefore the opposite mechanism to the widespread fluid flow.

Massive hydrate was found at several sites by piston coring within a blank zone (also referred to as Bullseye vent) at depths of 1–8 mbsf. Increased methane concentrations of up to 8 times the ocean background levels were measured in water samples taken above an active area (Solem et al., 2002). However, venting appears to be strongly episodic. Pore fluid alkalinity gradients from piston cores were converted to sulfate gradients, from which the amount of methane and related fluid flux were calculated. The calculated methane flux varies from 10–19 mol/m<sup>2</sup>k.y. outside the vent to values 32–0 mol/m<sup>2</sup>k.y. inside the vent. Assuming full methane saturation, the maximum methane flux inside the vent corresponds to a fluid flux of ~1 mm/y.

It is thus far unknown how important these cold vents are in the total budget of fluid flow in an accretionary prism. Drilling at the vent field would help to constrain the significance of fault-related fluid and/or gas flow.

The nature of the seismic blanking is yet unresolved. Several differing models have been published (Wood et al., 2002; Riedel et al., 2002; Zühsdorff and Spiess, 2004), but none of these models is able to explain all observations made at the vent field.

Detailed coring and logging will provide the necessary data to constrain mechanisms to explain seismic blanking at the cold vents.

Two sites are considered: an active cold vent (proposed Site CAS-06A) with widespread carbonate formation, massive near-seafloor gas hydrates, and abundant chemosynthetic communities, as well as an inactive cold vent (proposed Site CAS-06B), where seismic blanking has been observed over a 500 m × 1500 m area.

## **DRILLING STRATEGY**

The original proposal for Expedition 311 included seven sites. Part of the proposed drilling program consisted of five sites to be drilled in a transect perpendicular to the continental margin across the North Cascadia accretionary prism. Located at the western edge of the transect, proposed Site CAS-04B is situated in the deep Cascadia Basin. The next site, CAS-03B, is located on top of the westernmost uplifted ridge, followed by Site CAS-02C, located in the first slope sediment basin. The fourth, Site CAS-01B, is located near Site 889. The fifth transect site (CAS-05D) represents the eastern limit of the gas hydrate occurrence on the margin. One additional site was included in the original proposal, CAS-06A, located at a cold seafloor vent. An alternate site for this cold-vent location, Site CAS-06B, was proposed, which is an inactive vent location. In addition to the proposed transect and cold vent drilling, a two-hole site (CAS-01C) for a hydrogeologic cross-hole experiment with A-CORKs was also included in the original proposal. As discussed in “[Introduction](#),” the proposed two-hole (Site CAS-01C) hydrogeologic cross-hole experiment has been dropped from this initial North Cascadia drilling program. The focus of this expedition will be the proposed multisite transect and the identified cold vent site.

For this expedition, we plan to carry out logging-while-drilling (LWD) and measurement-while-drilling (MWD) operations prior to coring each site (pending Environmental Pollution and Safety Panel [EPSP] approval). There is a strong scientific need to obtain LWD/MWD data prior to coring. The coring operations will be complemented by frequent deployment of the PCS/HYACINTH pressure core systems. It is essential to know before deploying the available pressure core systems what the gas hydrate concentrations and vertical distribution are to choose the optimum depths for pressure coring operations. The coring operations are also complemented by frequent sampling for interstitial water, headspace gas, and microbiological analyses. Although those samples will be taken at relatively regular depths (e.g., every 5 m), the sampling frequency can be adjusted if gas hydrate concentrations and distribution

can be forward predicted through the analysis of the LWD/MWD precore logging surveys. Without prior knowledge of this distribution, subsampling may easily undersample (or miss completely) important sedimentary sections.

After a relatively short transit from Astoria, Oregon, LWD/MWD tools will be first deployed at proposed Site CAS-03B at the far western downslope end of the proposed multisite transect running from east to west down the continental margin (Table [T1](#)). The LWD/MWD hole at Site CAS-03B will be advanced to a depth of 300 mbsf. Site CAS-4B is now considered an alternate drill site. The next hole to be drilled and LWD/MWD logged will be at proposed Site CAS-02C, which will also be drilled to a depth of 300 mbsf. The third LWD/MWD hole will be drilled at proposed Site CAS-01B to a depth of 380 mbsf. The fourth LWD/MWD hole will be drilled at the cold vent proposed Site CAS-06A to a depth of 300 mbsf. The final LWD/MWD hole (proposed Site CAS-05D) will be drilled to a depth of 220 mbsf at the upslope limit of the planned multisite transect.

After completing the LWD/MWD logging program, the expedition will switch to conventional and pressure-controlled coring operations at each of the sites drilled during the LWD/MWD campaign. Each core hole will also be wireline logged (triple combination [triple combo] and Formation MicroScanner [FMS]-sonic tool strings). A single zero-offset VSP survey will be conducted at proposed Site CAS-01B. A single core hole is planned for each site. The standard core hole will consist of APC coring to an expected “refusal” depth of ~200 mbsf; each hole will be advanced to their proposed total depth (TD) by XCB coring. Interspersed with the APC/XCB cores in each hole will be approximately six PCS/HYACINTH pressure cores. Each of the APC core runs will also be monitored with the APC-methane (APCM) tool, which in turn will be used to analyze and modify gas hydrate core-handling operations. The coring program will start at proposed Site CAS-05D immediately following LWD/MWD operations. The core hole sequence will proceed down the continental slope to proposed Sites CAS-06A, CAS-01B, CAS-02C, and finishing at CAS-03B (Table [T1](#)).

## **Proposed Downhole Measurement Strategy**

Within the coring program special effort will be made to obtain geothermal gradient data to accurately predict the depth to the base of the gas hydrate stability zone at each site drilled during Expedition 311. Downhole temperature tool deployment will include multiple runs of the APC-temperature (APCT) tool (minimum of four runs per

hole) and Davis-Villinger Temperature-Pressure Probe (DVTTP) (minimum of two runs per hole) systems both above and below the depth of the BSR.

## **LOGGING/DOWNHOLE MEASUREMENTS PLAN**

### **Logging While Drilling**

LWD/MWD tools will be deployed at all proposed sites, including oriented resistivity-at-the-bit (RAB) images with 360° coverage of the borehole wall. The MWD tools will allow us to monitor drilling parameters and to transfer LWD data in real time. Because LWD sensors are located immediately above the drill bit, the measurements are made before gas hydrate dissociates under drilling disturbances, and these data are critical to identify gas hydrate distribution in the formation. In addition to directly addressing the expedition objectives, RAB images will be potentially useful for identifying high-resistivity features, helping to locate intervals where the pressure coring tools might be used to recover gas hydrate samples. To optimize scheduling and drilling success, all LWD/MWD operations will be completed at the beginning of the cruise, prior to coring operations.

### **Wireline Logging**

Because of the unstable nature of gas hydrate, wireline logging is critical to measure in situ properties of hydrate-bearing sediments. The standard triple combo (density, porosity, and resistivity) and FMS-sonic tool strings will be deployed at all sites. In addition, the three-component Well Seismic Tool (WST-3) will be used to record a VSP at proposed Site CAS-01B. Acoustic logs (along with the VSP) are critical in determining the acoustic velocity structure associated with the BSR. Both *P*-wave and *S*-wave velocity measurements will be made using the Dipole Sonic Imager (DSI) tool. Depth-to-seismic ties will also be accomplished by means of synthetic seismograms computed from the wireline density and sonic logs. High-resolution FMS electrical images will compliment the RAB images and may indicate features such as thin beds, veins, and fractures in hydrate-bearing sediments.

### **Vertical Seismic Profiling**

A zero-offset VSP is planned for proposed Site CAS-01B. The VSP will be conducted by repeatedly shooting a generator injection (GI) gun (105 in<sup>3</sup> generator/45 in<sup>3</sup> injector) hung from the drillship 2 m below the surface for each geophone depth in the bore-

hole. The geophone will be placed at about 10 regular intervals throughout the entire 350 m deep borehole. At each recording depth, the GI gun will be fired several times (up to 10 times) to stack the seismic signals and enhance the signal-to-noise ratio.

## **SAMPLING STRATEGY**

### **General**

Shipboard and shore-based researchers should refer to the interim IODP Sample, Data, and Obligations policy posted on the Web at [iodp.org/data\\_samples.html](http://iodp.org/data_samples.html). This document outlines the policy for distributing IODP samples and data to research scientists, curators, and educators. The document also defines the obligations that sample and data recipients incur. Access to data and core sampling during Expedition 311, or within the 1 y moratorium, must be approved by the Sample Allocation Committee (SAC). The SAC (composed of Co-Chief Scientists, Staff Scientist, and IODP Curator on shore and curatorial representative on board ship) will work with the Shipboard Scientific Party to formulate a formal expedition-specific sampling plan for shipboard and post cruise sampling.

Shipboard scientists are expected to submit sample requests 3 months before the beginning of the expedition. Sample requests may be submitted at [iodp.tamu.edu/curation/samples.html](http://iodp.tamu.edu/curation/samples.html). Based on sample requests (shore based and shipboard), the SAC and Shipboard Scientific Party will prepare a working cruise sampling plan. This plan will be subject to modification depending upon the actual material recovered and collaborations that may evolve between scientists during the expedition. Modifications to the sampling plan during the expedition require the approval of the SAC.

All sample frequencies and sizes must be justified on a scientific basis and will depend on core recovery, the full spectrum of other requests, and the cruise objectives. Some redundancy of measurement is unavoidable, but minimizing the duplication of measurements among the shipboard party and identified shore-based collaborators will be a factor in evaluating sample requests.

### **Cruise-Specific Sampling Plan**

Because the main focus of this expedition is gas hydrates, special protocols regarding sampling and measurement strategies will be required in addition to routine analyses and procedures. Modifications to core and sample handling, based on experience

gained from previous ODP and other hydrate drilling programs, will be required to quickly identify intervals containing gas hydrates. Summarized below is the anticipated measurement and sampling scheme and special hydrate sampling plan and protocol:

- Infrared (IR) imaging will be conducted via continuous scan systems and by hand-held cameras for immediate hydrate identification on the catwalk.
- Organic geochemistry samples will be collected by routine headspace and void gas sampling.
- Inorganic geochemistry samples will be collected for interstitial water geochemistry.
- Physical properties will include thermal conductivity, multisensor track (MST; *P*-wave velocity, non-contact resistivity, gamma ray attenuation bulk density, and magnetic susceptibility), moisture and density, split core velocity, shear strength, and resistivity.
- Sedimentology will include core description, smear slides, color reflectance, and digital core imaging.
- Biostratigraphy.
- Paleomagnetic analyses will support sediment age determination and gas hydrate-related mineralization.
- Microbiology sampling will be integrated with the organic and inorganic chemistry sampling program; existing microbiological sampling protocols will be employed including analyses of sample contamination.
- Downhole logging data including conventional wireline and LWD will be acquired.
- Downhole tool-derived data (APCT, DVTTP, and APCM) will be recorded.
- Additional sampling requests specified by shipboard and shore-based participants will be accommodated when possible.

## **Special Hydrate Sampling**

It is expected that gas hydrate-bearing core material will be recovered during conventional APC/XCB coring operations. It is also planned that PCS/HYACINTH coring will be employed to analyze the *in situ* occurrence of gas hydrate and to recover gas hydrate samples under *in situ* conditions. Special procedures for sampling gas hydrate-bearing cores follow:

- Sampling on the catwalk or from pressure cores will be based on an integrated sample plan, which will be developed from individual shipboard and shore-based sample requests.
- Gas hydrate sampling will be monitored by digital video and voice recording for immediate sample description.
- Specialized dissociation tests will be conducted on gas hydrate samples for volumetric and geochemical analyses.
- Recovered gas hydrate samples will be stored in liquid N<sub>2</sub> and/or in a repressurized sample vessel. PCS cores will be processed shipboard. HYACINTH recovered pressure cores will be maintained at pressurized conditions for shipboard and shore-based analyses.
- Special laboratory equipment designed to transfer and measure gas hydrate properties under controlled pressure conditions will be used. Specific laboratory equipment being considered includes the Geotek vertical logger, Georgia Tech MST-P, and Lawrence-Berkley X-ray computing tomography (CT) scanner (depending on funding availability).
- Because of the proximity and appropriate facilities, the Pacific Geoscience Centre (located in Sidney, British Columbia, Canada) is proposed as a clearinghouse for gas hydrate samples collected under the integrated sample plan.
- Gas hydrate samples will be distributed to approved investigators after inventory according to approved sampling requests.

## REFERENCES

Borowski, W.S., Paull, C.K., and Ussler, W., 1997. Carbon cycling within the upper methanogenic zone of continental rise systems: an example from methane-rich sediments overlying the Blake Ridge gas hydrate deposits. *Mar. Chem.*, 57:299–311.

Carpenter, G.B., 1981. Coincident sediment slump/clathrate complexes on the U.S. Atlantic continental slope. *Geo-Mar. Lett.*, 1:29–32.

Collett, T.S., 2000. Quantitative well-log analysis of in-situ natural gas hydrates [Ph.D. dissertation]. Colorado School of Mines.

Dallimore, S.R., Collett, T.S., and Uchida, T., 1999. Overview of science program, JAPEX/JNOC/GSC Mallik 2L-38 gas hydrate research well. In Dallimore, S.R., Uchida, T., and Collett, T.S. (Eds.), *Scientific Results from JAPEX/JNOC/GSC Mallik 2L-38 Gas Hydrate Research Well, Mackenzie Delta, Northwest Territories, Canada*. Bull.—Geol. Surv. Can., 544:11–17.

Dallimore, S.R., Collett, T.S., Uchida, T., Weber, M., Takahashi, H., and the Mallik Gas Hydrate Research Team, 2002. Overview of the 2002 Mallik gas hydrate production research well program. *Fourth Int. Conf. Gas Hydrates*: Yokohama, Japan, 19023:36–39.

Davis, E.E., and Hyndman, R.D., 1989. Accretion and recent deformation of sediments along the northern Cascadia subduction zone. *Geol. Soc. Am. Bull.*, 101:1465–1480.

Fink, C.R., and Spence, G.D., 1999. Methane hydrate distribution offshore Vancouver Island from detailed single channel seismic reflection data. *J. Geophys. Res.*, 104:2909–2922.

Fournier, R.O., and Potter R.W., II, 1979. A magnesium correction for the Na-K-Ca geothermometer. *Geochem. Cosmochim. Acta*, 43:1543–1550.

Gettrust, J., Chapman, R., Walia, R., Wood, W., Hannay, D., Lindwall, D., Spence, G.D., Louden, K., and Hyndman, R.D., 1999. High resolution seismic studies of deep sea gas hydrate using the DTAGS deep towed multichannel system. *Eos, Trans. Am. Geophys. Union*, 80(38):439–440.

Hyndman, R.D., 1995. The lithoprobe corridor across the Vancouver Island continental margin: the structural and tectonic consequences of subduction. *Can. J. Earth Sci.*, 32:1777–1802.

Hyndman, R.D., and Davis, E.E., 1992. A mechanism for the formation of methane hydrate and seafloor bottom-simulating reflectors by vertical fluid expulsion. *J. Geophys. Res.*, 97:7025–7041.

Hyndman, R.D., Moore, G.F., and Moran, K., 1993. Velocity, porosity, and pore-fluid loss from the Nankai subduction zone accretionary prism. In Hill, I.A., Taira, A., Firth, J.V., et al., *Proc. ODP, Sci. Results*, 131: College Station, TX (Ocean Drilling Program), 211–220.

Hyndman, R.D., Moran, K., and Yuan, T., 1999. The concentration of deep sea gas hydrates from downhole resistivity logs and laboratory data. *Earth Planet. Sci. Lett.*, 172(1–2):167–177.

Hyndman, R.D., Spence, G.D., Chapman, N.R., Riedel, M., and Edwards, R.N., 2001. Geophysical studies of marine gas hydrate in northern Cascadia. In Paull, C.K., and Dillon, W.P. (Eds.), *Natural Gas Hydrates, Occurrence, Distribution, and Detection*. Geophys. Monogr., 124:273–295.

Hyndman, R.D., Spence, G.D., Yuan, T., and Davis, E.E., 1994. Regional geophysics and structural framework of the Vancouver Island margin accretionary prism. In Westbrook, G.K., Carson, B., Musgrave, R.J., et al., *Proc. ODP, Init. Repts.*, 146 (Pt. 1): College Station, TX (Ocean Drilling Program), 399–419.

Jansen, E., Befring, S., Bugge, T., Eidvin, T., Holtedahl, H., and Sejrip, H.P., 1987. Large submarine slides on the Norwegian continental margin: sediments, transport and timing. *Mar. Geol.*, 78:77–107.

Jarrard, R.D., MacKay, M.E., Westbrook, G.K., and Screamton, E.J., 1995. Log-based porosity of ODP sites on the Cascadia accretionary prism. In Carson, B., Westbrook, G.K., Musgrave, R.J., and Suess, E. (Eds.), *Proc. ODP, Sci. Results*, 146 (Pt 1): College Station, TX (Ocean Drilling Program), 313–335.

Kastner, M., Kvenvolden, K.A., and Lorenson, T.D., 1998. Chemistry, isotopic composition, and origin of a methane-hydrogen sulfide hydrate at the Cascadia subduction zone. *Earth Planet. Sci. Lett.*, 156:173–183.

Kastner, M., Kvenvolden, K.A., Whiticar, M.J., Camerlenghi, A., and Lorenson, T.D., 1995b. Relation between pore fluid chemistry and gas hydrates associated with bottom-simulating reflectors at the Cascadia margin, Sites 889 and 892. In Carson, B., Westbrook, G.K., Musgrave, R.J., and Suess, E. (Eds.), *Proc. ODP, Sci. Results*, 146 (Pt 1): College Station, TX (Ocean Drilling Program), 175–187.

Kastner, M., Sample, J.C., Whiticar, M.J., Hovland, M., Cragg, B.A., and Parkes, J.R., 1995a. Geochemical evidence for fluid flow and diagenesis at the Cascadia convergent margin. In Carson, B., Westbrook, G.K., Musgrave, R.J., and Suess, E. (Eds.), *Proc. ODP, Sci. Results*, 146 (Pt 1): College Station, TX (Ocean Drilling Program), 375–384.

Kayen, R.E., and Lee, H.J., 1993. Slope stability in regions of sea-floor gas hydrate. In Schwab, W.C., Lee, H.J., and Twichell, D.C. (Eds.), *Submarine Landslides: Selected Studies in the U.S. Exclusive Economic Zone*. U.S. Geol. Surv. Bull., 2002:97–103.

Kharaka, Y.K., and Mariner, R.H., 1989. Chemical geothermometers and their application to formation waters from sedimentary basins. In Naeser, N.D., and McCulloch, T.H. (Eds.), *Thermal History of Sedimentary Basins*: Berlin (Springer-Verlag), 99–117.

Lee, M.W., Hutchinson, D.R., Dillon, W.P., Miller, J.J., Agena, W.F., and Swift, B.A., 1993. Method of estimating the amount of in situ gas hydrates in deep marine sediments. *Mar. Pet. Geol.*, 10:493–506.

McIver, R.D., 1982. Role of naturally occurring gas hydrates in sediment transport. *AAPG Bull.*, 66:789–792.

Novosel, I., 2002. Physical properties of gas hydrate related sediments offshore Vancouver Island [M.Sc. thesis]. Univ. Victoria, Canada.

Paull, C.K., Matsumoto, R., Wallace, P.J., et al., 1996. *Proc. ODP, Init. Repts.*, 164: College Station, TX (Ocean Drilling Program).

Paull, C.K., and Ussler, W., III, 1997. Are low salinity anomalies below BSRs a consequence of interstitial gas bubble barriers? *Eos, Trans. Am. Geophys. Union*, 78:F339.

Paull, C.K., Ussler, W.U., III, and Dillon, W.P., 2000. Potential role of gas hydrate decomposition in generating submarine slope failures. In Max, M.D. (Ed.), *Natural Gas Hydrate in Oceanic and Permafrost Environments*: Dordrecht (Kluwer Academic Publ.), 149–156.

Ransom, B., Spivack, A.J. and Kastner, M., 1995. Stable Cl isotopes in subduction-zone pore waters: implications for fluid-rock reactions and the cycling of chlorine. *Geology*, 23:715–718.

Riddihough, R.P., 1984. Recent movements of the Juan de Fuca plate system. *J. Geophys. Res.*, 89:6980–6994.

Riedel, M., 2001. 3D seismic investigations of northern Cascadia marine gas hydrates [Ph.D. dissertation]. Univ. Victoria, Canada.

Riedel, M., Collett, T.S., and Hyndman, R.D., in press a. Gas hydrate concentration estimates from chlorinity, electrical resistivity and seismic velocity. *Open File Rep.—Geol. Surv. Can.*

Riedel, M., Hyndman, R.D., Spence, G.D., and Chapman, N.R., 2002. Seismic investigations of a vent field associated with gas hydrates, offshore Vancouver Island. *J. Geophys. Res.*, 107(B9):2200.

Riedel, M., Novosel, I., Spence, G.D., Hyndman, R.D., Chapman, R.N., Solem, R.C., and Lewis, T., in press b. Geophysical and geochemical signatures associated with gas hydrate related venting at the north Cascadia margin. *Geol. Soc. Am. Bull.*

Smith, D.C., Spivack, A.J., Fisk, M.R., Haveman, S.A., Staudigel, H., and ODP Leg 185 Shipboard Scientific Party, 2000. Methods for quantifying potential microbial contamination during deep ocean coring. *ODP Tech. Note*, 28 [Online]. Available from World Wide Web: <<http://www-odp.tamu.edu/publications/tnotes/tn28/INDEX.HTM>>.

Solem, R.C., Spence, G.D., Vukajlovich, D., Hyndman, R.D., Riedel, M., Novosel, I., and Kastner, M., 2002. Methane advection and gas hydrate formation within an active vent field offshore Vancouver Island, Proc. of the 4<sup>th</sup> Intern. Conf. on Gas Hydrate, Yokohama, 2002.

Spence, G.D. Hyndman, R.D., Chapman, N.R., Riedel, M., Edwards, N., and Yuan, J., 2000. Cascadia margin, northeast Pacific Ocean: hydrate distribution from geophysical investigations. In Max, M.D. (Ed.), *Natural Gas Hydrate in Oceanic and Permafrost Environments*: Dordrecht (Kluwer Academic Publ.), 183–198.

Spivack, A.J., Kastner, M., and Ransom, B., 2002. Elemental and isotopic chloride geochemistry and fluid flow in the Nankai Rough. *Geophys. Res. Lett.*, 29:10.1029/2001GL014122.

Summerhayes, C.P., Bornhold, B.D., and Embley, R.W., 1979. Surficial slides and slumps on the continental slope and rise of South West Africa: a reconnaissance study. *Mar. Geol.*, 31:265–277.

Taylor, A.E., Dallimore, S.D., Hyndman, R.D., and Wright, F., 2002. Comparing the sensitivity of terrestrial and marine gas hydrates to climate warming at the end of the last ice age. *Fourth Int. Conf. Gas Hydrates*: Yokohama, Japan, 19023:63–70.

Torres, M.E., Teichert, B.M.A., Trehu, M., Borowski, W., and Tomaru, H., 2004. Relationship of pore water freshening to accretionary processes in the Cascadia margin: fluid sources and gas hydrate abundance. *Earth Planet. Sci. Lett.*, 226:225–241.

Trehu, A.M., Bohrmann, G., Rack, F.R., Collett, T.S., Goldberg, D.S., Long, P.E., Milkov, A.V., Riedel, M., Schultheiss, P., Torres, M.E., Bangs, N.L., Barr, S.R., Borowski, W.S., Claypool, G.E., Delwiche, M.E., Dickens, G.R., Gracia, E., Guerin, G., Holland, M., Johnson, J.E., Lee, Y.-J., Liu, C.-S., Su, X., Teichert, B., Tomaru, H., Vanneste, M., Watanabe, M., and Weinberger, J.L., 2004. Three-dimensional distribution of gas hydrate beneath southern Hydrate Ridge: constraints from ODP Leg 204. *Earth Planet. Sci. Lett.*, 222:845–862.

Ussler, W., III, and Paull, C.K., 2001. Ion exclusion associated with marine gas hydrate deposits. In Paull, C.K., and Dillon, W.P. (Eds.), *Natural Gas Hydrates: Occurrence, Distribution, and Detection*. Geophys. Monogr., 124:41–51.

von Huene, R., and Pecher, I.A., 1998. Neotectonics and the origins of BSRs along the Peru margin. *Earth Planet. Sci. Lett.*, 166:47–55.

Westbrook, G.K., Carson, B., Musgrave, R.J., et al., 1994. *Proc. ODP, Init. Repts.*, 146 (Pt. 1): College Station, TX (Ocean Drilling Program).

Wood, W.T., Gettrust, J.F., Chapman, N.R., Spence, G.D., and Hyndman, R.D., 2002. Decreased stability of methane hydrates in marine sediments owing to phase-boundary roughness. *Nature*, 420:656–660.

Xu, W., and Ruppel, C., 1999. Predicting the occurrence, distribution, and evolution of methane gas hydrate in porous marine sediments. *J. Geophys. Res.*, 104:5081–5096.

Yuan, T., Hyndman, R.D., Spence, G.D., and Desmons, B., 1996. Seismic velocity increase and deep-sea gas hydrate concentration above a bottom-simulating reflector on the northern Cascadia continental slope. *J. Geophys. Res.*, 101:13655–13671.

Yuan, T., Spence, G.D., and Hyndman, R.D., 1994. Seismic velocities and inferred porosities in the accretionary wedge sediments at the Cascadia margin. *J. Geophys. Res.*, 99:4413–4427.

Yuan, T., Spence, G.D., Hyndman, R.D., Minshull, T.A., and Singh, S.C., 1999. Seismic velocity studies of a gas hydrate bottom-simulating reflector on the northern Cascadia continental margin: amplitude modeling and full waveform inversion. *J. Geophys. Res.*, 104:1179–1191.

Zühlsdorff, L., and Spiess, V., 2004. Three-dimensional seismic characterization of a venting site reveals compelling indications of natural hydraulic fracturing. *Geology*, 32(2):101–104.

Expedition 311 Scientific Prospectus

**Table T1.** Expedition 311 operations summary.

Site	Location (lat, long)	Seafloor depth (mbsl)	Operations description	Transit (days)	Drilling/ Coring (days)	Wireline logging (days)
Balboa, Panama			Start of Expedition 311	4.0	0	(In Port)
			Transit ~3800 nmi to Astoria, Oregon, at 10.5 kt	15.1		
Astoria, Oregon			Science Party boards ship	1.0	0	(In Port)
			Transit ~206 nmi to Site CAS-03B at 10.5 kt	0.8		
CAS-03B	48°37.058' N, 127°02.413' W	1780	Hole A: LWD/MWD to 300 mbsf BSR at ~230 mbsf		1.2	
			DP move ~2.8 nmi to Site CAS-02C at 1.0 kt	0.0		
CAS-02C	48°38.688' N, 126°58.993' W	2230	Hole A: LWD/MWD to 300 mbsf BSR at ~230 mbsf		1.0	
			DP move ~5.7 nmi to Site CAS-01B at 1.0 kt	0.2		
CAS-01B	48°41.884' N, 126°51.924' W	1325	Hole A: LWD/MWD to 380 mbsf BSR at ~215 mbsf		1.3	
			DP move ~0.8 nmi to Site CAS-06A at 1.0 kt	0.0		
CAS-06A	48°40.050' N, 126°51.053' W	1280	Hole A: LWD/MWD to 300 mbsf BSR at ~215 mbsf		0.9	
			DP move ~9.9 nmi to Site CAS-05D at 1.0 kt	0.4		
CAS-05D	48°47.367' N, 126°40.717' W	970	Hole A: LWD/MWD to 220 mbsf		0.8	
			Hole B: APC to ~200 mbsf, XCB to TD at 220 mbsf (APCT/ DVTPP temperature and PCS/HYACINTH pressure coring)		2.2	
			- Wireline log with triple combo/FMS-sonic (~10 h) BSR @ ~130 mbsf		0.4	
			DP move ~9.9 nmi to Site CAS-06A at 1.0 kt	0.4		
CAS-06A	48°40.050' N, 126°51.053' W	1280	Hole B: APC to ~200 mbsf, XCB to TD at 300 mbsf (APCT/ DVTPP temperature and PCS/HYACINTH pressure coring)		2.5	
(Active Cold Vent)			- Wireline log with triple combo/FMS-sonic (~12 h)		0.5	
			DP move ~0.8 nmi to Site CAS-01B at 1.0 kt	0.1		
CAS-01B	48°41.884' N, (Site 889) 126°51.924' W	1325	Hole B: APC to ~200 mbsf, XCB to TD at 350 mbsf (APCT/ DVTPP temperature and PCS/HYACINTH pressure coring)		2.8	
			- Wireline log with triple combo/FMS-sonic (~13 h)		0.5	
			- Checkshot VSP with WST-3 (~6 h)		0.3	
			DP move ~5.7 nmi to Site CAS-02C at 1.0 kt	0.3		
CAS-02C	48°38.688' N, 126°58.993' W	2230	Hole B: APC to ~200 mbsf, XCB to TD at 300 mbsf (APCT/ DVTPP temperature and PCS/HYACINTH pressure coring)		3.0	
(First Slope Basin)			- Wireline log with triple combo/FMS-sonic (~13 h)		0.6	
			DP move ~2.8 nmi to Site CAS-03B at 1.0 kt	0.1		
CAS-03B	48°37.058' N, 127°02.413' W	1780	Hole B: APC to ~200 mbsf, XCB to TD at 300 mbsf (APCT/ DVTPP temperature and PCS/HYACINTH pressure coring)		2.9	
			- Wireline log with triple combo/FMS-sonic (~13 h)		0.6	
			Transit ~134.0 nmi to Victoria at 10.5 kt	0.6		
Victoria, B.C., Canada			End of Expedition 311	18.0	18.6	2.9
			Subtotal transit time:		18.0	
			Subtotal on-site time:		21.5	
			Total operating days:		39.5	
			Total expedition including 5.0 days of port call(s):		44.5	

Notes: LWD/MWD = logging-while-drilling/measurement-while-drilling operations. BSR = bottom-simulating reflector. APC = advanced piston corer, XCB = extended core barrel. APCT = APC Temperature tool, DVTPP = Davis-Villinger Temperature-Pressure Probe, PCS = Pressure Core Sampler. TD = total depth. Triple combo = triple combination tool string, FMS = Formation MicroScanner. VSP = vertical seismic profile; WST-3 = three-component Water Sampling Temperature tool. Assumes 24 h required for boarding of scientists in Astoria, thus limiting Balboa port call to 4.0 days maximum. Assumes drill string round trip with LWD and MWD tools (memory download and battery change) after Sites CAS-02C and CAS-06A. Approval to drill Site CAS-06B is pending. If denied, then Site CAS-06B will be drilled.

**Figure F1.** General location of proposed drilling transect near previous ODP Sites 889/890. A BSR is present on ~50% of the mid-continent slope (shaded area).



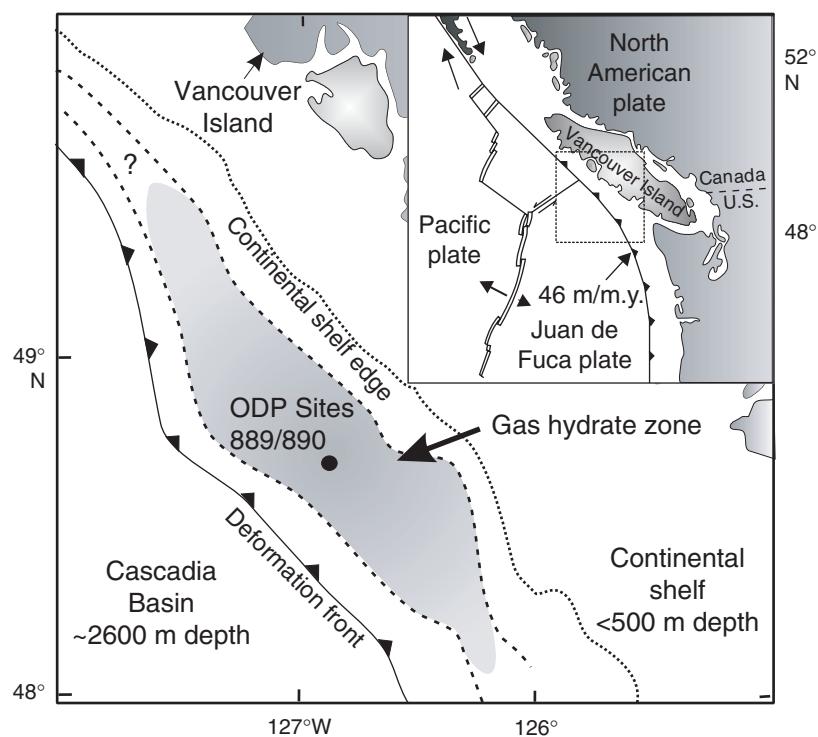



Figure F2. Marine gas hydrate cycle (after Hyndman and Davis, 1992). BSR = bottom-simulating reflector.

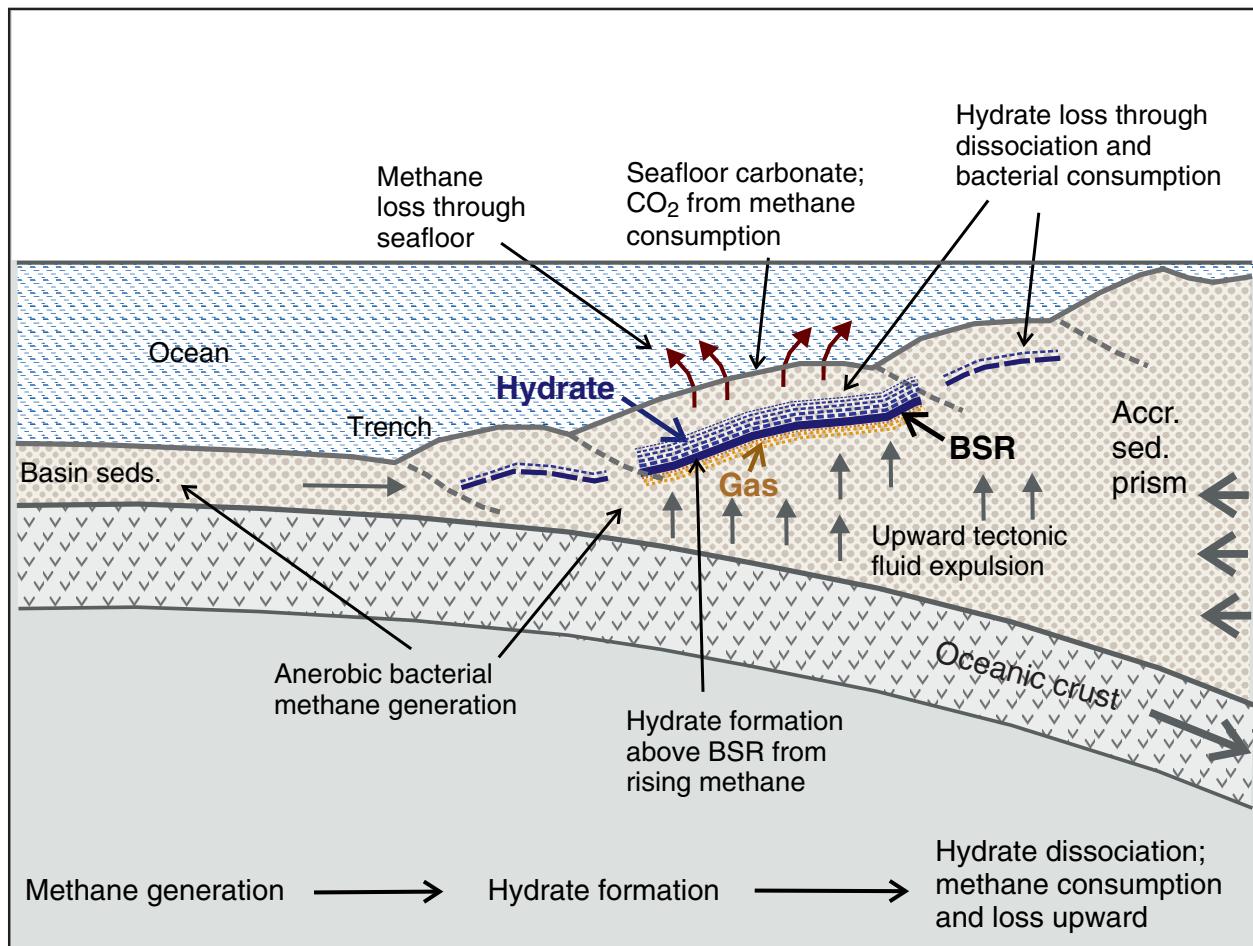


**Figure F3.** Bathymetry (in meters) of continental slope off Vancouver Island and locations of proposed sites of Expedition 311.

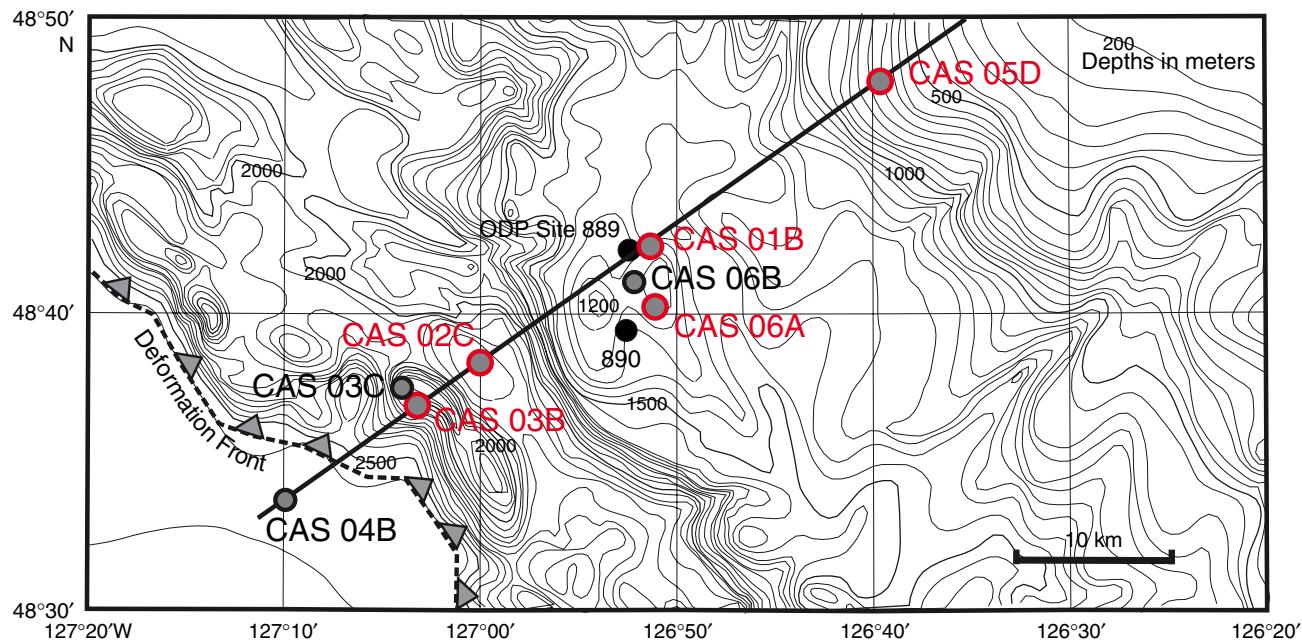


**Figure F4.** Seismic section (line 89-08) showing proposed Expedition 311 sites. BSR = bottom-simulating reflector.

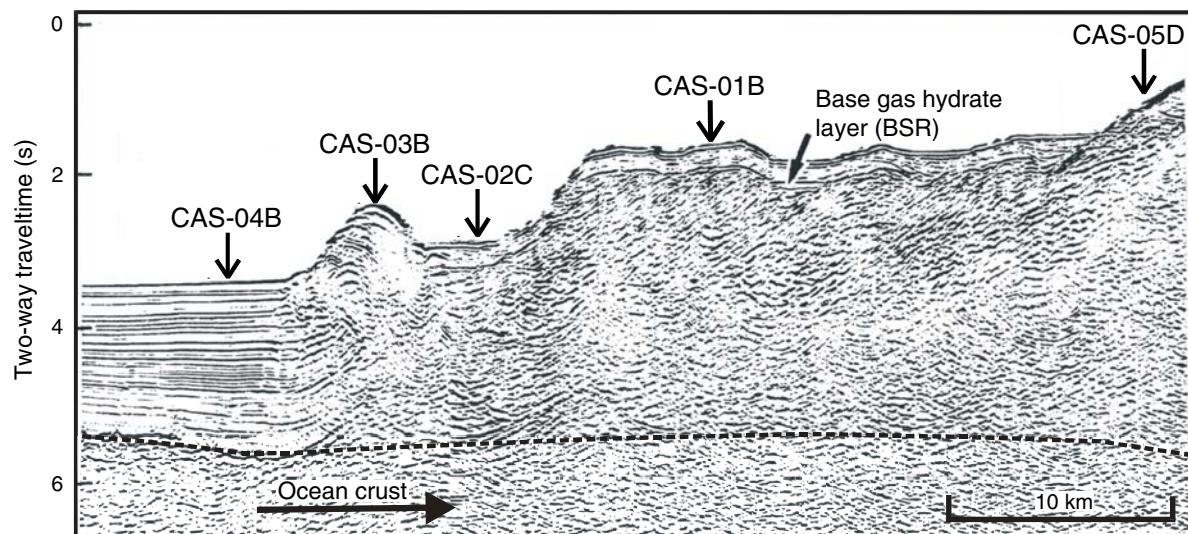


**Figure F5.** Seismostratigraphy and interpretation from Hole 889A (after Westbrook, Carson, Musgrave, et al., 1994). The part of inline 38 around ODP Hole 889A is shown for comparison (from Riedel, 2001). BSR = bottom-simulating reflector.

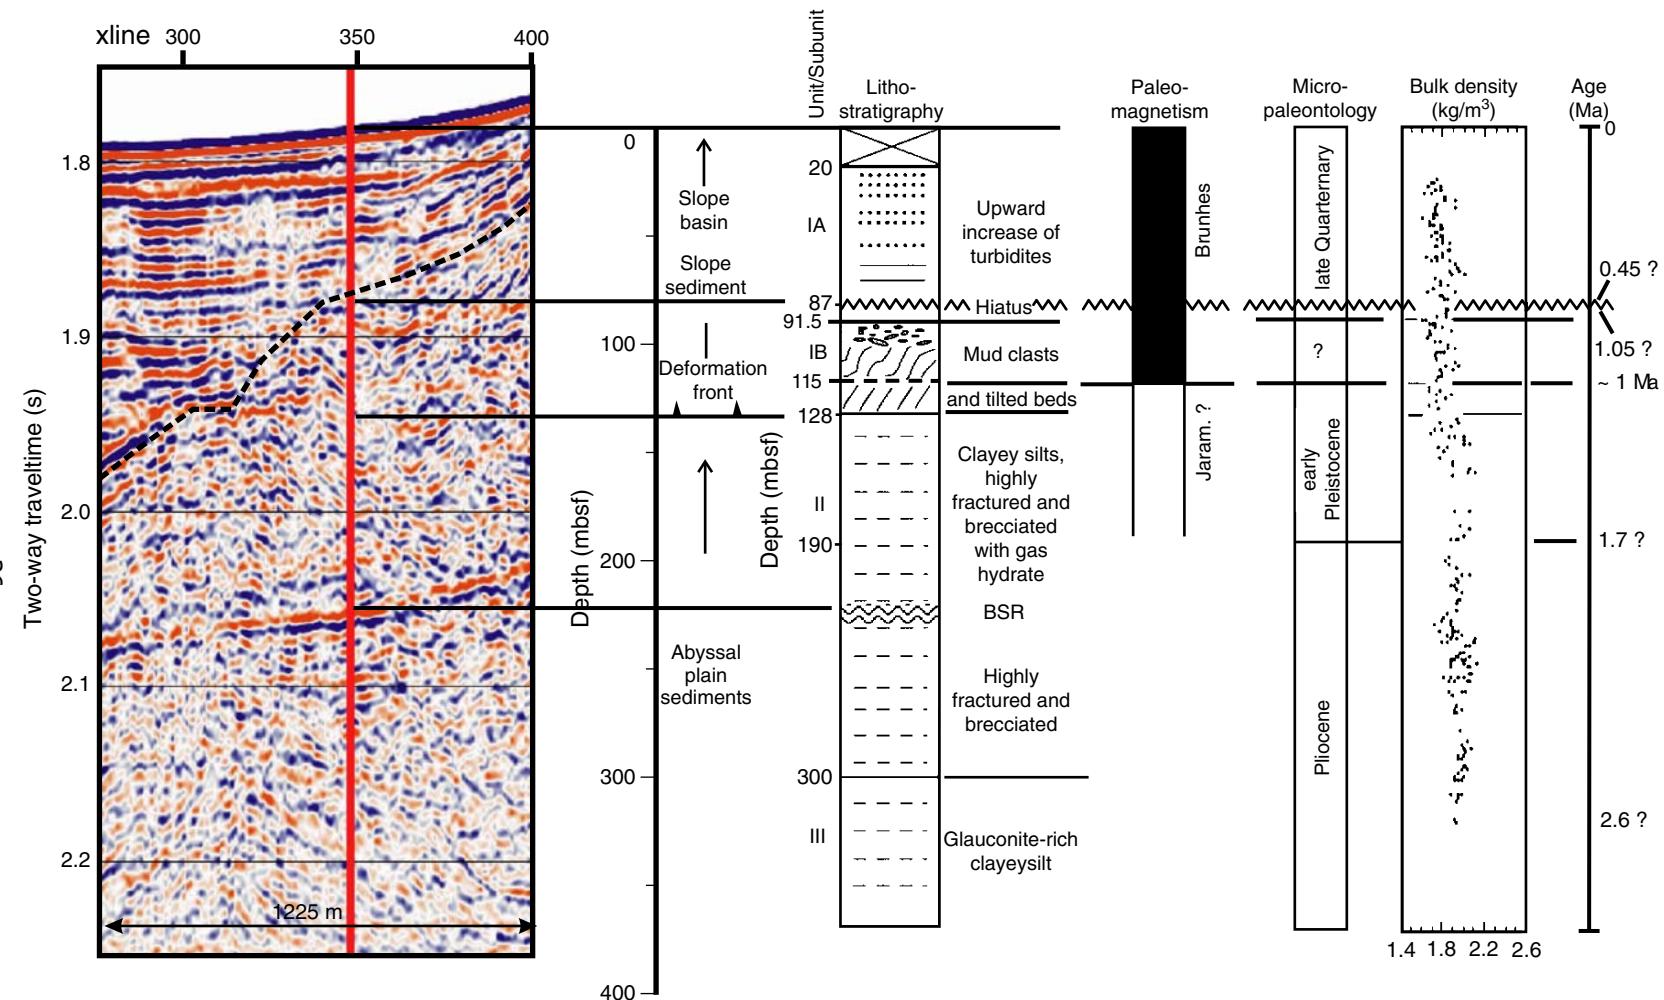


**Figure F6.** Seismic signature of the cold vents (blank zones) from (A) 3.5 kHz subbottom profiler (vertical exaggeration = 20) and (B) single-channel seismic data. Blank Zone 1 (proposed Site CAS-06A) is active; Zones 2–4 are inactive. Alternate Site CAS-06B is at blank Zone 4. BSR = bottom-simulating reflector.

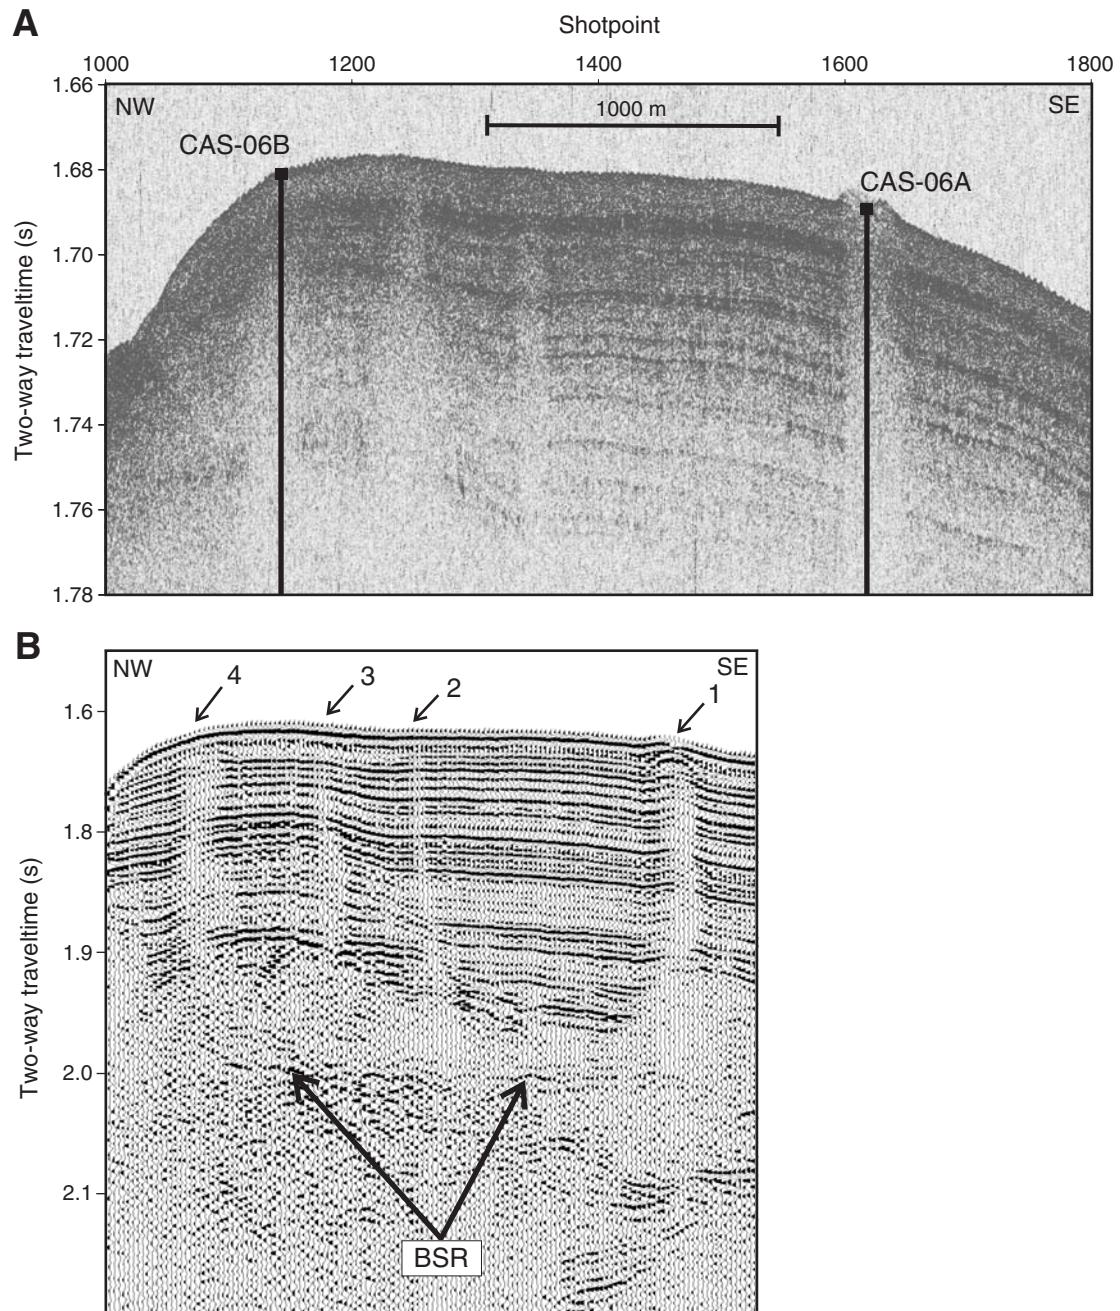

**Figure F7.** Seafloor bathymetry near proposed Site CAS-01B. Shown are locations of seismic lines of Figures F8 and F14A and F15.

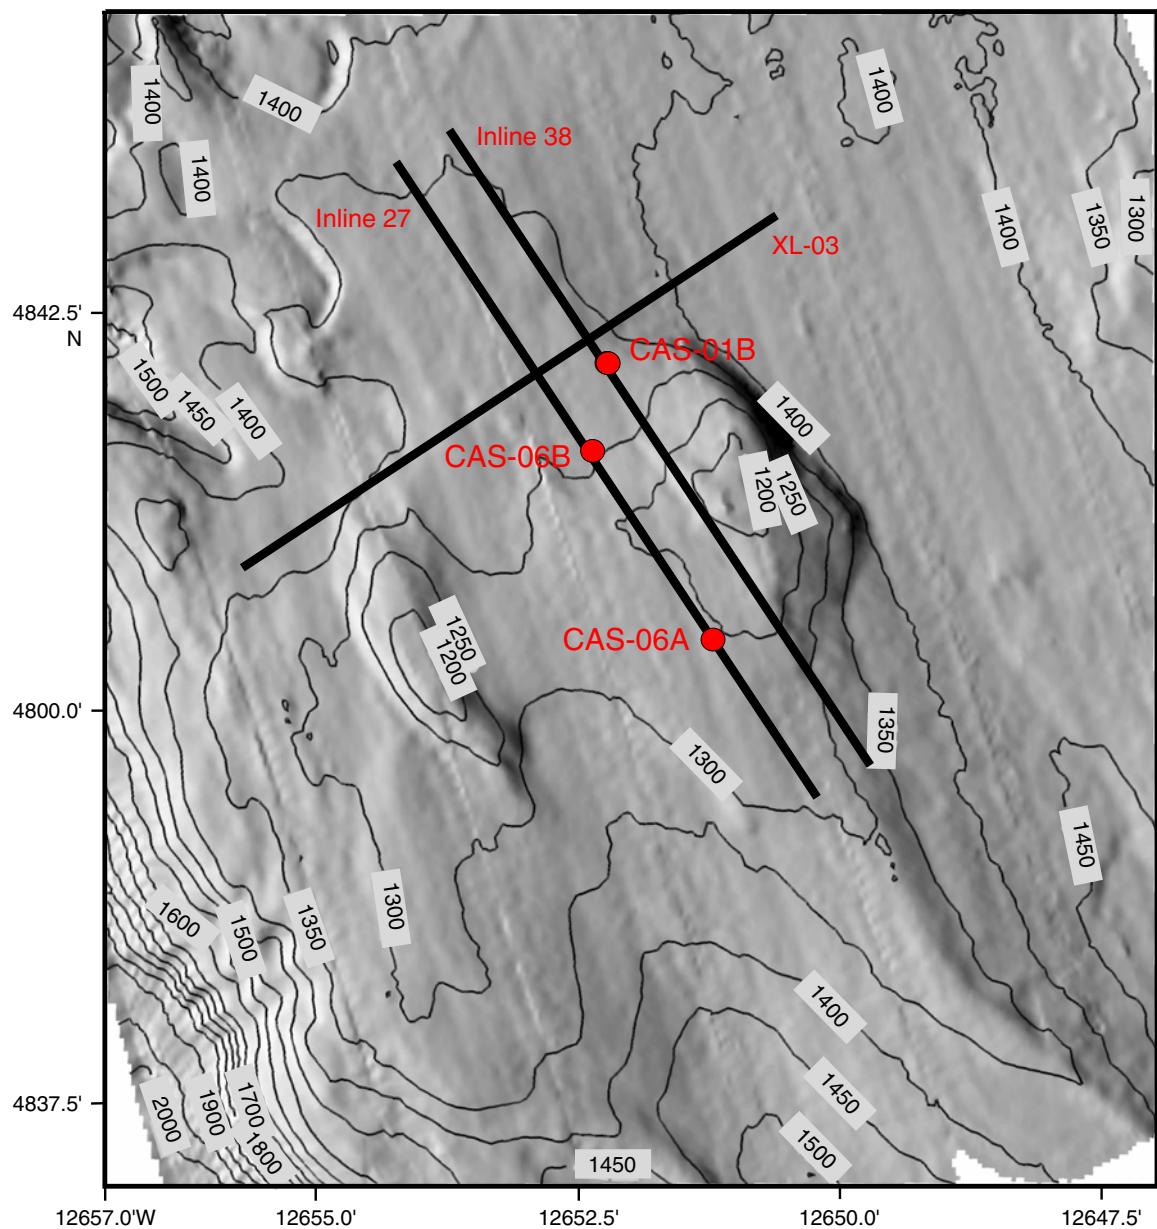


**Figure F8.** Site survey data at proposed Site CAS-01B. A. Multichannel seismic (MCS) Inline 38 from 1999 3-D cube (vertical exaggeration = 8). B. Regional MCS Line XL06 from 1999 survey (vertical exaggeration = 7). CDP = common depth point.

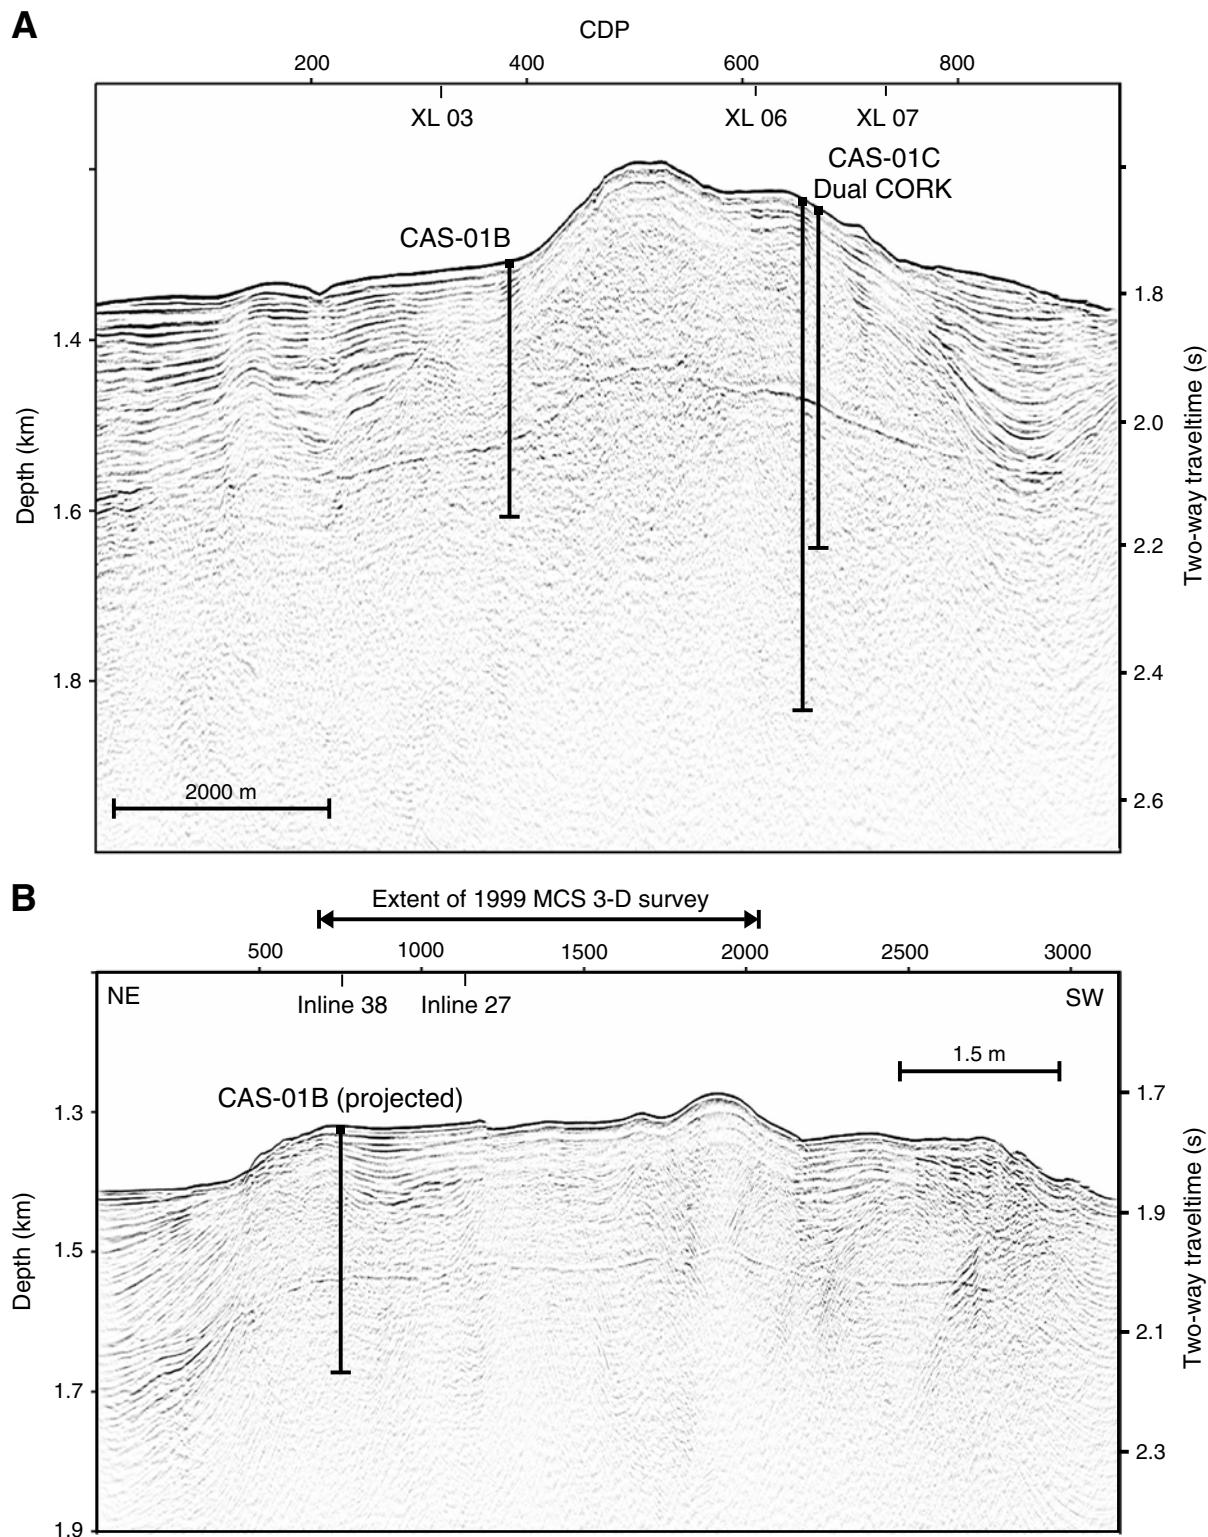


**Figure F9.** Site survey data for proposed Site CAS-02C. A. conventional MCS data of Line 89-08 (Leg 146 presite survey) (vertical exaggeration = 4). B. MCS data of Line PGC9902\_ODP07 acquired in 1999 (vertical exaggeration = 4.5). C. SCS Line PGC0408\_CAS02B\_05, crossing A and B perpendicularly (vertical exaggeration = 5). CDP = common depth point.


**A**

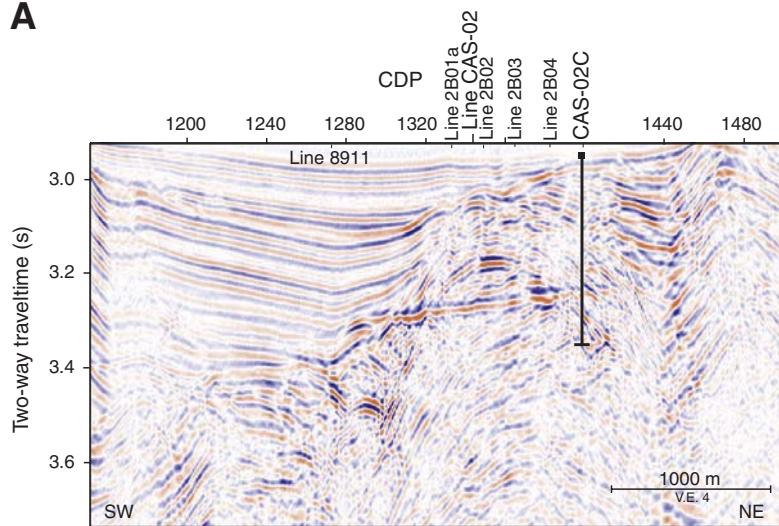


**B**

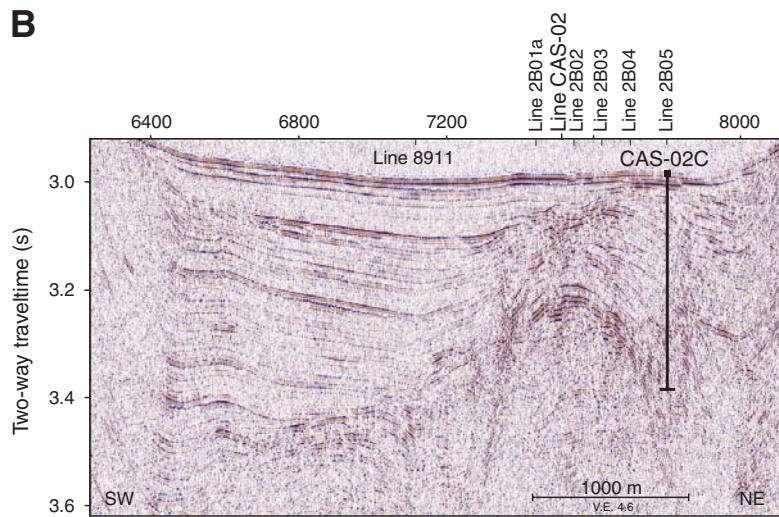



**C**

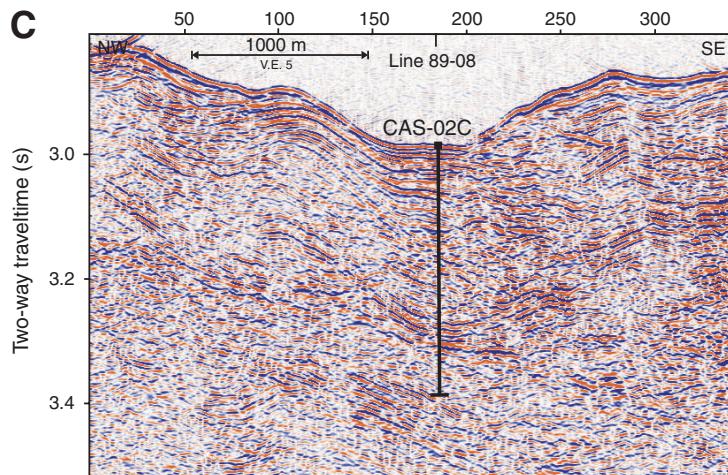


**Figure F10.** Site survey data for proposed Sites CAS-03B and CAS-03C. A. Conventional MCS data of Line 89-08 (Leg 146 presite survey) (vertical exaggeration = 4.3). B. SCS data of Line PGC0408\_CAS03B\_X04 (vertical exaggeration = 3.7). C. MCS data of Line CSA-03 crossing A and B perpendicularly (vertical exaggeration = 6.5). CDP = common depth point.

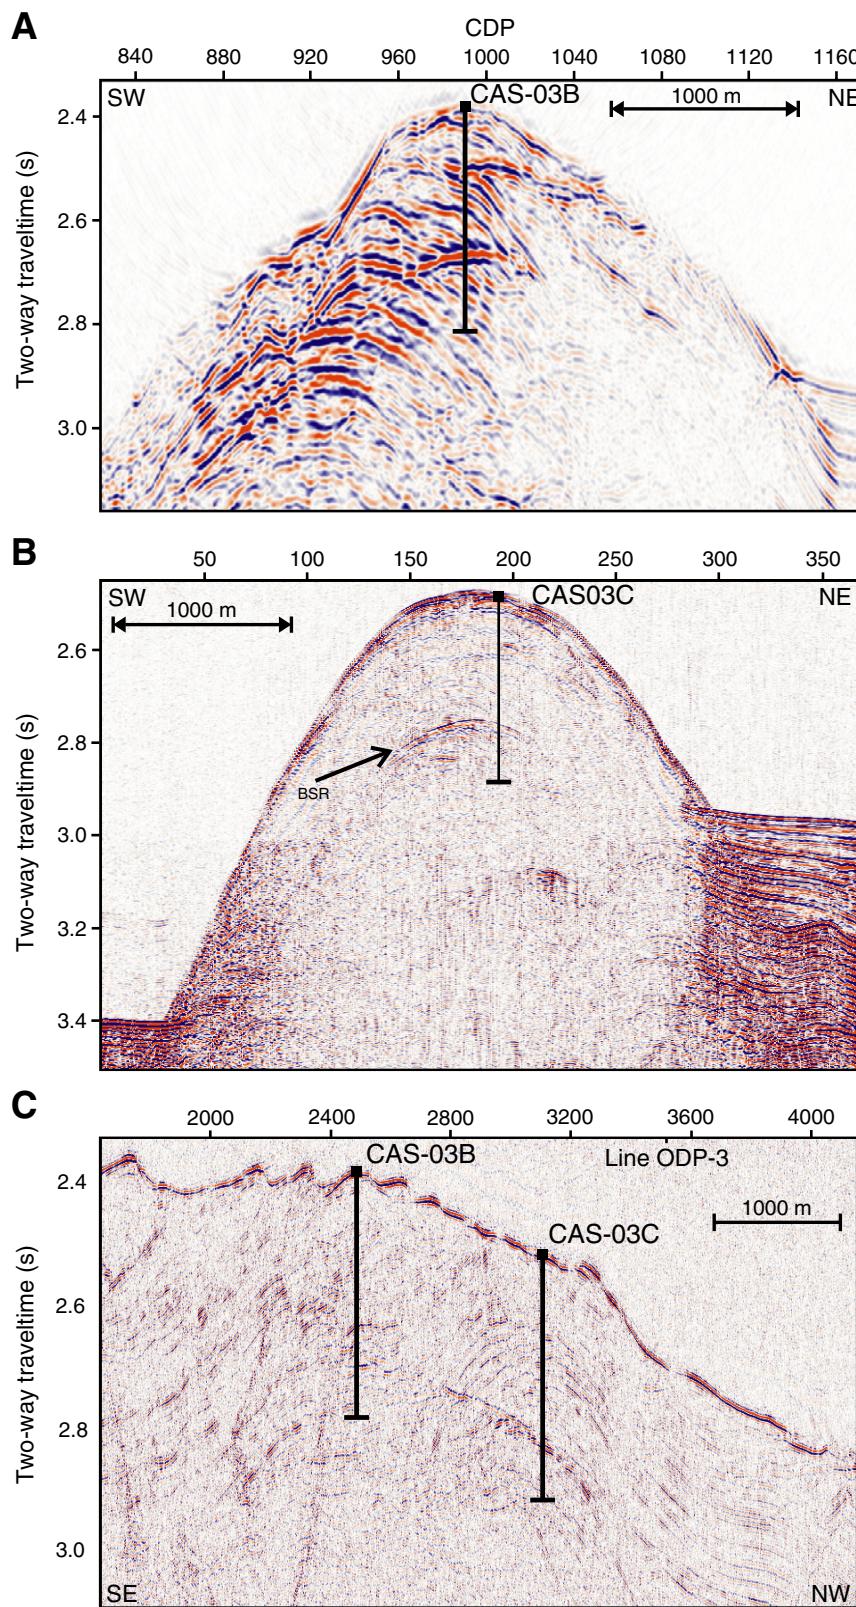


**Figure F11.** Site survey data for proposed Site CAS-04B. A. SCS data of Line PGC9902\_ODP07. B. SCS data of Line PGC9902\_CAS04.

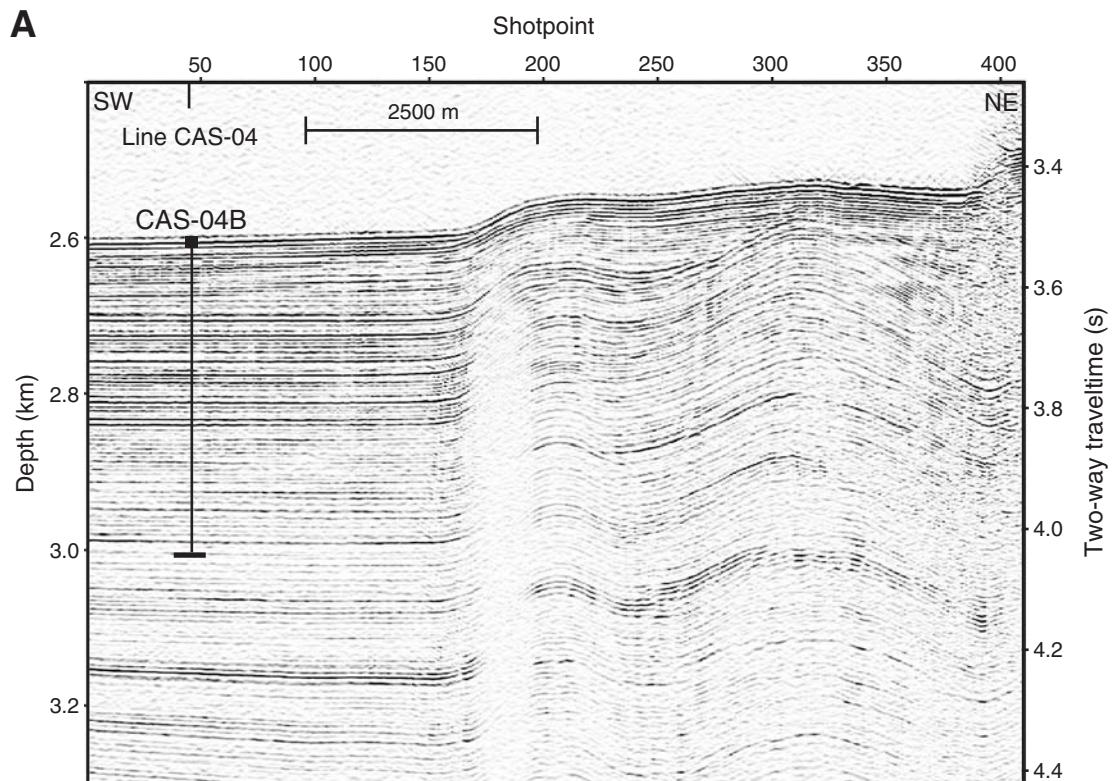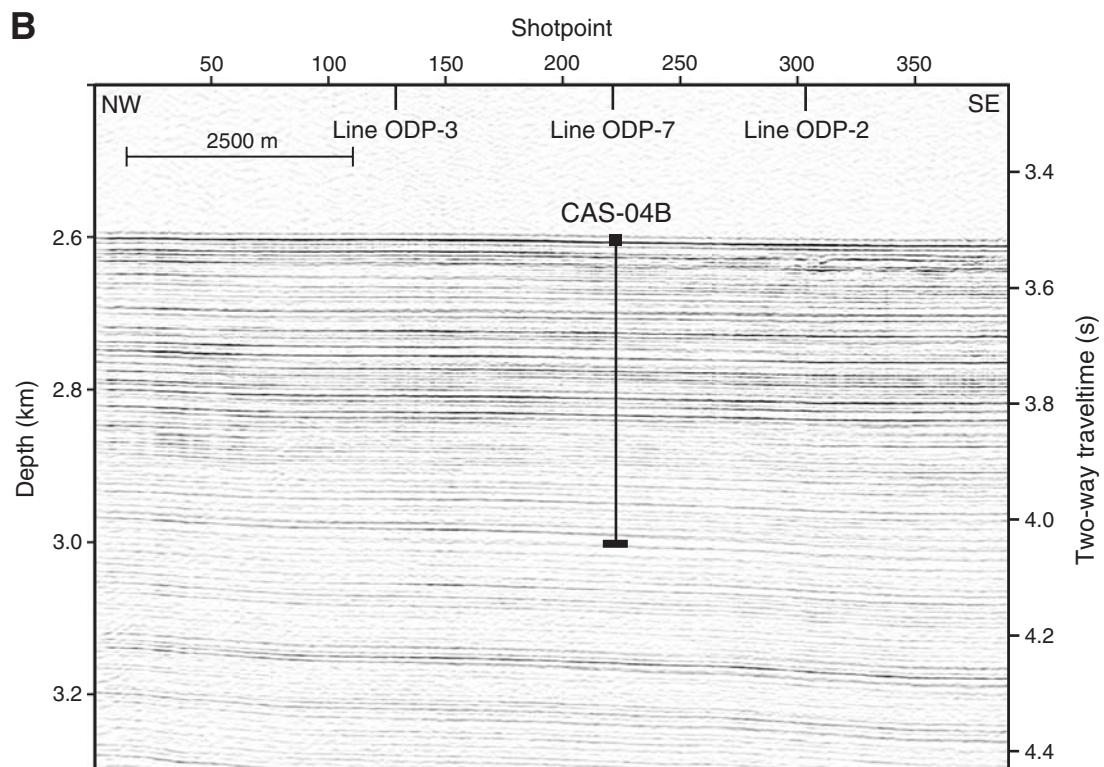**A****B**


**Figure F12.** Site survey data for proposed Site CAS-05B. **A.** Conventional MCS data of Line 89-08. **B.** MCS data of Line PGC9902\_ODP7. **C.** MCS data of Line PGC9902\_CAS05a.

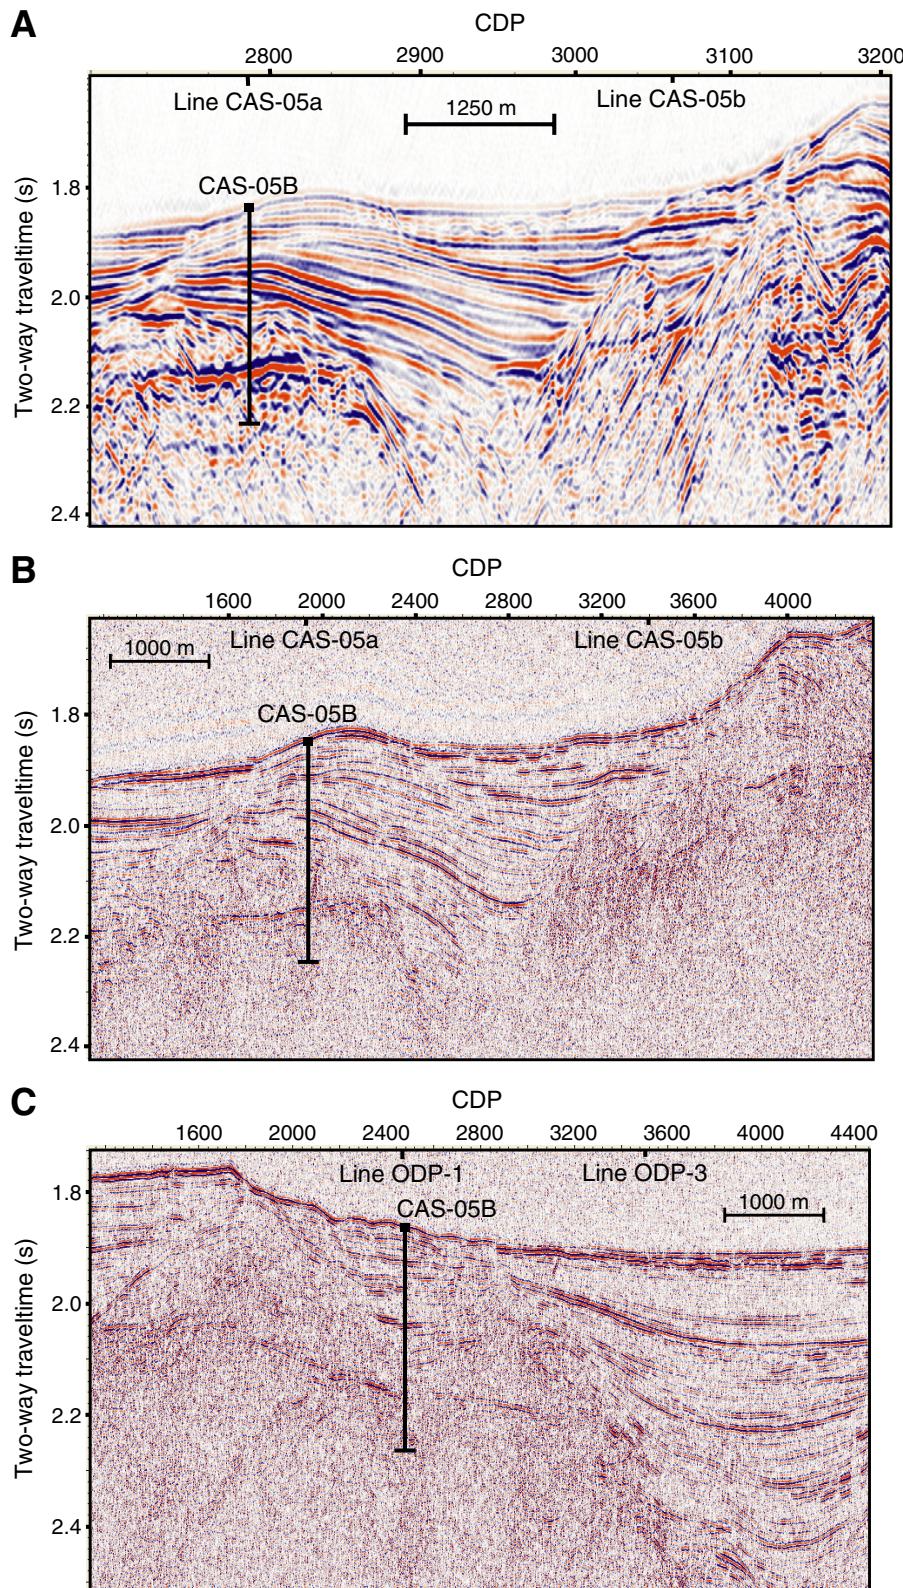



**Figure F13.** Site survey data for proposed Site CAS-05D. **A.** Conventional MCS data of line 89-08. **B.** MCS data of Line PGC9902\_ODP01. **C.** SCS data of Line PGC0408\_CAS05D\_04.

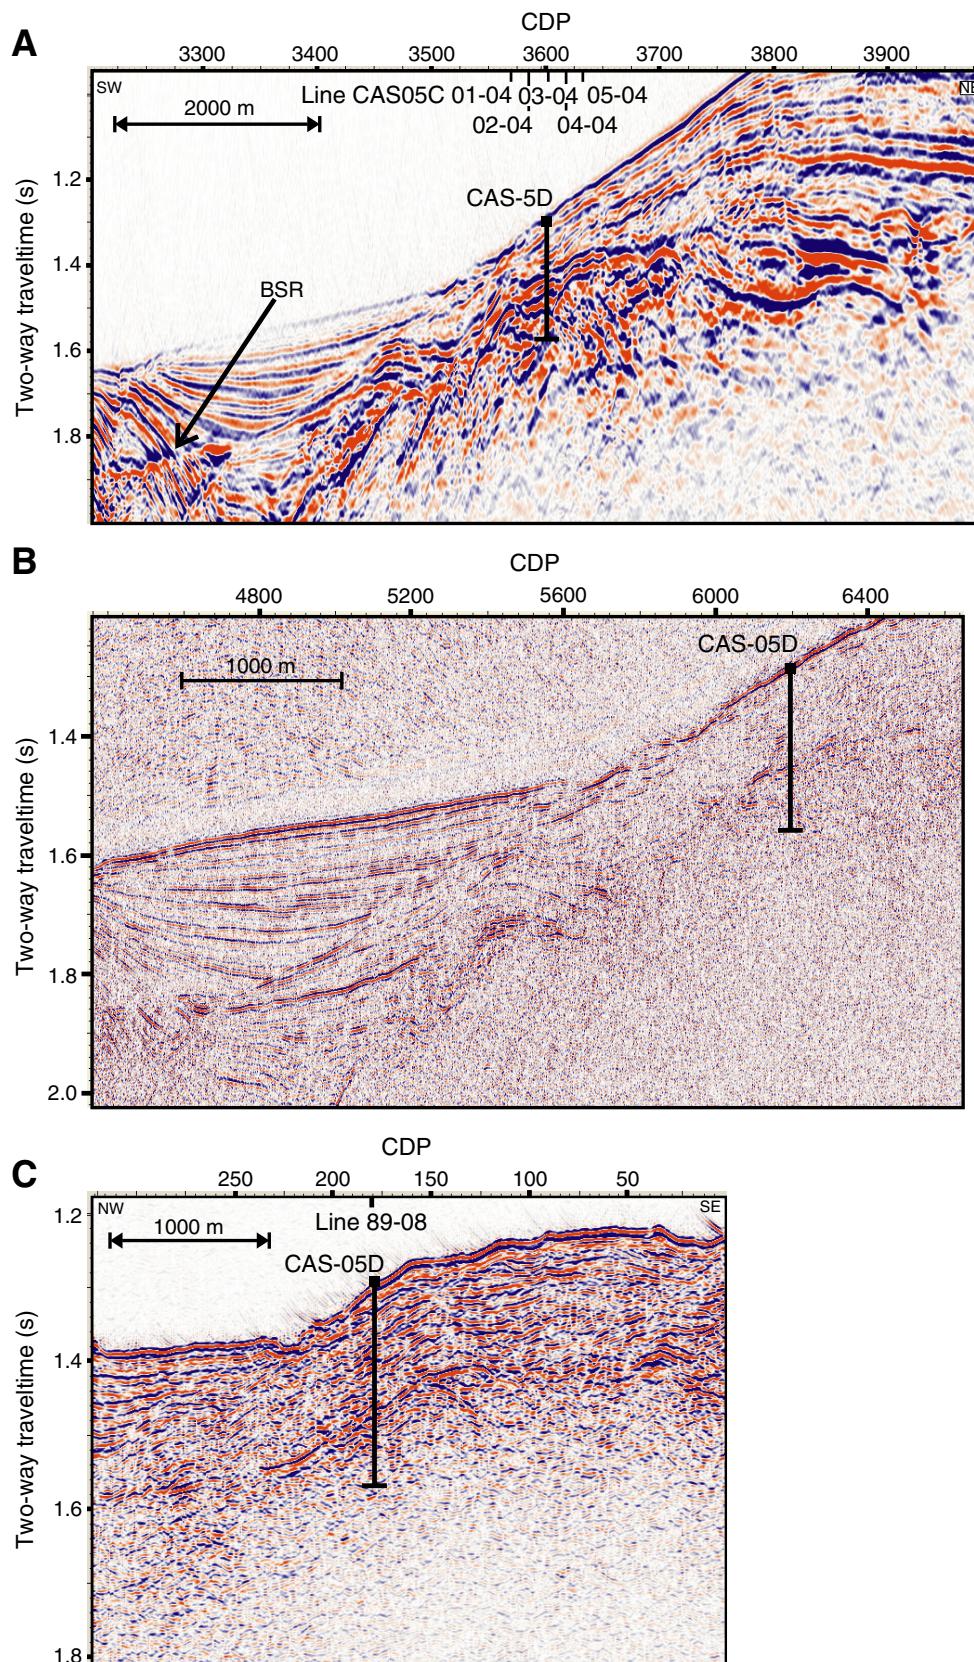


**Figure F14.** Site survey data for proposed Site CAS-06A. Inline 27 from 1999 3-D MCS data cube. **A.** MCS data (stacked). **B.** 3.5 kHz subbottom profiler data.

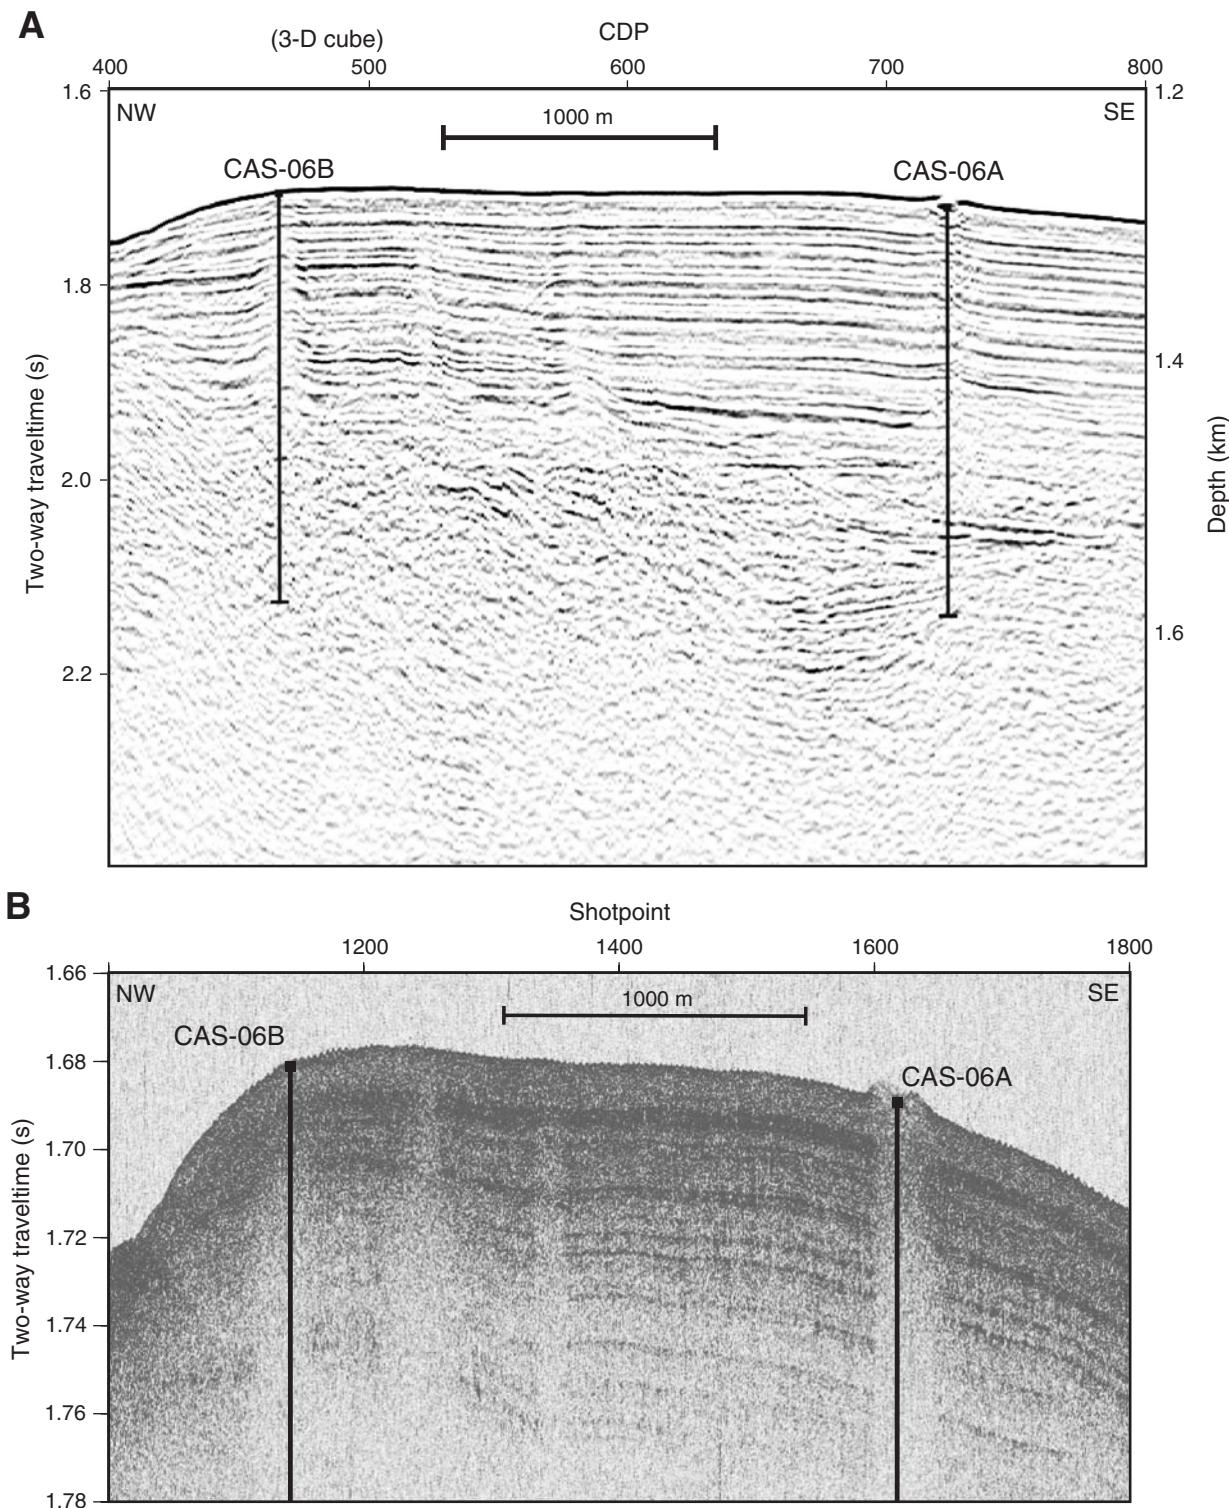


**Figure F15.** Site survey data for proposed Site CAS-06A. Inline 16 from 2000 SCS 3-D cube. A. SCS data. B. 3.5 kHz subbottom profiler data.

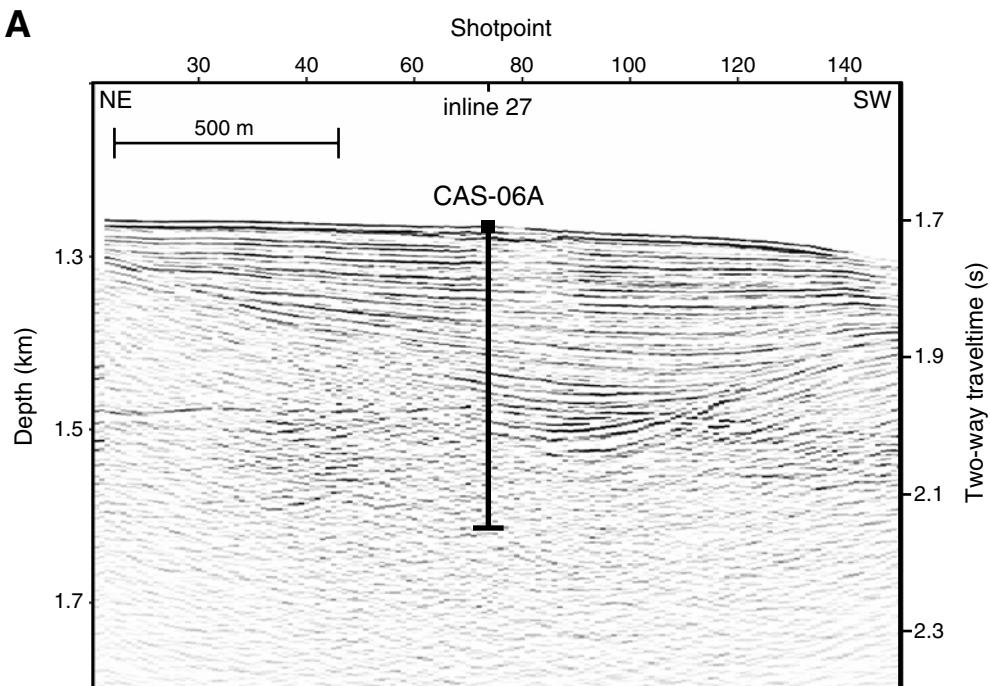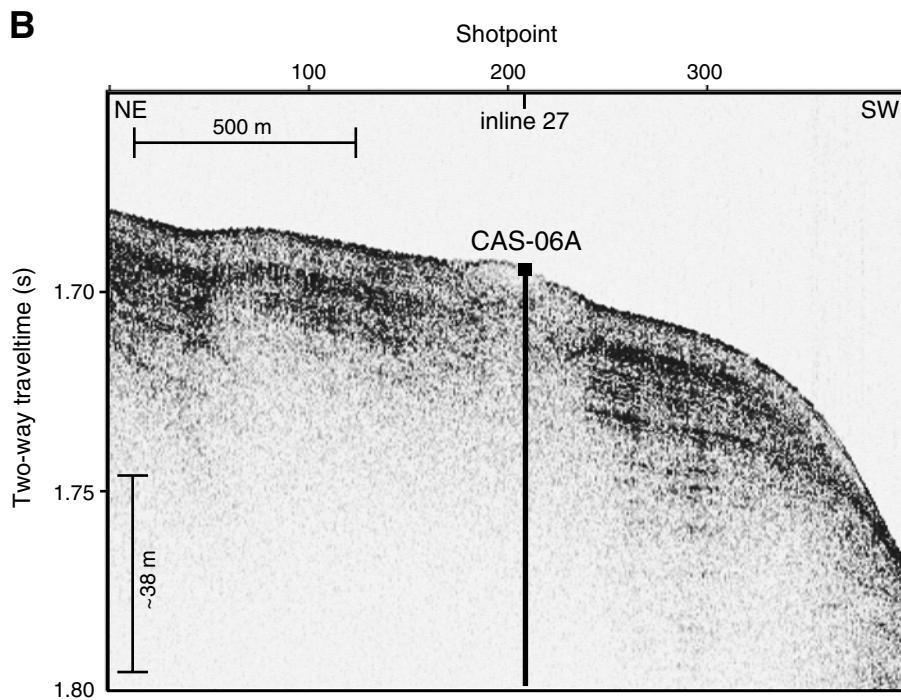**A****B**


**Figure F16. A-H.** Bottom video photographs taken with *ROPOS* in the area around proposed Site CAS-06A.

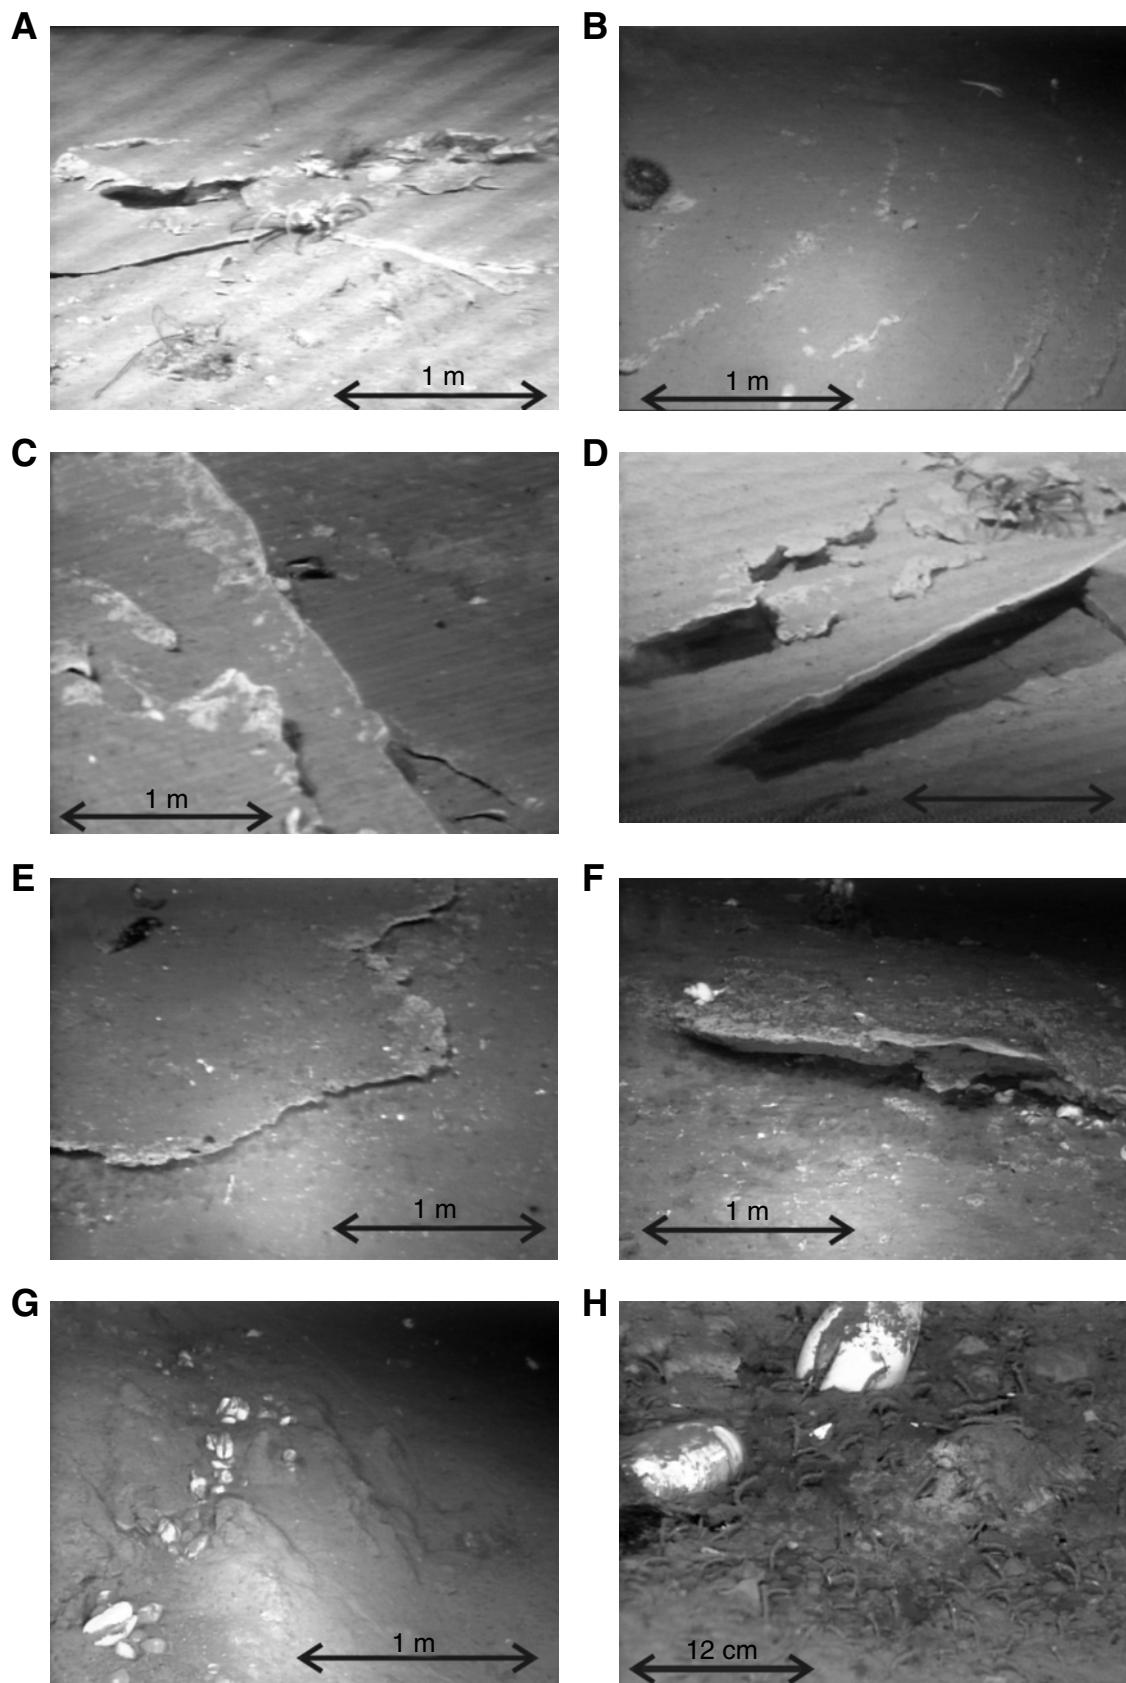

**Figure F17. A–C.** Samples of massive gas hydrate recovered with piston cores from the area around proposed Site CAS-06A.

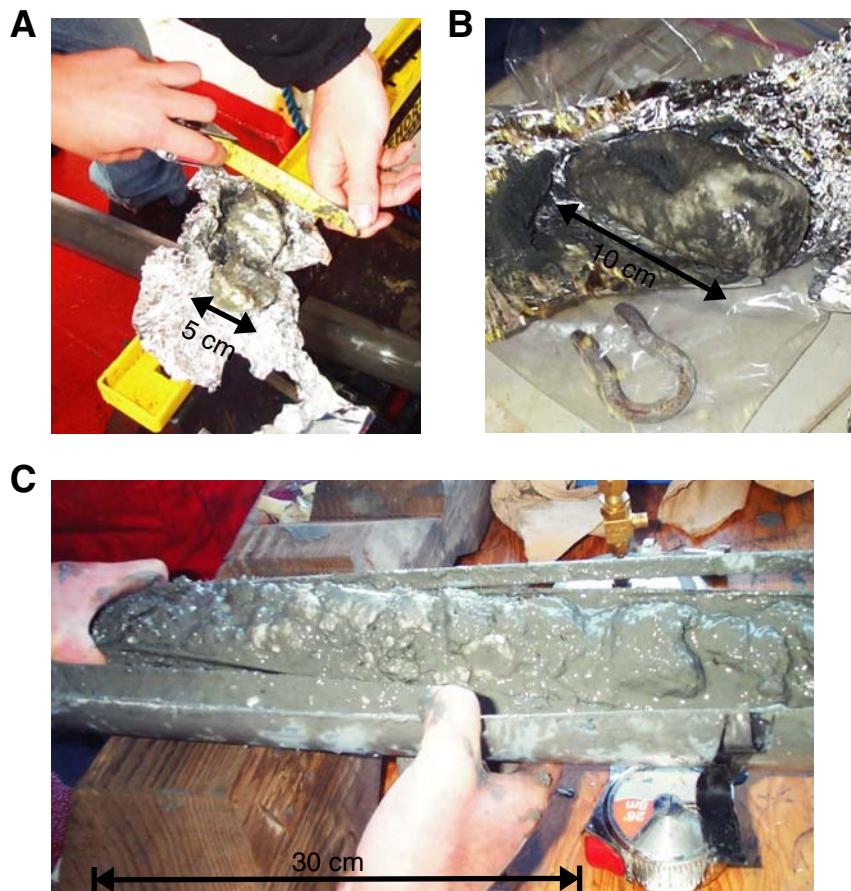


**Figure F18.** Site survey data for proposed Site CAS-06A. A. Map showing seafloor reflection coefficient from 2000 SCS data with location of piston cores near CAS06A. B. Map showing time slice of instantaneous amplitude from 2000 SCS 3-D data and depth of massive gas hydrate cap reflector. C. Crossline 75 through 2000 SCS data cube showing gas hydrate cap reflector. Open circles are location of piston cores taken in 2000.

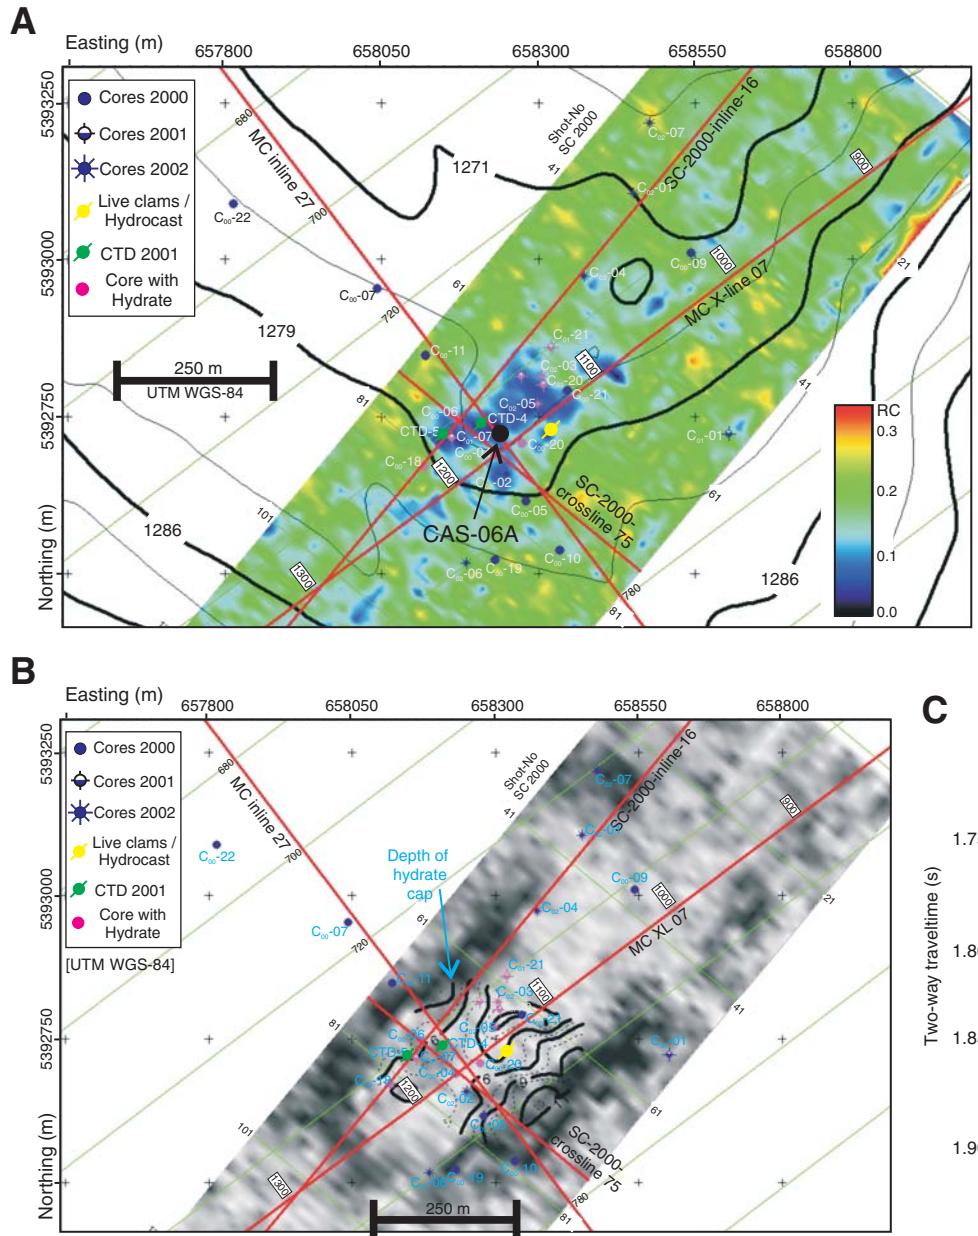


**Figure F19.** Site survey data for proposed Site CAS-06B. A. SCS data of Line PGC0408\_BZ4\_22. B. SCS data of Line PGC0408\_BZ4\_X05b.


**A**

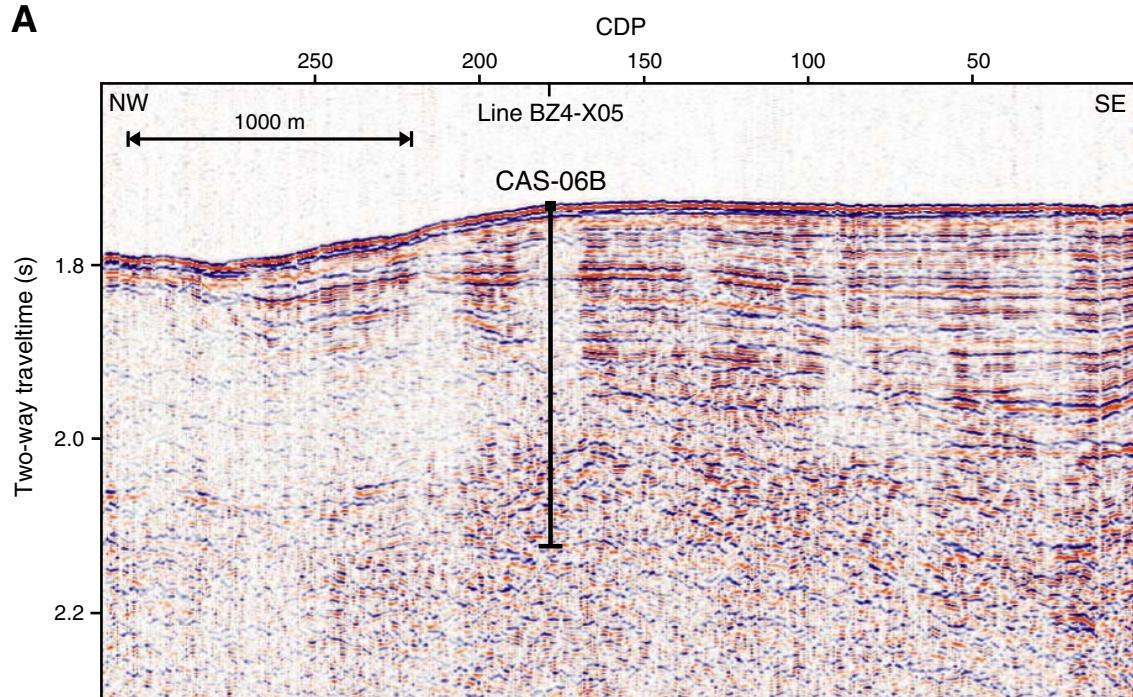

**B**

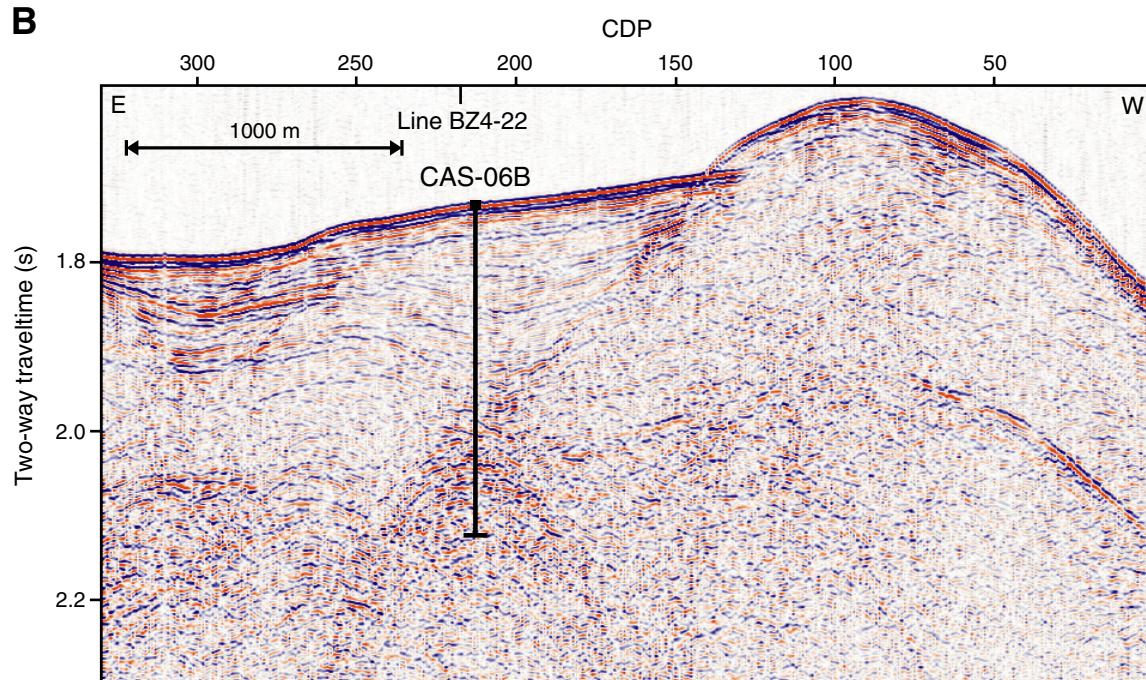

**Figure F20.** Site survey data for proposed Site CAS-06B. Time slice of instantaneous amplitude calculated from 2004 SCS data at 1.81 s two-way traveltime (TWT) showing extent of blank Zone 4 (CAS-06B).

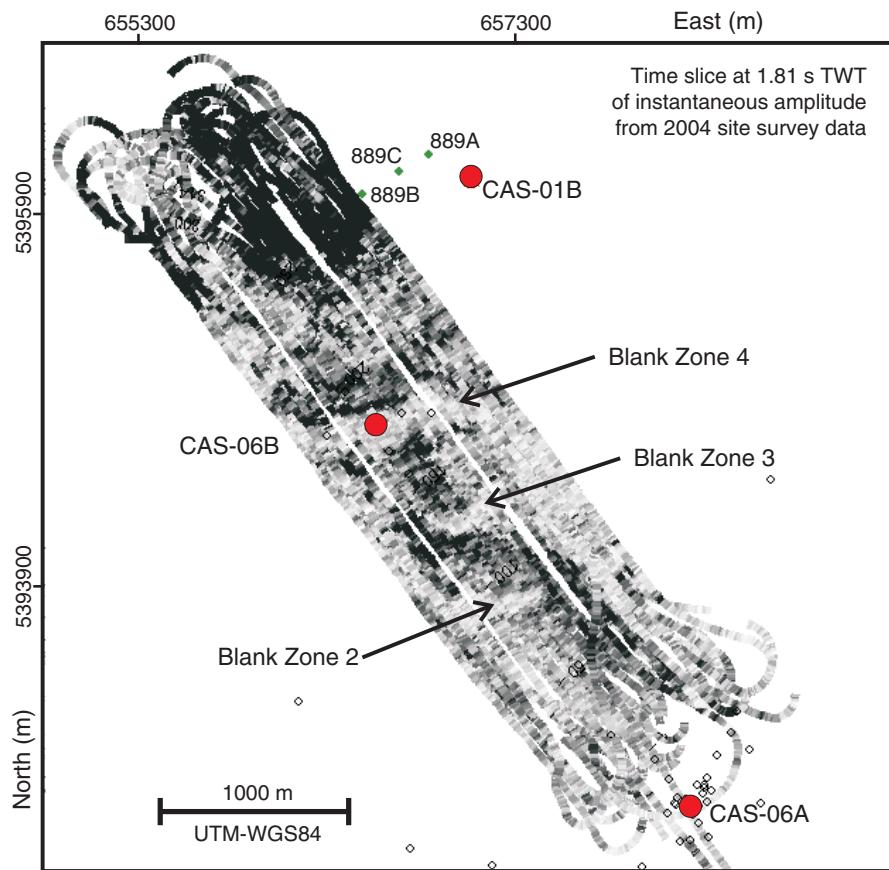

## SITE SUMMARIES

### Site CAS-01B

<b>Proposed site:</b>	CAS-01B
<b>Priority:</b>	Primary
<b>Position:</b>	48°41.884' N, 126°51.924' W
<b>Water depth (m):</b>	1325
<b>Target drilling depth (mbsf):</b>	350
<b>Approved maximum penetration (mbsf):</b>	400
<b>Survey coverage:</b>	<p>Regional site survey lines</p> <ul style="list-style-type: none"> <li>• Line 89-08</li> <li>• MCS 3-D (inline 38)</li> <li>• MCS Line XL03</li> </ul> <p>Figure F8</p>
<b>Objective:</b>	<p>Site CAS-01B is a revisit to Sites 889/890. A strong BSR is apparent in regional, low-frequency seismic data (Line 89-08), but higher frequency data reveal a reduction in the BSR reflection strength. Main objectives include characterization of</p> <ul style="list-style-type: none"> <li>• pore fluid chemistry</li> <li>• core physical properties</li> <li>• gas hydrate concentration estimates</li> </ul> <p>A further objective is to determine the nature of the BSR reflection and the thickness of the free gas zone (if any) underneath the BSR by wireline and LWD logging and by a zero-offset VSP.</p>
<b>Drilling and Logging program</b>	APC to refusal; XCB; PCS and HYACINTH (pending funding) pressure cores
<b>Logging program</b>	LWD, triple combo, FMS-sonic, zero-offset VSP, multiple use of APCT, DVTTP
<b>Nature of rock anticipated:</b>	Interlayered silts and clays, some authigenic carbonates

## SITE SUMMARIES (CONTINUED)

### Site CAS-02C

<b>Proposed site:</b>	CAS-02C
<b>Priority:</b>	Primary
<b>Position:</b>	48°38.688' N, 126°58.993' W
<b>Water depth (m):</b>	2230
<b>Target drilling depth (mbsf):</b>	300
<b>Approved maximum penetration (mbsf):</b>	300
<b>Survey coverage:</b>	<p>Regional site survey lines</p> <ul style="list-style-type: none"> <li>• PGC9902_CAS02_SC</li> <li>• PGC9902_CAS02_MCS</li> <li>• PGC9902_ODP7_MCS</li> <li>• Line 89-08</li> <li>• Line PGC0408_CAS02B_04</li> </ul> <p>Figure F9</p>
<b>Objective:</b>	Site CAS-02C is located within the first slope basin along the transect eastward of the deformation front. A BSR is located at 290 ms TWT (~230 mbsf). The BSR reflection strength is frequency dependent. The low-frequency data of Line 89-08 (~40 Hz) show a much stronger and continuous reflection than the high-frequency MCS data from 1999 (~100 Hz). The objective is to determine the nature of the BSR reflection and the thickness of the free gas zone (if any) underneath the BSR by wireline and LWD logging.
<b>Drilling and Logging program</b>	APC to refusal; XCB; PCS and HYACINTH pending funding) pressure cores
<b>Logging program</b>	LWD, triple combo, FMS-sonic, multiple use of APCT, DVTTP
<b>Nature of rock anticipated:</b>	Interlayered silts and clays, some authigenic carbonates

## SITE SUMMARIES (CONTINUED)

### Site CAS-03B

<b>Proposed site:</b>	CAS-03B
<b>Priority:</b>	Primary
<b>Position:</b>	48°37.058' N, 127°02.413' W
<b>Water depth (m):</b>	1780
<b>Target drilling depth (mbsf):</b>	300
<b>Approved maximum penetration (mbsf):</b>	300
<b>Survey coverage:</b>	<p>Regional site survey lines</p> <ul style="list-style-type: none"> <li>• PGC9902_CAS03_SC</li> <li>• PGC9902_CAS03_MCS</li> <li>• PGC9902_ODP7_MCS</li> <li>• Line 89-08</li> </ul> <p>Figure <a href="#">F10</a></p>
<b>Objective:</b>	<p>Site CAS-03B is located on the first uplifted ridge of accreted sediments. A BSR is located at 290 ms TWT (~230 mbsf). Objectives include detailed characterization of</p> <ul style="list-style-type: none"> <li>• pore-water chemistry</li> <li>• core physical properties</li> <li>• logging (LWD and wireline)</li> </ul> <p>The BSR reflection strength appears frequency dependent. The low-frequency data of Line 89-08 (~40 Hz) show a much stronger and continuous reflection than the high-frequency MCS data from 1999 (~100 Hz).</p> <p>The objective is to determine the nature of the BSR reflection and the thickness of (if any) free gas zone underneath the BSR by wireline and LWD logging. If time permits, a zero-offset VSP will be performed.</p>
<b>Drilling and Logging program</b>	APC to refusal; XCB; PCS and HYACINTH pending funding) pressure cores
<b>Logging program</b>	LWD, triple combo, FMS-sonic, multiple use of APCT, DVTTP
<b>Nature of rock anticipated:</b>	Interlayered silts and clays, some authigenic carbonates

## SITE SUMMARIES (CONTINUED)

### Site CAS-05D

<b>Proposed site:</b>	CAS-05D
<b>Priority:</b>	Primary
<b>Position:</b>	48°47.367' N, 126°40.717' W
<b>Water depth (m):</b>	970
<b>Target drilling depth (mbsf):</b>	220
<b>Approved maximum penetration (mbsf):</b>	220
<b>Survey coverage:</b>	<p>Regional site survey lines</p> <ul style="list-style-type: none"> <li>• PGC9902_ODP1_MCS</li> <li>• Line 89-08</li> <li>• PGC0408_CAS05B_03</li> </ul> <p>Figure F13</p>
<b>Objective:</b>	<p>Site CAS-05D is the shallowest water depth site on the transect. A relatively weak BSR is present at a depth of 160 ms TWT (~130 mbsf). The BSR becomes rapidly shallower in the vicinity of Site CAS-05D and represents the end-member of the gas hydrate regime on the margin.</p> <p>Objectives of this site include characterization of</p> <ul style="list-style-type: none"> <li>• pore-water chemistry and gas chemistry (head-space and voids)</li> <li>• core physical properties</li> <li>• gas hydrate occurrence (distribution, concentration).</li> </ul> <p>An additional objective is to determine the nature of the BSR reflection and the thickness of the free gas zone (if any) underneath the BSR by wireline and LWD logging.</p>
<b>Drilling and Logging program</b>	APC to refusal; XCB; PCS and HYACINTH (pending funding) pressure cores
<b>Logging program</b>	LWD, triple combo, FMS-sonic, multiple use of APCT, DVTTP
<b>Nature of rock anticipated:</b>	Interlayered silts and clays, some authigenic carbonates

## SITE SUMMARIES (CONTINUED)

### Site CAS-06A

<b>Proposed site:</b>	CAS-06A
<b>Priority:</b>	Primary
<b>Position:</b>	48°40.050' N, 126°51.053' W
<b>Water depth (m):</b>	1280
<b>Target drilling depth (mbsf):</b>	300
<b>Approved maximum penetration (mbsf):</b>	300
<b>Survey coverage:</b>	<ul style="list-style-type: none"> <li>• SCS 3-D data 2000 (inline 16)</li> <li>• MCS 3-D data 1999 (inline 27)</li> <li>• Regional MCS Line PGC9902_XL07</li> </ul> <p>Figures <a href="#">F14</a>, <a href="#">F15</a>, <a href="#">F16</a>, <a href="#">F17</a>, <a href="#">F18</a></p>
<b>Objective:</b>	<p>Site CAS-06A is located in an active cold vent area. There are shallow massive gas hydrate occurrences, carbonate outcrops, and chemosynthetic communities.</p> <p>The primary objectives are to characterize</p> <ul style="list-style-type: none"> <li>• gas hydrate and free gas occurrence throughout the cold vent</li> <li>• nature of the fluid flow regime</li> <li>• pore-water chemistry</li> <li>• core physical properties</li> </ul> <p>A further objective is to determine the nature of the BSR reflection and the thickness of the free gas zone (if any) underneath the BSR by wireline and LWD logging.</p> <p>A main open question from previous analyses is if a BSR is present underneath the vents (model by Riedel et al., 2002) or if the BSR is elevated (model by Wood et al., 2002).</p>
<b>Drilling and Logging program</b>	APC to refusal; XCB; PCS and HYACINTH (pending funding) pressure cores
<b>Logging program</b>	LWD, triple combo, FMS-sonic, multiple use of APCT, DVTTP
<b>Nature of rock anticipated:</b>	Interlayered silts and clays, some authigenic carbonates

## SITE SUMMARIES (CONTINUED)

## Site CAS-03C

<b>Proposed site:</b>	CAS-03C
<b>Priority:</b>	Alternate
<b>Position:</b>	48°37.633' N; 127°03.033' W
<b>Water depth (m):</b>	1875
<b>Target drilling depth (mbsf):</b>	300
<b>Approved maximum penetration (mbsf):</b>	300
<b>Survey coverage:</b>	<p>Regional site survey lines</p> <ul style="list-style-type: none"> <li>• PGC9902_CAS03_SC</li> <li>• PGC9902_ODP7_MCS</li> <li>• Line 89-08</li> <li>• Line PGC0408_CAS03B_X03</li> </ul> <p>Figure <a href="#">F10</a></p>
<b>Objective:</b>	<p>Site CAS-03C is an alternate location for Site CAS-03B. A stronger BSR can be seen in the MCS data from 1999 than underneath CAS-03B. This site is also unaffected by the presence of faults.</p> <p>Objectives of this site include detailed characterization of</p> <ul style="list-style-type: none"> <li>• pore-water chemistry</li> <li>• core physical properties</li> <li>• logging (LWD, wireline)</li> <li>• gas hydrate concentration estimates</li> </ul>
<b>Drilling and Logging program</b>	APC to refusal; XCB; PCS and HYACINTH (pending funding) pressure cores
<b>Logging program</b>	LWD, triple combo, FMS-sonic, multiple use of APCT, DVTTP
<b>Nature of rock anticipated:</b>	Interlayered silts and clays, some authigenic carbonates

## SITE SUMMARIES (CONTINUED)

### Site CAS-04B

<b>Proposed site:</b>	CAS-04B
<b>Priority:</b>	Alternate
<b>Position:</b>	48°33.461' N, 127°09.934' W
<b>Water depth (m):</b>	2560
<b>Target drilling depth (mbsf):</b>	400
<b>Approved maximum penetration (mbsf):</b>	400
<b>Survey coverage:</b>	<p>Regional site survey lines</p> <ul style="list-style-type: none"> <li>• PGC9902_CAS04_SC</li> <li>• PGC9902_ODP7_MCS</li> <li>• Line 89-08</li> </ul> <p>Figure <a href="#">F11</a></p>
<b>Objective:</b>	<p>Site CAS-04B is the reference site for the transect. It is located in the Cascadia abyssal plain, ~3 km west of the deformation front. It is similar to Site 888 of ODP Leg 146.</p> <p>Primary targets are determining the pore water chemistry profile and sediment physical properties from core and logging data.</p>
<b>Drilling and Logging program</b>	APC to refusal; XCB; PCS and HYACINTH (pending funding) pressure cores
<b>Logging program</b>	LWD, triple combo, FMS-sonic, multiple use of APCT, DVTTP
<b>Nature of rock anticipated:</b>	Interlayered silts and clays, some authigenic carbonates

## SITE SUMMARIES (CONTINUED)

## Site CAS-05B

<b>Proposed site:</b>	CAS-05B
<b>Priority:</b>	Alternate
<b>Position:</b>	48°44.161' N; 126°47.537' W
<b>Water depth (m):</b>	1360
<b>Target drilling depth (mbsf):</b>	350
<b>Approved maximum penetration (mbsf):</b>	350
<b>Survey coverage:</b>	<ul style="list-style-type: none"> <li>• MCS Line ODP-01</li> <li>• MCS line CAS-05a</li> <li>• Line 89-08</li> </ul> <p>Figure <a href="#">F12</a></p>
<b>Objective:</b>	<p>Objectives of this site include characterization of</p> <ul style="list-style-type: none"> <li>• pore water chemistry and gas chemistry (head-space and voids)</li> <li>• core physical properties</li> <li>• gas hydrate occurrence (distribution, concentration)</li> </ul> <p>An additional objective is to determine the nature of the BSR reflection and the thickness of the free gas zone (if any) underneath the BSR by wireline and LWD logging.</p>
<b>Drilling and Logging program</b>	APC to refusal; XCB; PCS and HYACINTH (pending funding) pressure cores
<b>Logging program</b>	LWD, triple combo, FMS-sonic, multiple use of APCT, DVTTP
<b>Nature of rock anticipated:</b>	Interlayered silts and clays, some authigenic carbonates

## SITE SUMMARIES (CONTINUED)

## Site CAS-06B

<b>Proposed site:</b>	CAS-06B
<b>Priority:</b>	Alternate
<b>Position:</b>	48°41.178' N, 126°52.363' W
<b>Water depth (m):</b>	1280
<b>Target drilling depth (mbsf):</b>	300
<b>Approved maximum penetration (mbsf):</b>	300
<b>Survey coverage:</b>	<ul style="list-style-type: none"> <li>• SCS 3-D data 2004 (line 22, line X05b)</li> <li>• MCS 3-D data 1999 (inline 27)</li> </ul> Figures <a href="#">F19</a> , <a href="#">F20</a>
<b>Objective:</b>	<p>Site CAS-06B is the inactive vent site, which shows widespread seismic blanking, with blanking increasing with seismic frequency. No chemosynthetic communities nor massive gas hydrate near seafloor have been observed.</p> <p>Objectives include characterization of</p> <ul style="list-style-type: none"> <li>• focused fluid-flow regime,</li> <li>• pore water chemistry,</li> <li>• core physical properties</li> <li>• nature of the BSR reflection and the thickness of the free gas zone (if any) underneath the BSR by wireline and LWD logging</li> </ul>
<b>Drilling and Logging program</b>	APC to refusal; XCB; PCS and HYACINTH (pending funding) pressure cores
<b>Logging program</b>	LWD, triple combo, FMS-sonic, multiple use of APCT, DVTTP
<b>Nature of rock anticipated:</b>	Interlayered silts and clays, some authigenic carbonates

## SCIENTIFIC PARTICIPANTS

### Co-Chief Scientist

**Timothy S. Collett**

U.S. Geological Survey

Energy Resources Program

Denver Federal Center

Box 25046, MS 939

Denver CO 80225

USA

[tcollett@usgs.gov](mailto:tcollett@usgs.gov)

Work: (303) 236-5731

Fax: (303) 236-0459

### Co-Chief Scientist

**Michael Riedel**

Pacific Geoscience Centre

Geological Survey of Canada

9860 West Saanich Road

PO Box 6000

Sidney BC V8L 4B2

Canada

[mriedel@pgc-gsc.nrcan.gc.ca](mailto:mriedel@pgc-gsc.nrcan.gc.ca)

Work: (250) 363-6451

Fax: (250) 363-6565

### Staff Scientist/Expedition Project Manager

**Mitchell J. Malone**

Integrated Ocean Drilling Program

Texas A&M University

1000 Discovery Drive

College Station TX 77845-9547

USA

[malone@iodp.tamu.edu](mailto:malone@iodp.tamu.edu)

Work: (979) 845-6329

Fax: (979) 845-0876

### Logging Staff Scientist

**Gilles Guérin**

Lamont-Doherty Earth Observatory

Columbia University

Borehole Research Group

PO Box 1000, 61 Route 9W

Palisades NY 10964

USA

[guerin@ldeo.columbia.edu](mailto:guerin@ldeo.columbia.edu)

Work: (845) 365-8671

Fax: (845) 365-3182

### Microbiologist

**Yowsuke Higashi**

Biological Resources and Functions

National Institute of Advanced Industrial Science and Technology

AIST Tsukuba Central 6

1-1-1 Higashi 1-Chome

Tsukuba-shi, Ibaraki-ken 305-8566

Japan

[y-higashi@aist.go.jp](mailto:y-higashi@aist.go.jp)

Work: (81) 29-861-6068

Fax: (81) 29-861-6417

### Microbiologist

**Leena D. Palekar**

Scripps Institution of Oceanography

University of California, San Diego

Marine Biological Grade

4305 Hubbs Hall

LaJolla CA 92093-0202

USA

[lpalekar@ucsd.edu](mailto:lpalekar@ucsd.edu)

Work: (858) 534-5233

### Microbiologist

**Hideyoshi Yoshioka**

Institute for Geo-Resources and Environment

National Institute of Advanced Industrial Science and Technology

Central 7

1-1-1 Higashi

Tsukuba 305-8567

Japan

[hi-yoshioka@aist.go.jp](mailto:hi-yoshioka@aist.go.jp)

Work: (81) 298-61-3800

Fax: (81) 298-61-3666

### Inorganic Geochemist

**Miriam Kastner**

Scripps Institution of Oceanography

University of California, San Diego

Geoscience Research Division

9500 Gilman Drive

La Jolla CA 92093-0212

USA

[mkastner@ucsd.edu](mailto:mkastner@ucsd.edu)

Work: (858) 534-2065

Fax: (858) 822-4945

**Inorganic Geochemist**

**Ji-Hoon Kim**

Petroleum and Marine Resources Research Division  
Korea Institute of Geoscience & Mineral Resources  
(KIGAM)

30 Gajeong-dong  
Yuseong-gu, Daejeon 305-350  
Korea  
[save@kigam.re.kr](mailto:save@kigam.re.kr)  
Work: (82) 42-868-3276  
Fax: (82) 42-862-7275

**Inorganic Geochemist**

**Marta E. Torres**

College of Oceanic and Atmospheric Sciences  
Oregon State University  
104 Ocean Administration Bldg.  
Corvallis OR 97331-5503  
USA

[mtorres@coas.oregonstate.edu](mailto:mtorres@coas.oregonstate.edu)  
Work: (541) 737-2902  
Fax: (541) 737-2064

**Inorganic Geochemist**

**Ulrich G. Wortmann**

Department of Geology  
University of Toronto  
22 Russell Street  
Toronto, Ontario M5S 3B1  
Canada  
[uli.wortmann@utoronto.ca](mailto:uli.wortmann@utoronto.ca)  
Work: (416) 978-7084  
Fax: (416) 978-7084

**Pressure Core Sampler Scientist/**

**Organic Geochemist**

**Verena Heuer**

Research Center Ocean Margins  
Universität Bremen  
PO Box 330 440  
Bremen 28334  
Germany

[vheuer@uni-bremen.de](mailto:vheuer@uni-bremen.de)

Work: (49) 421-218-65702  
Fax: (49) 421-218-65715

**Organic Geochemist**

**Masanori Kaneko**

Department of Earth Sciences  
Okayama University  
Tsushima-Naka 3-1-1  
Okayama 700-8530  
Japan  
[triplem@ms5.megaegg.ne.jp](mailto:triplem@ms5.megaegg.ne.jp)  
Work: (81) 86-251-7887

**Organic Geochemist**

**John Pohlmann**

Virginia Institute of Marine Science  
Department of Physical Sciences  
Gloucester Point VA  
USA  
[johnp@ccs.nrl.navy.mil](mailto:johnp@ccs.nrl.navy.mil)  
Work: 202-404-3365  
Fax: 202-404-8175

**Paleontoogist (Diatoms)**

**Fumio Akiba**

Diatom Minilab Ltd.  
Iwasawa 632-12  
Hanno, Saitama 357-0023  
Japan  
[akiba357@hanno.jp](mailto:akiba357@hanno.jp)  
Work: (81) 42-974-4066  
Fax: same

**Physical Properties Specialist**

**Michelle Ellis**

School of Ocean and Earth Science  
Southampton Oceanography Centre  
European Way  
Southampton  
SO14 3ZH  
United Kingdom  
[mhe1@noc.soton.ac.uk](mailto:mhe1@noc.soton.ac.uk)  
Work: 44 (0) 2380 592574

**Physical Properties Specialist**

**Hiroko Kitajima**

Department of Geology and Geophysics  
Texas A&M University  
College Station TX 77843-3115  
USA  
[hkitajima@geo.tamu.edu](mailto:hkitajima@geo.tamu.edu)  
Work: (979) 845-3407

**Physical Properties Specialist**

**Philip E. Long**

Environmental Technology Division  
Pacific Northwest National Laboratory  
902 Battelle Boulevard  
Richland WA 99354  
USA  
[philip.long@pnl.gov](mailto:philip.long@pnl.gov)  
Work: (509) 372-6090  
Fax: (509) 372-6089

**Physical Properties Specialist**

**Anne M. Tréhu**

College of Oceanic and Atmospheric Sciences  
Oregon State University  
104 Ocean Admin. Building  
Corvallis OR 97331-5503  
USA  
[trehu@coas.oregonstate.edu](mailto:trehu@coas.oregonstate.edu)  
Work: (541) 737-2655  
Fax: (541) 737-2064

**Sedimentologist**

**Marie-Madeleine Blanc-Valleron**

Laboratoire de Géologie  
Museum National d'Histoire Naturelle  
43 rue Buffon  
Paris 75005  
France  
[valleron@mnhn.fr](mailto:valleron@mnhn.fr)  
Work: (33) 1407-9-3473  
Fax: (33) 1407-9-3739

**Sedimentologist**

**Yoshitaka Hashimoto**

Department of Natural Environmental Science  
Kochi University  
Faculty of Science  
Akebonocy 2-5-1  
Kochi 780-8520  
Japan  
[hassy@cc.kochi-u.ac.jp](mailto:hassy@cc.kochi-u.ac.jp)  
Work: (81) 88-844-8318  
Fax: (81) 88-844-8356

**Sedimentologist**

**Jiasheng Wang**

Faculty of Earth Sciences  
China University of Geosciences  
Lumo Road 388  
Wuhan, Hubei 430074  
P.R. China

[js-wang@cug.edu.cn](mailto:js-wang@cug.edu.cn)

Work: (86) 27-6788-3001  
Fax: (86) 27-6788-3002

**Sedimentologist**

**Barbara Teichert**

Bundesanstalt fuer Geowissenschaften & Rohstoffe  
(BGR)  
Stilleweg 2  
D-30655 Hannover  
Germany  
[b.teichert@bgr.de](mailto:b.teichert@bgr.de)  
Phone: (49) 511 643 2785  
Fax: (49) 511 643 3663

**Logging Scientist**

**Peter D. Jackson**

Geophysics and Marine  
British Geological Survey  
Kingsley Dunham Centre  
Keyworth, Nottingham NG12 5GG  
United Kingdom  
[pdj@bgs.ac.uk](mailto:pdj@bgs.ac.uk)  
Work: (44) 115-9363379  
Fax: (44) 115-9363145

**LDEO Logging Scientist**

**Alberto Malinverno**

Lamont-Doherty Earth Observatory  
Columbia University  
Borehole Research Group  
Palisades NY 10964  
USA  
[alberto@ldeo.columbia.edu](mailto:alberto@ldeo.columbia.edu)  
Work: (845) 365-8639  
Fax: (845) 365-3182

**Schlumberger Engineer**

**Steven Kittredge**

911 Center Point Rd.  
Carrollton GA 30117  
USA  
[kittredgesw@yahoo.com](mailto:kittredgesw@yahoo.com)  
Work: (281) 480-2000  
Fax: (281) 480-9550

**Operations Superintendent**

**Michael Storms**

Integrated Ocean Drilling Program  
Texas A&M University  
1000 Discovery Drive  
College Station TX 77845-9547  
USA  
[storms@iodp.tamu.edu](mailto:storms@iodp.tamu.edu)  
Work: (979) 845-2101  
Fax: (979) 845-0876

**Drilling Engineer**

**Derryl Schroeder**

Integrated Ocean Drilling Program  
Texas A&M University  
1000 Discovery Drive  
College Station TX 77845-9547  
USA  
[schroeder@iodp.tamu.edu](mailto:schroeder@iodp.tamu.edu)  
Work: (979) 845-8481  
Fax: (979) 845-2308

**Drilling Engineer**  
**Richard Dixon**  
Integrated Ocean Drilling Program  
Texas A&M University  
1000 Discovery Drive  
College Station TX 77845-9547  
USA  
[dixon@iodp.tamu.edu](mailto:dixon@iodp.tamu.edu)  
Work: (979) 845-3207  
Fax: (979) 845-2308

**Laboratory Officer**  
**Roy T. Davis**  
Integrated Ocean Drilling Program  
Texas A&M University  
1000 Discovery Drive  
College Station TX 77845-9547  
USA  
[davis@iodp.tamu.edu](mailto:davis@iodp.tamu.edu)  
Work: (979) 845-2496  
Fax: (979) 845-0876

**Assistant Laboratory Officer**  
**Timothy Bronk**  
Integrated Ocean Drilling Program  
Texas A&M University  
1000 Discovery Drive  
College Station TX 77845-9547  
USA  
[bronk@iodp.tamu.edu](mailto:bronk@iodp.tamu.edu)  
Work: (979) 845-0879  
Fax: (979) 845-0876

**Assistant Laboratory Officer**  
**Paul Teniere**  
Integrated Ocean Drilling Program  
Texas A&M University  
1000 Discovery Drive  
College Station TX 77845-9547  
USA  
[teniere@iodp.tamu.edu](mailto:teniere@iodp.tamu.edu)  
Work: (979) 458-1067  
Fax: (979) 845-0876

**Marine Curatorial Specialist**  
**Philip Rumford**  
Integrated Ocean Drilling Program  
Texas A&M University  
1000 Discovery Drive  
College Station TX 77845-9547  
USA  
[rumford@iodp.tamu.edu](mailto:rumford@iodp.tamu.edu)  
Work: (979) 845-5056  
Fax: (979) 845-0876

**Imaging Specialist**  
**William Crawford**  
Integrated Ocean Drilling Program  
Texas A&M University  
1000 Discovery Drive  
College Station TX 77845-9547  
USA  
[crawford@iodp.tamu.edu](mailto:crawford@iodp.tamu.edu)  
Work: (979) 862-7757  
Fax: (979) 458-1617

**Yeoperson**  
**Katerina Petronotis**  
Integrated Ocean Drilling Program  
Texas A&M University  
1000 Discovery Drive  
College Station TX 77845-9547  
USA  
[petronotis@iodp.tamu.edu](mailto:petronotis@iodp.tamu.edu)  
Work: (979) 845-1199  
Fax: (979) 862-3527

**Marine Laboratory Specialist: Chemistry**  
**Christopher Bennight**  
Integrated Ocean Drilling Program  
Texas A&M University  
1000 Discovery Drive  
College Station TX 77845-9547  
USA  
[bennight@iodp.tamu.edu](mailto:bennight@iodp.tamu.edu)  
Work: (979) 845-7209  
Fax: (979) 845-0876

**Marine Laboratory Specialist: Chemistry**  
**Lisa Brandt**  
Integrated Ocean Drilling Program  
Texas A&M University  
1000 Discovery Drive  
College Station TX 77845-9547  
USA  
[brandt@iodp.tamu.edu](mailto:brandt@iodp.tamu.edu)  
Work: (979) 845-3602  
Fax: (979) 845-0876

**Marine Laboratory Specialist: Downhole Tools/ Thin Sections**  
**Peter Kannberg**  
Integrated Ocean Drilling Program  
Texas A&M University  
1000 Discovery Drive  
College Station TX 77845-9547  
USA  
[kannberg@iodp.tamu.edu](mailto:kannberg@iodp.tamu.edu)  
Work: (979) 845-3602  
Fax: (979) 845-0876

**Marine Laboratory Specialist:**

Paleomagnetism

Jennifer Henderson

Integrated Ocean Drilling Program

Texas A&M University

1000 Discovery Drive

College Station TX 77845-9547

USA

**[henderson\\_j@iodp.tamu.edu](mailto:henderson_j@iodp.tamu.edu)**

Work: (979) 845-3602

Fax: (979) 845-0876

**Marine Laboratory Specialist: Physical Properties**

Heather Paul

Integrated Ocean Drilling Program

Texas A&M University

1000 Discovery Drive

College Station TX 77845-9547

USA

**[paul@iodp.tamu.edu](mailto:paul@iodp.tamu.edu)**

Work: (979) 845-3602

Fax: (979) 845-0876

**Marine Laboratory Specialist:**

Underway Geophysics

Karen Johnston

Integrated Ocean Drilling Program

Texas A&M University

1000 Discovery Drive

College Station TX 77845-9547

USA

**[johnston@iodp.tamu.edu](mailto:johnston@iodp.tamu.edu)**

Work: (979) 845-3602

Fax: (979) 845-0876

**Marine Laboratory Specialist: X-Ray**

Jason Deardorff

Integrated Ocean Drilling Program

Texas A&M University

1000 Discovery Drive

College Station TX 77845-9547

USA

**[deardorff@iodp.tamu.edu](mailto:deardorff@iodp.tamu.edu)**

Work: (979) 845-2481

Fax: (979) 845-0876

**Marine Instrumentation Specialist**

Randy Gjesvold

Integrated Ocean Drilling Program

Texas A&M University

1000 Discovery Drive

College Station TX 77845-9547

USA

**[gjesvold@iodp.tamu.edu](mailto:gjesvold@iodp.tamu.edu)**

Work: (979) 845-3602

Fax: (979) 845-0876

**Marine Instrumentation Specialist**

Mike Meiring

Integrated Ocean Drilling Program

Texas A&M University

1000 Discovery Drive

College Station TX 77845-9547

USA

**[kleinmeiring@yahoo.com](mailto:kleinmeiring@yahoo.com)**

Work: (979) 845-3602

Fax: (979) 845-0876

**Marine Computer Specialist**

Paula Clark

Integrated Ocean Drilling Program

Texas A&M University

1000 Discovery Drive

College Station TX 77845-9547

USA

**[clark@iodp.tamu.edu](mailto:clark@iodp.tamu.edu)**

Work: (979) 845-3897

Fax: (979) 458-1617

**Marine Computer Specialist**

David Morley

Integrated Ocean Drilling Program

Texas A&M University

1000 Discovery Drive

College Station TX 77845-9547

USA

**[morley@iodp.tamu.edu](mailto:morley@iodp.tamu.edu)**

Work: (979) 862-4847

Fax: (979) 458-1617

**Applications Developer**

David Fackler

Integrated Ocean Drilling Program

Texas A&M University

1000 Discovery Drive

College Station TX 77845-9547

USA

**[fackler@iodp.tamu.edu](mailto:fackler@iodp.tamu.edu)**

Work: (979) 845-3036

Fax: (979) 845-2308

## APPENDIX B

### IODP Expedition 311 Cascadia Margin Hydrates Scientific Prospectus

Appendix B, 6 pages

*In-Situ Sampling and Characterization of Naturally Occurring Marine Methane Hydrate  
Using the D/V JOIDES Resolution.*

**Integrated Ocean Drilling Program  
Expedition 311 Scientific Prospectus Addendum**

**Cascadia Margin Gas Hydrates**

Michael Riedel  
Co-Chief Scientist  
Pacific Geoscience Centre  
Geological Survey of Canada  
9860 West Saanich Road  
PO Box 6000  
Sidney BC V8L 4B2  
Canada

Timothy S. Collett  
Co-Chief Scientist  
U.S. Geological Survey  
Energy Resources Program  
Denver Federal Center  
Box 25046, MS 939  
Denver CO 80225  
USA

Mitchell J. Malone  
Staff Scientist/Expedition Project Manager  
Integrated Ocean Drilling Project  
Texas A&M University  
1000 Discovery Drive  
College Station TX 77845-9547  
USA

## PUBLISHER'S NOTES

Material in this publication may be copied without restraint for library, abstract service, educational, or personal research purposes; however, this source should be appropriately acknowledged.

### Citation:

Collett, T.S., Reidel, M., and Malone, M.J., 2005. Cascadia margin gas hydrates addendum. *IODP Sci. Prospl.*, 311 addendum. doi:10.2204/iodp.sp.311add.2005

### Distribution:

Electronic copies of this series may be obtained from the Integrated Ocean Drilling Program (IODP) Publication Services homepage on the World Wide Web at [iodp.tamu.edu/publications](http://iodp.tamu.edu/publications).

This publication was prepared by the Integrated Ocean Drilling Program U.S. Implementing Organization (IODP-USIO): Joint Oceanographic Institutions, Inc., Lamont-Doherty Earth Observatory of Columbia University, and Texas A&M University, as an account of work performed under the international Integrated Ocean Drilling Program, which is managed by IODP Management International (IODP-MI), Inc. Funding for the program is provided by the following agencies:

European Consortium for Ocean Research Drilling (ECORD)

Ministry of Education, Culture, Sports, Science and Technology (MEXT) of Japan

Ministry of Science and Technology (MOST), People's Republic of China

U.S. National Science Foundation (NSF)

## DISCLAIMER

Any opinions, findings, and conclusions or recommendations expressed in this publication are those of the author(s) and do not necessarily reflect the views of the participating agencies, IODP Management International, Inc., Joint Oceanographic Institutions, Inc., Lamont-Doherty Earth Observatory of Columbia University, Texas A&M University, or Texas A&M Research Foundation.

This IODP Scientific Prospectus is based on precruise Science Advisory Structure panel discussions and scientific input from the designated Co-Chief Scientists on behalf of the drilling proponents. During the course of the cruise, actual site operations may indicate to the Co-Chief Scientists and the Operations Superintendent that it would be scientifically or operationally advantageous to amend the plan detailed in this prospectus. It should be understood that any proposed changes to the science deliverables outlined in the plan presented here are contingent upon the approval of the IODP-USIO Science Services, TAMU, Deputy Director of Science Services in consultation with IODP-MI.

## INTRODUCTION

Integrated Ocean Drilling Program (IODP) Expedition 311 was originally scheduled with 22 on site operational days. In May 2005 in response to a significant change on the IODP U.S. Implementing Organization (USIO) riserless vessel schedule, an additional 15 operational days was added to Expedition 311 "Cascadia Margin Gas Hydrates." The purpose of this addendum is to provide an updated operational and scientific plan for the expedition that accounts for the additional days that have been assigned to Expedition 311.

The revised schedule includes a port call in Astoria, Oregon (USA) on 16 September 2005 to embark the scientific party and a port call in Victoria, British Columbia (Canada) at the end of Expedition 311 on 28 October 2005. Expedition 311 is now scheduled to include a total of 37 operational days on site. The original operations plan, as described in the scientific prospectus for Expedition 311 (Collett, Reidel, Malone, and the Expedition 311 Project Team, 2005) included drilling and coring activities at five sites across the Northern Cascadia accretionary prism (table T1 in the original prospectus). The proposed Expedition 311 drill sites included a four-site transect identified by proposed Sites CAS-03B, CAS-02C, CAS-01B, and CAS-05D. The fifth drill site in the plan also included drilling an active cold vent identified as proposed Site CAS-06A.

## REVISED OPERATIONS PLAN

As originally planned (table T1 in Collett, Reidel, Malone, and the Expedition 311 Project Team, 2005), this expedition was scheduled to carry out logging-while-drilling (LWD) and measurement-while-drilling (MWD) operations (drilling in Hole A) prior to coring each site (pending Environmental Pollution and Safety Panel approval). After completing the LWD/MWD logging program, the expedition was scheduled to conduct conventional and pressure-controlled coring operations (drilling in Hole B) at each of the sites drilled during the LWD/MWD campaign. The main change in the Expedition 311 science plan to accommodate for the addition of 15 operational days is the inclusion of a third special core and tool deployment hole (drilling in Hole C) at each of the five sites to be drilled during the expedition. Under the new operational plan for Expedition 311 (Table [T1](#)), Hole A at each site will be dedicated to the LWD/MWD operations, Hole B will be dedicated to "continuous" advanced piston corer/extended core barrel (APC/XCB) coring, with additional temperature measurements using the APC temperature (APCT) and Davis-Villinger Temperature-Pressure Probe (DVTPP) tools as well as monitoring pressure/temperature conditions of each core by deploying the APC methane (APCM) tool. The new Hole C at each site will be a dedicated "special tools hole" with a focus on pressure core deployments, special spot core requirements, and wireline logging and vertical seismic profile (VSP) deployments (Table [T1](#)).

The drilling schedule for Expedition 311 will be updated during the cruise to accommodate any unforeseen changes in the schedule. However, the new Hole C is mainly dedicated to pressure coring, with a total of six alternating deployments of the pressure coring sampler (PCS), HYACINTH pressure corer (HPC) and Fugro percussion corer (FPC) systems. Previous gas hydrate drilling has often been characterized by incomplete core recovery; thus, the addition of Hole C will allow us to include additional conventional APC/XCB spot coring in the to sample missed or poorly sampled intervals in Hole B. At this stage the total amount of additional coring required to fill gaps in the Hole B coring program is unknown. Based on experience gained during Ocean Drilling Program (ODP) Leg 204 off Oregon, we plan for an additional generic 100 m coring at each site during Expedition 311. Hole C, which is likely to be in better condition than the continuously cored Hole B, will also be wireline logged after coring operations are completed. Within the new operational plan, Hole B will also include limited pressure coring with three deployments of the PCS. These three PCS cores, along with the PCS cores from Hole C will be used for degassing experiments. The ability to use a three-hole rather than a two-hole strategy at each site will allow a more complete and continuous coring strategy and more judicious deployment of pressure coring systems based on knowledge gained in Holes A and B.

A second change to the original operations plan includes revision of the VSP strategy. Originally, a single zero-offset VSP was planned at proposed Site CAS-01B. The geophone spacing will be changed from the original 25 m to a more closely spaced 5 m interval. This will yield higher-resolution seismic data to better image details in the gas hydrate-bearing sedimentary section at proposed Site CAS-01B. Changing the VSP spacing to 5 m will add ~7 h to the original plan. If less time is available, a 10 m geophone spacing may be used, which would add only ~3 h to the project plan. A lower-priority addition to the VSP program is a possible VSP at proposed Site CAS-06A with 5 m geophone spacing. This second VSP at Site CAS-06A will add an additional 13 h to the original operational plan.

The third change to the Expedition 311 operational plan includes the addition of shallow (~18 m deep) dedicated microbiological core holes at proposed Sites CAS-06A and CAS-01B. The addition of two dedicated shallow microbiological core holes will give us an improved understanding of the three-dimensional aspects of microbiological system associated with the active cold vent at proposed Site CAS-06A and a regular background site (proposed Site CAS-01B). Furthermore, we will use Hole C to core the upper ~18 m at each other site (proposed Sites CAS-03B, CAS-02C, and CAS-05D) for dedicated microbiological sampling.

At the time the Expedition 311 *Scientific Prospectus* was published, funding for the third-party HYACINTH pressure coring system (HPC/FPC) and infrared (IR) and computed tomography (CT) core imaging was pending. Supplemental funding from the U.S. Department of Energy for these activities has been approved. A detailed operational plan for the IR core imaging system is being currently developed by Peter Schultheiss (Geotek) and Phil Long (PNNL). The HYACINTH pressure coring and IR core imaging programs will most likely follow our experience from ODP Leg 204 with modifications based on new experiences gained during the JIP cruise in the Gulf of Mexico earlier this year.

## REFERENCES

Collett, T.S., Reidel, M., Malone, M.J., and the Expedition 311 Project Team, 2005. Cascadia margin gas hydrates. *IODP Sci. Pros.*, 311. [doi:10.2204/iodp.sp.311.2005](https://doi.org/10.2204/iodp.sp.311.2005)

Table T1. Expedition 311 revised operations plan.

Proposed site	Location (latitude, longitude)	Seafloor depth (mbrf)	Operations description	Port call (days)	Transit (days)	Drilling/ coring (days)	Wireline logging (days)
Balboa, Panama			Start of Expedition 311	4.0	(In port)		
			Transit ~3800 nmi to Astoria, Oregon @ 10.5 kt		15.1		
Astoria, Oregon (USA)			Science Party boards ship in Astoria	2.0	(In port)		
			Transit ~206 nmi to Site CAS-03B @ 10.5 kt		0.8		
CAS-03B	48°37.058' N, 127°02.413' W	1791	Hole A: LWD/MWD to 300 mbsf (BSR @ ~230 mbsf)			1.4	
			DP move ~2.8 nmi to Site CAS-02C @ 1.0 kt		0.0		
CAS-02C	48°38.688' N, 126°58.993' W	2241	Hole A: LWD/MWD to 300 mbsf (BSR @ ~230 mbsf)			1.1	
			DP move ~5.7 nmi to Site CAS-01B @ 1.0 kt		0.2		
CAS-01B	48°41.884' N, 126°51.924' W	1336	Hole A: LWD/MWD to 380 mbsf (BSR @ ~215 mbsf)			1.2	
			DP move ~0.8 nmi to Site CAS-06A @ 1.0 kt		0.0		
CAS-06A	48°40.050' N, 126°51.053' W	1291	Hole A: LWD/MWD to 300 mbsf (BSR @ ~215 mbsf)			1.0	
			DP move ~9.9 nmi to Site CAS-05D @ 1.0 kt		0.4		
CAS-05D	48°47.367' N, 126°40.717' W	981	Hole A: LWD/MWD to 220 mbsf (BSR @ ~130 mbsf)			0.8	
			Hole B: APC/APCT to ~200 mbsf XCB/DVTP, PCS to TD @ 220 mbsf			2.2	
			Hole C: 2 APC cores, drill ahead XCB/half-cores to TD (220 mbsf) Pressure coring: PCS/HPC Logging: triple combo and FMS-sonic			2.5	0.4
			DP move ~9.9 nmi to Site CAS-06A @ 1.0 kt		0.4		
CAS-06A	48°40.050' N, 126°51.053' W	1291	Hole B: APC to ~15 mbsf (2 MBIO cores)			0.3	
			Hole C: APC to ~15 mbsf (2 MBIO cores)			0.1	
	(Active Cold Vent)		Hole D: APC/APCT to ~200 mbsf XCB/DVTP, PCS to TD (300 mbsf)			2.3	
			Hole E: 2 APC cores, drill ahead XCB/half-cores to TD (300 mbsf) Pressure coring: PCS/HPC Logging: triple combo and FMS-sonic VSP: 5 m spacing (12 h)			2.9	1.0
			DP move ~0.8 nmi to Site CAS-01B @ 1.0 kt		0.1		
CAS-01B	48°41.884' N, 126°51.924' W	1336	Hole B: APC to ~15 mbsf (2 MBIO cores)			0.3	
			Hole C: APC to ~15 mbsf (2 MBIO cores)			0.1	
	(Site 889)		Hole D: APC/APCT to ~200 mbsf XCB/DVTP, PCS to TD (350 mbsf)			2.6	
			Hole E: 2 APC cores, drill ahead XCB/half-cores to TD (350 mbsf) Pressure coring: PCS/HPC Logging: triple combo and FMS-sonic VSP: 5 m spacing (13 h)			3.1	1.0
			DP move ~5.7 nmi to Site CAS-02C @ 1.0 kt		0.3		

Expedition 311 Scientific Prospectus Addendum

Proposed site	Location (latitude, longitude)	Seafloor depth (mbrf)	Operations description	Port call (days)	Transit (days)	Drilling/ coring (days)	Wireline logging (days)
CAS-02C	48°38.688' N, 126°58.993' W  <b>(First Slope Basin)</b>	2241	Hole B: APC/APCT to ~200 mbsf XCB/DVTP, PCS to TD (300 mbsf)  Hole C: 2 APC cores, drill ahead XCB/half-cores to TD (300 mbsf) Pressure coring: PCS/HPC Logging: triple combo and FMS-sonic			2.9	
			DP move ~2.8 nmi to Site CAS-03B @ 1.0 kt		0.1		
CAS-03B	48°37.058' N, 127°02.413' W	1791	Hole B: APC/APCT to ~200 mbsf XCB/DVTP, PCS to TD (300 mbsf)  Hole C: 2 APC cores, drill ahead XCB/half-cores to TD (300 mbsf) Pressure coring: PCS/HPC Logging: triple combo and FMS-sonic			2.7	
			Transit ~134.0 nmi to Victoria @ 10.5 kt		0.6		
Victoria, B.C., Canada			End of Expedition 311		18.0	33.6	3.4
				Subtotal transit time:	18.0		
				Subtotal on site time:	37.0		
				Total operating days:	55.0		
				Total expedition including 6.0 days of port call(s):	61.0		

Notes: DP = dynamic positioning. LWD = logging while drilling, MWD = measurement while drilling. BSR = bottom-simulating reflector, TD = total depth. APC = advanced piston corer, XCB = extended core barrel. APCT = APC temperature tool, DVTP = Davis-Villinger Temperature Probe. PCS = pressure coring sampler, HPC = HYACINTH pressure corer. Triple combo = triple combination tool string, FMS = Formation MicroScanner. VSP = vertical seismic profile. MBIO = microbiology sample. Seafloor depth is prospectus water depth + 11.0 m adjustment from water line to rig floor (i.e., drillers depth). Astoria is shown as a 2 day port call due to timing of port entry (crossing the Columbia Bar) and possibly increasing loading issues. Each deep cored hole has 16 h contingency to allow for hole instability, H<sub>2</sub>S, and hydrate handling slow-downs.